



(51) International Patent Classification:
B05B 11/00 (2006.01)

(21) International Application Number:
PCT/IB2011/050908

(22) International Filing Date:
3 March 2011 (03.03.2011)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
BS2010A000078 14 April 2010 (14.04.2010) IT

(71) Applicant (for all designated States except US): **GUALA DISPENSING S.p.A.** [IT/IT]; Zona Ind. D/5 Spinetta Marengo, I-ALESSANDRIA I-15122 (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ALLUIGI, Riccardo** [IT/IT]; c/o GUALA DISPENSING S.p.A. Zona Ind., D/5 Spinetta Marengo, I-15122 Alessandria (IT).

(74) Agents: **PULIERI, Gianluca Antonio** et al.; c/o JACOBACCI & PARTNERS S.p.A., Piazza della Vittoria, 11, I-25122 Brescia (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: TRIGGER DISPENSER FOR LIQUIDS WITH A STOP FOR THE DISPENSING VALVE

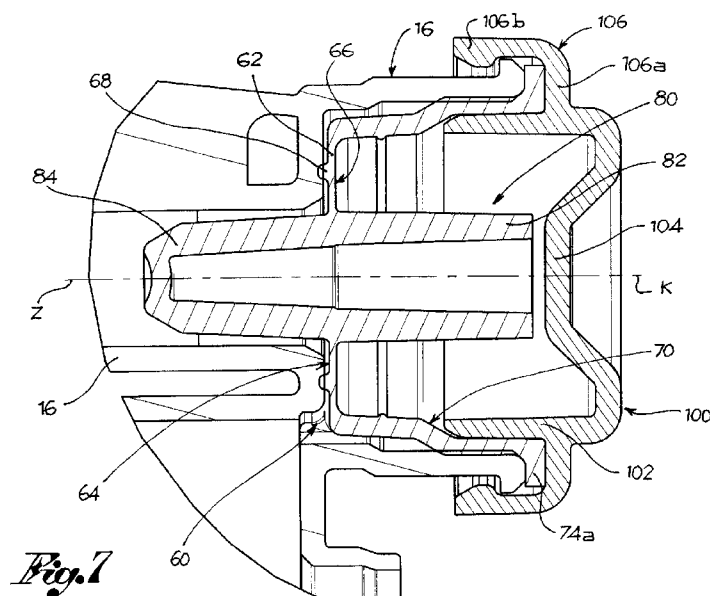

(57) Abstract: A trigger dispenser (1) for liquids comprises a suction valve (30) and a delivery valve (60), separate from the suction valve (30). The dispenser (1) has a detachable stop (100), comprising a bottom (104) positioned rearwards of the delivery valve (60) to form an end stop abutment with this during the dispensing step.

DESCRIPTION**"Trigger dispenser for liquids with a stop for the
dispensing valve"**

[0001] The present invention relates to a trigger dispenser device for a liquid.

[0002] The prior trigger dispenser devices envisage pumping means operated by a trigger, which aspirate the liquid into a pumping chamber and dispense it externally by means of a piston.

[0003] It is well-known how, in order for the jet of liquid dispensed to travel a good distance from the device and a good spray of fine drops to be achieved, a pre-compression of the liquid before dispensing is required.

[0004] Trigger dispenser devices are known of with a pre-compression valve, also known as delivery valve, positioned between the pumping chamber and the dispensing pipe of the liquid.

[0005] However, such valves have numerous drawbacks: often, subjected to the pressure of the liquid, they open more than they should, with obvious consequences on the functioning of the device.

[0006] Some prior devices therefore have a portion of the cover positioned rearwards of the delivery valve, to limit its excursion. However, such devices are subject to malfunctioning due to impact of the cover, which alters

the abutment for the delivery valve.

[0007] The purpose of the present invention is to satisfy the aforesaid requirements, and to overcome the drawbacks of the prior art, by making a trigger dispenser device with a significantly reliable pre-compression valve.

[0008] Such purpose is achieved by a dispenser device according to claim 1.

[0009] The characteristics and advantages of the trigger dispenser device according to the present invention will be evident from the description given below, made by way of a non-limiting example, according to the appended drawings, wherein:

[0010] - figure 1 shows a cross-section view of the dispenser device according to the present invention in accordance with one embodiment;

[0011] - figure 2 shows a detail of the cross-section in figure 1, showing a suction valve of the device;

[0012] - figure 3 shows the suction valve in figure 2;

[0013] - figure 4 shows a detail of the cross-section in figure 1, showing a delivery valve of the device;

[0014] - figures 5 and 6 shows the delivery valve in figure 4;

[0015] - figure 7 shows a cross-section view of a further embodiment of the delivery valve;

[0016] - figure 8 shows the dispenser device without the

cover;

[0017] - figure 9 shows an enlargement of the frame IX in figure 8; and

[0018] - figure 10 shows a return element of the dispenser device.

[0019] A dispenser assembly for a liquid comprises a container, to contain the liquid to be dispensed, and a manually operated trigger dispenser device 1, mechanically connected to the container.

[0020] For example, the device 1 comprises a closure 2 for connection with the neck of the bottle, for example for a threaded or bayonet coupling.

[0021] The device 1 further comprises a frame 3, generally made in polymer material, usually in one piece, for the support of the other components.

[0022] In particular, the device 1 comprises pumping means suitable to aspirate the liquid from the container and to spray it outwards of the said device.

[0023] For example, the pumping means comprise a pumping chamber 4 suitable to be placed in fluidic communication with the container; for example, the frame 3 comprises a suction pipe 6 open at one end towards the container and such as to come out, at the opposite end, in the chamber 4.

[0024] The pumping means further comprise a piston 8,

sliding sealed in the chamber 4 along a piston axis X.

[0025] For example, the frame 3 comprises a chamber wall 10a, for example cylindrical, with axis coinciding with the piston axis X, which annularly defines the chamber 4, and a bottom wall 10b, for example perpendicular to the piston axis X, placed opposite the piston head 8, which defines the bottom of the chamber 4.

[0026] Preferably, the suction pipe 6 comes out into the pumping chamber 4 through the suction opening 6a made in said bottom wall 10b.

[0027] In addition, the device 1 comprises actuation means with manual activation, suitable to be moved to move the piston 8 in translation.

[0028] For example, the actuation means comprise a trigger 12, supported by the frame 3, for example hinged to it or translatable on it. The trigger 12 is engageable with the piston 8 to move said piston in translation.

[0029] The piston 8 is slidable in the chamber 4 between an initial rest or rearward position, wherein the volume of the chamber 4 is at its maximum, and a final dispensing or forward or end stop position, wherein the volume of the chamber 4 is at its minimum.

[0030] Preferably, moreover, the actuation means comprise return means suitable for constantly influencing the trigger towards the initial rest position. For example,

said return means comprise an elastic element 200.

[0031] Furthermore, the device 1 comprises a dispensing pipe 14 suitable to be placed in fluidic communication with an inlet opening 14a, with the pumping chamber 4 and, at the outlet opening 14b, with the outside environment, to spray the liquid into the environment.

[0032] For example, the frame 3 comprises an annular duct wall 16 around the dispensing axis Z, which annularly defines the dispensing pipe 14.

[0033] The dispensing pipe extends along the dispensing axis Z, preferably distinct and parallel with the piston axis X.

[0034] In correspondence of the inlet opening 14a, outside the dispensing pipe 14, the frame 3 comprises a support wall 16, for example an annular wall axial-symmetric to the dispensing axis Z.

[0035] Around the inlet opening 14a, outside the dispensing pipe 14, a crown surface 18 is made which surrounds said inlet opening 14a given that the support wall 16 is larger in size than said inlet opening 14a.

[0036] Preferably, moreover, the device 1 comprises a nozzle 20 applied to the outlet end 14b of the dispensing pipe 14, to place the outgoing liquid in vortication or to nebulise it or to close /open the dispensing pipe exit.

[0037] One embodiment of such nozzle is described, for example, in the document BS2010A000003 in the Applicant's name, the teaching of which is herein incorporated.

[0038] Preferably, moreover, the nozzle 20 is provided with apertures 22 on the lateral wall, to form a functioning indicator, together with a jutting wall 24 of the frame 3, positioned below said aperture 22.

[0039] The embodiment details of a dispenser device having a nozzle fitted with functioning indicator is described, for example, in the document BS2009A000195 in the Applicant's name, the teaching of which is herein incorporated.

[0040] Preferably, the device 1 comprises suction valve means suitable to permit the passage of liquid from the suction pipe 6 to the pumping chamber 4 when the piston 8 returns from the final position to the initial position and suitable to limit or prevent the return of the liquid from the pumping chamber 4 to the suction pipe 6 when the piston translates from the initial position to the final position.

[0041] The suction valve means comprise a suction valve 30 suitable to fluidically separate the pumping chamber 4 from the suction pipe 6, applied to the bottom wall 10b of the chamber 4, so as to surmount or cover the suction opening 6a.

[0042] The suction valve 30 comprises a diaphragm 32, which surmounts the suction opening 6a, having a front side 34, facing the piston 8, and a rear side 36, preferably axial-symmetric to a valve axis Y.

[0043] Preferably, the valve axis Y coincides with the piston axis 8.

[0044] The valve 30 further comprises, according to one embodiment, a continuous annular boss 38, projecting axially from the rear side 36 of the diaphragm 32.

[0045] Preferably, moreover, the valve 30 comprises a stem 40, projecting from the rear side 36, preferably along the valve axis Y. The stem 40 is suitable to snap-couple to the bottom wall 10b, for example through the thickness crossing a hole 10c made through the thickness of said bottom wall 10b.

[0046] Preferably, from the inside of the chamber 4 outwards, along the valve axis Y, the stem 40 comprises a sealing section 42, which has a diameter suitable to be inserted in the hole 10c so as to seal it, a reduced section 44 and a head 46, preferably pointed, for snap-insertion in the hole 10c.

[0047] Preferably, moreover, the valve 30 has an axial compartment 48, extending along the valve axis Y, open on the front side 34 and blind.

[0048] Preferably, moreover, the device 1 comprises

delivery valve means suitable to permit the passage of the pressurised liquid from the pumping chamber 4 to the dispensing pipe 14 when the piston translates from the initial position to the final position.

[0049] The delivery valve means comprise a delivery valve 60, applied to the intake of the dispensing pipe 14, that is, in correspondence with the inlet opening 14a.

[0050] The delivery valve 60 comprises a flexible baffle 62, having a front surface 64 facing the dispensing pipe 14, and a rear surface 66, positioned so as to abut with the crown surface 18, preferably axial-symmetric to a delivery valve axis K.

[0051] Preferably, the delivery valve axis K coincides with the dispensing axis Z.

[0052] Preferably, moreover, the delivery valve 60 comprises a continuous annular boss 68, projecting axially from the rear side 64 of the baffle 62.

[0053] According to a preferred embodiment, the delivery valve 60, comprises a connection wall 70, projecting axially from the rear side 66 of the baffle 62, which can be hooked to the support wall 16 of the frame 3.

[0054] In particular, at the free annular end 72, opposite the baffle 62, the connection wall 70 comprises a welt 74 suitable to hook onto the support wall 16.

[0055] Preferably, moreover, the delivery valve 60

comprises a sleeve 80 having an axial extension, composed of a tubular element projecting from the baffle 62.

[0056] Preferably, the sleeve 80 comprises an abutment section 82 projecting axially from the rear surface 66 of the baffle 62, for example so as to remain axially contained in the connection wall 70.

[0057] Preferably, in addition, the sleeve 80 comprises an auxiliary section 84 projecting axially from the front surface 64 of the baffle 62, inserting a section of itself into the dispensing pipe 14, without obstructing it.

[0058] Preferably, moreover, the sleeve is itself made in one piece and in one piece with the baffle 62; the sleeve 80 is closed at the front, while at the rear it is open, to facilitate assembly of the valve to the frame.

[0059] According to a preferred embodiment, moreover, the device 1 comprises a cover 90 supported by the frame 3, to cover said frame and the inside components. The trigger 12 and preferably the nozzle 20 project from the cover 90.

[0060] Preferably, the cover 90 comprises an upper portion 92 which extends along the dispensing pipe 14, as far as the nozzle 20. Preferably, said upper portion 92 has at least one indicator opening 92a, from which a signalling portion 94 of the frame 3 preferably projects or is

visible, preferably in colour contrast with said upper portion 92, to form a signal.

[0061] According to one embodiment moreover, the cover 90 comprises a rear portion 96, positioned rearwards of the delivery valve 60, in relation to the dispensing axis Z.

[0062] In a rest configuration of the dispensing device, the rear portion 96 of the cover 90 is axially distanced from the sleeve 80 of the delivery valve 60; in a dispensing configuration rather, wherein the baffle 62 is deformed to permit the passage of pressurised liquid into the dispensing pipe, the sleeve 80 axially abuts with the rear portion 96 of the cover 90, to form an end stop.

[0063] According to a further embodiment (figure 7), the delivery valve 60 has a free end 72 of the connection wall 70 which ends in a radial, annular base crown 74a, placed in axial abutment with the support wall 16 of the frame 3.

[0064] According to such embodiment the device 1 further comprises, in addition, a stop 100 applied rearwards of the delivery valve 60, connected to the support wall 16 of the frame 3.

[0065] For example, the stop 100 is engageable by snap-coupling with the support wall 16.

[0066] In such configuration therefore, the abutment for the delivery valve, formed by the stop 100, is

structurally independent of the cover 90.

[0067] Advantageously, this makes it possible to simplify production of the device and, in addition, to free the cover of functional tasks in relation to the delivery valve. In other words, advantageously, this makes it possible to assign the cover a solely aesthetic role, without the impact it is usually subjected to, detracting from the functioning of the inside components.

[0068] In particular, the stop 100 comprises a cup element 102 inserted in the support wall 16, a bottom 104, on the bottom of the cup element 102, positioned rearwards of the sleeve 80, and an annular arm 106, which extends externally to the cup element 102.

[0069] The annular arm 106 comprises a radial portion 106a, which extends radially outwards of the cup element 102, and an axial portion 106b, connected to the radial portion, which extends axially so as to snap-couple to the support wall 16.

[0070] The base crown 74a of the connection wall 70 is thereby constrained between the end of the support wall 16 and the radial portion 106a of the annular arm 106.

[0071] Moreover, the cup element 102 is axially overlapped, at least along one section, with the connection wall 70 of the delivery valve 60.

[0072] Said connection wall 70 is therefore pushed radially

by the cup element 102 against the support wall 16 of the frame 3, so as to block the connection wall 70 and produce forced adhesion of the connection wall 70 to the support wall 16.

[0073] Such configuration has proven particularly advantageous, in that the delivery valve acts as a pre-compression valve, opening to transit of the liquid towards the dispensing pipe only when the action of the liquid exceeds a predefined pressure threshold.

[0074] In a rest configuration of the dispensing device, the rear portion 104 of the stop 100 is axially distanced from the sleeve 80 of the delivery valve 60; in a dispensing configuration rather, wherein the baffle 62 is deformed to permit the passage of pressurised liquid into the dispensing pipe, the sleeve 80 axially abuts with the rear portion 104 of the stop 100, to form an end stop.

[0075] The device 1 is fitted with return means, comprising the elastic element 200, suitable for constantly influencing the trigger 12 towards the initial rest position.

[0076] The elastic element 200 is positioned externally to the pumping chamber 4, engaged on one side with the trigger 12, for example near the connection of said trigger to the piston 8, and on the other side connected to the frame 3.

[0077] Preferably, the elastic element 200 is symmetric to the piston axis X and is positioned astride the pumping chamber 4.

[0078] According to a preferred embodiment, the elastic element 200 comprises a transversal bar 202, engaged with the trigger 12, extending along a transversal axis W perpendicular to the imaginary plane on which the piston axis X and the dispensing axis Z lie.

[0079] Preferably, moreover, the elastic element 200 comprises a pair of arched arms 204, parallel and transversally distanced, between which the pumping chamber 4 is contained, which extend axially starting from the transversal bar 202.

[0080] Preferably, moreover, the elastic element 200 comprises a connection bar 206, which joins the two arched arms 204 on the side opposite the transversal bar 202.

[0081] The connection bar 206 snap-couples to the frame 3, for example in the area under the pumping chamber.

[0082] For example, the elastic element 200 comprises at least one insert projecting axially from the connection bar 206, snap-coupling to the frame. For example, a pair of inserts 208 is envisaged, each preferably formed of a pair of flexible prongs.

[0083] During normal use, the device 1 is mechanically

connected to the container and a tube is usually connected to the suction pipe 6, to aspirate the liquid contained in the container.

[0084] According to a preferred embodiment, the suction valve and/or the delivery valve are made by moulding, for example in low-density polyethylene (PELD); preferably, moreover, the elastic element is moulded, for example in acetalic resin (POM); preferably, in addition, the stop is moulded, for example in polypropylene (PP).

[0085] In an initial configuration, let us assume that the pumping chamber 4 already contains aspirated liquid and that the piston is in the initial rest position.

[0086] By operating the trigger 12, the piston 8 translates from the initial position towards the final position, pressing the liquid contained in the pumping chamber 4, constituting a dispensing step of use of the device.

[0087] During the dispensing step, the liquid acts on the suction valve 30, pressing the diaphragm 32, which covers the suction opening 6a of the dispensing pipe 6, against the bottom wall 10b, so as to create a seal against the return of the liquid from the chamber 4 towards the container.

[0088] In particular, the boss 38, which surrounds the suction opening 6a externally to the suction pipe, is pressed against the bottom wall 10b, ensuring the seal.

[0089] In addition, during the dispensing step, the liquid acts on the delivery valve 60 so as to distance the baffle 62 from the crown surface 18 which surrounds the inlet opening 14a of the dispenser pipe 14.

[0090] In particular, the liquid seeps between the baffle 62 and the crown surface 18, outside the annular boss 68, causing the detachment of the baffle 62 from the crown surface and therefore the entrance of the pressurised liquid into the dispensing pipe 14.

[0091] The baffle 62 is limited in its backward movement by the sleeve 80 which during the dispensing step goes to abut against the rear portion 96 of the cover 90 or of the bottom 104 of the stop 100, depending on the embodiment.

[0092] During the dispensing step, the elastic element 200 deforms elastically; in particular, the arched arms 204 arch further than in the un-deformed condition.

[0093] At the end of the dispensing step, the piston is in the final position and the trigger is released. The return means act on the trigger to bring it back again, simultaneously dragging the piston from the final position towards the initial position, constituting a return step of use of the device.

[0094] During the return step, a depression is created in the pumping chamber 4, by virtue of the sealed sliding of

the piston 8.

[0095] During the return step, the diaphragm 32 of the suction valve 30 separates from the bottom wall 10b and the depression permits suction of the liquid from the container into the pumping chamber 4.

[0096] In the return step, furthermore, the baffle 62 of the dispenser valve 60 remains in contact with the crown surface 18.

[0097] Innovatively, the dispenser device according to the present invention demonstrates excellent repeatability of functioning as regards the pre-compression of the liquid to be dispensed.

[0098] Advantageously, moreover, the device is very easy to assemble, and therefore permits a lowering of machine-time and consequent increase in production.

[0099] In particular, many components are coaxial, enabling very rapid assembly; in addition, many components are axial-symmetric, thereby preventing problems of orientation during assembly.

[00100] According to a further advantageous aspect, the components are firmly connected to the frame, to prevent accidental dismantling, for example during transport; in addition, the connection is often a snap-coupling, leading to high speed and reliable assembly.

[00101] It is clear that a person skilled in the art

may make modifications to the device described above so as to satisfy contingent requirements.

[00102] For example, according to one embodiment, the piston axis and dispensing axis are separate and incident.

[00103] Such variations are also contained within the sphere of protection as defined by the appended claims.

CLAIMS

1. Triggered dispensing device (1) for a liquid, comprising:

- a frame (3);
- a pumping chamber (4) and a piston (8) sliding sealed in the pumping chamber along a piston axis (X), said chamber being provided of a bottom wall (10b);
- a trigger (12) operatively connected to the piston (8) to move it;
- a suction pipe (6) fluidly connectable to a container of the liquid to be dispensed, wherein said suction pipe (6) comes out into the pumping chamber (4) through a suction opening (6a) provided in the bottom wall (10b);
- a dispensing pipe (14) having extension along a dispensing axis (Z), fluidly connected at an extremity to the pumping chamber (4) through an inlet opening (14a) and, at the other extremity, fluidly connected with the outside environment;
- a suction valve (30) suitable for regulating the flow of fluid between the suction pipe (6) and the pumping chamber (4);
- a delivery valve (60), distinct from the suction valve, comprising a baffle (62) outside the dispensing pipe (14), suitable for regulating the flow of fluids between the pumping chamber and the dispensing pipe (14);

- a removable stop (100), comprising a bottom (104) arranged behind the delivery valve (60), to create a stop for this during the dispensing phase.

2. Device according to the claim 1, wherein the frame (3) comprises a supporting wall (16) annular with respect to the dispensing axis (Z) and the stop (100) is fitted to the supporting wall (16).

3. Device according to the claim 2, wherein the delivery valve (60) comprises a connection wall (70) annular with respect to the dispensing axis (Z), inserted in the supporting wall (16) of the frame (3) and abutting on this, and wherein the stop (100) comprises a cup element (102) having a section superimposed axially and inserted in the connection wall (70).

4. Device according to any one of the preceding claims wherein the stop (100) comprises an annular arm (106), that extends radially outwards, folding over the frame (3).

5. Device according to the claim 4, wherein the delivery valve (60) has a free extremity (72) of the connection wall (70) which ends with an annular radial base crown (74a), positioned axially up against the supporting wall (16) of the frame (3), on which the annular arm (106) folds.

6. Device according to any one of the preceding claims, wherein the inlet opening (14a) is surrounded, outside


the dispensing pipe (14), by a crown surface (18), and wherein the baffle (62) of the delivery valve (60), in the return phase, is abutting on the crown surface (18) that surrounds the inlet opening (14a) of the dispensing pipe (14).



7. Device according to any one of the preceding claims, wherein the delivery valve (60) comprises a sleeve (80) protruding from the baffle (62) along a delivery valve axis (K), on the opposite side respect to the dispensing pipe (14), to create a stop during the dispensing phase.

8. Device according to the claim 7, wherein the delivery valve axis (K) coincides with the dispensing axis (Z).

9. Device according to any one of the preceding claims, wherein the delivery valve is made all in one piece, preferably of low-density polyethylene.

10. Device according to any one of the preceding claims, comprising a cover (90) to cover the internal components.

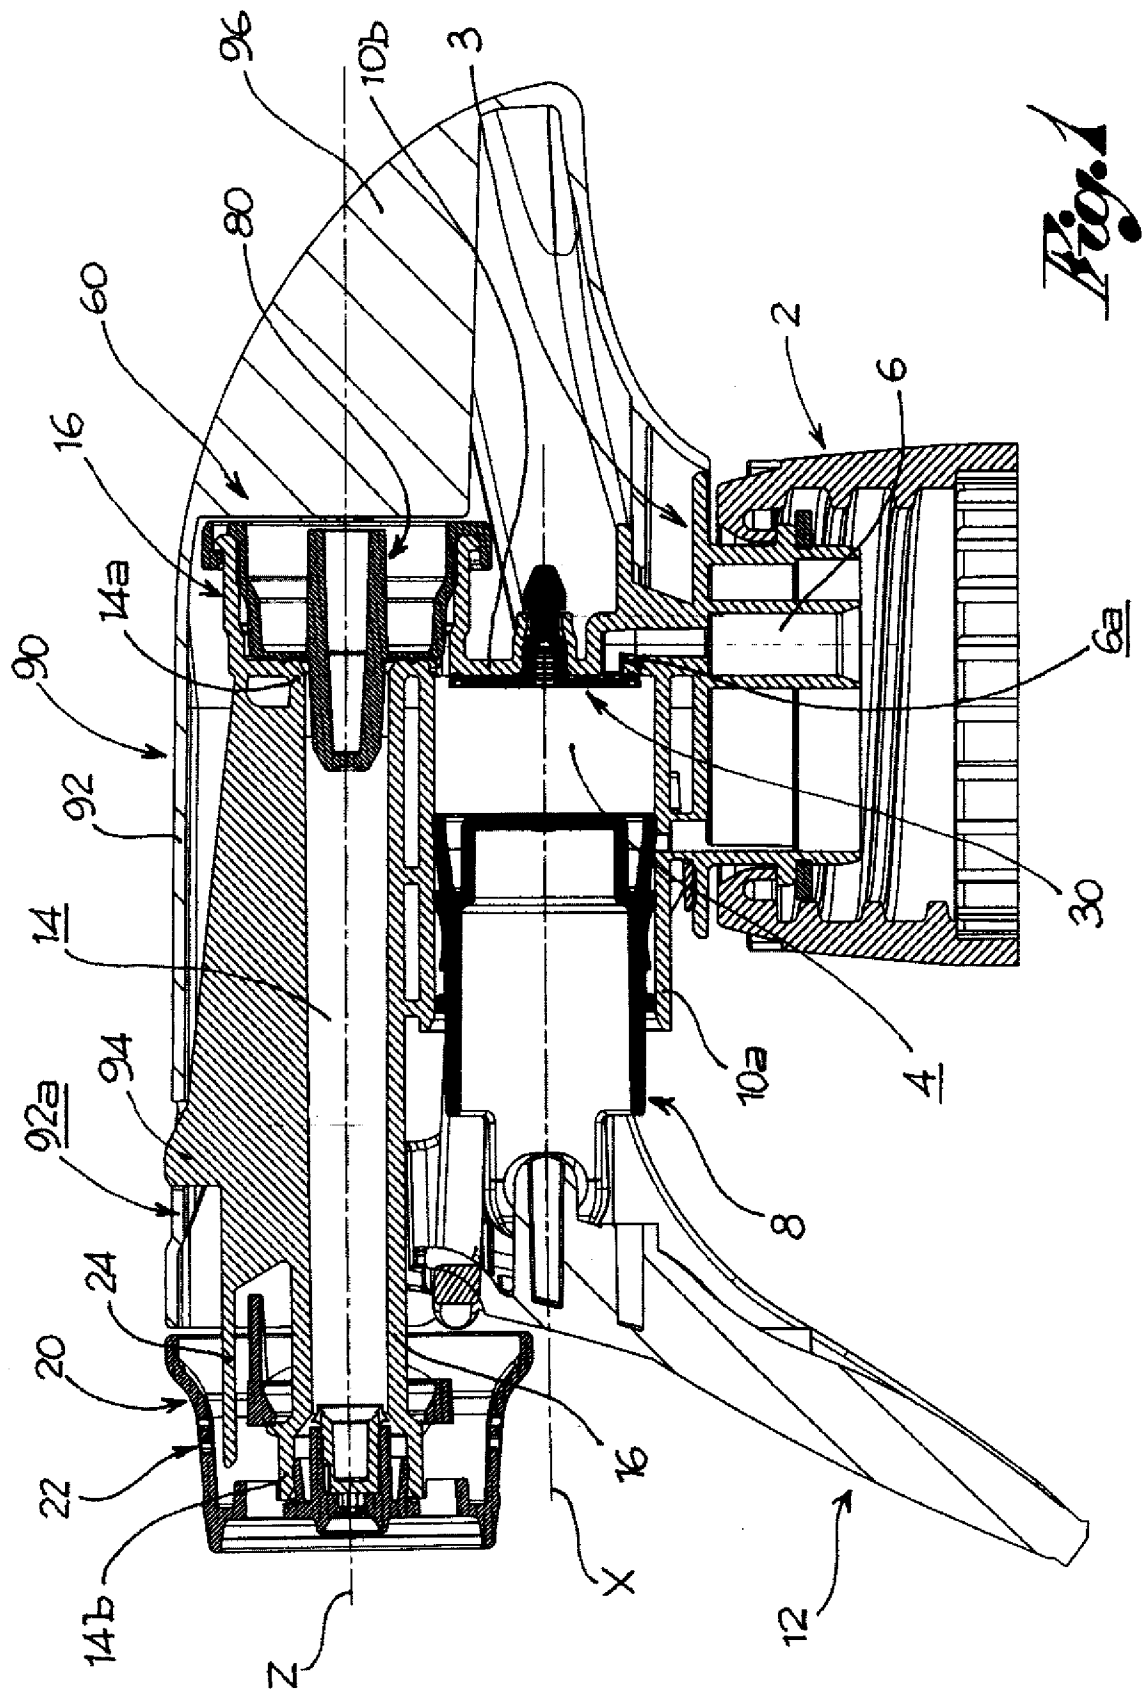

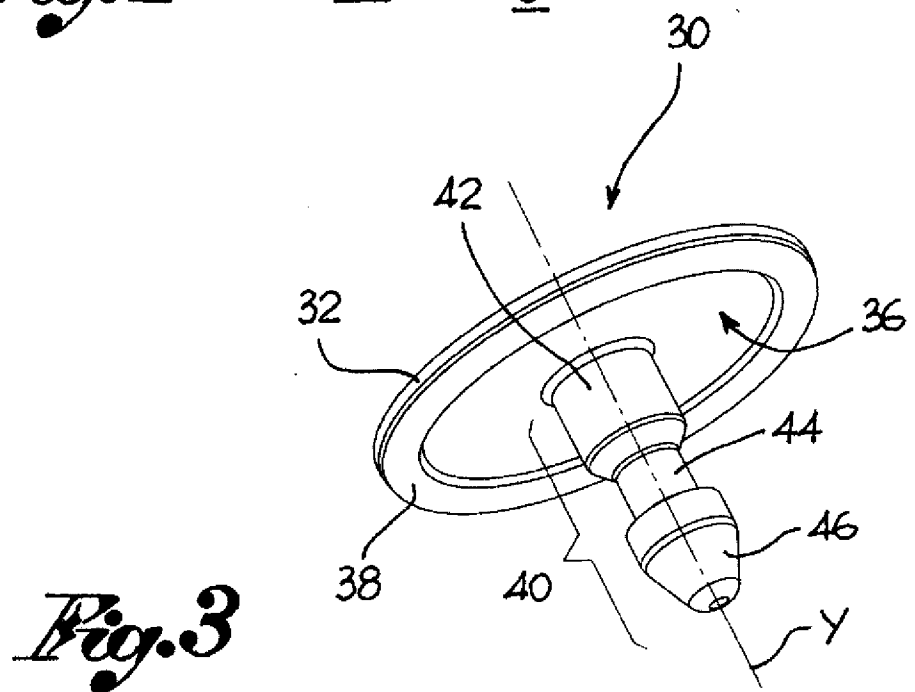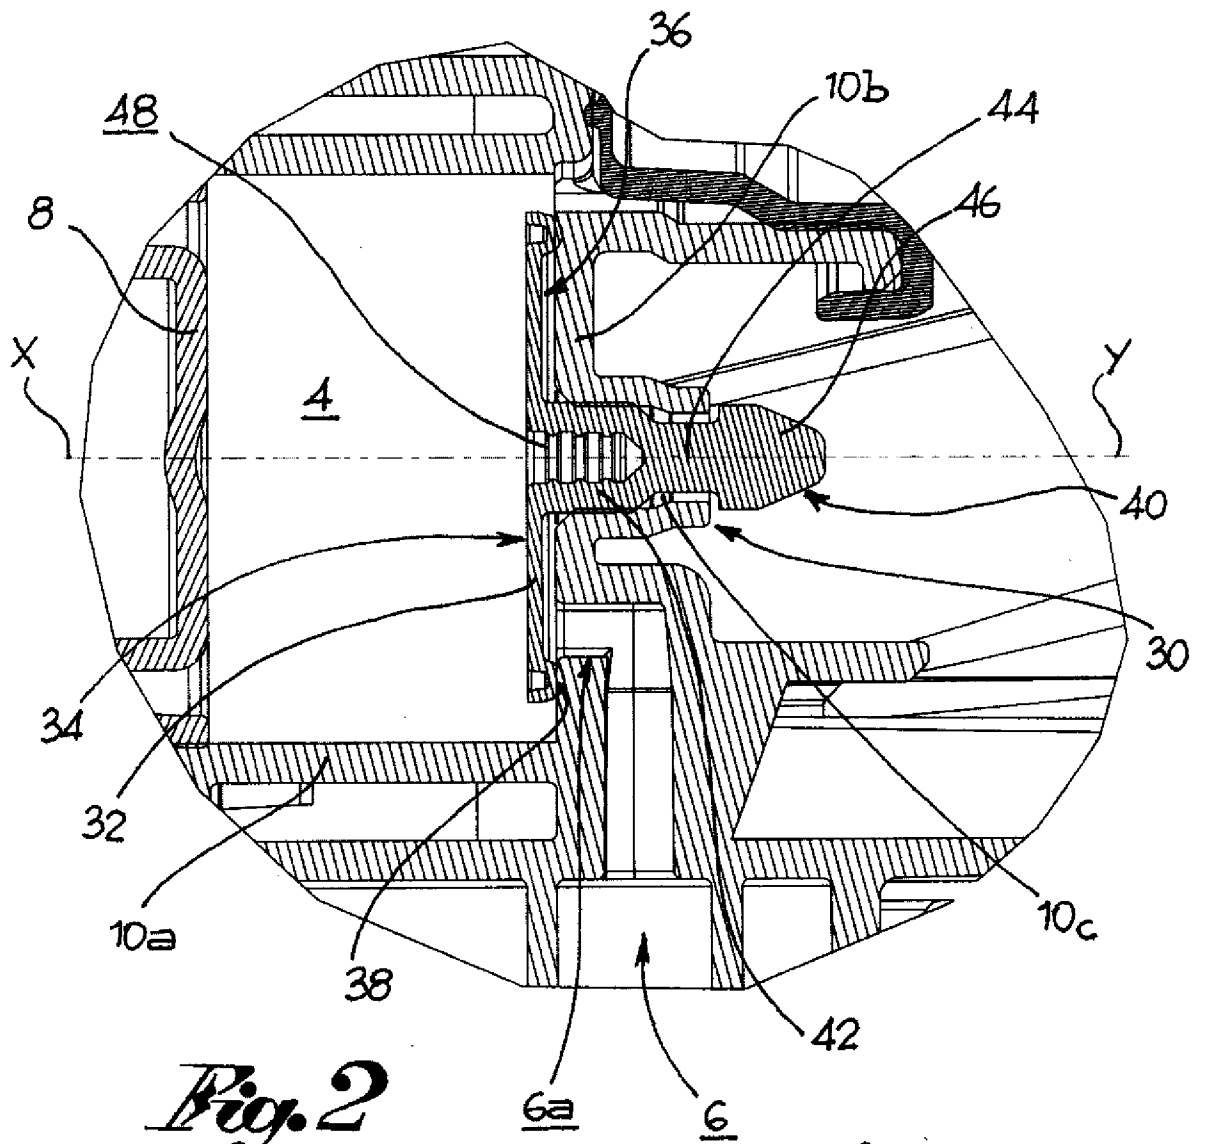

3/5





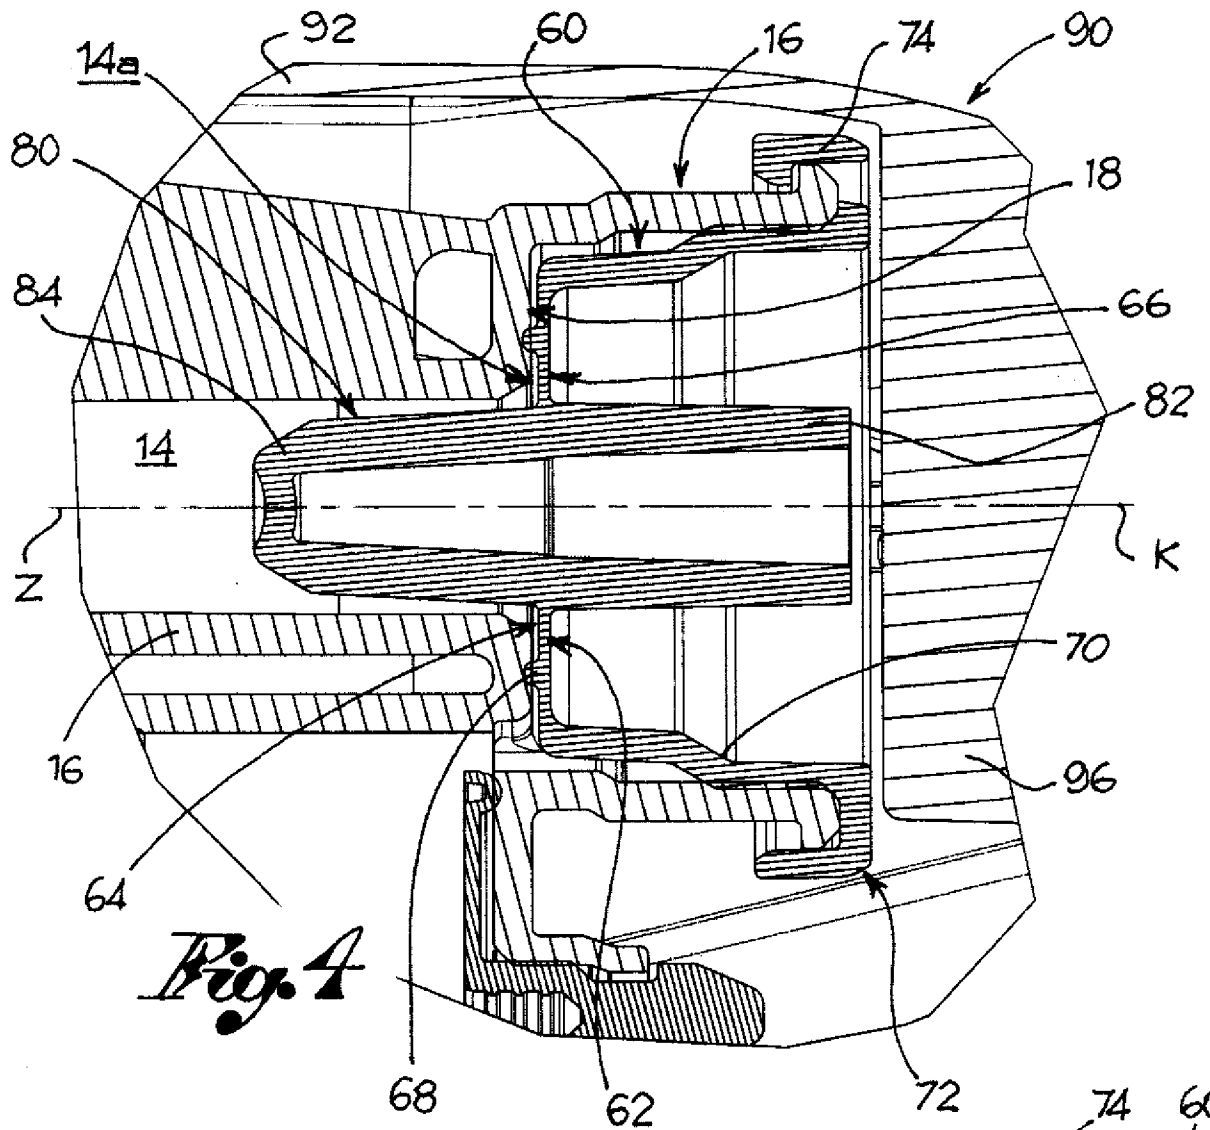


Fig. 5

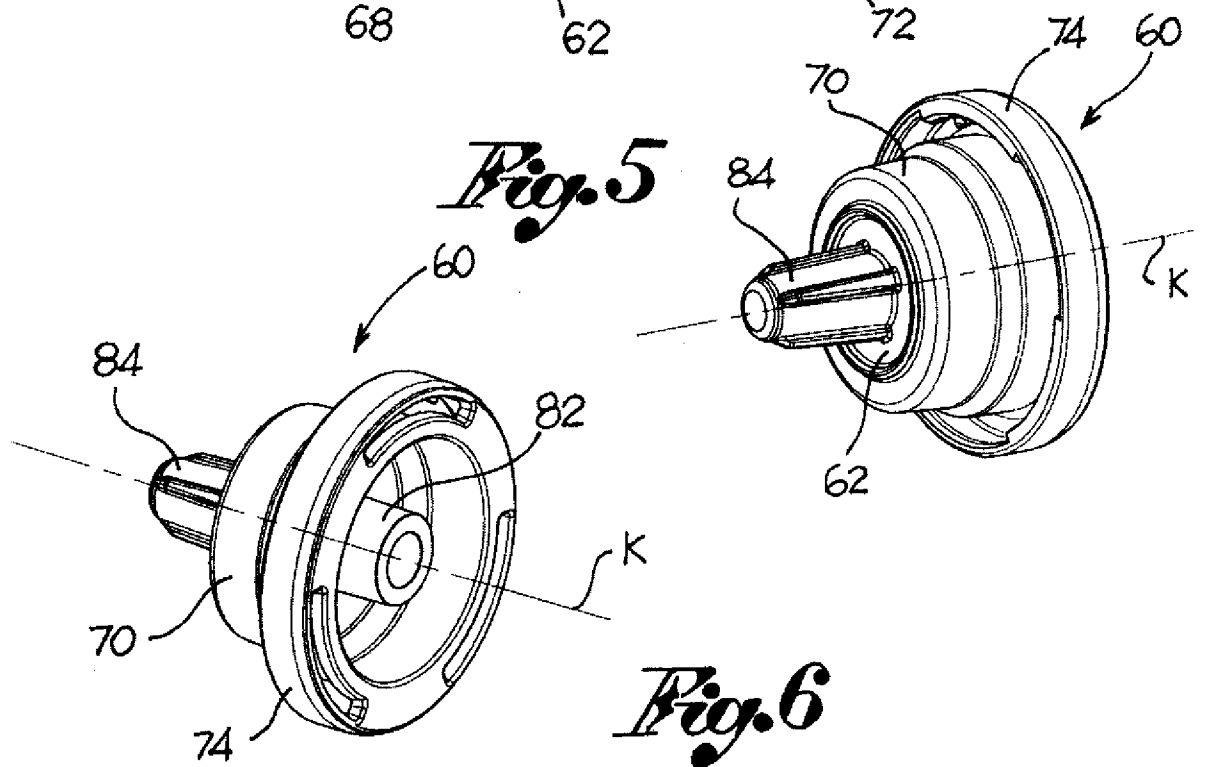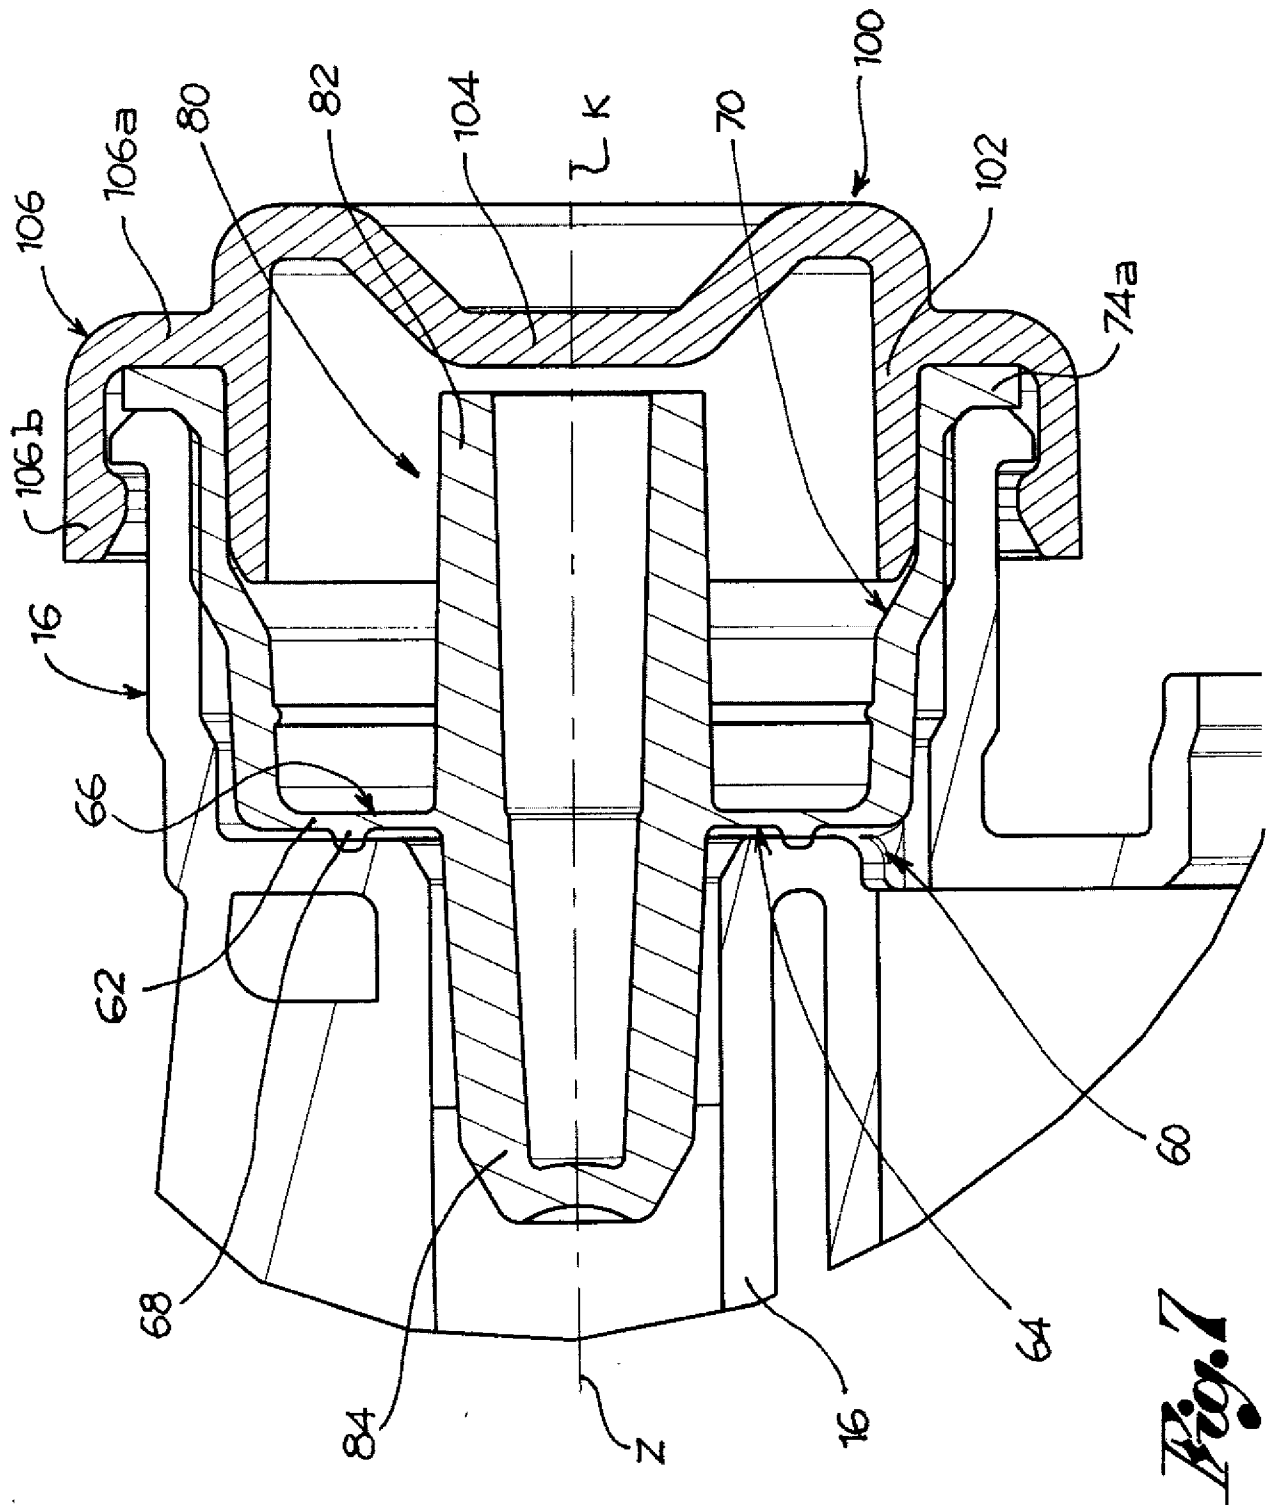

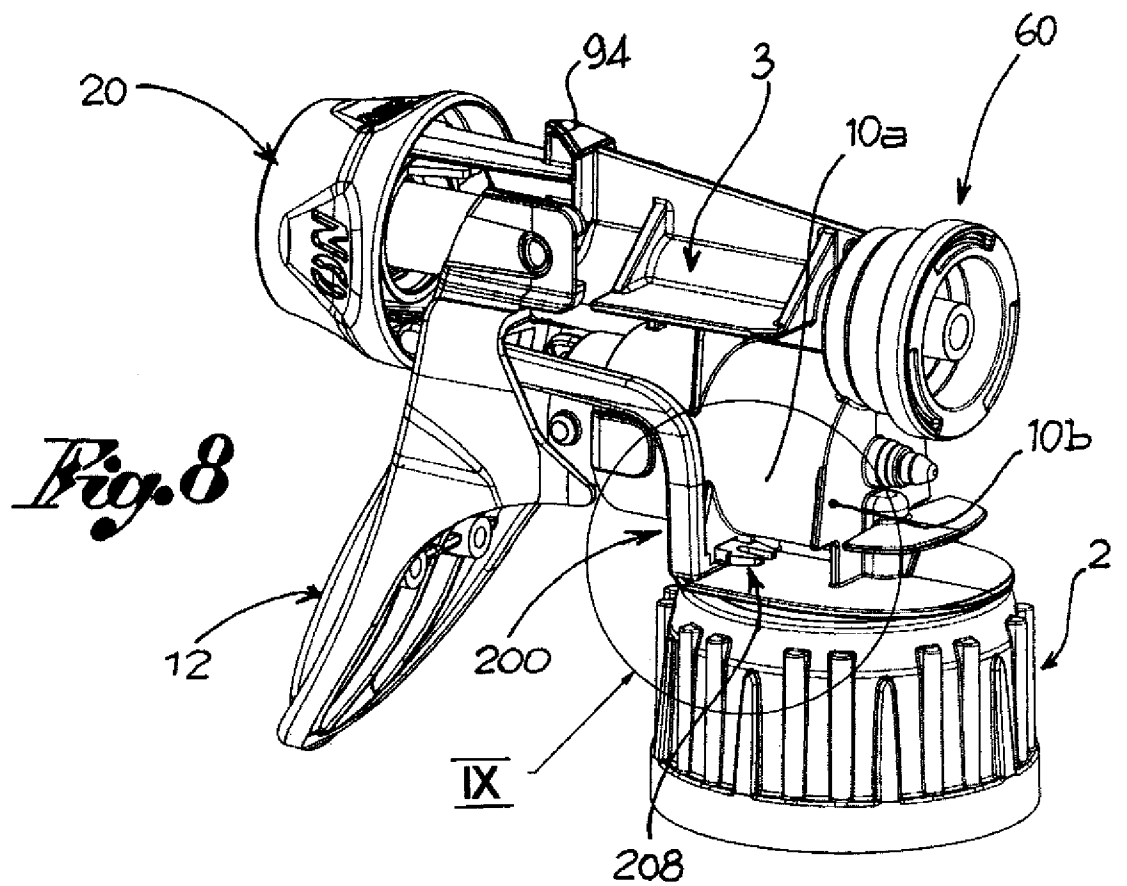

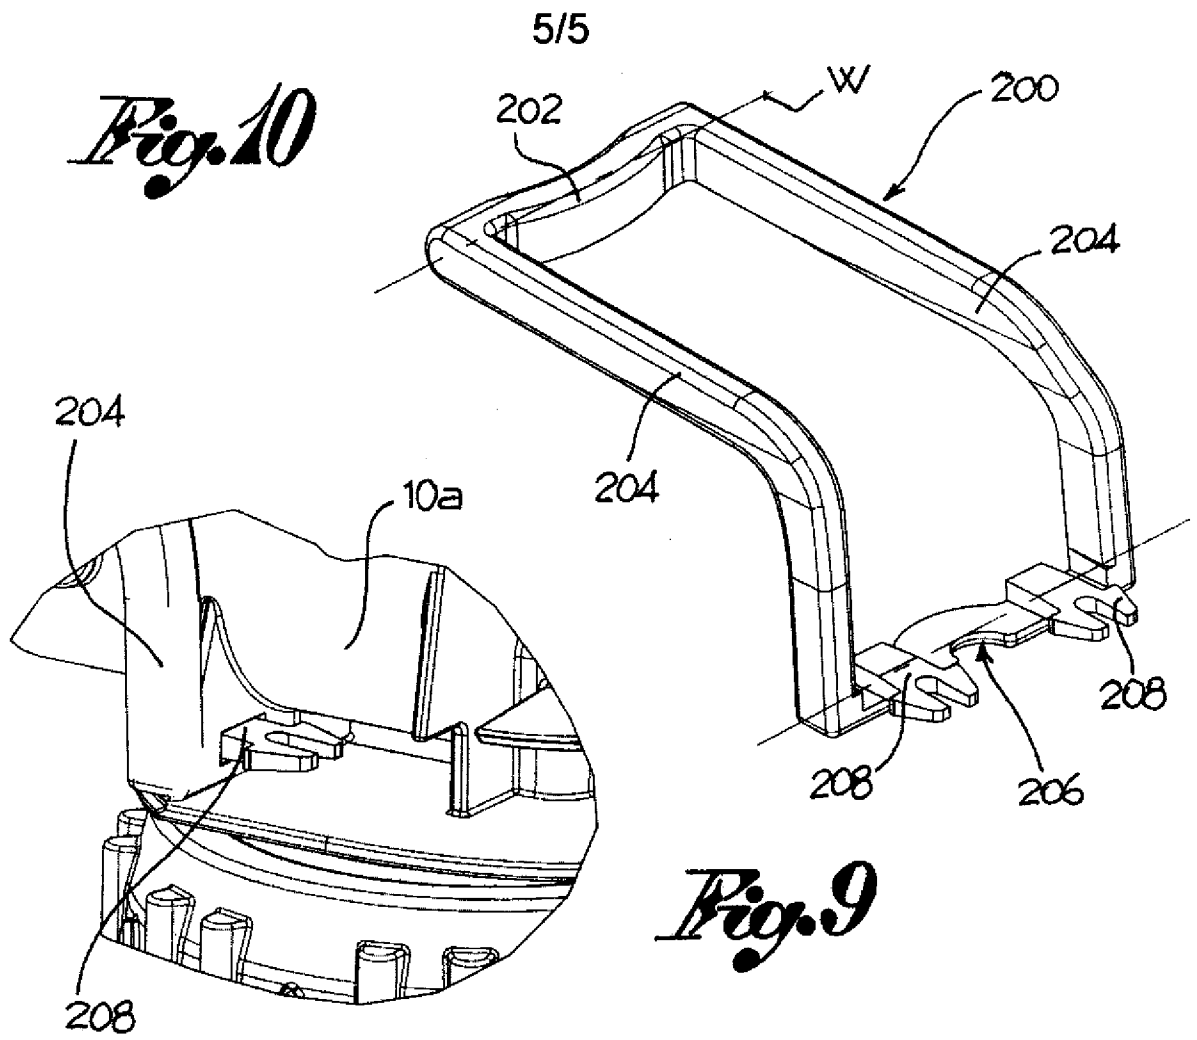

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2011/050908

A. CLASSIFICATION OF SUBJECT MATTER
INV. B05B11/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/116656 A1 (AFA POLYTEK BV [NL]; MAAS WILHELMUS JOHANNES JOSEPH [NL]; HURKMANS PET) 2 October 2008 (2008-10-02)	1,6-10
A	page 5, lines 18-24 page 10, line 16 - page 15, line 31 figures 1-11	2-5
X	WO 00/33970 A1 (AFA POLYTEK BV [NL]; MAAS WILHELMUS J J [NL]; HURKMANS PETRUS L W [NL]) 15 June 2000 (2000-06-15)	1,6-10
A	page 4, line 35 - page 7, line 31 figures 1-9	2-5
A	FR 2 928 357 A1 (AIRLESSYSTEMS SOC PAR ACTIONS [FR]) 11 September 2009 (2009-09-11) page 6, line 25 - page 8, line 16 figures 1,6,7	1
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 June 2011

Date of mailing of the international search report

24/06/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Menn, Patrick

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2011/050908

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 10 2007 024724 A1 (INOTECH KUNSTSTOFFTECHNIK GMBH [DE]) 31 July 2008 (2008-07-31) paragraph [0032] figures 1-4 -----	1
A	US 4 986 453 A (LINA JEAN-PIERRE [FR] ET AL) 22 January 1991 (1991-01-22) column 7, lines 62-66 figures 1,8-13 -----	1
A	US 2009/152304 A1 (FOSTER DONALD D [US]) 18 June 2009 (2009-06-18) paragraphs [0002], [0022], [0043] figures 1-4 -----	1
A	JP 10 146546 A (YOSHINO KOGYOSHO CO LTD) 2 June 1998 (1998-06-02) abstract figures 1,2 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2011/050908

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008116656	A1	02-10-2008	AR 067219 A1 07-10-2009
		AU 2008231968 A1 02-10-2008	
		CA 2681285 A1 02-10-2008	
		CL 8132008 A1 17-10-2008	
		CN 101674889 A 17-03-2010	
		EA 200901292 A1 30-04-2010	
		EP 1974826 A1 01-10-2008	
		JP 2010522076 T 01-07-2010	
		KR 20100015848 A 12-02-2010	
		US 2008230563 A1 25-09-2008	
		ZA 200906470 A 27-10-2010	
-----	-----	-----	-----
WO 0033970	A1	15-06-2000	AT 261778 T 15-04-2004
		AU 1897200 A 26-06-2000	
		BR 9916110 A 04-09-2001	
		CA 2354125 A1 15-06-2000	
		CN 1329522 A 02-01-2002	
		CZ 20012045 A3 15-05-2002	
		DE 69915677 D1 22-04-2004	
		DE 69915677 T2 10-02-2005	
		DK 1137493 T3 26-07-2004	
		EP 1137493 A1 04-10-2001	
		ES 2216612 T3 16-10-2004	
		HK 1042065 A1 10-12-2004	
		HU 0104627 A2 28-03-2002	
		JP 4344098 B2 14-10-2009	
		JP 2002531261 T 24-09-2002	
		PL 348824 A1 17-06-2002	
		PT 1137493 E 30-07-2004	
		RU 2234379 C2 20-08-2004	
		SK 7782001 A3 07-01-2002	
-----	-----	-----	-----
FR 2928357	A1	11-09-2009	NONE
-----	-----	-----	-----
DE 102007024724	A1	31-07-2008	NONE
-----	-----	-----	-----
US 4986453	A	22-01-1991	NONE
-----	-----	-----	-----
US 2009152304	A1	18-06-2009	NONE
-----	-----	-----	-----
JP 10146546	A	02-06-1998	JP 3655413 B2 02-06-2005
-----	-----	-----	-----