




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : D21F 3/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/70142</p> <p>(43) International Publication Date: 23 November 2000 (23.11.00)</p>
<p>(21) International Application Number: PCT/SE00/00826</p> <p>(22) International Filing Date: 2 May 2000 (02.05.00)</p> <p>(30) Priority Data: 9901754-3 14 May 1999 (14.05.99) SE 60/139,634 17 June 1999 (17.06.99) US</p> <p>(71) Applicants (for all designated States except US): VALMET-KARLSTAD AB [SE/SE]; Box 1014, S-651 15 Karlstad (SE). VALMET CORPORATION [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): LAAPOTTI, Jorma, Tapio [FI/FI]; Raponkuja 6, FIN-40270 Palokka (FI).</p> <p>(74) Agent: LUNDQUIST, Lars-Olof; L-O Lundquist Patentbyrå AB, Box 80, S-651 03 Karlstad (SE).</p>		<p>(81) Designated States: BR, CA, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: METHOD AND MACHINE FOR MANUFACTURING PRINTING PAPER OR PAPERBOARD

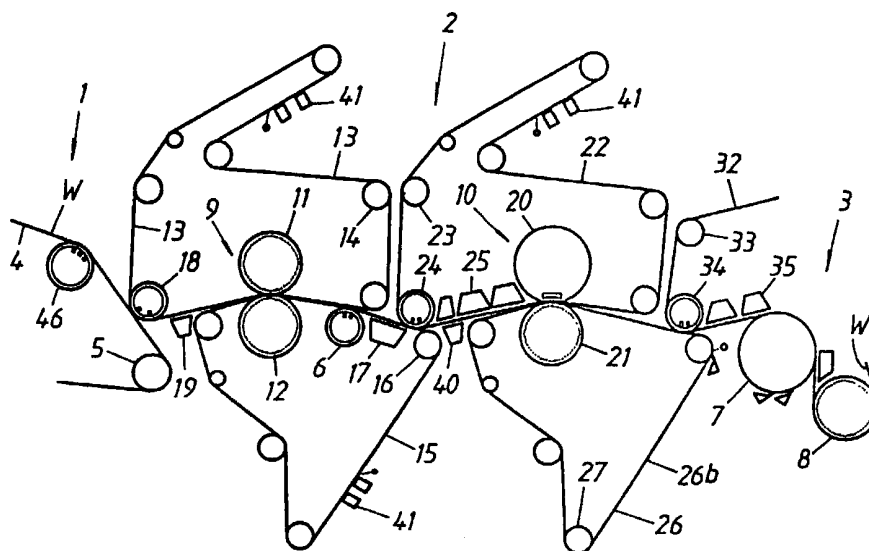

(57) Abstract

For manufacturing printing paper or paperboard with a grammage of 30–200 g/m² in a paper or paperboard machine, comprising a wet section, a press section and a drying section, and in which a formed web (W) is pressed in a roll press with a double-felted roll-press nip and, thereafter, in a shoe press with an extended single or double-felted shoe-press nip, it is suggested, in accordance with the invention that the web is pressed in a deflection-compensating roll press, having said double-felted roll-press nip and open press rolls; that the machine is operated at a web speed of at least 1,200 m/min.; that the web in the roll-press nip is subjected to a linear load ranging from 100 to 300 kN-m and a specific pressure ranging from 5 to 15 MPa; and that the web in the shoe-press nip is subjected to a linear load ranging from 500 to 1,500 kN/m and a specific high pressure ranging from 4 to 13 MPa, to obtain a dewatered web with a dry-solids content of at least 35 per cent after the roll-press nip and at least 45 per cent after the shoe-press nip.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method and machine for manufacturing printing paper or paperboard

The present invention relates to a method for
5 manufacturing printing paper or paperboard with a
grammage of 30-200 g/m² in a paper or paperboard machine,
comprising a wet section, a press section and a drying
section, in which method a web, formed in the wet
10 section, is pressed in a roll press with a double-felted
roll-press nip and, thereafter, in a shoe press with an
extended single or double-felted shoe-press nip.

The invention also relates to a paper or paperboard
machine for manufacturing printing paper or paperboard at
15 high speed, which printing paper or paperboard has a
grammage of 30-200 g/m², comprising a wet section, a
press section and a drying section, which press section
includes a roll press, having a double-felted roll-press
nip, and a shoe press, having an extended single or
20 double-felted shoe-press nip.

US-4,561,939 describes a paper machine with a press
section, consisting of a double-felted roll press and a
double-felted shoe press. The roll press is of a
25 conventional type having grooved rolls with rigid
envelope surfaces. Such a configuration precludes high
web speeds. After the press nip in the roll press, a
suction shoe is arranged in the loop of the lower press
felt, which suction shoe is intended to act so that the
30 web accompanies the lower press felt. At high speeds,
however, such a suction shoe cannot ensure such behaviour
of the web. The suction shoe is an important element in
the press section, according to this patent
specification, which therefore does not disclose or
35 suggest other suction devices to ensure the correct web
behaviour at high speeds. Said specification employs a
suction shoe after the second double-felted press nip as

well, which therefore contributes to a further limitation of this known paper machine in respect of web speed. Said patent specification is limited to a double-felted shoe press for the second press nip and, thus, it does not disclose a transfer belt to replace one of the press felts to enable a secure web run and, thereby, higher speeds. Neither does it recognize the possibility of operating with a transfer belt at very high speeds and obtaining good dry-solids content also for mechanical pulp, which is used for manufacturing newsprint, LWC base paper and SC paper. The known paper machine further lacks blowing boxes that generate partial vacuums to secure the firm attachment of the web to the press felt so as to enable high speeds, which result in strong air flows, which can easily detach the web from the press felt.

The object of the present invention is to provide an improved method and an improved paper or paperboard machine that enables the manufacture of printing paper or paperboard at very high speeds and that further enables high efficiency and a great increase in productivity.

The method, in accordance with the invention, is characterized in that

- the web is pressed in a deflection-compensating roll press, having said double-felted roll-press nip and open press rolls,
- the machine is operated at a web speed of at least 1,200 m/min.,
- the web in said roll-press nip is subjected to a linear load ranging from 100 to 300 kN/m, preferably from 120 to 250 kN/m, and a specific pressure ranging from 5 to 15 MPa, preferably from 8 to 11 MPa,
- the web in said shoe-press nip is subjected to a linear load ranging from 500 to 1,500 kN/m, preferably from 700 to 1,200 kN/m, and a specific pressure ranging from 4 to 13 MPa, preferably from 4 to 8 MPa,

- to obtain a dewatered web with a dry-solids content of at least 35 per cent, preferably at least 38 per cent, after the roll-press nip and at least 45 per cent after the shoe-press nip.

5

The paper or paperboard machine, in accordance with the invention, is characterized in that the roll press has open press rolls with deflection-compensating, rotatably journalled envelope surfaces and in that the machine is
10 arranged to be operated at a web speed of at least 1,200 m/min., with a linear load in the roll-press nip ranging from 100 to 300 kN/m, preferably from 120 to 250 kN/m, and in the shoe-press nip ranging from 500 to 1,500 kN/m, preferably from 700 to 1,200 kN/m, and with a
15 specific pressure in the roll-press nip ranging from 5 to 15 MPa, preferably from 8 to 11 MPa, and in the roll-press nip ranging from 4 to 13 MPa, preferably from 4 to 8 MPa, to obtain a dewatered web with a dry-solids content of at least 35 per cent, preferably at least
20 38 per cent, after the roll-press nip and at least 45 per cent after the shoe-press nip.

The invention is further described below with reference to the drawings.

25

Figure 1 shows schematically parts of a machine, in accordance with a first embodiment of the invention, for manufacturing a web of cellulosic fiber material.

30

Figure 1a shows parts of a press section, modified in relation to the one in the machine in accordance with Figure 1.

35

Figure 2 shows schematically parts of a machine, in accordance with a second embodiment of the invention.

Figure 3 shows schematically parts of a machine, in accordance with a third embodiment of the invention.

5 Figure 3a shows parts of a machine, the press section of which is modified in relation to the one in the machine in accordance with Figure 3.

10 Figure 4 shows schematically parts of a machine, in accordance with a fourth embodiment of the invention.

Figure 5 shows in detail the special roll press that forms part of the embodiments shown in accordance with Figures 1-4.

15 Figures 1-4 show schematically parts of paper or paperboard machines for manufacturing printing paper or paperboard in a continuous web W. Each of the machines comprises a wet section 1, a press section 2 and a drying section 3.

20 The wet section 1, of which the downstream part alone is shown, comprises a forming wire 4, running in a loop around guide rolls 5. In the embodiment according to Figure 1, a suction roll 46 is arranged in the loop of the forming wire 4 immediately upstream of a pick-up point. Such a suction roll is not always used in wire parts of more recent design, as illustrated in Figures 2-4.

30 The drying section 3 comprises a plurality of drying cylinders 7 and rolls 8, which can be grooved rolls or blind-drilled rolls, as shown, or, alternatively, smooth rolls or conventional suction rolls with or without an inner suction box with sealing devices (in the latter case with interior vacuum) or so-called "Vac" rolls, which have grooves, holes in the grooves and a partial vacuum inside the roll.

35

The press section 2 comprises a double-felted roll press 9 and, downstream of the roll press 9, a shoe press 10, which can be a single-felted shoe press in accordance with Figures 1 and 3 or a double-felted shoe press in accordance with Figures 2 and 4. The roll press 9 comprises an open upper press roll 11 and an open lower press roll 12, which press rolls 11, 12 co-operate with each other to create a roll-press nip between them. Further, the roll press 9 comprises an upper endless press felt 13, upper felt, running in a loop through the roll-press nip around a plurality of guide rolls 14, and a lower endless press felt 15, lower felt, running in a loop through the roll-press nip around a plurality of guide rolls 16.

The upper felt 13 of the roll press acts as a pick-up felt and has, in its loop, a pick-up suction roll 18, arranged in close proximity to the forming wire 4 to transfer the web W from the forming wire 4 to the upper felt 13.

In the embodiments in accordance with Figures 1 and 2, the lower felt 15 acts as the transfer felt, carrying the web W from the roll-press nip to the shoe press 10, whilst in the embodiments in accordance with Figures 3 and 4, the upper felt 13 acts as the transfer felt. In the loop of the press felt 13 or 15, respectively, acting as the transfer felt, blowing boxes generating partial vacuum or suction boxes 17 are arranged downstream of the press nip within the zone where the press felt 13 or 15, respectively, carries the web W. In the embodiments in accordance with Figures 1 and 2, a suction roll 6 is additionally arranged in the loop of the lower felt 15 at a point downstream of the roll-press nip where the press felts 13, 15 diverge from each other, the suction roll 6 ensuring that the web W accompanies the lower felt 15.

A steam box 19 is arranged in proximity to the outside of the upper felt 13 downstream of the pick-up suction roll 18 for favourable conditioning of the web W with steam before its pressing in the first press nip.

The shoe press 10 comprises a shoe-press roll 20 and a counter roll 21, which rolls 20, 21 co-operate with each other to create an extended shoe-press nip. The shoe press 10 further comprises a first, endless press clothing 22 in the shape of a press felt, running in a loop through the extended shoe-press nip around the shoe-press roll 20, around a plurality of guide rolls 23 and around a pick-up suction roll 24, which is arranged in close proximity to the web-carrying lower felt 15 or upper felt 13, respectively, of the roll press 9 to remove and transfer the web W from the web-carrying lower felt 15 or upper felt 13, respectively, of the roll press 9 to the press felt 22 of the shoe press 10, allowing the press felt 22 of the shoe press 10 to act as a pick-up felt as well. Blowing boxes generating partial vacuum or suction boxes 25 are arranged in the loop of the press felt 22 of the shoe press 10, downstream of the pick-up suction roll 24, to retain the web W on the outside of the press felt 22 of the shoe press 10 before the extended shoe press nip. In the embodiment in accordance with Figure 4, the loop of the press felt 22 accommodates a suction roll 30 downstream of the extended press nip and a subsequent blowing box that generates a partial vacuum or suction box 31.

The shoe press 10 further comprises a second, endless press clothing 26, running in a loop through the extended shoe-press nip around the counter roll 21 and around a plurality of guide rolls 27. In the embodiments in accordance with Figures 2 and 4, the second press clothing 26 is a press felt 26a, whilst in the

embodiments in accordance with Figures 1 and 3, it is an impermeable or substantially impermeable transfer belt 26b having a smooth web-contacting surface. The first press clothing, i.e. the press felt 22, in the loop of which the shoe-press roll 20 is located, is arranged in a top position (as is the shoe-press roll 20) in the embodiments in accordance with Figures 1 and 2, whilst it is arranged in a bottom position (as is the shoe-press roll 20) in the embodiments in accordance with Figures 3 and 4. In the embodiment in accordance with Figure 2, a suction roll 28 and a subsequent blowing box generating partial vacuum or suction box 29 are situated downstream of the extended press nip in the loop of the press felt 26a, which accommodates the counter roll 21.

In the embodiments shown, the counter roll 21 of the shoe press 10 is shown as a grooved roll or a blind-drilled roll. Alternatively, the counter roll is a smooth roll.

In the embodiments in accordance with Figures 1 and 2, the web W is transferred from the lower felt 15 of the roll press 9 to the upper felt 22 of the shoe press 10, whilst in the embodiments in accordance with Figures 3 and 4, the web W is transferred from the upper felt 13 of the roll press 9 to the lower felt 22 of the shoe press 10. The lower clothing 26 of the shoe press 10, in the embodiments in accordance with Figures 1 and 2, and the lower clothing 22 of the shoe press 10, in the embodiment in accordance with Figure 4, are arranged to carry the web W after the extended shoe-press nip up to the drying section 3; whilst, in the embodiment in accordance with Figure 3, the upper clothing 26 of the shoe press 10 in the form of the transfer belt 26b is arranged to carry the web W after the extended shoe-press nip.

The drying section 3 comprises an endless, permeable drying clothing 32 in the form of a mesh dryer or dryer

felt, running in a loop around a plurality of guide rolls 33, the drying cylinders 7 and the rolls 8. In the embodiments in accordance with Figures 1, 2 and 4, the mesh dryer or the dryer felt 32 also runs around a pick-up suction roll 34, arranged in close proximity to the lower clothing 22 alternatively 26a or 26b of the shoe press 10 so that the pressed web W is transferred from the lower clothing 22 alternatively 26a or 26b to the mesh dryer or dryer felt 32. Blowing boxes generating partial vacuum or suction boxes 35 are arranged in suitable locations in the loop of the mesh dryer or dryer felt 32. The embodiment in accordance with Figure 3 employs a separate, endless pick-up clothing 36, which can be a wire or a felt and which runs in a loop around a plurality of guide rolls 37 and a pick-up suction roll 38, arranged in close proximity to the second press clothing 26 of the shoe press 10, i.e. the transfer belt 26b, to transfer the pressed web W from the transfer belt 26b to the pick-up clothing 36. A blowing box generating partial vacuum or suction box 39 is arranged downstream of the pick-up suction roll 38 in the loop of the pick-up wire or pick-up felt 36. In the embodiment in accordance with Figure 3, the first upstream roll 8 in the drying section is arranged in close proximity to the pick-up wire or pick-up felt 36 so that the pressed web W is transferred from the pick-up wire or pick-up felt 36 to the mesh dryer or dryer felt 32.

A steam box 40 is arranged in a free space, where the underside of the web W is exposed, situated between the lower felt 15 of the roll press 9 and the lower clothing 22 or 26, respectively, of the shoe press 10, in close proximity either to the upper felt 13 of the roll press 9 in accordance with Figure 3, for instance, or to the upper clothing 26 or 22, respectively, of the shoe press in accordance with Figure 1.

Designation number 41 denotes suitable equipment for conditioning the press felts 13, 15, 22, 26a.

As is evident from the drawings, the press section has a closed web run from the wet section to the drying section and provides good runability for all grades of printing paper as well as enabling very high operating speeds. The press section has two press nips optimized to achieve good runability and dry-solids content. The suction roll and the blowing boxes after the roll nip result in good runability. The second press nip is a shoe-press nip where a very high nip load can be used and a very high dry-solids content can be achieved. By using a steam box before the first press nip and, especially, after the second press nip, a better dry-solids content can be achieved and the profile of the dry-solids content can be controlled.

At all the pick-up points, suction rolls are present to ensure that the web is transferred from one clothing to another, as well as blowing boxes generating partial vacuum or suction boxes to ensure that the web is retained adhered to the clothing. These measures, furthermore, contribute to good runability and enabling operation at very high speeds without web ruptures occurring. The partial vacuum in the suction roll 6 is in the range of about 10-30 kPa, in the suction roll 24 about 15-40 kPa and in the suction roll 28 about 10-30 kPa, if this is used. The partial vacuum in the suction roll 34 is in the range of about 15-40 kPa. The blowing boxes 17, 25, 29 generating partial vacuum provide a partial vacuum of about 300-1,000 Pa.

A web transfer of the type shown in Figures 3 and 4 for transferring the web from the roll press to the shoe press is particularly suitable for manufacturing

paperboard, as there are open, wedge-shaped gaps after the roll-press nip and before the shoe-press nip.

Figure 1a shows parts of a press section similar to the one in the machine in accordance with Figure 1, but with a modified configuration of the shoe press 10 in respect of the run of the lower press clothing 26, i.e. the transfer belt 26b, relative to the upper felt 22 before the extended shoe-press nip. The guide roll 27a located nearest to the shoe-press nip is elevated and arranged close to the upper felt 22 so that, in the direction away from the elevated guide roll 27a, the transfer belt 26b runs in contact with the upper felt 22, enclosing the web W between them to form a sandwich construction. An additional guide roll 23a is arranged in the loop of the upper felt 22 at the position of said elevated guide roll 27a to create a nip not compressing the web. The shoe press in the machine in accordance with Figure 2 can be modified in the same way as shown in Figure 1a. The use of such a sandwich construction, which follows after the steam box 40, means that the distance between the web W and the steam box 40 becomes very precise. Furthermore, the number of blowing boxes generating partial vacuum or suction boxes 25 can, in the embodiment shown in Figure 1a, be reduced to a single one.

Figure 3a shows part of a machine similar to the one in accordance with Figure 3, but with a modified configuration of the roll press 9 and the shoe press 10 in respect of the run of the lower press clothings 15, 22 and the upper press clothings 13, 26 relative to each other after and before the press nip. In the loop of the upper felt 13 of the roll press 9, a suction roll 47 is arranged downstream of the roll-press nip to guide the upper felt 13 into contact with the lower felt 15 so that the upper and lower felts 13, 15 and the web W enclosed therebetween form a sandwich construction after the

roll-press nip. In such an embodiment, with a suction roll 47 in the loop of the upper felt 13 carrying the web, it is possible to reduce the number of blowing boxes generating partial vacuum or suction boxes 17 to, for instance, a single one in accordance with the embodiment shown. In the loop of the transfer belt 26b of the shoe press 10, the upstream guide roll 27a located nearest to the shoe-press nip is lowered and arranged close to the lower felt 22 so that, in the direction away from the lowered guide roll 27a, the transfer belt 26b runs in contact with the lower felt 22, enclosing the web W between them to form a sandwich construction. An additional guide roll 23a can be arranged in the loop of the lower felt 22 to support the sandwich construction, if so desired. Accordingly, in such an embodiment of the shoe press 10, where the web W is enclosed in a sandwich construction, no blowing boxes generating partial vacuum or suction boxes are required in this run. One or several such boxes 25 are arranged along the whole or part of the zone where the web runs with its top side exposed, i.e. in a closed draw before said sandwich construction in the shoe press, the number of boxes 25 being adapted to the length of the closed draw. The machine in accordance with Figure 4 can be modified in the same way as the one in accordance with Figure 3 to obtain a sandwich construction after the roll-press nip as well as before the shoe-press nip in conformity with Figure 3a.

A web run of the type shown in Figure 3a for conveying the web from the roll-press nip to the shoe-press nip is particularly suitable for manufacturing printing paper at high speeds, as the open, wedge-shaped gaps after the roll-press nip and before the shoe-press nip have been eliminated.

35

In the embodiments shown of the machine in accordance with the invention, the press rolls of the roll press are

of the deflection-compensating type, as illustrated in detail in Figure 5. Each press roll has a rotatable envelope surface 42 and an inner, static I-shaped beam 43, extending axially between the end walls and supporting an elongate shoe member 44 that comprises a plurality of hydrostatic and hydrodynamic slide shoes, arranged in a row and hydraulically loaded between the I beam 43 and the envelope surface 42 by way of power cylinders 45, a thin film of oil being maintained between each slide shoe and the inside of the envelope. Thanks to such a construction, the vibrations in the press rolls are damped in a very effective manner. Thus, the two shoe members 44 act against the insides of the envelope surfaces within the roll-press nip and can be controlled section by section in relation to each other to compensate for deflections in the envelope surfaces of the press rolls. The press rolls are blind-drilled or grooved. Preferably, the envelope surface of each press roll has an outer layer of steel, exhibiting grooves with a width of about 0.5 mm, for instance, and a depth of about 5 mm, for instance, the cc distance between two adjacent parallel grooves being about 2.25 mm, for instance. Thus, the grooved press roll has a very large aggregate groove volume, namely $1.1 \text{ dm}^3/\text{m}^2$ of envelope surface with the specified groove values. Such a high groove volume has been found to be favourable for avoiding streams of water and crushing. The narrowness of the grooves (0.5 mm) avoids groove markings in the web. As the grooved layer is made of steel, the groove volume remains constant during pressing even at very high linear loads in the roll-press nip. The described properties of the press rolls therefore contribute to high web speeds being feasible and high levels of dry-solids content being obtained already after the first press nip without the web being crushed. Generally, the aggregate groove or void volume is in the range of $0.7\text{-}1.8 \text{ dm}^3/\text{m}^2$ of envelope surface.

Thus, the described deflection-compensating press rolls effectively eliminate the vibrations created at high linear loads, high specific top pressures and high web speeds.

The linear load in the roll-press nip is in the range of 100-300 kN/m, preferably 120-250 kN/m, and in the shoe-press nip 500-1,500 kN/m, preferably 700-1,200 kN/m.

The specific pressure in the roll-press nip is in the range of 5-15 MPa, preferably 8-11 MPa, and in the shoe-press nip 4-13 MPa, preferably 4-8 MPa.

The dry-solids content of the web after the wet section is generally in the range of 15-22 per cent, depending on the type of printing paper, the dry-solids content for fine paper normally being 18-22 per cent, for newsprint and LWC base paper, 16-18 per cent, and for SC paper, 15-17 per cent.

Generally, the web speed is currently generally in the range of 1,200-1,700 m/min. depending on the type of printing paper, amongst other factors, the speed for fine paper in modern paper machines and press sections typically being about 1,200-1,500 m/min., for newsprint about 1,300-1,700 m/min., for LWC base paper about 1,400-1,600 m/min. and for SC paper about 1,400-1,600 m/min.

To obtain good runability at very high speeds, i.e. over 1,700 m/min., the shoe press is preferably provided with a transfer belt, which is more favourable in the bottom position, i.e. in accordance with Figure 1.

The higher the dry-solids content obtained after the roll press is, the better the runability between the roll press and the shoe press becomes.

When the shoe press employs a transfer belt and a press felt, the water will be pressed out of the web in only one direction, i.e. towards the press felt, which means
5 that the web becomes asymmetrical, having dissimilar sides (smooth and uneven, respectively). Consequently, it holds good that the more water that can be removed from the web in the double-felted roll-press nip, the less water needs to be removed in the shoe-press nip, which
10 results in an improved symmetry of density in the z direction.

In the following, an account is given of the designs and results of a number of experiments in manufacturing
15 different grades of printing paper, the properties of which are as follows.

Fine paper: Chemical pulp, filler content about 12-18 per cent, filler usually calcium carbonate,
20 grammage 40-200 g/m².

Newsprint: Mechanical pulp, no filler, grammage about 40-48 g/m².

25 SC paper: Mechanical pulp 70-80 per cent and chemical pulp 30-20 per cent, kaolin filler about 30 per cent, grammage about 42-56 g/m².

LWC base paper: Mechanical pulp 55-60 per cent, chemical
30 pulp 45-40 per cent, filler about 5-15 per cent, grammage 33-45 g/m².

Experiment 1

35 Press section:	In accordance with Figure 1
Type of printing paper:	LWC base paper
Grammage:	40 g/m ²

Web speed: 1,500 m/min.
 Design of 1st press: Grooved rolls
 Design of 2nd press: Shoe length 200 mm,
 shoe-press roll with
 5 grooved envelope
 surface, transfer belt
 as bottom clothing
 Linear load in 1st press: 200 kN/m
 Linear load in 2nd press: 1,100 kN/m
 10 Specific pressure in 1st press: 9.0 MPa
 Specific pressure in 2nd press: 7.3 MPa
 Results:
 Dry-solids content after
 15 1st press: 39 per cent
 Dry-solids content after
 2nd press: 49 per cent

Experiment 2

20 Press section: In accordance with
 Figure 1
 Type of printing paper: SC paper
 Grammage: 56 g/m²
 Web speed: 1,500 m/min.
 25 Design of 1st press: Grooved rolls
 Design of 2nd press: Shoe length 200 mm,
 shoe-press roll with
 grooved envelope
 surface, transfer belt
 30 as bottom clothing
 Linear load in 1st press: 200 kN/m
 Linear load in 2nd press: 1,100 kN/m
 Specific pressure in 1st press: 9.0 MPa
 Specific pressure in 2nd press: 7.3 MPa
 35 Results:
 Dry-solids content after

1st press: 42 per cent
Dry-solids content after
2nd press: 57 per cent

5 Experiment 3

Press section: In accordance with
Figure 1
Type of printing paper: Fine paper
Grammage: 80 g/m²
10 Web speed: 1,500 m/min.
Design of 1st press: Grooved rolls
Design of 2nd press: Shoe length 200 mm,
shoe-press roll with
15 grooved envelope
surface, transfer belt
as bottom clothing
Linear load in 1st press: 200 kN/m
Linear load in 2nd press: 1,100 kN/m
Specific pressure in 1st press: 9.0 MPa
20 Specific pressure in 2nd press: 7.3 MPa

Results:

Dry-solids content after
1st press: 38 per cent
25 Dry-solids content after
2nd press: 48 per cent

Experiment 4

30 Press section: In accordance with
Figure 2, but web run
to the first nip in
accordance with
Figure 1
Type of printing paper: Fine paper
35 Grammage: 101 g/m²
Web speed: 1,200 m/min.
Design of 1st press: Grooved rolls

Design of 2nd press: Shoe length 250 mm,
shoe-press roll with
grooved envelope
surface, felt as bottom
clothing

5 Linear load in 1st press: 200 kN/m
Linear load in 2nd press: 1,000 kN/m
Specific pressure in 1st press: 9.0 MPa
Specific pressure in 2nd press: 6.2 MPa

10 Results:
Dry-solids content after
1st press: 38.9 per cent
Dry-solids content after
15 2nd press: 46.1 per cent

Experiment 5

Press section: In accordance with
Figure 1

20 Type of printing paper: SC paper
Grammage: 52 g/m²
Web speed: 1,400 m/min.
Design of 1st press: Grooved rolls
Design of 2nd press: Shoe length 220 mm,
shoe-press roll with
grooved envelope
surface, transfer belt
as bottom clothing

25 Linear load in 1st press: 250 kN/m
Linear load in 2nd press: 1,200 kN/m
Specific pressure in 1st press: 10.0 MPa
Specific pressure in 2nd press: 7.5 MPa

Results:
35 Dry-solids content after
1st press: 42.9 per cent
Dry-solids content after

2nd press: 49.6 per cent

Experiment 6

5 Press section: In accordance with
Figure 1

Type of printing paper: SC paper

Grammage: 52.3 g/m²

Web speed: 1,200 m/min.

Design of 1st press: Grooved rolls

10 Design of 2nd press: Shoe length 220 mm,
shoe-press roll with
grooved envelope
surface, transfer belt
as bottom clothing

15 Linear load in 1st press: 250 kN/m

Linear load in 2nd press: 1,200 kN/m

Specific pressure in 1st press: 10.0 MPa

Specific pressure in 2nd press: 7.5 MPa

20 Results:

Dry-solids content after
1st press: 46.1 per cent

Dry-solids content after
2nd press: 51.4 per cent

25

Experiment 7

30 Press section: In accordance with
Figure 2, but web run
to the first nip in
accordance with Figure
1

Type of printing paper: Fine paper

Grammage: 80 g/m²

Web speed: 1,200 m/min.

35 Design of 1st press: Grooved rolls

Design of 2nd press: Shoe length 250 mm,
shoe-press roll with

		grooved envelope surface, felt as bottom clothing
	Linear load in 1st press:	250 kN/m
5	Linear load in 2nd press:	700 kN/m
	Specific pressure in 1st press:	10.0 MPa
	Specific pressure in 2nd press:	4.2 MPa
	Results:	
10	Dry-solids content after 1st press:	42 per cent
	Dry-solids content after 2nd press:	45 per cent
15	<u>Experiment 8</u>	
	Press section:	In accordance with Figure 1
	Type of printing paper:	Newsprint
	Grammage:	48 g/m ²
20	Web speed:	1,500 m/min.
	Design of 1st press:	Grooved rolls
	Design of 2nd press:	Shoe length 220 mm, shoe-press roll with grooved envelope surface, transfer belt as bottom clothing
25	Linear load in 1st press:	250 kN/m
	Linear load in 2nd press:	1,000 kN/m
	Specific pressure in 1st press:	10.0 MPa
30	Specific pressure in 2nd press:	6.2 MPa
	Results:	
	Dry-solids content after 1st press:	38 per cent
35	Dry-solids content after 2nd press:	48 per cent

Experiment 9

	Press section:	In accordance with Figure 1
	Type of printing paper:	SC paper
5	Grammage:	52 g/m ²
	Web speed:	1,600 m/min.
	Design of 1st press:	Grooved rolls
10	Design of 2nd press:	Shoe length 220 mm, shoe-press roll with grooved envelope surface, transfer belt as bottom clothing
	Linear load in 1st press:	200 kN/m
	Linear load in 2nd press:	700 kN/m
15	Specific pressure in 1st press:	9.0 MPa
	Specific pressure in 2nd press:	4.2 MPa

Results:

20	Dry-solids content after 1st press:	41 per cent
	Dry-solids content after 2nd press:	55 per cent

The experiments reported on above show that good levels
25 of dry-solids content can be obtained at high web speeds.
The results are surprising, as it has previously been
believed that a short roll nip, 40-60 mm, resulting in a
short dwell time, 1.2-2.5 ms, fails to provide a good
dry-solids content at high machine speeds. In all the
30 experiments, with different grades of paper and grammage,
the web was pressed in the first roll-press nip without
being crushed. This is very surprising.

35 A press section with a first press in the shape of a
double-felted roll press and a second press in the shape
of a shoe press constitute a cheaper configuration than a
press section with two shoe presses.

The first roll press provides very good levels of dry-solids content with linear loads in the roll-press nip of 120-250 kN/m, which in some cases is much better than is provided by a shoe press with a linear load of 1,000 kN/m. The reason for this is that the roll press at high linear loads creates much higher specific top pressures than a shoe press with an extended nip with a high load. This results in good water removal and dry-solids content, especially in the double-felted roll-press nip.

The described deflection-compensating, open press rolls in top and bottom positions very effectively prevent vibrations that constitute a problem with ordinary, solid press rolls when the linear load and the web speed are high. The two deflection-compensating, open press rolls described have their shoe members acting against each other and the stresses on the envelope surfaces of the press rolls will therefore be low at high linear loads in the roll-press nip. The deflection-compensating, open press rolls do not require cambering and therefore the CD profile in the roll-press nip can be controlled so that it becomes very straight. Furthermore, the moisture profile of the press felts will be good and the service life of the felts will increase.

30

35

C L A I M S

1. A method for manufacturing printing paper or paperboard with a grammage of 30-200 g/m² in a paper or paperboard machine, comprising a wet section, a press section and a drying section, in which method a web (W), formed in the wet section, is pressed in a roll press with a double-felted roll-press nip and, thereafter, in a shoe press with an extended single or double-felted shoe-press nip, characterized in that
- the web (W) is pressed in a deflection-compensating roll press, having said double-felted roll-press nip and open press rolls,
 - the machine is operated at a web speed of at least 1,200 m/min.,
 - the web in said roll-press nip is subjected to a linear load ranging from 100 to 300 kN/m, preferably from 120 to 250 kN/m, and a specific pressure ranging from 5 to 15 MPa, preferably from 8 to 11 MPa,
 - the web in said shoe-press nip is subjected to a linear load ranging from 500 to 1,500 kN/m, preferably from 700 to 1,200 kN/m, and a specific pressure ranging from 4 to 13 MPa, preferably from 4 to 8 MPa,
 - to obtain a dewatered web with a dry-solids content of at least 35 per cent, preferably at least 38 per cent, after the roll-press nip and at least 45 per cent after the shoe-press nip.
2. A method as claimed in claim 1, characterized in that the web (W), after the roll-press nip, is brought to adhere to the press felt (15 or 13) acting as a transfer felt in the roll press with the aid of a suction roll (6) and/or one or several blowing boxes that generate partial vacuum or suction boxes (17).
3. A method as claimed in claim 1, characterized in that the web (W), after the shoe-press nip, which is

double-felted, is brought to adhere to the press felt (26 or 22) acting as a transfer felt in the shoe press (10) with the aid of a suction roll (28, 30) and/or one or several blowing boxes that generate partial vacuum or suction boxes (29, 31).

4. A method as claimed in claim 1, characterized in that the web (W), after the shoe-press nip, which is single-felted, is brought to adhere to the press clothing (26) acting as a transfer belt (26b) with the aid of its smooth web-contacting surface.

5. A method as claimed in any one of claims 1-4, characterized in that the web (W), having been transferred from the roll press (9) to the shoe press (10), is brought to adhere to the press felt (22) acting as the felt carrying the web in the shoe press with the assistance of blowing boxes that generate partial vacuum or suction boxes (25), arranged in the loop of the last-mentioned press felt (22).

6. A method as claimed in any one of claims 1-5, characterized in that the web (W) is transferred from the roll press (9) to the shoe press (10) with the aid of a pick-up suction roll (24), arranged in the loop of the press felt (22) of the shoe press (10), which press felt (22) carries the web (W) to the shoe-press nip.

7. A method as claimed in claim 2, characterized in that the web (W) is conveyed to the shoe-press nip enclosed between the first and second press clothings (22, 26) in a sandwich construction.

8. A method as claimed in claim 1 or 2, characterized in that the web (W) is conveyed from the roll-press nip enclosed between the upper and lower press felts (13, 15) in a sandwich construction.

9. A method as claimed in claim 1, 4, 5 or 6, characterized in that the web (W) is conveyed from the roll-press nip to the shoe-press nip enclosed between the upper and lower press felts (13, 15) in a first sandwich construction and, following a closed draw between the roll press and the shoe press, thereafter enclosed between the first and second press clothings (22, 26) of the shoe press (10) in a second sandwich construction.

10

10. A method as claimed in any one of claims 1-9, characterized in that the web (W) is pressed in the deflection-compensating roll press, the rolls of which each have a water-receiving capacity of $0.7-1.8 \text{ dm}^3/\text{m}^2$ of envelope surface.

15

11. A paper or paperboard machine for manufacturing printing paper or paperboard at high speed, which printing paper or paperboard has a grammage of $30-200 \text{ g/m}^2$, comprising a wet section (1), a press section (2) and a drying section (3), which press section includes a roll press, having a double-felted roll-press nip, and a shoe press, having an extended single or double-felted shoe-press nip, characterized in that the roll press has open press rolls with deflection-compensating, rotatably journalled envelope surfaces and in that the machine is arranged to be operated at a web speed of at least $1,200 \text{ m/min.}$, with a linear load in the roll-press nip ranging from 100 to 300 kN/m , preferably from 120 to 250 kN/m , and in the shoe-press nip ranging from 500 to $1,500 \text{ kN/m}$, preferably from 700 to $1,200 \text{ kN/m}$, and with a specific pressure in the roll-press nip ranging from 5 to 15 MPa , preferably from 8 to 11 MPa , and in the shoe-press nip ranging from 4 to 13 MPa , preferably from 4 to 8 MPa , to obtain a dewatered web with a dry-solids content of at least 35 per cent, preferably at least 38 per cent, after the

35

roll-press nip and at least 45 per cent after the shoe-press nip.

- 5 12. A machine as claimed in claim 11, characterized in that a suction roll (6) and/or one or several blowing boxes that generate partial vacuum or suction boxes (17) are arranged after the roll-press nip in the loop of the press felt (15 or 13) acting as a transfer felt in the roll press (9).
- 10 13. A machine as claimed in claim 11, characterized in that a suction roll (28, 30) and/or one or several blowing boxes that generate partial vacuum or suction boxes (29, 31) are arranged after the shoe-press nip, 15 which is double-felted, in the loop of the press felt (26 or 22) acting as a transfer felt in the shoe press (10).
- 20 14. A machine as claimed in claim 11, characterized in that one of the press clothings (26) of the shoe press (10) is an impermeable transfer belt (26b), having a smooth surface, to which the web (W) adheres after the shoe-press nip.
- 25 15. A machine as claimed in any one of claims 11-14, characterized in that blowing boxes (25) that generate partial vacuum are arranged in the loop of the press felt (22) arranged to carry the web (W) in the shoe press (10) from the roll press (9) to the shoe-press nip.
- 30 16. A machine as claimed in any one of claims 11-15, characterized in that a pick-up suction roll (24) is arranged in the shoe press (10) in the loop of the press felt (22) arranged to carry the web (W) to the shoe-press 35 nip, which pick-up suction roll (24) is arranged with its press felt (22) to co-operate with the press felt (15 or

13) acting as a transfer felt in the roll press to transfer the web (W) to said press felt (22).

17. A machine as claimed in claim 12, characterized in that the first and second press clothings (22, 26) of the shoe press (10) are arranged to run in contact with each other before the shoe-press nip, whilst enclosing the web (W) between them, to form a sandwich construction up until the shoe-press nip.

10

18. A machine as claimed in claim 11 or 12, characterized in that the upper and lower press felts (13, 15) of the roll press (9) are arranged to run in contact with each other from the roll-press nip, whilst enclosing the web (W) between them, to form a sandwich construction up until a suction roll (6, 47) arranged in the loop of the web-carrying press felt (15 or 13, respectively).

19. A machine as claimed in claim 11, 14, 15 or 16, characterized in that the upper and lower press felts (13, 15) of the roll press (9) are arranged to run in contact with each other, whilst enclosing the web (W) between them, to form a first sandwich construction up until a suction roll (47) arranged in the loop of the press felt (13) carrying the web, and in that the first and second press clothings (22, 26) of the shoe press (10) are arranged to run in contact with each other before the shoe-press nip, whilst enclosing the web (W) between them, to form a second sandwich construction up until the shoe-press nip.

20. A machine as claimed in any one of claims 11-19, characterized in that the open press rolls (11, 12) each have an envelope surface (42) of steel with holes or grooves for receiving water, that together have a volume per square metre of envelope surface of 0.7-1.8 dm³.

35

21. A machine as claimed in claim 20, characterized in that the groove or hole volume is about $1.1 \text{ dm}^3/\text{m}^2$ of envelope surface.

5

22. A machine as claimed in claim 21, characterized in that the press roll (11, 12) is grooved, the grooves having a width of about 0.5 mm and a depth of about 5 mm, the cc distance between two adjacent grooves being about 2.25 mm.

10

23. A machine as claimed in any one of claims 14-22, characterized in that the impermeable transfer belt (26b) is arranged as a lower press clothing in the shoe press (10).

15

20

25

30

35

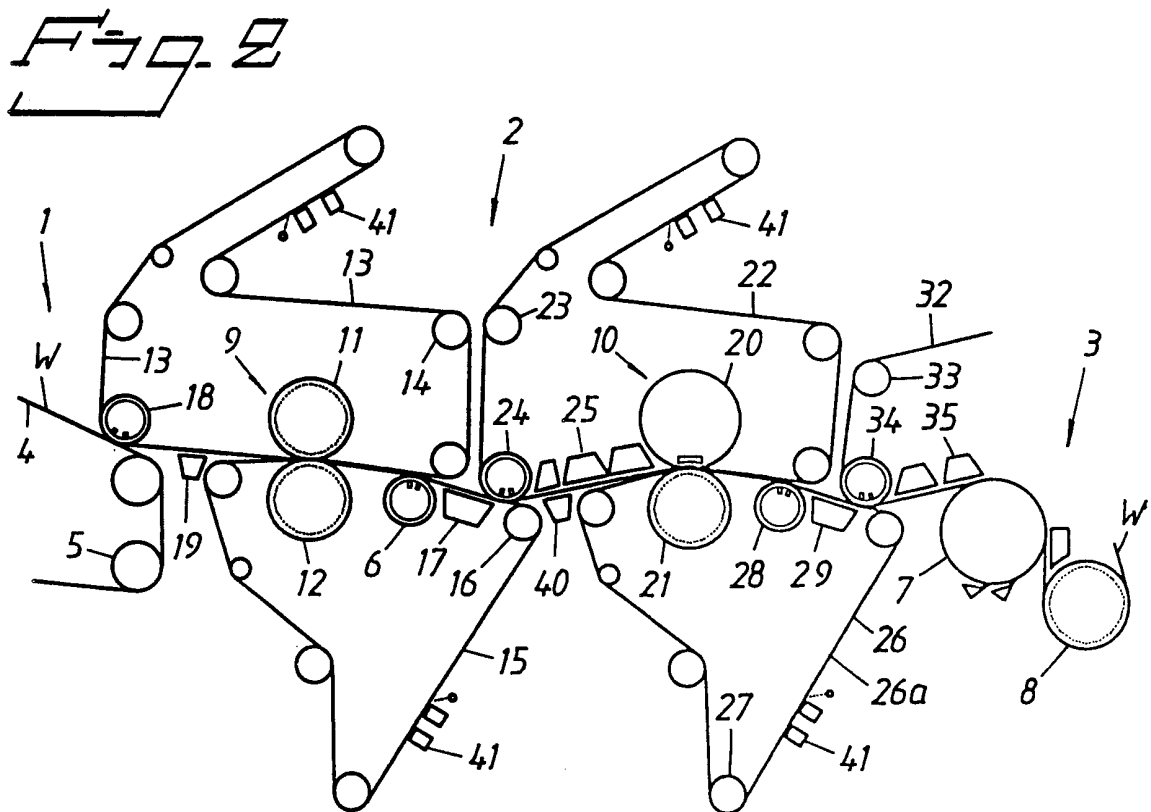
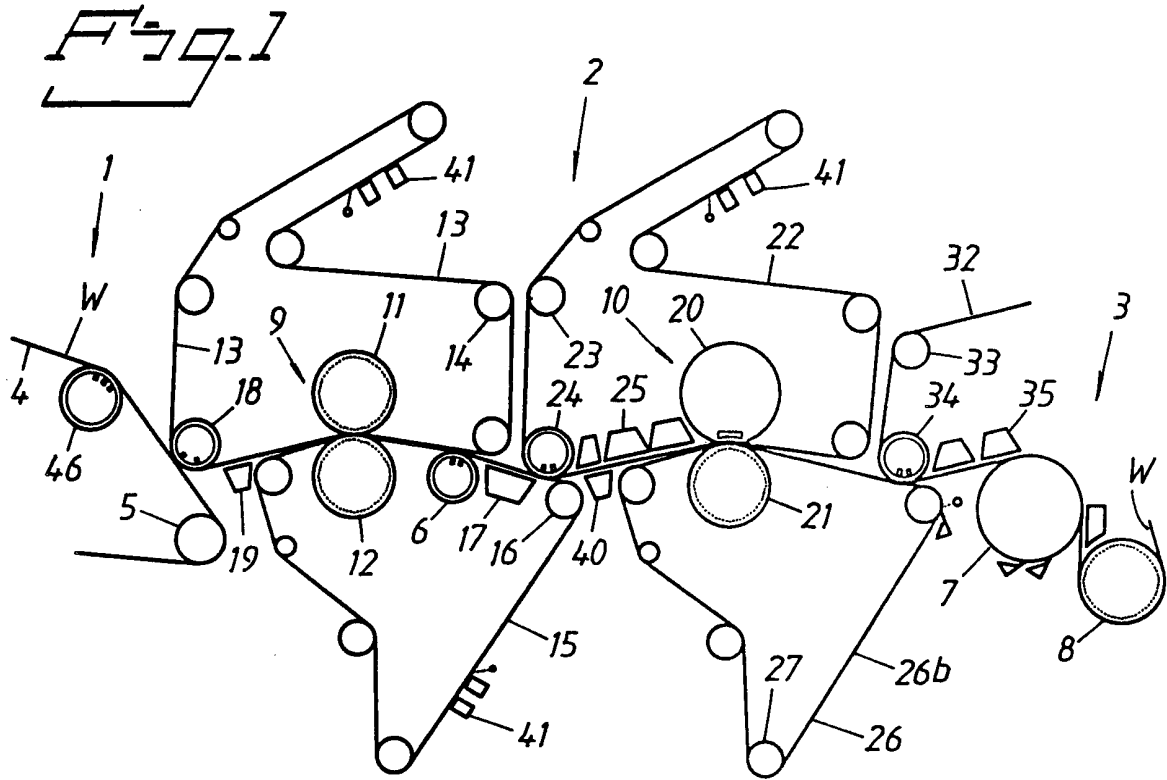


Fig. 3

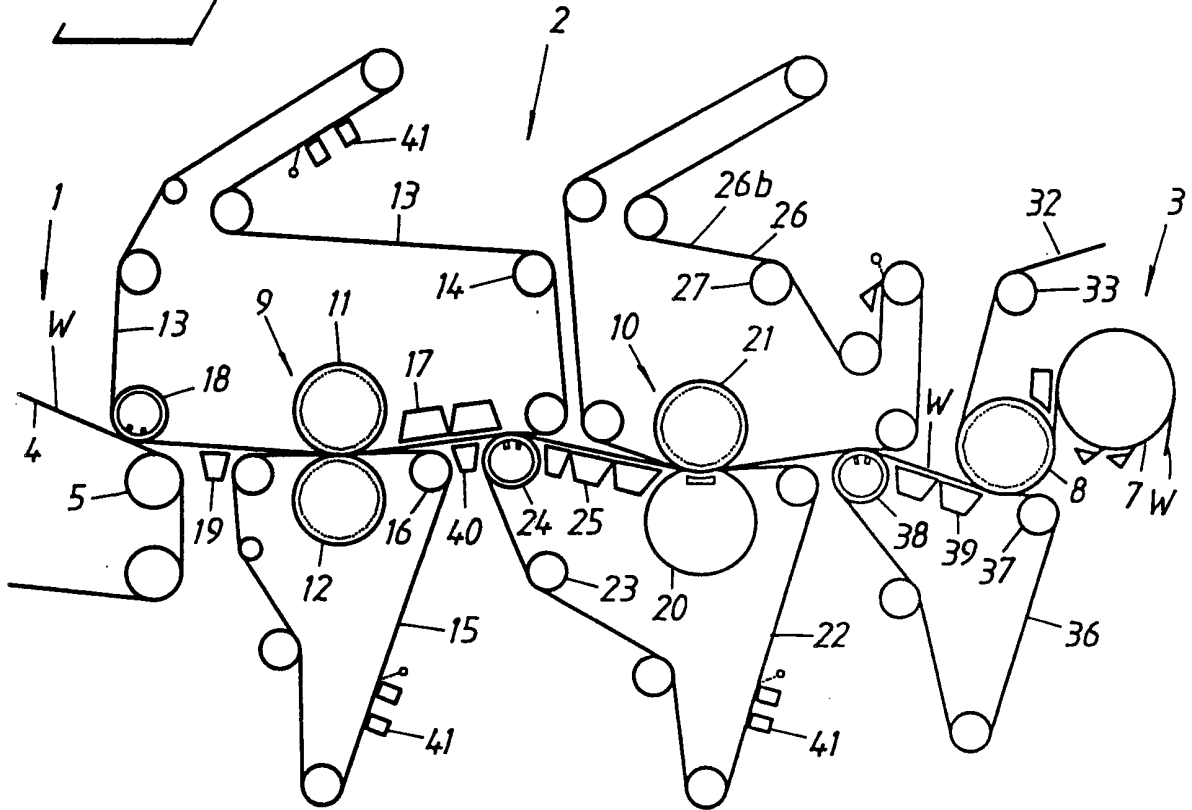


Fig. 4

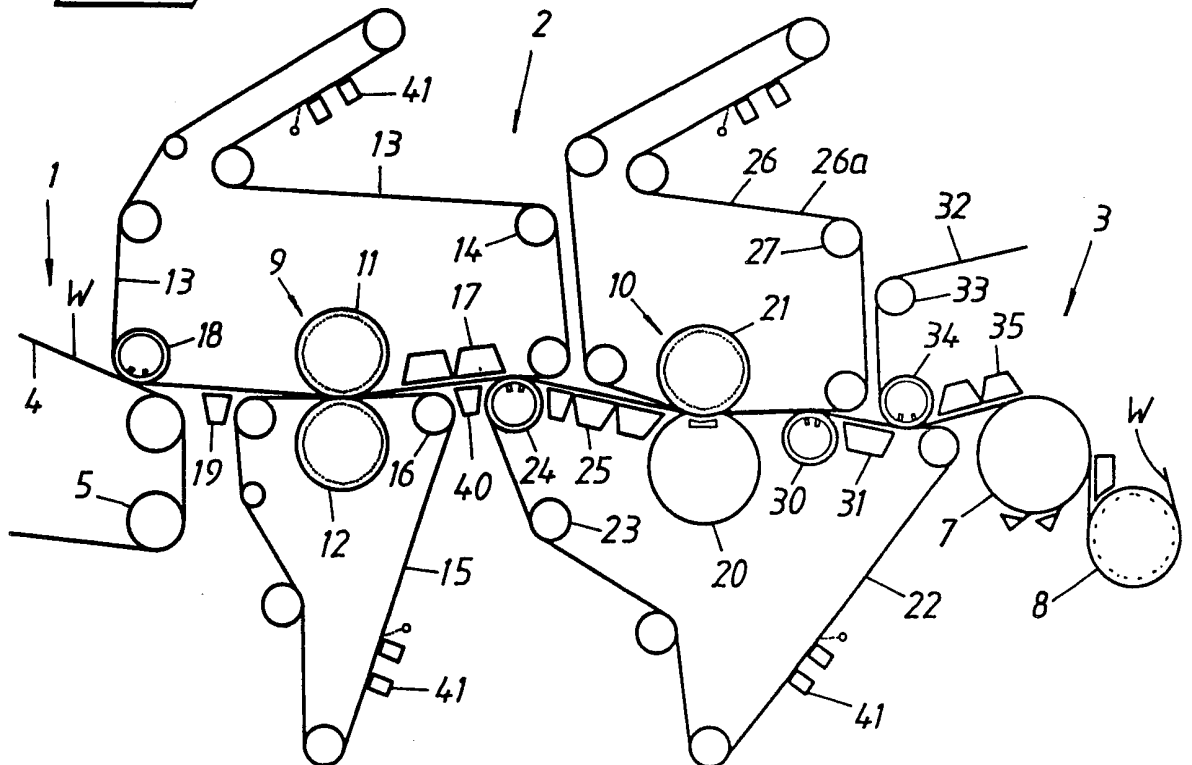


Fig. 1a

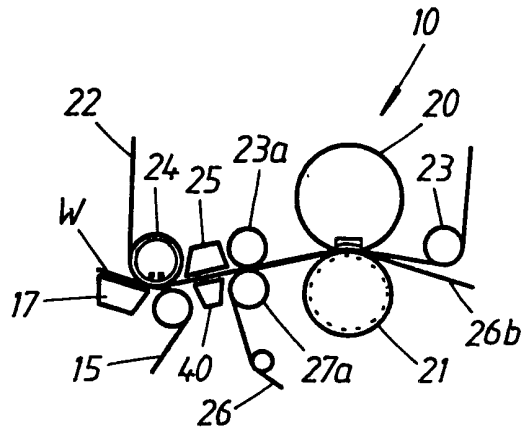


Fig. 3a


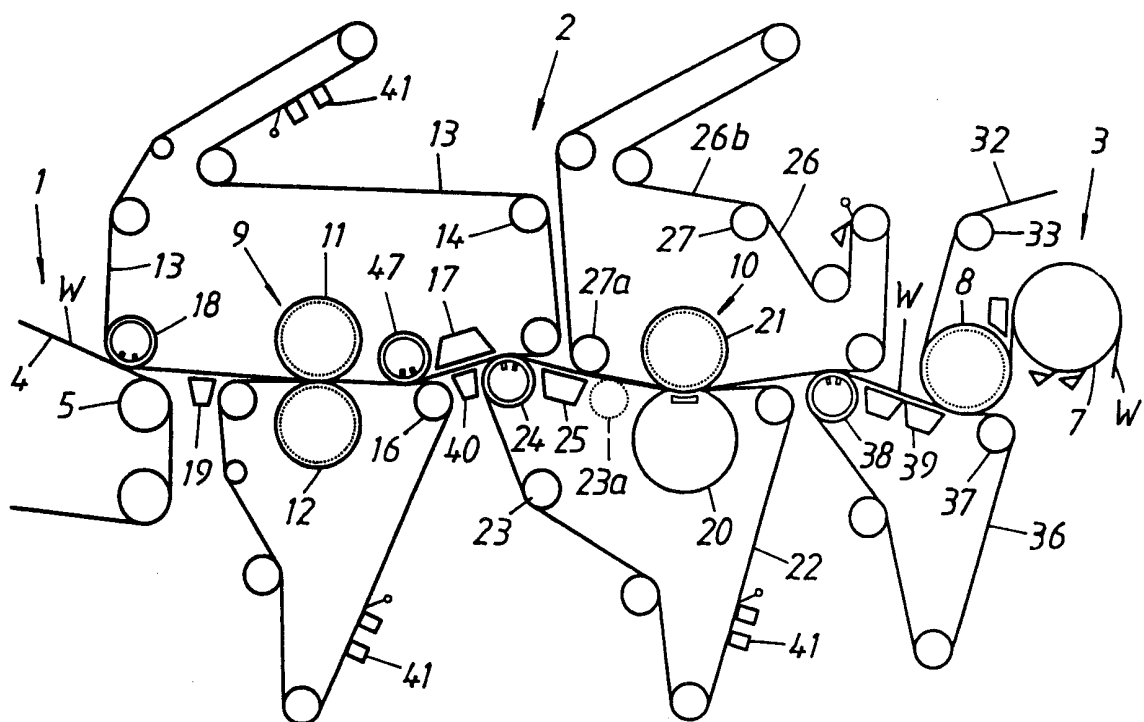


Fig. 5

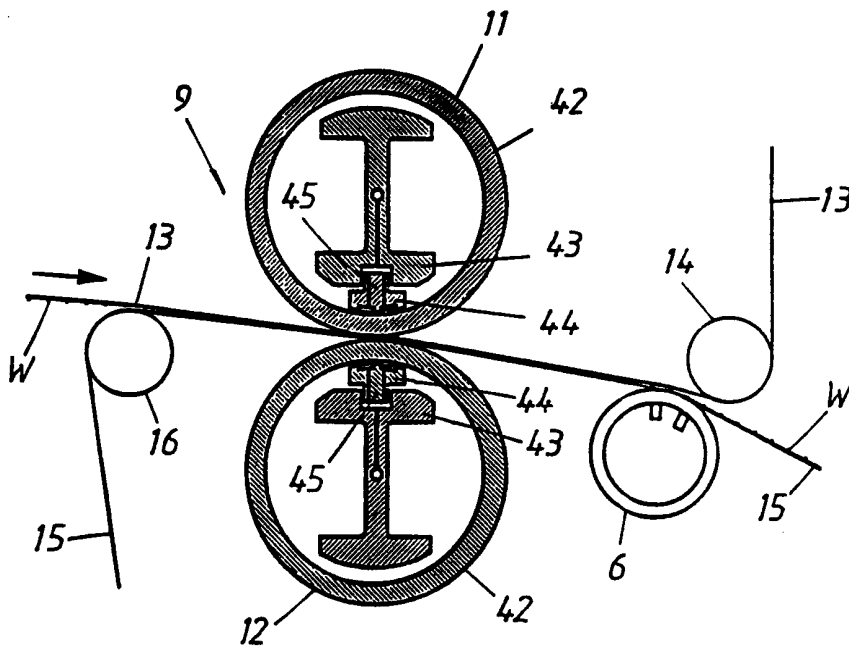

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00826

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21F 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4561939 A (EDGAR J.JUSTUS), 31 December 1985 (31.12.85), figure 1, claim 1, abstract --	1-23
A	EP 0487483 A1 (VALMET PAPER MACHINERY INC.), 27 May 1992 (27.05.92), figures 1-4, claims 1-3,5, 8,9, abstract --	1-23
A	WO 8706634 A1 (BELOIT CORPORATION), 5 November 1987 (05.11.87), figures 1-4, claim 1, abstract --	1-23
A	US 5639351 A (ANTTI ILMARINEN), 17 June 1997 (17.06.97), claims 1-6, abstract --	1-23

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 Sept 2000

Date of mailing of the international search report

20 -09- 2000

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Mattias Arvidsson/MP
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

01/08/00

PCT/SE 00/00826

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4561939 A	31/12/85	BR 8501268 A	19/11/85
		CA 1238218 A	21/06/88
		DE 3566817 D	00/00/00
		EP 0159280 A,B	23/10/85
		SE 0159280 T3	
		ES 541529 A	01/06/86
		ES 8607449 A	01/11/86
		FI 84194 B	15/07/91
		FI 850627 A	27/09/85
		IN 161969 A	05/03/88
		JP 1010636 B	22/02/89
		JP 60215893 A	29/10/85
		KR 8701626 B	17/09/87
		PH 21616 A	11/12/87
EP 0487483 A1	27/05/92	SE 0487483 T3	
		AT 168423 T	15/08/98
		CA 2055927 A,C	24/05/92
		DE 69129788 D,T	19/11/98
		EP 0770727 A	02/05/97
		FI 96789 B,C	15/05/96
		FI 905798 A	24/05/92
		FI 916094 A	24/05/92
		US 5389205 A	14/02/95
		US 5611893 A	18/03/97
WO 8706634 A1	05/11/87	BR 8607142 A	19/04/88
		CA 1294472 A	21/01/92
		EP 0267186 A,B	18/05/88
		SE 0267186 T3	
		FI 92081 B,C	15/06/94
		FI 875715 A	28/12/87
		JP 3020517 B	19/03/91
		JP 63501433 T	02/06/88
		KR 9309275 B	25/09/93
		US 4704192 A	03/11/87

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

01/08/00

PCT/SE 00/00826

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5639351 A	17/06/97	AT 192801 T	15/05/00
		CA 2086061 A	24/06/93
		DE 9219194 U	07/10/99
		DE 69231040 D	00/00/00
		EP 0549553 A	30/06/93
		EP 0718434 A,B	26/06/96
		SE 0718434 T3	
		EP 0799932 A	08/10/97
		FI 98844 B,C	15/05/97
		FI 916100 A	24/06/93
		FI 970989 A	10/03/97
		IT MI990751 V	15/12/99
		US 5522959 A	04/06/96
