

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 May 2003 (30.05.2003)

PCT

(10) International Publication Number
WO 03/044295 A1

(51) International Patent Classification⁷: E04B 1/86,
E04F 15/20

(21) International Application Number: PCT/NZ02/00256

(22) International Filing Date:
22 November 2002 (22.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
515694 22 November 2001 (22.11.2001) NZ

(71) Applicant (for all designated States except US):
FLETCHER BUILDING HOLDINGS LIMITED
[NZ/NZ]; 810 Great South Road, Penrose, 1006 Auckland
(NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HALLOWS, Robert, Malcolm** [NZ/NZ]; 9 Wyman Place, Pakuranga, 1706 Auckland (NZ).


(74) Agent: **BALDWIN SHELSTON WATERS**; P O Box 5999, Wellesley Street, 1000 Auckland (NZ).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR REDUCING SOUND TRANSMISSION

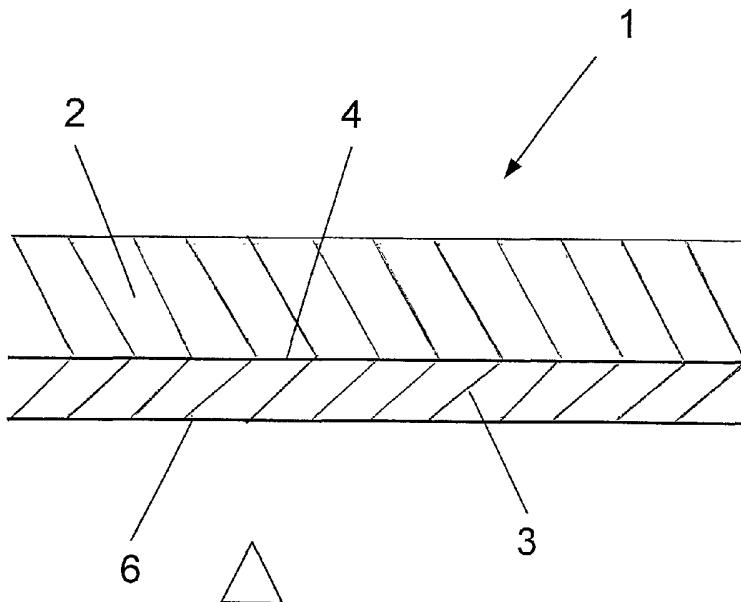

(57) Abstract: A sound transmission reduction system for use between a floor (5) or other integer of a building construction and a suitable covering for the floor (5) or other integer includes : i) a rigid single layer substrate (2) of gypsum fibreboard, fibre cement, hardboard, plywood or stabilised reconstituted wood, having a thickness of not more than 14mm; ii) a single resilient layer (3) having a thickness of not more than 10mm secured or securable to one surface (4) of said substrate (2); iii) the resilient layer (3) being secured or securable on its opposite surface (6) to the floor (5) or other integer, such that the arrangement provides a reduction of sound transmission through the floor (5) or other integer. A method of reducing sound transmission is also disclosed.

WO 03/044295 A1





Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

System and Method for Reducing Sound Transmission

Technical Field

5 The present invention relates to sound transmission reduction in building constructions and particularly but not exclusively to sound transmission through concrete floors.

Background Art

10 For simplicity the present invention will be described in the context of its use with a concrete floor. It is to be understood, however, that the present invention would have application wherever control of sound transmission, particularly structure-borne sound transmission, through a solid floor or even wall of any material was required.

15 In apartment blocks and other close proximity residential dwellings there is a recognised need for effective sound proofing between rooms and between dwellings. This is of increasing importance, at least in New Zealand and Australia, as occupant expectations and building code requirements increase.

20 A particular problem is in respect of relatively low frequency, and in the case of hard floor surfaces high frequency, sound transmission through the floors of a building.

25 A known method of reducing interfloor sound transmission involves the use of a relatively thick resilient layer, often rubber, beneath the floor covering. However, previous systems all suffer from disadvantages relating to their total thickness, acoustic performance and/or suitability for use with all common types of floor coverings. In particular some of the prior art systems are unsuitable for use with relatively rigid and brittle coverings such as ceramic tiles.

30 Australian patent AU 403,047 describes a laminate comprising a polyvinylaromatic resin bonded to a wood chip board upper layer. Such chip board may provide an unsuitable surface for many floor coverings, including ceramic tiles or vinyl. Even if a further layer is added between the chip board layer and the tiles, the chip board may require a surface treatment and/or a further stabilisation layer to be added, which may

RC503737/142

2

increase the cost and the time required for installation.

International publication WO 98/21027 describes a sound absorbing resilient layer comprising a rubber underlay, preferably manufactured from recycled tyres, with a grooved lower surface. The resilient layer is preferably between 11/64" (~4.4mm) and 3" (~76mm), and most preferably between 3/8" (~9.5mm) and 1" (~25.4mm). The grooves in the resilient layer are intended to enhance the sound attenuating properties of the resilient layer by limiting the contact area with the sub-floor.

This system, particularly in its more preferred form, may be relatively thick. This may be undesirable as the total height of each living space incorporating the resilient layer must be increased to ensure that regulations regarding ceiling to floor spacing are complied with. This may increase the cost of buildings such as multi-story apartment blocks. Where a maximum building envelope limit is imposed, thicker overlays can reduce the number of levels for rent. From an occupant and designer perspective, there is often resistance to thicker overlays because a small step results where the thick overlay is installed beneath hard surfaces, but not beneath carpet. This may result in unsatisfactory aesthetics and may compromise safety.

United States patent US 5,968,630 describes a laminate which includes a combination of a low density polyethylene foam and low density polyethylene film which is loose laid on a concrete sub-floor. A wooden laminate flooring is installed over the polyethylene layers. The system is intended to help smooth irregularities in the sub-floor and to introduce a measure of resilience to the floor as a whole.

One problem with this system may be that the upper layer may be too flexible to allow rigid floor coverings such as ceramic tiles to be used without a risk of cracking, and may therefore only be suitable for flexible floor coverings such as a vinyl or rubber tiles. The flexible floor may lack a solid feel which many people may prefer. The foam may also compress locally under high pressure loading, such as that provided by some furniture, thereby reducing the acoustic performance of the system. Even if the foam is not compressed in this way, the acoustic performance of the system may not be sufficient for some applications.

EP 864,712 describes a simple sound rubber mat which reduces the noise produced by an upper timber floor. This system may suffer from the problems associated

RC503737/142

3

with a lack of rigidity common to systems which use a timber upper surface, as described above.

5 EP 829,588 describes a board suitable for covering a floor or wall which is manufactured from a mixture of rubber scrap and expanded polystyrene.

10 Other systems of the prior art have involved pouring an upper layer of a settable substance on top of a resilient layer, the upper layer setting to provide a relatively stiff substrate on top of the resilient layer. Systems of this type may be inconvenient to install and in particular may slow the progress of the construction while the upper layer cures.

15 None of the systems described above combine the characteristics of acceptable noise attenuation, easy installation, ability to cope with sustained in-use serviceability loads, relatively low overall thickness and broad compatibility with most common flooring surfaces.

The Applicant does not concede that any or all of the patents referred to above necessarily form part of the common general knowledge of a skilled addressee, or are necessarily patents which would be discovered by a diligent searcher.

20 Objects Of The Invention

It is therefore an object of the present invention to provide a sound transmission reduction system for a building construction which provides a cost effective and relatively thin and user friendly sound transmission control which overcomes or at least ameliorates 25 disadvantages of present proposals or which at least will provide the public with a useful choice.

30 Further objects of the invention will become apparent from the following description.

Disclosure Of The Invention

According to one aspect of the present invention there is provided a sound transmission reduction system for use between a floor or other integer of a building construction and a 35 suitable covering for said floor or other integer includes;

RC503737/142

4

- a rigid single layer substrate of gypsum fibreboard, fibre cement, hardboard, plywood or stabilised reconstituted wood, having a thickness of not more than 14mm;

5

- a single resilient layer having a thickness of not more than 10mm secured or securable to one surface of said substrate;
- said resilient layer being secured or securable on its opposite surface to said floor or other integer, the arrangement being such that in use the securing together of said substrate and said resilient layer and the securing of said resilient layer to said floor or other integer provides a reduction of sound transmission through said floor or other integer.

10

15 Preferably, said substrate may be between 4mm and 14 mm thick.

Preferably, said substrate may be between 6mm thick and 14 mm thick.

Preferably, said substrate may be substantially 6.5mm thick.

20

Preferably, said substrate may have a modulus of elasticity of between 3 GPa and 18 GPa.

25 Preferably, said substrate may have a modulus of elasticity of substantially 7GPa.

25

Preferably, said substrate may have a modulus of rupture of between 5 MPa and 25 MPa.

30

Preferably, said substrate may have a modulus of rupture of substantially 11 MPa.

Preferably, said resilient material may be between 2mm and 10mm thick.

Preferably, said resilient material may be between 2mm and 3mm thick.

35

Preferably, said resilient material may be substantially 3mm thick.

RC503737/142

5

Preferably, said resilient layer may have a density of between 20kg/m³ and 150 kg/m³.

5 Preferably, said resilient layer may have a density of substantially 75 kg/m³.

Preferably, said resilient layer may be a polyolefin.

Preferably, said resilient layer may be a foamed polyethylene.

10 Preferably, said substrate may be gypsum fibreboard.

Preferably, the total thickness of said system may be less than 11mm.

15 Preferably, said sound transmission reduction system may have a point load failure test result, as herein defined, of at least 1.5 kN.

Preferably, said sound transmission reduction system may have a point load failure test result, as herein defined, of at least 1.8kN.

20 Preferably, said substrate may include a plurality of sheets, with adjacent edges of said sheets glued together to form butt joints.

25 According to a second aspect of the present invention a method of reducing sound transmission through a floor or other integer of a building construction includes:

- securing one side of a single resilient layer having a thickness of not more than 10mm to said floor or other integer;
- securing a single substrate of gypsum fibreboard, fibre cement, hard board plywood or stabilised reconstituted wood, of thickness not more than 14mm, to an opposite side of said single resilient layer;
- wherein the resilient layer is secured to said substrate and said floor or other integer such that sound transmission through said floor or other integer is reduced.

35 Preferably, the method may include the step of securing a suitable covering to said

RC503737/142

6

substrate on an opposite side to said resilient layer.

Preferably, the method may include the step of securing said single resilient layer to said floor or other integer by means of a contact adhesive.

5

Preferably, the method may include the step of securing said substrate to said single resilient layer by means of a contact adhesive.

Preferably, said resilient material may be a polyolefin.

10

Preferably, said resilient material may be a foamed polyethylene.

15

Preferably, said substrate may be formed by a plurality of sheets of gypsum fibreboard, fibre cement or hard board, the method including the step of gluing adjacent edges of said sheets together to form butt joints.

Preferably, said substrate may be gypsum fibreboard.

20

According to a further aspect of the present invention a sound transmission reduction system and/or a method of reducing sound transmission is substantially as herein described with reference to Figure 1 or Figure 2.

25

Further aspects of this invention which should be considered in all its novel aspects will become apparent from the following description given by way of example and with reference to the accompanying drawings.

Brief Description Of The Drawings

30

Figure 1: shows very diagrammatically a cross-sectional view through one possible embodiment of the invention;

Figure 2: shows very diagrammatically a cross-sectional view through a joint in the embodiment of Figure 1;

35

Figure 3: shows a graph of the performance of the present invention compared to a bare concrete slab;

Figures 4 & 5: show graphs of the performance of the present invention compared with presently available floor coverings across a range of frequency;

5

Figure 6: shows a comparison of the present invention with other available floor coverings in respect of its impact insulation class (IIC).

10

Figure 7: shows a graph comparing the point load failure of the present invention with other available systems.

Best Mode For Carrying Out The Invention

15

In controlling sound transmission of noise within and between multi-unit dwellings the impact insulation class (IIC) rating is of particular significance. Many such dwellings will have concrete floors, and the need to reduce impact sound transmitted through such floors is of particular concern. Typical solutions to date have utilised multiple layers of various materials such as gypsum fibre and plywood, typically with the joints within the multi-layer system being staggered in order to provide additional strength. Other solutions have incorporated thick layers of a resilient material such as glass wool or mineral wood mat typically being loose laid over a floor and relying on dead weight for placement. It will be appreciated that typically such present solutions have tended to be at least 30mm thick, usually more.

25

Other solutions such as the use of shredded rubber mats or bitumen based mats have proved to be expensive and/or not installer-friendly. In contrast the present invention due to its use of materials is expected to be substantially less costly while also being installer-friendly.

30

Referring to the accompanying drawings and initially to Figures 1 and 2 an embodiment of the present invention is shown very diagrammatically in cross-section and including in Figure 2 the join between substrate sheets.

35

In the sound transmission reduction system of the present invention as shown and referenced generally by arrow 1, a single layer sheet material substrate 2 is provided, on

RC503737/142

8

which a suitable floor covering (not shown), for example ceramic floor tiles, vinyl, timber or any other suitable floor covering such as are well known to those skilled in the art, may be laid.

5 The substrate 2 is not more than 14mm thick, or preferably 4mm to 14mm thick and suitably 6.5mm thick gypsum fibreboard, although other suitably light, strong, rigid and dimensionally stable materials such as fibre cement, hard board, plywood, stabilised reconstituted wood or the like may be used. Some of these substrates 2, for example plywood, may be sufficiently hard wearing to allow the use of paint or polyurethane as a
10 floor covering in areas which are not subject to high traffic.

Preferably the substrate may provide a Modulus of Elasticity of 3Gpa to 18Gpa and a Modulus of Rupture of between 5Mpa to 25Mpa, and more preferably a Modulus of Elasticity of substantially 7GPa and a Modulus of Rupture of substantially 11MPa.

15 An under surface of the substrate 2 is shown secured with a resilient layer 3. Suitably this securement is by means of a layer of adhesive 4. Such adhesive 4 may be provided across substantially all or merely part of the adjacent surfaces of the substrate 2 and the resilient layer 3 or may be by spot adhesive. The adhesive layer 4 may suitably be a contact adhesive suitably with a less than 24 hour dry time. The suitable adhesive may for example, be Bostik (trademark) 1181 contact adhesive.

25 Installers of the system may prefer to use gypsum fibreboard as the substrate 2 due to the ease with which its dimensions may be varied on site, suitably by the "score and snap" method, by which a sharp blade is pressed firmly and run across the face of the substrate 2, and resilient layer 3 if already adhered to the substrate 2, to cut the resilient layer 3 and score the substrate 2. The edges of the substrate 2 furthest from either side of the cut are then brought together to snap the substrate 2 into two pieces.

30 Gypsum fibreboard may also be manufactured in suitable size sheets, typically in the order of 1800mm × 1200mm, which an installer may find particularly convenient as they are of such a size, shape and weight that they may be carried by a single person.

35 Gypsum fibreboard may also provide a suitable mounting surface for most common floor coverings, and in particular for rigid floor coverings such as ceramic tiles. Installation of the floor covering over gypsum fibreboard may be assisted by the fact that,

RC503737/142

9

due to the stiffness of the system, relatively shallow contours in the floor may be smoothed over rather than the substrate 2 following the contour of the floor as may occur in some systems of the prior art. This may improve the appearance of the floor covering. In addition the gypsum fibreboard may provide a pre-sealed surface onto which a suitable floor covering such as tiles may be affixed without further preparation of the surface.

Those skilled in the art will appreciate that some of the advantages mentioned above may also be provided by one of the alternative substrates 2 listed above.

10 The resilient layer 3 is relatively thin, not more than 10mm thick, and preferably towards the lower end of that range, suitably of the order of 3mm thick. Suitably the resilient layer 3 may be a polyolefin with high resilience and with sufficiently low creep and with suitably high compressive strength. Preferably the characteristics of the resilient material 3 would incorporate:

15 • Approximately less than 10% creep at 23°C in three years under a 5kPa load.

• Approximate water absorption ASTMC-272-53 less than 0.5% by volume absorption after total immersion in water for 24 hours.

20 • Density of 20 to 150 kg/m³.

• Thickness of between 2 to 10mm.

25 • Compressive strength greater than 2kPa, or more preferably compressive strength at 50% compression of 1.5kPa.

A suitable material may be a 3mm layer of foamed polyethylene.

30 The resilient layer 3 is shown secured to a floor 5, in this example illustrated as a concrete floor.

35 The securing of the resilient layer 3 to the floor 5 is by means of a further adhesive layer 6. Suitably the adhesive layer 6 utilises a water based trowellable adhesive with a short dry time, preferably less than 1 hour. Almost any suitable adhesive layer 6 may be used, such as urethane for example. The Applicant has found that the

RC503737/142

10

choice of adhesive 6 does not impact on the acoustic performance of the invention provided the adhesive layer 6 is reasonably thin.

An important part of the present invention is the combination of a relatively thin resilient layer 3 with a suitably thin substrate 2. If the resilient layer selected is too thick and/or of insufficient density and/or of insufficient compressive strength, then the resilient layer 3 may not provide sufficient support to the substrate 2 to accommodate in service loads. Additionally, an improper resilient layer 3 may result in the substrate 2 flexing sufficiently that cracking of floor coverings such as tiles, or telegraphing of imperfections to a vinyl surface, may occur. Deformation of the resilient layer 3 under localised loads may also significantly reduce the acoustic performance of the system.

Surprisingly however, the Applicant has found that a combination of a suitably dense, suitably thin resilient layer 3 with a suitable substrate 2 not only provides good serviceability, including sufficient strength, rigidity, dimensional stability and flatness, but also excellent impact sound insulation characteristics.

Referring briefly to Figure 2, where sheets of the substrate 2 need to be joined a high strength multi-purpose construction adhesive joint, suitably with less than 24 hour dry time and with water resistance, is provided along the adjoining edges of the sheet 2 to create a butt type joint. The joint 7 between the sheets 2 ensures that vertical loads are transferred across the substrate 2 and is also effective at helping to prevent the telegraphing of cracks across the substrate 2. The ability of the system to perform adequately with the joints 7 glued in this way avoids the need to use double layers of substrate 2 with overlapping joints, such as are common in the systems of the prior art. This may contribute to the ease and speed of installation of the system as well as keeping the overall thickness of the system to a minimum.

In view of the thickness of presently available solutions to the impact sound transmission problem, and in particular the thickness of some of the resilient layers of the prior art, and the choice of materials used, it would be expected that the present invention as shown in Figures 1 and 2 would not provide adequate impact sound transmission control, or at least would not perform as well as currently available systems.

It has been unexpectedly found in tests carried out on the present invention that it in fact performs better than most currently available and more expensive systems of

RC503737/142

11

similar thickness and may perform better than many thicker systems of the prior art, while in many cases offering a simpler construction.

5 Referring therefore to Figure 3 the graph shows the performance of the present invention, referred to herein as the GIB® sound barrier board concrete system or abbreviated as GSBC, as compared to a bare concrete slab with no ceiling.

10 The sample tested used a 3mm resilient polyethylene layer adhered to a concrete surface by a layer of adhesive. The layer of adhesive, around 0.5mm-1mm thick, was applied by a 3mm deep notched trowel. The resilient layer was pressed onto the adhesive. A sheet of 6.5mm gypsum fibreboard was adhered to the upper surface of the polyethylene layer via a layer of adhesive of less than about 0.2mm, thereby providing a sound transmission reduction system of around 10.5mm total thickness.

15 300mm × 300mm ceramic tiles were adhered to the substrate with latex modified cementitious adhesive. The tiles were spaced 3mm apart, with the gaps grouted.

20 It would seem that substantial impact sound control is provided at all frequencies with the exception of the region around 500Hz, where resonance of the system appears to occur. Those skilled in the art will appreciate that all overlay systems may suffer from such a resonance effect at some frequencies.

25 Turning then to Figures 4 and 5, the test sample of the present invention described above is compared with presently available systems utilising a bitumen-based mat and 5mm and 10mm shredded rubber mats. It would appear that the present invention performs well across the range of frequencies and better than the alternatives for some of the frequencies.

30 Then in Figure 6 the present invention (GSBC) is compared with the rubber mat alternative systems as far as its IIC rating is concerned and it is seen to be higher than either of the alternatives.

35 Acoustic testing of one sample which had a 3mm resilient layer 3 with a density of 75kg/m³, a 6.5mm gypsum fibreboard substrate 2, and covered by a monocottura tiles provided a ΔLnw of 18 dB (or ΔIIC of 20 dB when tested to ISO 140-8:1997.

RC503737/142

12

Figure 7 shows point load failure results for the present invention and a number of systems of the prior art, each with two different tiles on their upper surface. All references herein to point load failure test results are with respect to tests carried out as described below with monocottura tiles having a Modulus of Rupture of 40MPa.

5

The embodiment of the present invention tested used a 3mm resilient layer and 6.5mm substrate. The examples of the prior art included an 11mm thick bitumen mat, 5mm thick shredded rubber mat, 5.5mm thick shredded rubber mat and 5.1 mm thick bed of trowel-on acoustic adhesive.

10

The test samples were prepared as follows.

15

Two 300mm × 300mm pieces of acoustic overlay were adhered to a concrete substrate using an adhesive specified by the manufacturer of the overlay. The pieces of overlay were butt-jointed as per the manufacturers recommendations, with the exception of the acoustic adhesive which has no join.

20

One monocottura 300 × 300 × 8 mm tile and one 300 × 300 × 8mm porcelain tile were adhered to each overlay using a premium latex modified cementitious tile adhesive. The adhesive was applied along the length of the samples using a 8mm × 8mm notched trowel angled at 45° to the surface. The tiles were set with a 3mm gap. The gap was filled with flexible sealant. The tile gap and acoustic overlay joins were aligned on each sample except the bitumen mat, where the tiles were laid to the manufacturers specifications of offsetting the overlay 45° to the tiled surface.

25

The monocottura tiles had nominal 2.2% water absorption and Modulus of Rupture of 40MPa. The porcelain tiles had less than 0.2% water absorption and Modulus of Rupture of 54MPA.

30

The specimens were allowed to cure for 11 days prior to testing.

35

The samples were loose laid on the base of an Instron (Trade Mark) universal testing machine. A 25mm diameter steel ball bearing was pressed onto the surface of the tiles at two points, at a distance of approximately 4mm from the sealant and 100mm from the outer edges of each tile.

RC503737/142

13

The load cell was advanced towards the tiles at a rate of 4mm/minute. Failure was registered as the load at which the tiling system was heard to crack, although a physical crack in the tile was not necessarily visible.

5 As Figure 7 shows, the present invention provided a superior point load failure strength of all the samples tested. The point load failure test described above provides results which are representative of in-use serviceability, a higher test result indicating a better in-use serviceability.

10 A preferred embodiment of the present invention may provide a point load failure test result of at least 1.5kN, or more preferably at least 1.8kN, under the test conditions described above.

15 It is thus seen that a single relatively thin substrate of gypsum fibreboard or the like, and a relatively thin layer of a resilient material such as foam polyethylene secured together and with the resilient layer secured to the floor of a building, can surprisingly provide excellent impact sound transmission solution and provide an in-use serviceability load when covered with a typical floor covering such as ceramic tiles. In that regard it would not be expected that a single thin substrate on a resilient material would sustain in-use serviceability loads when covered with ceramic tiles, due to not being strong enough. 20 However, testing of the present invention has shown it to perform well in that regard.

25 It is considered that the rigid substrate 2 is providing an effective load spreading across the surface of the resilient layer 3. In this way the superior point load strength is being achieved. In a practical situation this would mean that a heavy item of furniture such as a table would not over time damage the resilient layer 3, in turn damaging its sound control characteristics, as could otherwise happen in previous systems.

30 Where in the foregoing description, reference has been made to specific components or integers having known equivalents, then such equivalents are incorporated herein as if individually set forth.

35 Although the above description has been given by way of example with reference to possible embodiments of the invention, it is to be understood that modifications or improvements may be made without departing from the scope of the appended claims.

CLAIMS

1. A sound transmission reduction system for use between a floor or other integer of a building construction and a suitable covering for said floor or other integer including:

5

- a rigid single layer substrate of gypsum fibreboard, fibre cement, hardboard, plywood or stabilised reconstituted wood, having a thickness of not more than 14mm;
- 10 ▪ a single resilient layer having a thickness of not more than 10mm secured or securable to one surface of said substrate;
- 15 ▪ said resilient layer being secured or securable on its opposite surface to said floor or other integer, the arrangement being such that in use the securing together of said substrate and said resilient layer and the securing of said resilient layer to said floor or other integer provides a reduction of sound transmission through said floor or other integer.

2. The sound transmission reduction system of claim 1 wherein said substrate is between 4mm and 14 mm thick.

20

3. The sound transmission reduction system of claim 2 wherein said substrate is between 6mm thick and 14 mm thick.

25

4. The sound transmission reduction system of claim 3 wherein said substrate is substantially 6.5mm thick.

5. The sound transmission reduction system of any one of the preceding claims wherein said substrate has a modulus of elasticity of between 3 GPa and 18 GPa.

30

6. The sound transmission reduction system of claim 5 wherein said substrate has a modulus of elasticity of substantially 7GPa.

35

7. The sound transmission reduction system of any one of the preceding claims wherein said substrate has a modulus of rupture of between 5 MPa and 25 MPa.

RC503737/142

15

8. The sound transmission reduction system of any one of the preceding claims wherein said substrate has a modulus of rupture of substantially 11 MPa.

5 9. The sound transmission reduction system of claims 1 to 8 wherein said resilient material is between 2mm and 10mm thick.

10. The sound transmission reduction system of claim 9 wherein said resilient material is between 2mm and 3mm thick.

10 11. The sound transmission reduction system of claim 10 said resilient material is substantially 3mm thick.

12. The sound transmission reduction system of any one of the preceding claims wherein the resilient layer has a density of between 20kg/m³ and 150 kg/m³.

15 13. The sound transmission reduction system of claim 12 wherein said resilient layer has a density of substantially 75 kg/m³.

20 14. The sound transmission reduction system of any one of the preceding claims wherein said resilient layer is a polyolefin.

15. The sound transmission reduction system of claim 14 wherein said resilient layer is foamed polyethylene.

25 16. The sound transmission reduction system of any one of the preceding claims wherein said substrate is gypsum fibreboard.

17. The sound transmission reduction system of any one of the preceding claims wherein the total thickness of said system is less than 11mm.

30 18. The sound transmission reduction system of any one of the preceding claims with a point load failure test result, as herein defined, of at least 1.5 kN.

19. The sound transmission reduction system of claim 18 with a point load failure test result, as herein defined, of at least 1.8kN.

35

RC503737/142

16

20. The sound transmission reduction system of any preceding claim wherein said substrate includes a plurality of sheets, with adjacent edges of said sheets glued together to form butt joints.

5 21. A method of reducing sound transmission through a floor or other integer of a building construction including:

- securing one side of a single resilient layer having a thickness of not more than 10mm to said floor or other integer;
- securing a single substrate of gypsum fibreboard, fibre cement, hard board plywood or stabilised reconstituted wood, of thickness not more than 14mm, to an opposite side of said single resilient layer;
- wherein the resilient layer is secured to said substrate and said floor or other integer such that sound transmission through said floor or other integer is reduced.

10 22. The method of claim 21 including the step of securing a suitable covering to said substrate on an opposite side to said resilient layer.

15 23. The method of claim 21 or 22 including the step of securing said single resilient layer to said floor or other integer by means of a contact adhesive.

20 24. The method of claim 21, 22 or 23 including the step of securing said substrate to said single resilient layer by means of a contact adhesive.

25 25. The method of any one of claims 21 to 24 wherein said resilient material is a polyolefin.

30 26. The method of claim 25 wherein said resilient material is a foamed polyethylene.

35 27. The method of any one of claims 21 to 26 wherein said substrate is formed by a plurality of sheets of gypsum fibreboard, fibre cement or hard board, the method including the step of gluing adjacent edges of said sheets together to form butt joints.

28. The method of any one of claims 21 to 27 wherein said substrate is gypsum


RC503737/142

17

fibreboard.

29. A sound transmission reduction system or a method of reducing sound transmission is substantially as herein described with reference to Figure 1 or Figure 2.

1 / 7

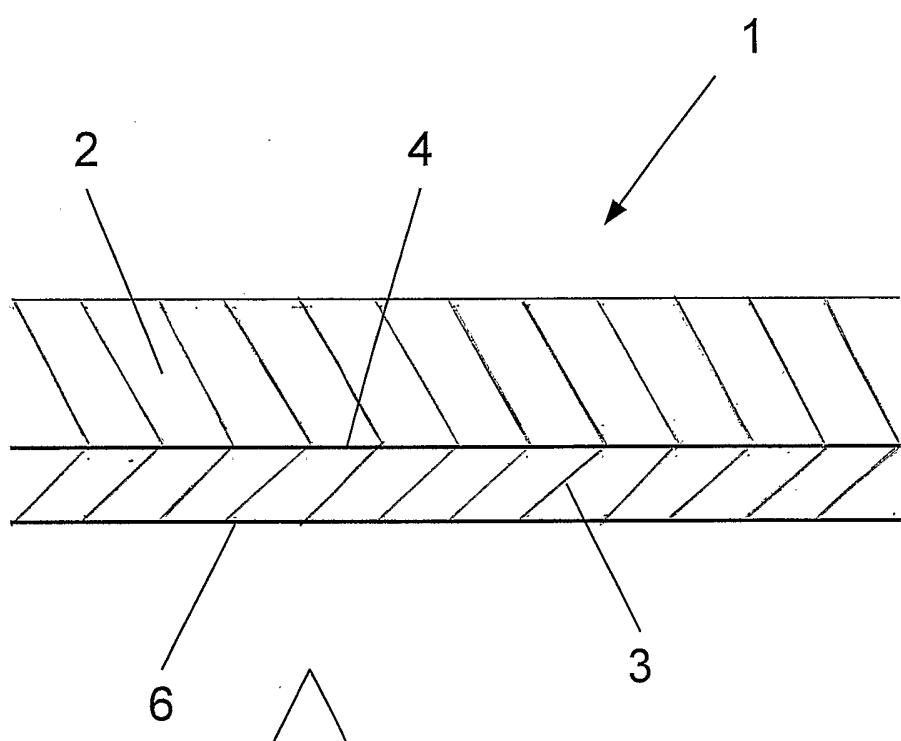


- 5 -



FIGURE 1

2 / 7

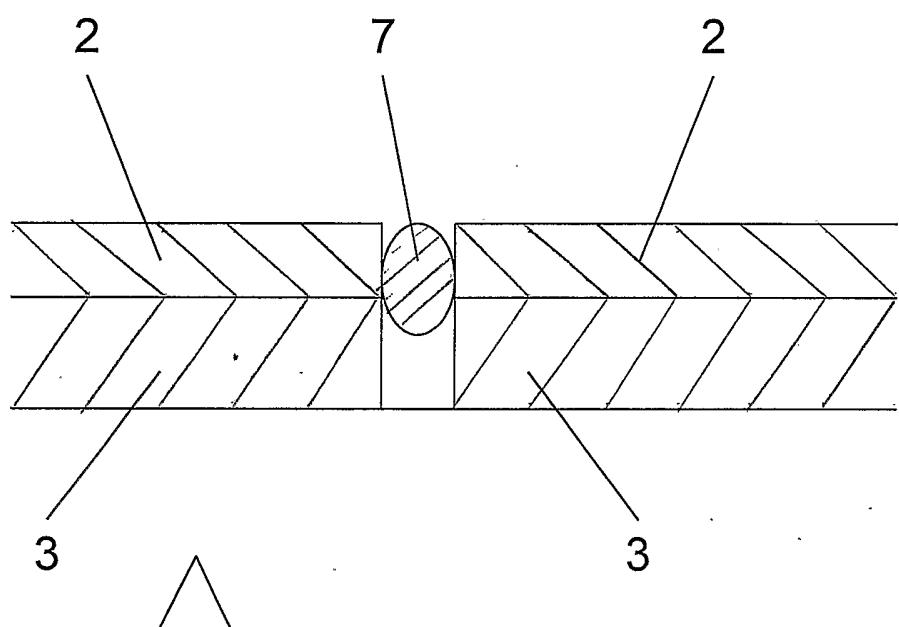

- 5 -



FIGURE 2

3 / 7

**Performance of Present Invention
compared to bare concrete slab - no ceiling.**

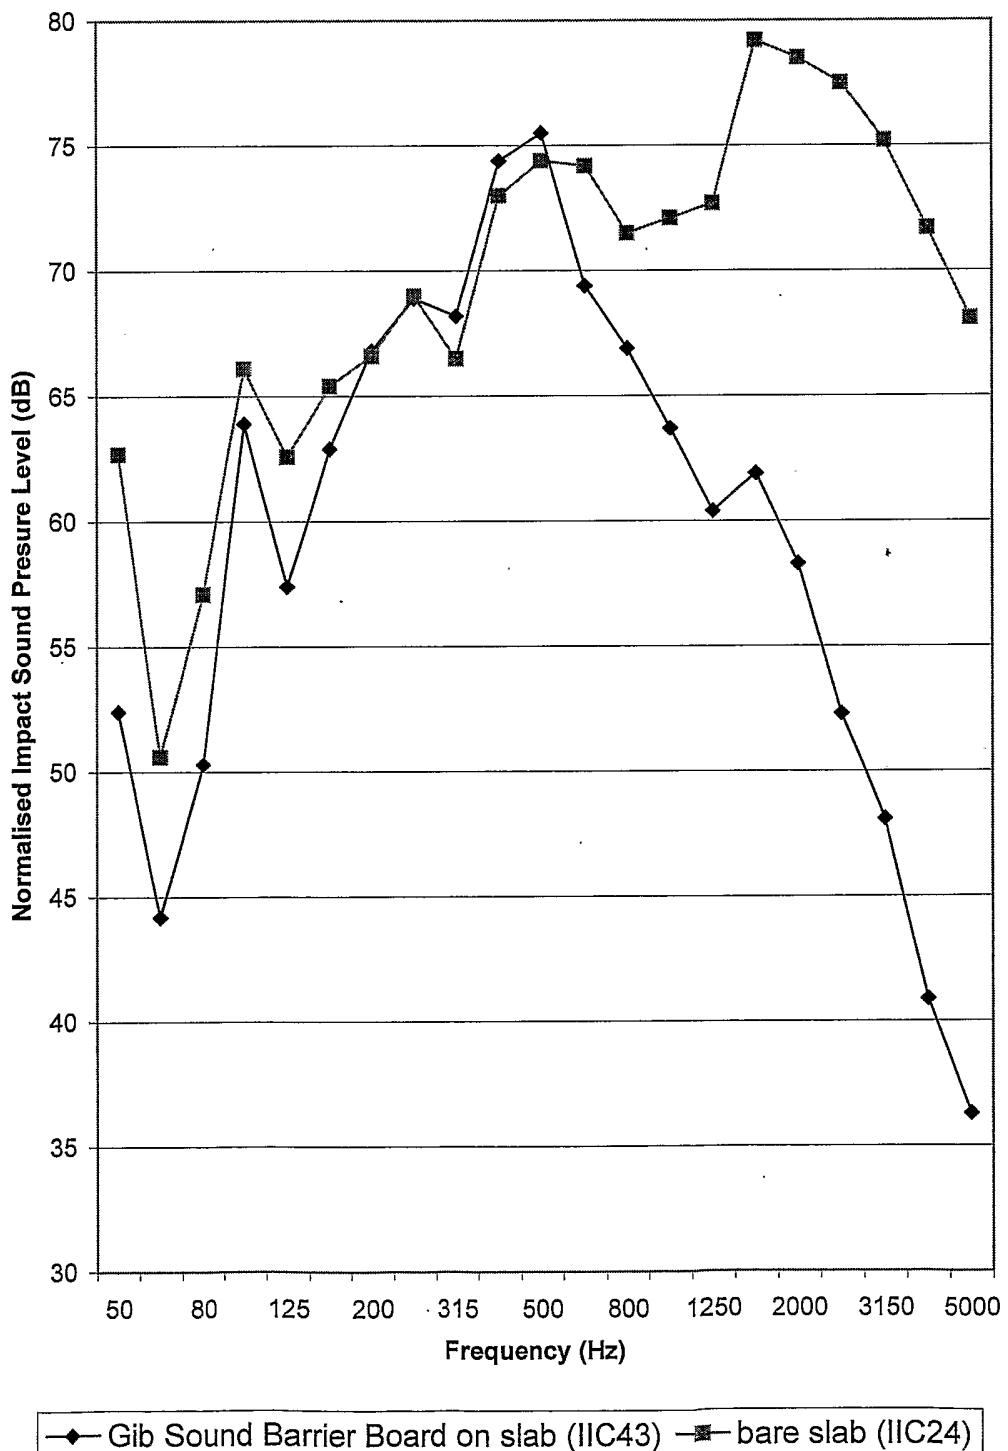
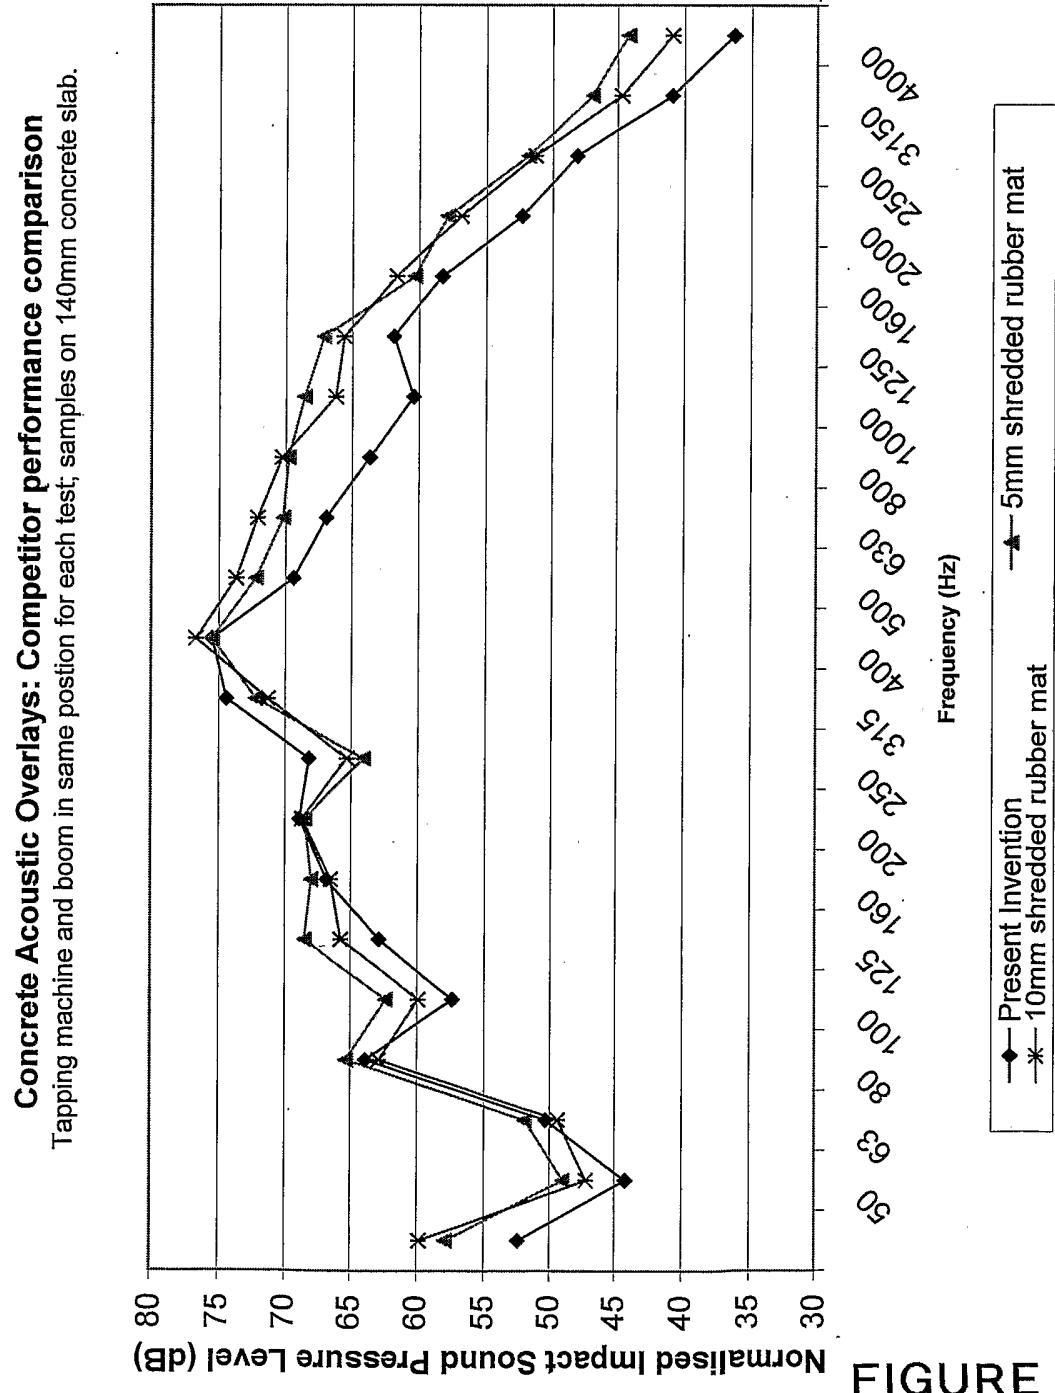


FIGURE 3

4 / 7

**FIGURE 4**

5 / 7

Concrete Acoustic Overlays: Competitor performance comparison
 Tested to ISO 140 - 6 (exception: 1m² samples); tapping machine and boom in same position for each test; samples on 140mm concrete slab.


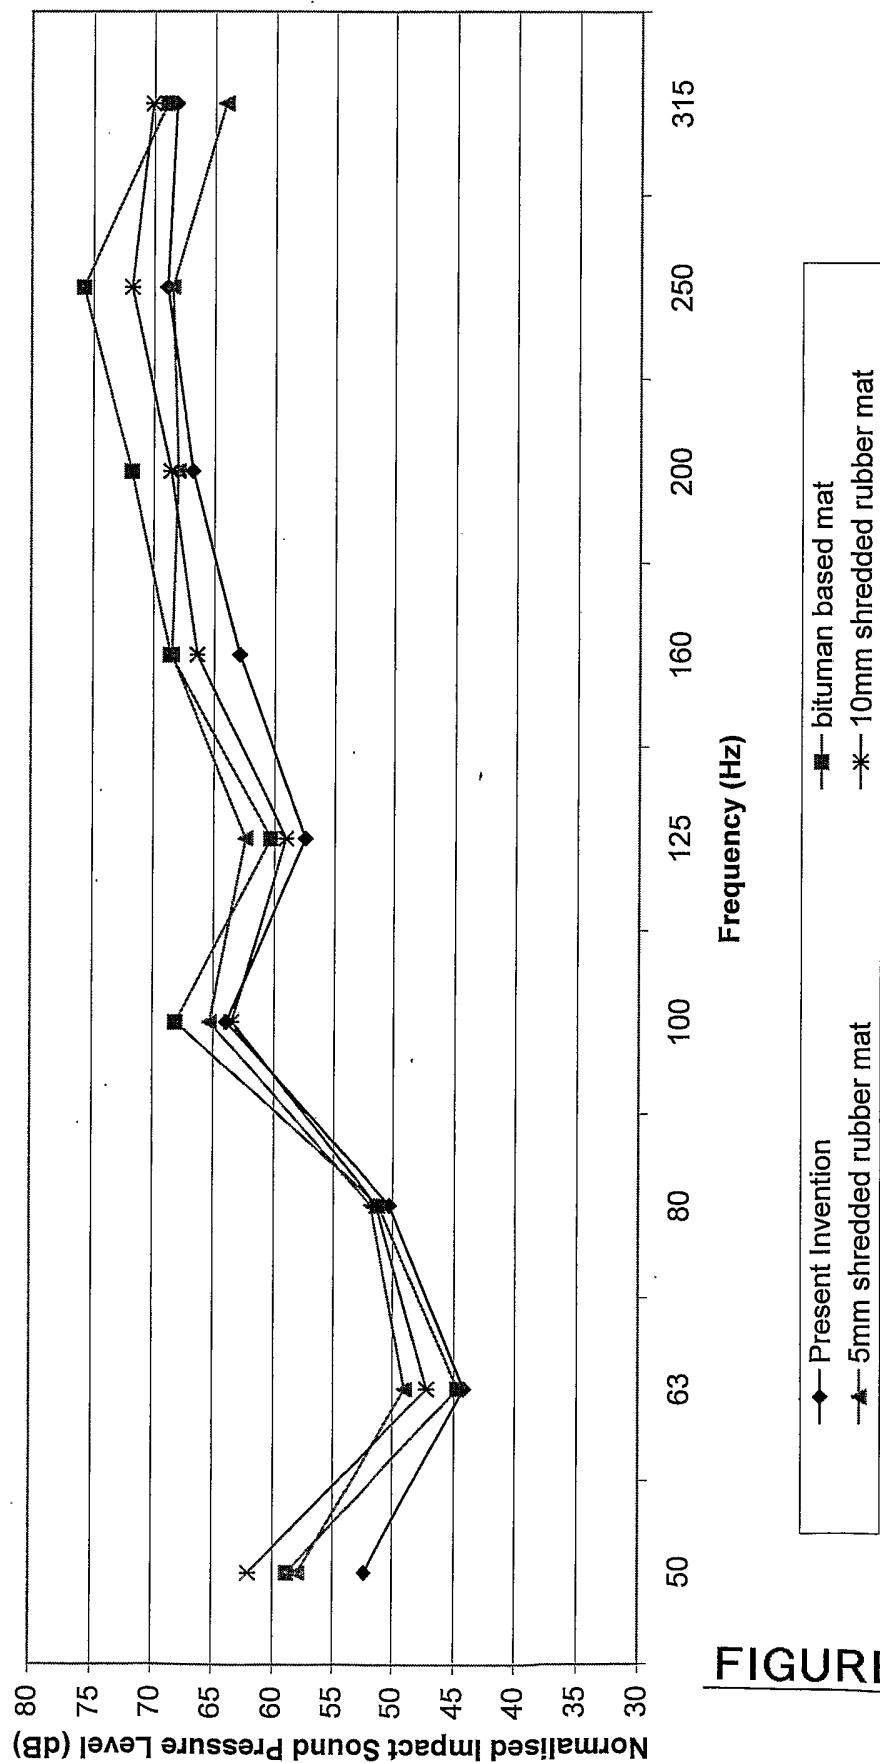


FIGURE 5

6 / 7

Comparison of Present Invention with competitor single number ratings

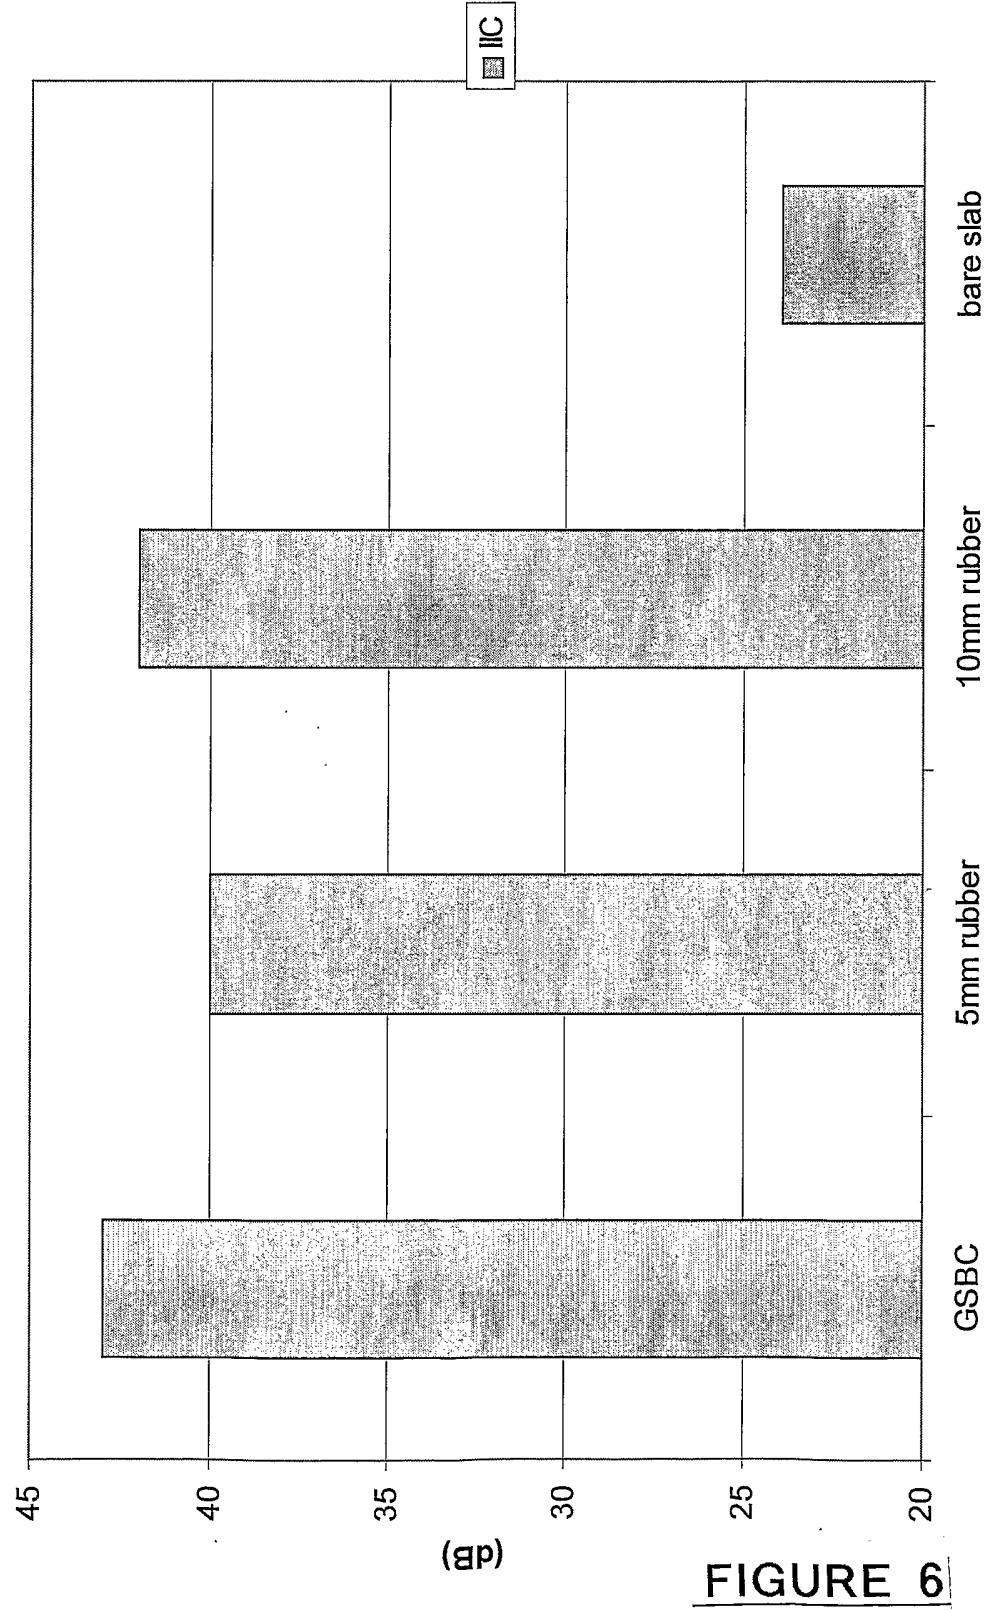

7 / 7

Comparison of Present Invention with competitor - point load failure

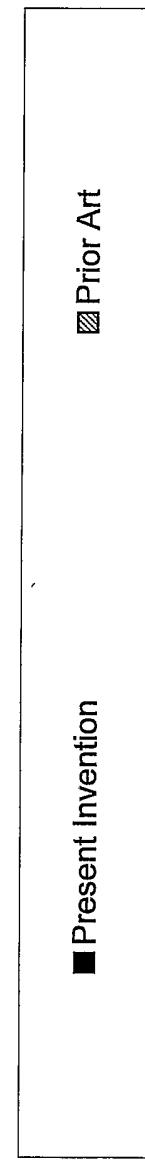
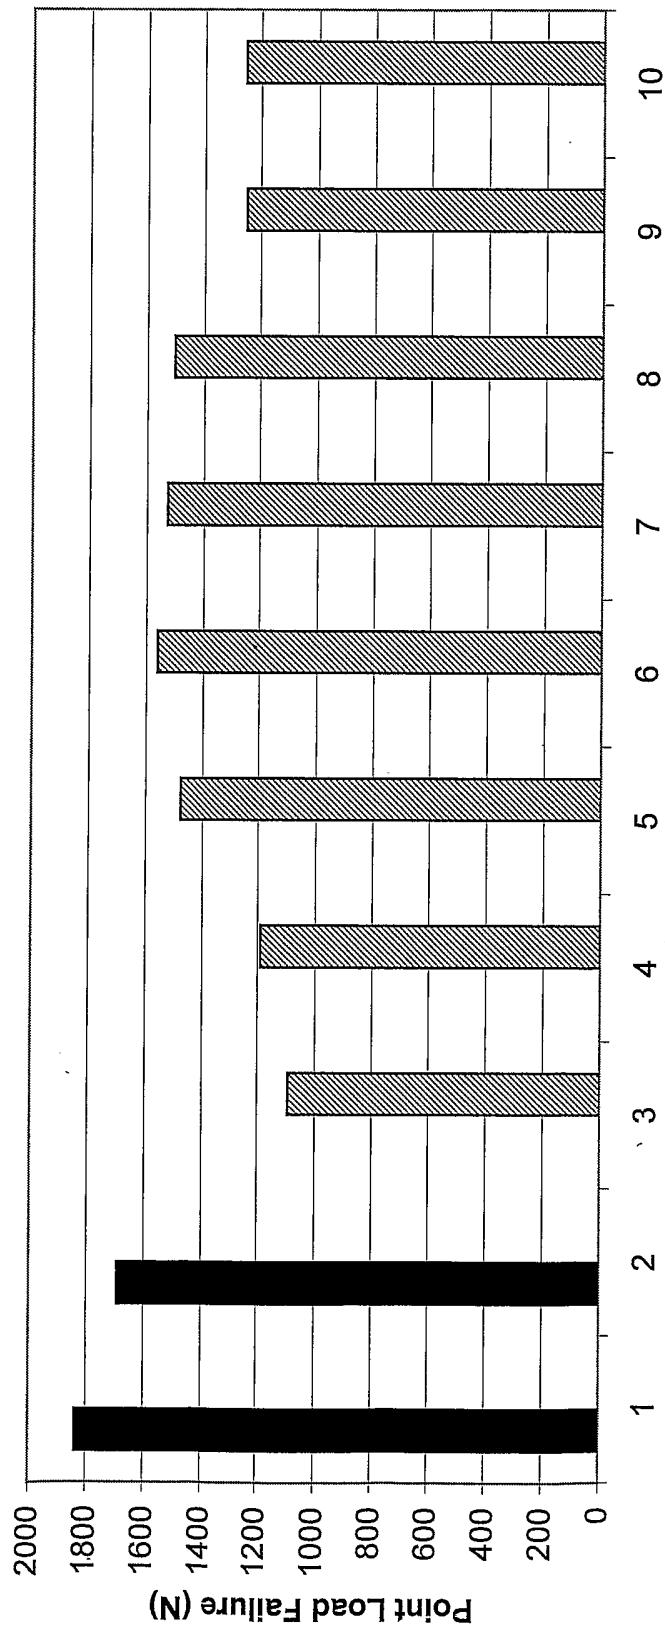


FIGURE 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ02/00256

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. 7: E04B 1/86, E04F 15/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

REFER ELECTRONIC DATABASE DETAILED BELOW

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 DWPI IPC E04B 1/-, 2/-, 5/-, E04C 2/-, E04F 15/- and KEYWORDS sound, acoustic, nois:, vibrat:, attenuat:, insul:, isolat:, damp, absorb, reduc:, abat:, gypsum, fibr:, board, plywood, wood, cement, resilient, rubber, foam, spring

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0829588 B1 (WEDI) 19 December 2001 Page 2, lines 37 to 26 and Claims 1 and 2	1 to 4, 21
X	EP 0864712 B1 (PER AKUSTIK AG) 14 November 2001 Page 3, line 10 and Claims 1 and 2	1 to 4, 12, 12, 21 to 24
X	EP 1088800 A2 (ARMSTRONG WORLD INDUSTRIES, INC) 4 April 2001 Column 5, line 53 to Column 6, line 24 and Figure 1	1 to 4, 21, 22

 Further documents are listed in the continuation of Box C See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
24 February 2003

Date of mailing of the international search report

27 FEB 2003

Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaaustralia.gov.au
Facsimile No. (02) 6285 3929

Authorized officer

COLIN FITGIBBON

Telephone No : (02) 6283 2226

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ02/00256

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 100 21 966 A1 (BLOCKEN) 7 December 2000 Column 4, lines 39 to 47 and Claim 1	1 to 4, 9 to 11, 21
X	US 5968630 A (FOSTER) 19 October 1999 Column 2, lines 22 to 63 and figures	1 to 4, 9, 10, 12, 15, 21 to 24, 26
X	GB 2306183 A (MONARFLEX LTD) 30 April 1997 Page 3, line 5 to Page 5, line 22 and figures	1 to 4, 9, 10, 12, 13, 15, 20 to 24, 26

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ02/00256

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member		
EP	829588	NONE			
EP	864712	NONE			
EP	1088800	EP 1088632 US 6443258	EP 1088799	EP 1088946	
DE	10021966	NONE			
US	5968630	US 5952076			
GB	2306183	AU 16116/97	WO 9729257		
END OF ANNEX					