

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2008 (13.11.2008)

PCT

(10) International Publication Number
WO 2008/137560 A1

- (51) International Patent Classification:
G06F 3/042 (2006.01)
 - (21) International Application Number:
PCT/US2008/062241
 - (22) International Filing Date: 1 May 2008 (01.05.2008)
 - (25) Filing Language: English
 - (26) Publication Language: English
 - (30) Priority Data:
11/743,627 2 May 2007 (02.05.2007) US
 - (71) Applicant (for all designated States except US): **POA SANA LIQUIDATING TRUST** [US/US]; 2134 Jardin Drive, Mountain View, California 94040 (US).
 - (72) Inventor; and
 - (75) Inventor/Applicant (for US only): **DEANE, Peter** [GB/US]; 1580 Sunshine Valley Road, Moss Beach, California 94038 (US).
 - (74) Agents: **KALINSKI, Francis, T., II** et al.; P.O. Box 1687, Cupertino, California 95015-1687 (US).
 - (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
 - (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

(54) Title: SHADOW DETECTION IN OPTICAL TOUCH SENSOR THROUGH THE LINEAR COMBINATION OF OPTICAL BEAMS AND GREY-SCALE DETERMINATION OF DETECTED SHADOW EDGES

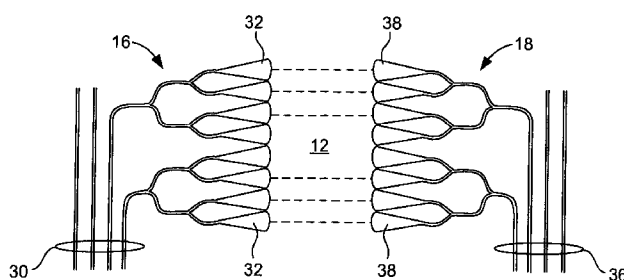


FIG. 2

(57) Abstract: An optical based input touch display device with high resolution shadow detection using the linear splitting of waveguides among transmit and receive lenses and grey-scale calculations for shadow edge and center detection is disclosed. The apparatus includes a light source and a transmit waveguide optically coupled to the light source. The transmit waveguide includes a plurality of transmit waveguide grooves coupled to a plurality of groups of shared transmit lenses respectively. The plurality of groups of transmit lenses, which are configured to generate a plurality of collimated light beams from the light source. A receive waveguide is also provided having a plurality of receive waveguide grooves coupled to a plurality of groups of shared receive lenses. The plurality of groups of receive lenses are configured to receive the plurality of collimated light beams. A photodiode array including a plurality of photodiodes are optically coupled to the plurality of receive waveguide grooves respectively. Each of the photodiodes is configured to receive light from the plurality of light beams received by the plurality of groups of receive lenses respectively. A processor is configured to detect shadow edge and/or shadow center of an interrupt in the plurality of collimated light beams.



WO 2008/137560 A1

**SHADOW DETECTION IN OPTICAL TOUCH SENSOR
THROUGH THE LINEAR COMBINATION OF OPTICAL
BEAMS AND GREY-SCALE DETERMINATION OF DETECTED
SHADOW EDGES**

5

FIELD OF THE INVENTION

[0001] The present invention relates to optical based input touch display devices, and more particularly, to shadow detection for optical based input touch devices using linear splitting of optical beams and grey-scale calculations for detecting the shadow edge and center of an input device.

10

BACKGROUND OF THE INVENTION

[0002] User input devices for data processing systems can take many forms. Two types of relevance are touch screens and pen-based screens. With either a touch screen or a pen-based screen, a user may input data by touching the display screen with an input device, such as a stylus, pen or finger.

15

[0003] One conventional approach to providing a touch or pen/stylus-based input system is to overlay a resistive or capacitive film over the display screen. This approach has a number of problems. Foremost, the film causes the display to appear dim and obscures viewing of the underlying display. To compensate, the intensity of the display screen is often increased. However, in the case of most portable devices, such as cell phones, personal digital assistants and laptop computers, the added intensity requires additional power, reducing the life of the battery of the device. The films are also easily damaged. In addition, the cost of the film scales dramatically with the size of the screen. With large screens, the cost is therefore typically prohibitive.

25

[0004] Another approach to providing touch or pen/stylus-based input systems is to use an array of source Light Emitting Diodes (LEDs) along two adjacent X-Y sides of an input display and a reciprocal array of corresponding photodiodes along the opposite two adjacent X-Y sides of the input display. Each LED generates a light beam directed to the reciprocal photodiode. When the user touches the display, with either an input device, the interruption in light beams are detected by the corresponding X and Y photodiodes on the opposite side of the display. The data input is thus determined by calculating the coordinates of the interruptions as detected by the X and Y photodiodes. This type of data input display, however, also has a

30

number of problems. A large number of LEDs and photodiodes are required for a typical data input display. The position of the LEDs and the reciprocal photodiodes also need to be aligned. The relatively large number of LEDs and photodiodes, and the need for precise alignment, make such displays complex, expensive, and difficult
5 to manufacture.

[0005] Yet another approach involves the use of polymer waveguides to both generate and receive beams of light from a single light source to a single array detector. With known polymer waveguides, an array of light transmitting lenses, each coupled to the light source through a waveguide, is positioned on one side of touch
10 input display. An opposing array of receive lenses are positioned on the opposite side of the display. Each of the receive lenses have a corresponding waveguide that is optically coupled to a light detector such as a photodiode. During operation, light from the light source is transmitted through the waveguide and the transmit lenses, creating a plurality of collimated light beams adjacent the surface of the display. On
15 the opposing side of the display, the lenses receive the collimated light, which is conveyed to the light detectors through the waveguides. When a data entry is made, using an input device contacting the display, the collimated light at the point of contact is interrupted. The light detectors determine the location of the interrupt, and based on the location, determine the data entry. For more information on polymer
20 waveguides, see for example US patent application 11/498,356, US patent publications 2005/0271319, 2006/0001653, 2006/0002655, 2006/0001654, 2005/0271326, 2005/0271983, 2005/0201681 and US patent number 7,099,553, all incorporated herein by reference for all purposes.

[0006] A number of issues are associated with the aforementioned touch screens
25 using polymer waveguides. Foremost, each transmit and receive channel requires a dedicated waveguide. Since a significant number of transmit and receive channels are needed to obtain the necessary input resolution, a large number of waveguides are required. Touch screens are often used with small to medium sized consumer items, such as cell phones and PDAs. The optical touch sensor therefore typically needs to
30 fit into a small space, ideally integrated into the display. Since the waveguide structures are usually planar, the number of waveguides used, and hence the system resolution, can be limited by the area available for the waveguide structures.

[0007] An optical based input touch display device with high resolution shadow detection using the linear splitting of waveguides among transmit and receive lenses and grey-scale calculations for shadow edge and center detection is therefore needed in order to minimize the space occupied by the waveguide structures.

5

SUMMARY OF THE INVENTION

[0008] An optical based input touch display device with high resolution shadow detection using the linear splitting/combining of waveguides among transmit/receive waveguide structures and grey-scale calculations for shadow edge and center detection is disclosed. The apparatus includes a light source and a transmit waveguide
10 optically coupled to the light source. The transmit waveguide includes a plurality of transmit waveguide grooves coupled to a plurality of groups of shared transmit lenses respectively. The plurality of groups of transmit lenses, which are configured to generate a plurality of collimated light beams of equal intensity from the light source. A receive waveguide is also provided having a plurality of receive waveguide grooves
15 coupled to a plurality of groups of shared receive lenses. The plurality of groups of receive lenses are configured to receive and linearly combine the plurality of collimated light beams. A photodiode array including a plurality of photodiodes are optically coupled to the plurality of receive waveguide grooves respectively. Each of the photodiodes is configured to receive light from the plurality of light beams
20 received by the plurality of groups of receive lenses respectively. A processor is configured to detect shadow edge and/or shadow center of an interrupt in the plurality of collimated light beams.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Figure 1 is a perspective view of a touch display using polymer waveguides
25 according to the present invention.

[0010] Figure 2 is a diagram illustrating linear optical splitting and combining waveguides used in the touch display of the present invention.

[0011] Figure 3 is a perspective view illustrating an optical splitting waveguide according to the present invention.

30 [0012] Figure 4 is a top view diagram illustrating an input device interrupting a collimated beam of light in the touch display of the present invention.

[0013] Figure 5 is a plot illustrating the voltage output versus received light for a photodiode light detector used in the touch display of the present invention.

[0014] Figure 6A and 6B are diagrams illustrating grey-scale edge and center shadow detection in accordance with the present invention.

[0015] Like elements are designated by like reference numbers in the Figures.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 [0016] Referring to Figure 1, a touch screen data input device is shown. The data input device 10 defines a "grid" 12 of collimated light beams in the free space adjacent to a touch screen 14. The grid 12 (represented by the horizontal and vertical dashed lines) of light is created by a transmit polymer waveguide 16 provided on first X and Y sides of the screen 14. A receive polymer waveguide 18 is provided on the
10 opposing X and Y sides of the screen 14 and is configured to receive the collimated beams of light. A light source 19, such as a laser diode, is optically coupled to the transmit waveguide 16. A photodiode array 20 is optically coupled to the individual waveguides of the receive polymer waveguide 18. A processor 22, which is coupled to the photodiode array 20, is provided to determine the X and Y coordinate of any
15 interrupt in the grid 12 of collimated light caused during a data entry.

[0017] Referring to Figure 2, a diagram illustrating the transmit waveguide 16 and the receive waveguide 18 according to one embodiment is shown. The transmit waveguide 16 includes a plurality of waveguide grooves 30 and a plurality of lenses 32. In the embodiment illustrated, the light transmitted from the light source 19 (not
20 shown) is transmitted through each waveguide groove 30 and is optically split or shared among four lenses 32. In one embodiment, the splitting is linear, meaning each lens 32 receives the same amount of light and generates a collimated beam of light of equal intensity. In other embodiments, the splitting can be non-linear. On the receive side, the waveguide 18 also includes a plurality of waveguide grooves 36 and lenses
25 38. The collimated light received from each shared lens 38 is linearly combined and provided to the common waveguide groove 36. The photodiodes of the array 20 are optically coupled to each of the waveguide grooves 36 respectively. It should be noted that for the sake of simplicity, only a few of the grooves 30 and 36 and lenses 32 and
30 38 are illustrated. In most actual embodiments, a larger number of both would be provided.

[0018] It should be noted that in the embodiment shown in Figure 2, the ratio of splitting between lenses and waveguide grooves is four to one (4:1) or 2^N where $N=2$. In alternative embodiments, the ratio can be altered, for example anywhere from 2^N

where N ranges from 1 to 6 (i.e., 2 to 64 lenses per waveguide groove). Regardless of the number of lenses used, the primary goal in one embodiment is the linear generation of generally uniform intensity collimated light beams. In other embodiments, the light beams can be of non-uniform intensity. In yet other
5 embodiments, the ratio on the transmit side and the receive side do not necessarily need to match. In one specific example, eight lenses 32 can be shared among one groove 30 on the transmit side, while four lenses 38 are shared among one groove 36 on the receive side. In other examples, anywhere from two to sixty four or more lenses 32/36 per groove 30/36 can be used on either the transmit and/or the receive
10 side. Again, regardless of the number of lenses provided on the transmit and receives sides, the primary goal of the lenses in one embodiment is the linear combination of the light received at each lens. In other embodiments, the combining of the received light can be non-linear. In various other embodiments, the lenses have an aperture ranging from 50 microns to 5 millimeters.

15 **[0019]** Referring to Figure 3, a perspective view of either waveguide 16/18 is shown. In this embodiment, the waveguide 16/18 is L-shaped and includes the lenses 32/38 arranged along the inner periphery. The grooves 30/36 are coupled to the lenses 32/38 at one end and travel to the optical coupling end 40 of the waveguide. At the optical coupling end 40, the grooves 30/36 are optically coupled to either a light source 19 or
20 the photodiode array 20, depending if the waveguide is used as a transmitter 16 or receiver 18 respectively. The grooves 30/36 run parallel to one another along the outer edge opposite the lenses 32/38 along the length of the waveguide.

[0020] With the linear sharing arrangement described above, the number of grooves 30/36 required per waveguide 16/18 is significantly reduced. In the example shown in
25 Figure 2 for example, the number of grooves is reduced to by a factor of four since each groove is optically coupled to four lenses. The width "Wd" of the waveguides 16/18 can therefore be significantly reduced. Also the number of photodiodes on the array 20 can also be reduced along with the size or processing power of the processor 22.

30 **[0021]** Referring to Figure 4, a top view diagram illustrating an input device interrupting a collimated beam of light in the touch display of the present invention is shown. During operation, a user will make data entries to the device 10 using some type of an input device 42, such as a pen, stylus or their finger. As the entry is made,

the input device 42 is moved laterally across the surface of the touch screen 14 in the X-Y plane. In the example illustrated, the input device is being moved in the Y direction, as signified by the arrow 39. It should be well understood that during normal operation, the input device will be moved in both the X and Y directions along the X-Y plane defined by the surface 14 of the input device 10.

[0022] The amount of light from the collimated beam of light 12 received at the lens 38 is inversely proportional to the amount of light blockage caused by the input device 42. When the input device 42 is not directly in front of the lens 38 and there is no blockage, resulting lens 38 receiving the full intensity of the collimated light. On the contrary when the input device 42 is fully blocking or interrupting the collimated light beam, the lens 38 receives little to no light. In the position shown in the figure, the input device is partially blocking the light, meaning the lens 38 receives only a portion of the collimated beam, as illustrated by the shaded area.

[0023] Referring to Figure 5, a plot 50 illustrating the voltage output versus received light for a photodiode light detector used in the touch display of the present invention is shown. Photodiodes typically generate an output voltage that is an integral of the received optical flux. The optical flux is defined by exposure time multiplied by the optical power of the received light. In the embodiment shown in the plot 50, the photodiode is pre-charged to 2.0 volts and generates a voltage of 0.5 volts upon saturation. The output voltage 52 is some linear value between the pre-charge and saturation voltages, depending on the amount of received optical flux. The plot 50 shows linear output voltages 52A through 52E, each representing the output of the diode depending on the degree of blockage. Linear voltage outputs 52A through 52E show full blockage, 75 percent, 50 percent, 25 percent and no blockage respectively. The exposure time (t_{optimal}) is the exposure time selected to prevent the diode from becoming saturated at full light exposure. At the end of each t_{optimal} cycle, the diode is pre-charged to 2.0 volts.

[0024] In the context of the subject application, the term ‘grey scale’ refers to the inverse proportionality of the light input at the receive lenses 38 versus the voltage output 52A through 52E at the corresponding photodiode in the array 20. In other words, the more light received at the diode, the smaller the magnitude of the voltage output of the diode, and vice-versa. As discussed in detail below, this grey scaling effect can be used for height and shadow detection.

[0025] Referring to Figure 6A, a diagram illustrating grey-scale shadow detection in accordance with the present invention. Figure 6A shows an input device 42 being laterally moved between position P1 and P2 relative to a number of adjacent receive lenses 38. It should be noted that for the sake of illustration, the value of N in this example is two, or there are four lenses 38 per receive waveguide 36 (i.e., $2^2=4$). The width of the input device 42 is (2^{2+1}) lenses wide, or a total of eight lenses 38 wide. With this arrangement, the grey scale of each lens 38 twenty five percent (25%). In other words, when the input device 42 blocks four, three, two, one or none of the lenses 38 of a given waveguide 36, the grey scale output will be 1, 0.75, 0.5, 0.25, and 0.0 respectively. In position P1, the input device 42 is blocking any light from reaching the lenses 36 of waveguides 38B and 38C. On the other hand, the lenses 36 of waveguides 38A and 38D-38F are not blocked and receive the collimated light unobstructed. As the input device is moved from position P1 to position P2, the amount of light received by the lenses 36 of waveguides 38B through 38D changes.

[0026] Referring now to Figure 6B, a table that illustrates the voltage output of the photodiodes is shown. Each column A through F corresponds to the waveguides 38A through 38F respectively. Each row signifies an increment of time between when the input device 42 is moved between position P1 and position P2. The entry at the intersection of each column and row includes a number that signifies the approximate voltage output of the photodiode that receives the light from waveguide 38A through 38F respectively. As a reminder, an entry of ("1") indicates that the waveguide 38 is providing little to no light to the photodiode (i.e., generating two volts) because all of its lenses 36 are blocked from receiving light, whereas an entry of ("0") means the none of the lenses 36 are being blocked.

[0027] In the first row when the input device 42 is at P1, the entry for column B and C is (1), and (0) for the remaining columns A and D through F. As the input device 42 is moved from left to right, lens 38B is no longer fully blocked and begins to receive some light, lens 38C remains fully blocked, and lens 38D becomes partially blocked. As a result, the entry for the three lenses 38b, 38C and 38D in the second row is (.75, 1, and .25). As the input device 42 continues its movement to position P2, the entry for the three lenses 38b, 38C and 38D changes to (.5, 1, .5), (.25, 1, .75) and (0, 1, 1) for the third, fourth and fifth rows respectively.

5 [0028] As the shadow edge of the input device 42 moves across a group of lenses 38 sharing a waveguide groove 36, the total linear power of the light received is reduced in proportion to the shadow. By choosing the width of the combined group of lenses 38 to be less than half the smallest recognized shadow size, the full occlusion of the group of lenses can be achieved. As a result, the shadow center of the input device 42 can be accurately determined. The aspect ratio (i.e., aperture) of the lenses 38 are therefore dictated by the desired resolution. In one embodiment, if a desired resolution of 0.125 millimeters is desired, then lenses 38 having an aperture of 2X or .25 millimeters is required.

10 [0029] Polymer waveguides 16 can be made in a number of known methods. See for example US patent application 11/498,356, US patent publications 2005/0271319, 2006/0001653, 2006/0002655, 2006/0001654, 2005/0271326, 2005/0271983, 2005/0201681 and US patent number 7,099,553, all incorporated herein by reference for all purposes.

15 [0030] While this invention has been described in terms of several preferred embodiments, there are alteration, permutations, and equivalents, which fall within the scope of this invention. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present invention. It is therefore intended that the following appended claims be interpreted as including all
20 such alterations, permutations and equivalents as fall within the true spirit and scope of the present invention.

CLAIMS


What is claimed is:

1. An apparatus, comprising;
a optical waveguide, the optical waveguide including:
5 a waveguide groove formed in the optical waveguide; and
a plurality of lenses optically coupled to the waveguide groove so that
either light received by the plurality of lenses is combined in the waveguide
groove or light transmitted by the waveguide groove is split among the
plurality of lenses.
- 10 2. The apparatus of claim 1, wherein the combining and the splitting of the
received or the transmitted light is linear among the plurality of lenses.
3. The apparatus of claim 1, wherein the combining and the splitting of the
received or the transmitted light is non-linear among the plurality of lenses.
4. The apparatus of claim 1, wherein the plurality of lenses equals 2^N , where n
15 ranges from one to six.
5. The apparatus of claim 1, wherein the plurality of lenses have an aperture
ranging from 50 microns to 5 millimeters.
6. The apparatus of claim 1, wherein the waveguide is L-shaped and is
configured to either receive or generate collimated light beams in the X and Y
20 directions.
7. The apparatus of claim 1, further comprising a plurality of the waveguide
grooves, each of the waveguide grooves having the plurality of lenses optically
coupled thereto.
8. An apparatus, comprising:
25 a light source;
a transmit waveguide optically coupled to the light source, the transmit
waveguide having a plurality of transmit waveguide grooves coupled to a plurality of
groups of shared transmit lenses respectively, the plurality of groups of transit lenses
configured to generate a plurality of collimated light beams from the light source;
30 a receive waveguide having a plurality of receive waveguide grooves coupled
to a plurality of groups of shared receive lenses, the plurality of groups of receive
lenses being configured to receive the plurality of collimated light beams;
a photodiode array including a plurality of photodiodes optically coupled to
the plurality of receive waveguide grooves respectively, each of the photodiodes

configured to receive light from the plurality of light beams received by the plurality of groups of receive lenses respectively; and

a processor configured to detect shadow edge and/or shadow center of an interrupt in the plurality of collimated light beams.

- 5 9. The apparatus of claim 8, wherein the collimated light beams are transmitted and received in one or more of the following: the X direction; the Y direction; or the X and Y directions.
- 10 10. The apparatus of claim 8, further comprising a touch screen of a data input device, wherein the collimated light beams are transmitted and received adjacent the touch screen device.
11. The apparatus of claim 8, wherein the plurality of shared groups of transmit lenses each comprises 2^N lenses where N ranges from one to six.
12. The apparatus of claim 8, wherein the plurality of shared groups of received lenses each comprises 2^N lenses where N ranges from one to six.
- 15 13. The apparatus of claim 8, wherein plurality of shared groups of transmit lenses have an aperture ranging from 50 microns to 5 millimeters.
14. The apparatus of claim 8, wherein plurality of shared groups of receive lenses have an aperture ranging from 50 microns to 5 millimeters.
- 20 15. The apparatus of claim 8, wherein the photodiodes generate voltage signals in proportion to the amount of the receive light from the plurality of light beams received by the plurality of groups of receive lenses respectively.
- 25 16. The apparatus of claim 15, wherein the processor detects the shadow edge and/or shadow center of an interrupt in the plurality of collimated light beams from the voltage signals in proportion to the amount of the receive light from the plurality of light beams received by the plurality of groups of receive lenses respectively.
17. The apparatus of claim 1, wherein the optical waveguide is made from polymer and the waveguide groove is formed in the polymer.
18. The apparatus of claim 1, wherein the transmit waveguide and the receive waveguide are both polymer waveguides.
- 30 19. The apparatus of claim 1, wherein the optical waveguide is made from a piece molded substrate with the plurality of lenses and the waveguide groove molded into the substrate and an optically transparent material filling the waveguide groove.

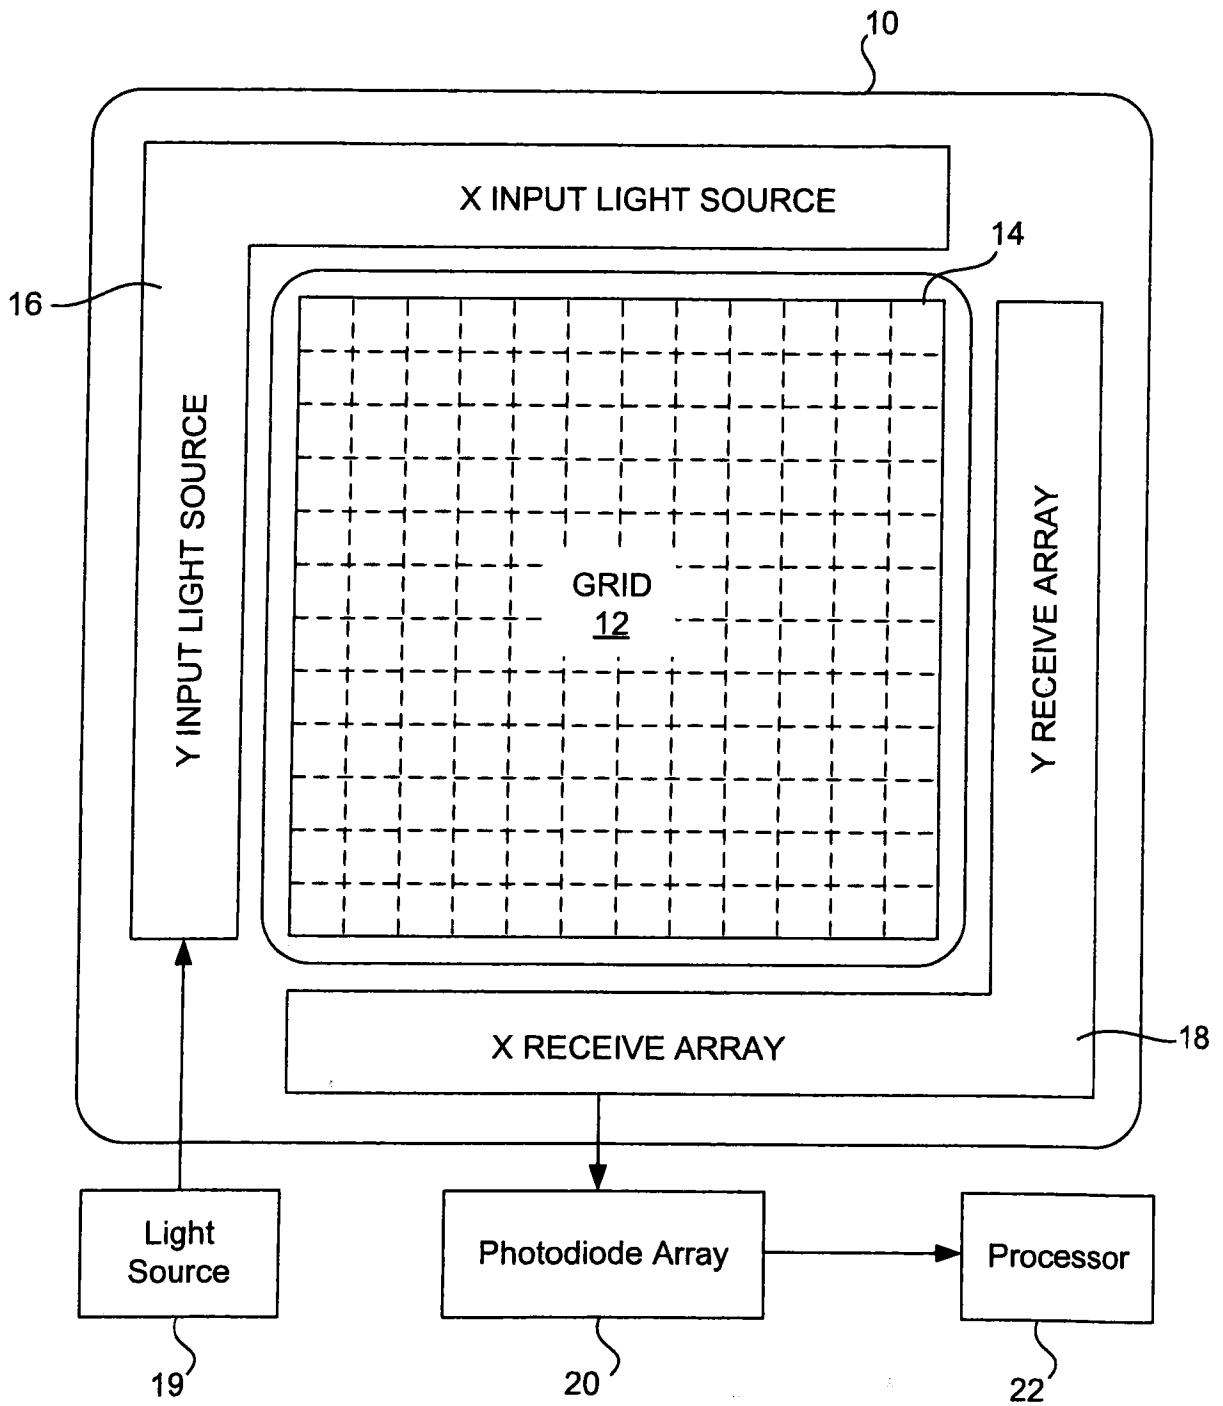

10 ↗

FIG. 1

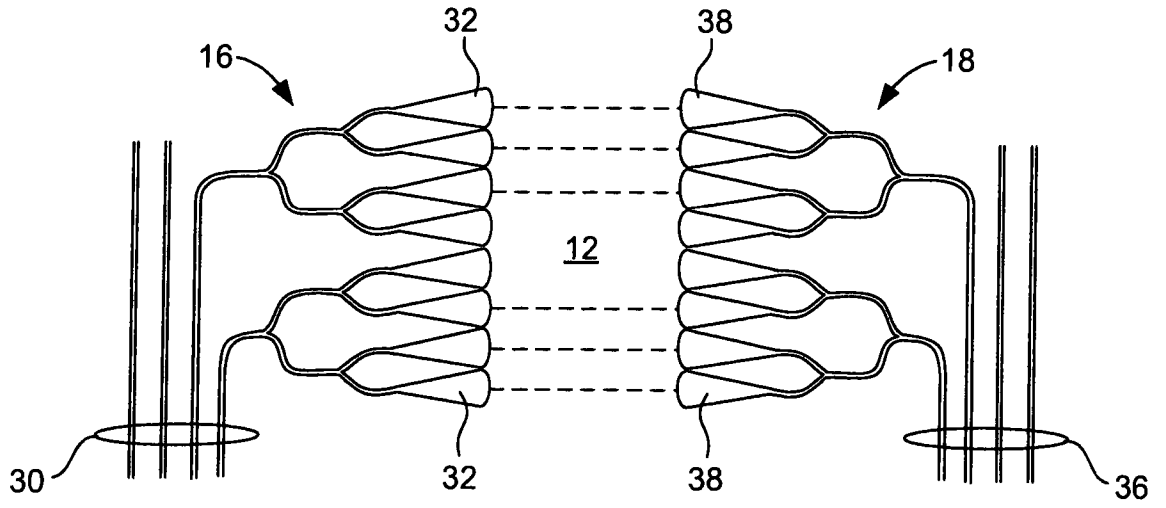


FIG. 2

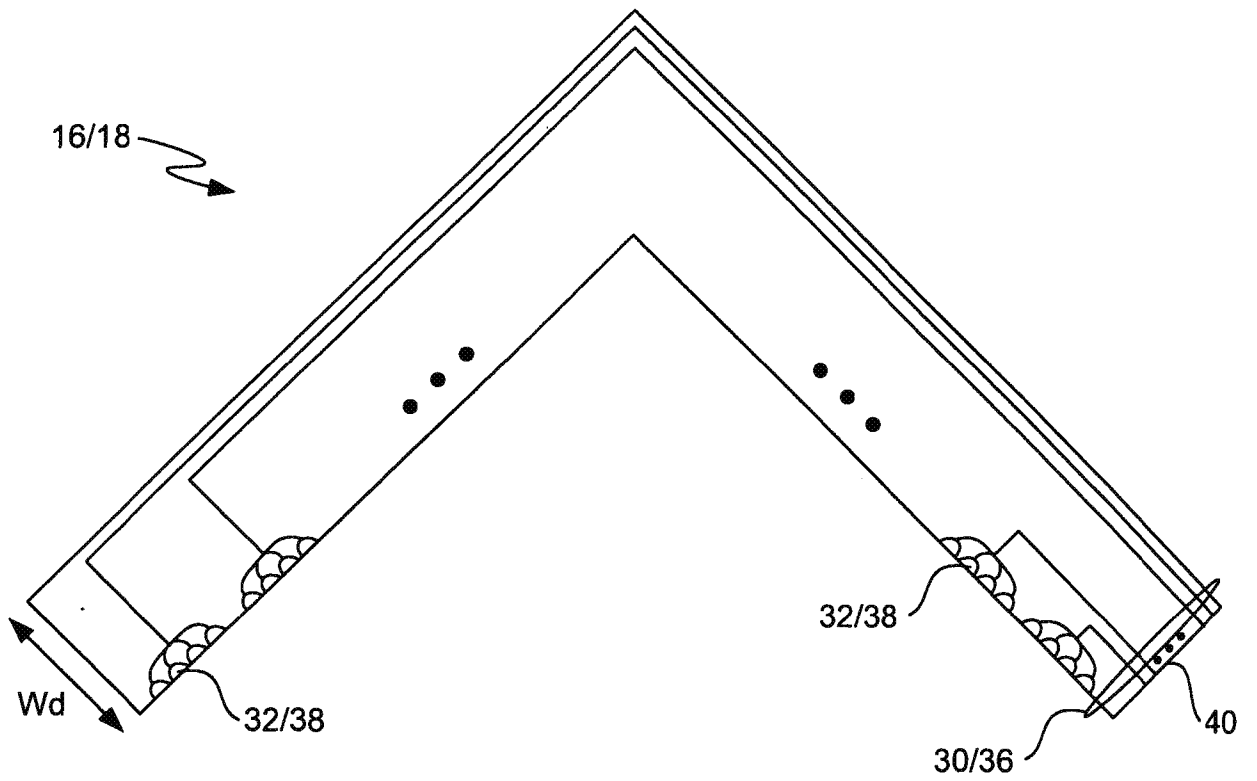


FIG. 3

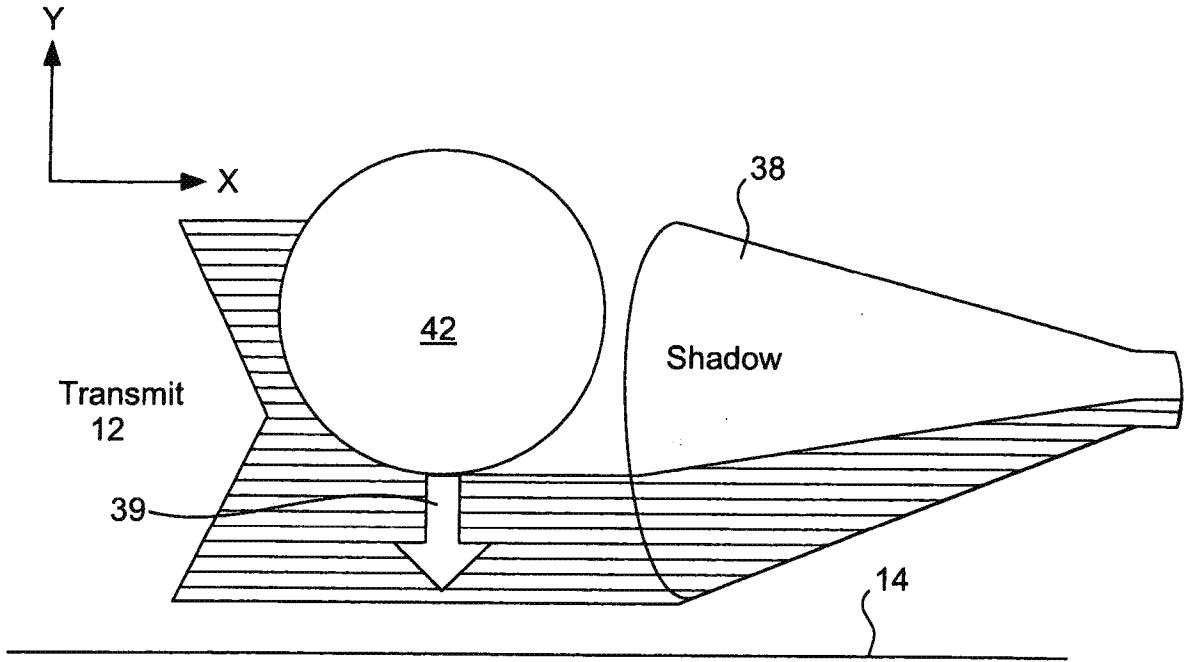


FIG. 4

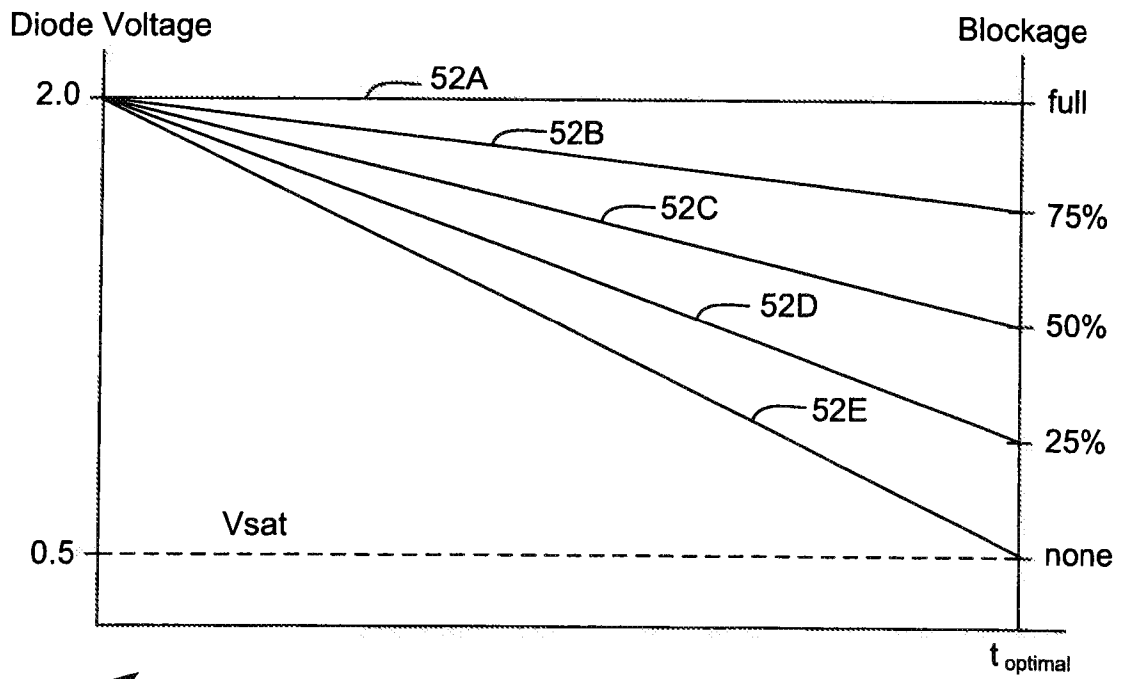


FIG. 5

50 ↗

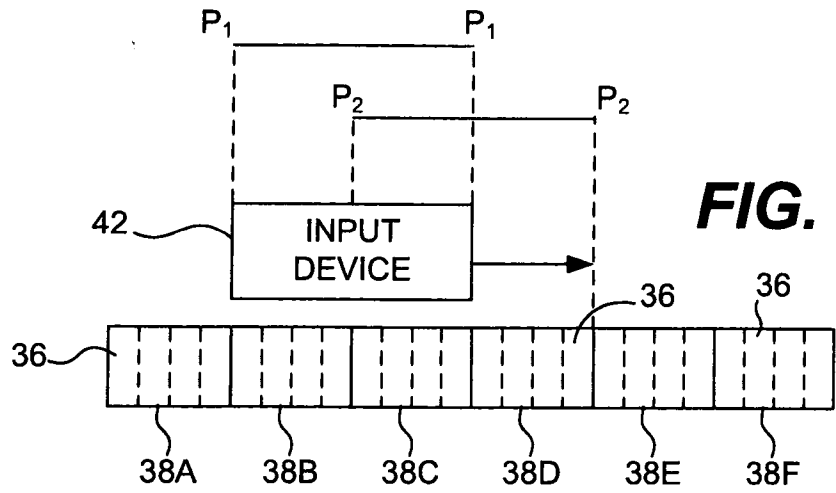


FIG. 6A

	A	B	C	D	E	F
POSITION P1 →	0	1	1	0	0	0
	0	.75	1	.25	0	0
	0	.5	1	.5	0	0
	0	.25	1	.75	0	0
POSITION P2 →	0	0	1	1	0	0

FIG. 6B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/062241

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F3/042

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005/271319 A1 (GRAHAM DAVID S [US]) 8 December 2005 (2005-12-08) abstract; claims 25-27; figures 1-7 paragraphs [0002], [0009], [0020] - [0022], [0024], [0028] - [0031]	1-19
Y	WO 98/40844 A (POA SANA LLC [US]; GRAHAM DAVID S [US]; FRANCIS DANIEL A [US]) 17 September 1998 (1998-09-17) abstract; figures 1-12D page 14, line 13 - page 15, line 16 ----- -/--	1-19

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

25 July 2008

Date of mailing of the international search report

07/08/2008

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Köhn, Andreas

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2008/062241

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>WO 2006/060875 A (RPO PTY LTD [AU]; CHARTERS ROBERT BRUCE [AU]; CORNISH BENJAMIN [AU]) 15 June 2006 (2006-06-15) abstract; claim 23; figures 1-12 page 1, line 10 - page 2, line 2 page 3, lines 23-25 page 8, lines 1-25 page 10, line 6 - page 11, line 2 page 11, lines 23-27 page 12, line 10 - page 14, line 18 page 15, lines 4-7, 26-31 page 17, lines 3-9 page 20, line 19 - page 21, line 4</p>	1-19
Y	<p>GB 2 420 620 A (AGILENT TECHNOLOGIES INC [US]) 31 May 2006 (2006-05-31) abstract; figures 1-6 paragraphs [0006], [0013] - [0021], [0027] - [0030]</p>	1-19
Y	<p>US 2003/063775 A1 (RAFII ABBAS [US] ET AL) 3 April 2003 (2003-04-03) abstract; figures 1A-17 paragraphs [0068], [0069], [0189], [0190], [0193]</p>	15,16
A	<p>US 2004/201579 A1 (GRAHAM DAVID S [US]) 14 October 2004 (2004-10-14) abstract; figures 1-3C paragraphs [0008], [0009], [0018], [0024] - [0028]</p>	15,16
A	<p>JANSEN L A ET AL: "FINGER POINT DETECTION USING GAS PANEL" 1 December 1980 (1980-12-01), IBM TECHNICAL DISCLOSURE BULLETIN, IBM CORP. NEW YORK, US, PAGE(S) 3287/3288 , XPO02069118 ISSN: 0018-8689 the whole document</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2008/062241

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
US 2005271319 A1	08-12-2005	CN 1993640 A	04-07-2007		
		DE 112005001275 T5	26-04-2007		
		JP 2008504563 T	14-02-2008		
		KR 20070041499 A	18-04-2007		
		US 2007154133 A1	05-07-2007		
		WO 2005121852 A1	22-12-2005		
WO 9840844 A	17-09-1998	AT 218227 T	15-06-2002		
		AU 742483 B2	03-01-2002		
		AU 6701098 A	29-09-1998		
		CA 2283169 A1	17-09-1998		
		CN 1260060 A	12-07-2000		
		DE 69805610 D1	04-07-2002		
		DE 69805610 T2	21-11-2002		
		EP 0965098 A1	22-12-1999		
		HK 1029422 A1	10-03-2006		
		JP 2001514779 T	11-09-2001		
		US 6351260 B1	26-02-2002		
		US 5914709 A	22-06-1999		
		WO 2006060875 A	15-06-2006	AU 2005313861 A1	15-06-2006
				CA 2588806 A1	15-06-2006
CN 101103289 A	09-01-2008				
EP 1831742 A1	12-09-2007				
KR 20070089994 A	04-09-2007				
TW 272413 B	01-02-2007				
GB 2420620 A	31-05-2006	JP 2006155616 A	15-06-2006		
		US 2006114244 A1	01-06-2006		
US 2003063775 A1	03-04-2003	NONE			
US 2004201579 A1	14-10-2004	NONE			