

(43) International Publication Date
19 October 2017 (19.10.2017)

(51) International Patent Classification:

B82Y 10/00 (2011.01) **H01L 31/0224** (2006.01)
B82Y 15/00 (2011.01) **H01L 31/028** (2006.01)
B82Y 40/00 (2011.01) **H01L 31/0352** (2006.01)
H01L 29/417 (2006.01) **H01L 29/12** (2006.01)
H01L 29/45 (2006.01) **H01L 29/16** (2006.01)
H01L 29/66 (2006.01) **H01L 29/41** (2006.01)
H01L 29/778 (2006.01)

(21) International Application Number:

PCT/FI2017/050214

(22) International Filing Date:

28 March 2017 (28.03.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16165147.6 13 April 2016 (13.04.2016) EP

(71) Applicant: **NOKIA TECHNOLOGIES OY** [FI/FI];
Karaportti 3, 02610 Espoo (FI).

(72) Inventors: **ALLEN, Mark**; 7 Chervil Way, Great Cam-
bourne CB23 6BA (GB). **WHITE, Richard**; 24 Old
Pound Close, Hemingford Grey, Huntingdon, Cambridge
PE28 9DY (GB).

(74) Agents: **NOKIA TECHNOLOGIES OY** et al.; Ari
Aarnio, IPR Department, Karakaari 7, 02610 Espoo (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: AN APPARATUS AND METHOD COMPRISING TWO DIMENSIONAL MATERIAL

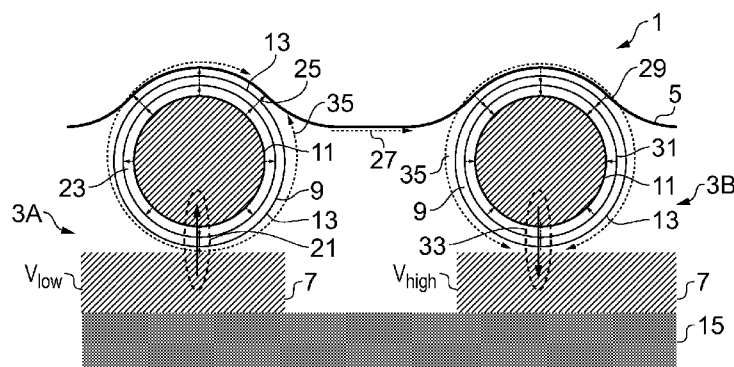


FIG. 2

(57) Abstract: An apparatus and method, the apparatus comprising: at least one electrode configured to provide an electrical connection to a channel (5) of two dimensional material, for example graphene, wherein the electrode comprises a conductive layer (7) and plurality of nanostructures (9), for example nanowires, wherein at least some of the nanostructures comprise a conductive core (11) and a coating of two dimensional material (13), the coating for example comprising graphene. The device may be a sensing device and possibly quantum dots may overlay the channel (see Figure 6).

TITLE

An Apparatus and Method Comprising Two Dimensional Material

5 TECHNOLOGICAL FIELD

Examples of the disclosure relate to an apparatus and method of forming an apparatus wherein the apparatus comprises two dimensional material. In particular, examples of the disclosure relate to an apparatus and method of forming an apparatus comprising one or
10 more electrodes coupled to a channel of two dimensional material.

BACKGROUND

Electronic apparatus comprising two dimensional materials such as graphene are
15 known. Such apparatus comprise electrodes arranged to provide an electrical connection to the two dimensional material. This electrical connection requires charge transfer between the three dimensional material of the electrodes and the two dimensional material.

It is useful to provide apparatus with an improved electrodes for connection to a two
20 dimensional material.

BRIEF SUMMARY

According to various, but not necessarily all, examples of the disclosure there is provided
25 an apparatus comprising: at least one electrode configured to provide an electrical connection to a channel of two dimensional material wherein the electrode comprises a conductive layer and plurality of nanostructures wherein at least some of the nanostructures comprise a conductive core and a coating of two dimensional material.

30 The conductive layer may comprise metal.

The conductive core of at least some of the nanostructures may comprise metal.

The nanostructures may comprise at least one of: nanoparticles, nanowires.
35

2

The coating of two dimensional material may be formed on the conductive core of at least some of the nanostructures.

5 The channel of two dimensional material and the coating of two dimensional material may both comprise graphene.

The nanostructures may be provided overlaying the conductive layer. The channel of two dimensional material may be provided overlaying the nanostructures.

10 The conductive layer may be provided overlaying the nanostructures. The nanostructures may be provided overlaying the channel of two dimensional material.

15 The apparatus may comprise a first electrode and a second electrode. The channel of two dimensional material may extend between the first electrode and the second electrode and a further plurality of nanostructures may be provided between the electrodes and in contact with the channel of two dimensional material.

The apparatus may comprise quantum dots.

20 The quantum dots may be provided overlaying the channel of two dimensional material in the region between the first electrode and the second electrode.

25 According to various, but not necessarily all, examples of the disclosure there is provided a sensing device comprising an apparatus as described above.

30 According to various, but not necessarily all, examples of the disclosure there is provided a method comprising: forming at least one electrode wherein the electrode comprises a conductive layer and plurality of nanostructures wherein at least some of the nanostructures comprise a conductive core and a coating of two dimensional material; and configuring the at least one electrode to provide an electrical connection to a channel of two dimensional material.

The conductive layer may comprise metal.

35 The conductive core of at least some of the nanostructures may comprise metal.

The nanostructures may comprise at least one of: nanoparticles, nanowires.

The coating of two dimensional material may be formed on the conductive core of at least some of the nanostructures.

5

The channel of two dimensional material and the coating of two dimensional material may both comprise graphene.

The method may comprise providing the nanostructures overlaying the conductive layer.

10

The method may comprise providing the channel of two dimensional material overlaying the nanostructures.

The method may comprise providing the conductive layer overlaying the nanostructures.

The method may comprise providing the nanostructures overlaying the channel of two dimensional material.

15

The method may comprise providing a first electrode and a second electrode.

The channel of two dimensional material may extend between the first electrode and the second electrode and the method may comprise providing a further plurality of nanostructures between the electrodes and in contact with channel of two dimensional material.

20

The method may comprise providing one or more quantum dots. The quantum dots may be provided overlaying the channel of two dimensional material in the region between the first electrode and the second electrode.

25

According to various, but not necessarily all, embodiments of the invention there is provided examples as claimed in the appended claims.

30

BRIEF DESCRIPTION

For a better understanding of various examples that are useful for understanding the detailed description, reference will now be made by way of example only to the accompanying drawings in which:

35

Fig. 1 illustrates an apparatus;

Fig. 2 illustrates electronic coupling within an apparatus;

Fig. 3 illustrates another apparatus;

Fig. 4 illustrates another apparatus;

Fig. 5 illustrates another apparatus;

5 Fig. 6 illustrates an apparatus comprising quantum dots;

Fig. 7 illustrates another apparatus comprising quantum dots; and

Fig. 8 illustrates a method.

DETAILED DESCRIPTION

10

The Figures illustrate an apparatus 1 and method of forming an apparatus 1. The apparatus comprises at least one electrode 3 configured to provide an electrical connection to a channel 5 of two dimensional material wherein the electrode 3 comprises a conductive layer 7 and plurality of nanostructures 9 wherein at least some of the nanostructures 9 comprise
15 a conductive core 11 and a coating 13 of two dimensional material.

The apparatus 1 may be used in any electronic device which comprises a channel 5 of two dimensional material. The apparatus 1 may be used for sensing or any other suitable application.

20

Fig. 1 illustrates an apparatus 1 according to examples of the disclosure. The apparatus 1 comprises at least one electrode 3 and a channel 5 of two dimensional material.

25

The electrode 3 is configured to provide an electrical connection to the channel 5 of two dimensional material. The electrode 3 is configured for charge transfer between the electrode 3 and the channel 5 of two dimensional material. The electrode 3 may be configured to provide a direct current path between the electrode 3 and the channel 5 of two dimensional material.

30

The electrode 3 comprises a conductive layer 7 and a plurality of nanostructures 9. In the example of Fig. 1 the nanostructures 9 are arranged overlaying the conductive layer 7. Other arrangements of the conductive layer 7 and the plurality of nanostructures 9 may be used in other examples of the disclosure.

35

The conductive layer 7 may comprise a conductive material such as chromium, gold or any other suitable material. The conductive layer 7 comprises a three dimensional material.

The nanostructures 9 may comprise nanoparticles, nanowires or any other suitable nanostructures. The nanoparticles may comprise spherical or substantially spherical structures. The nanowires may comprise elongate structures. The elongate structures may have a circular cross section. Other types of nanostructures may be used in other examples of the disclosure.

The nanostructures may be of any suitable size. The size of the nanostructures may range from a few nanometers up to around 100 nanometers.

The nanostructures 9 comprise a conductive core 11 and a coating 13 of two dimensional material. In some examples each of the nanostructures 9 may comprise a conductive core 11 and a coating 13 of two dimensional material. In some examples at least some of the nanostructures 9 may comprise a conductive core 11 and a coating 13 of two dimensional material.

The conductive core 11 may comprise a conductive material such as copper or any other suitable metal. In some examples the metal that is used may also be suitable for directly growing the coating 13 of two dimensional material. The material that is used for the conductive core 11 may be selected to reduce the work function between the conductive core 11 and the coating 13 of two dimensional material. In some examples the conductive core 11 may comprise the same type of metal as the conductive layer 7. In other examples different metals could be used for the conductive core 11 and the conductive layer 7.

The coating 13 of two dimensional material comprises the same type of material as is used in the channel 5 of two dimensional material. In some examples the two dimensional material may comprise graphene. In other examples the coating 13 of two dimensional material may comprise a different material to the channel 5 of two dimensional material.

The coating 13 may comprise a monolayer of two dimensional material or a small number of layers of two dimensional material. The coating 13 may have a thickness of less than 1nm.

The coating 13 may be provided directly on the conductive core 11 so that there are no intervening layers between the conductive core 11 and the coating 13 of two dimensional material. In some examples the coating 13 of two dimensional material may be formed on

6

the surface of the conductive core 11. As the coating 13 is formed on the surface of the conductive core 11 this reduces the opportunity for residue and other contaminants to be introduced into the coating 13. This may ensure that there is good electrical contact between the conductive core 11 and the coating 13 of two dimensional material.

5

The coating 13 may extend around the entire circumference of the conductive core 11. This may increase the area of conductive material which is in contact with the two dimensional material of the coating 13.

10

The channel 5 of two dimensional material may comprise graphene or any other suitable material. The channel 5 of two dimensional material may be provided in a thin layer. In some examples the channel 5 of two dimensional material may have a thickness in the range of nanometers. In some examples the channel 5 of two dimensional material may comprise an atomic monolayer.

15

In the example apparatus 1 of Fig. 1 the channel 5 of two dimensional material is provided overlaying the nanostructures 9 of the electrode 3. The channel 5 of two dimensional material is provided overlaying the nanostructures 9 so that the channel 5 of two dimensional material is in direct contact with the coating 13 of two dimensional material.

20

The channel 5 of two dimensional material may be provided between source and drain electrodes. The channel 5 of two dimensional material may be provided as a channel in a field effect transistor or other sensing device.

25

Fig. 2 illustrates electronic coupling within an example apparatus 1. In the example of Fig. 2 the apparatus 1 comprises a first electrode 3A and a second electrode 3B which may be as described above in relation to Fig. 1. A channel 5 of two dimensional material extends between the first electrode 3A and the second electrode 3B. In the example of Fig. 2 only one nanostructure 9 is illustrated in each electrode 3A, 3B for clarity. However it is to be appreciated that the electrodes 3A, 3B may each comprise a plurality of nanostructures 9.

30

In the example of Fig. 2 the electrodes are provided on a substrate. The substrate may comprise a layer of dielectric 15 or any other suitable material.

35

In the example of Fig. 2 the first electrode 3A has a first electrical potential V_{low} and the second electrode 3B has a second electrical potential V_{high} . In the example of Fig. 2 the

7

first electrode 3A has a lower electric potential than the second electrode 3B. The first electrode 3A may provide a source electrode and the second electrode 3B may provide a drain electrode. This arrangement could be reversed in other examples of the disclosure. The channel 5 of two dimensional material extends between the first electrode 3A and the second electrode 3B.

In the example of Fig. 2 the nanostructures 9 are provided overlaying the conductive layer 7. The conductive core 11 of the nanostructures 9 is only separated from the conductive layer 7 by the thickness of the coating 13. As the coating 13 is only an atomic monolayer or a small number of atomic monolayers the conductive core 11 is provided at the same electrical potential as the conductive layer 7. The coating 13 only provides a small energy barrier between the conductive layer 7 and the conductive core 11. This enables electrons to pass from the conductive layer 7 to the conductive core 11 via electron tunnelling as indicated by the arrow 21.

Electrons from the conductive core 11 are then injected into the coating 13 of two dimensional material as indicated by the arrows 23. The injection of electrons from the conductive core 11 into the coating 13 of two dimensional material may occur at any point where the conductive core 11 is in contact with the coating 13 or where the conductive core 11 is within tunnelling distance of the coating. As the coating 13 is provided around the circumference of the conductive core 11 this provides a large surface area for the transfer of electrons between the conductive core 11 and the coating 13.

Electrons from the coating 13 are then transferred to the channel 5 of two dimensional material as indicated by the arrows 25. As the channel 5 of two dimensional material comprises the same material as the coating 13 they have a similar density of states. This allows for efficient charge transport between the coating 13 and the channel 5 of two dimensional material.

Electrons are then transferred though the channel 5 towards the second electrode 3B as indicated by the arrow 27. At the second electrode 3B the electrons are transferred from the channel 5 to the coating 13 of the nanostructures 9 in the second electrode 3B as indicated by the arrows 29.

The nanostructures 9 in the second electrode 3B also have the coating 13 provided around the surface of the conductive core 11 to provide a large surface area for the transfer of

electrons between the conductive core 11 and the coating 13. This allows for electrons to be transferred from the coating 13 to the conductive core 11 as indicated by arrow 31. The electrons from the conductive core 11 can then be transferred to the conductive layer 7 by electron tunnelling as indicated by the arrow 33.

5

Therefore the examples of the disclosure provide for efficient electron transfer between a channel 5 of two dimensional material and electrodes 3 comprising a three dimensional material.

10

It is to be appreciated that there would also be some charge transfer directly between the conductive layer 7 and the channel 5 of two dimensional material as indicated by the arrows 35.

15

Fig. 3 illustrates another example apparatus 1 according to examples of the disclosure. The apparatus 1 comprises a source electrode 3A, a drain electrode 3B and a gate electrode 17. In the example of Fig. 3 the channel 5 of two dimensional material comprises graphene. In the example apparatus of Fig. 3 the electrodes 3A, 3B, 17 and the channel 5 of two dimensional material are configured as a graphene field effect transistor (GFET).

20

The source electrode 3A and drain electrode 3B comprise a conductive layer 7 and a plurality of nanostructures 9 which may be as described above. The gate electrode 17 may comprise a conductive material such as metal or any other suitable material.

25

A layer of dielectric 15 is provided between the gate electrode 17 and the source electrode 3A and the drain electrode 3B. The layer of dielectric 15 may comprise any suitable insulating material. The layer of dielectric material 15 may be configured to prevent a short circuit between the gate electrode 17 and the conductive layers 7 of the source electrode 3A and drain electrode 3B.

30

In the example of Fig. 3 the coating 13 of two dimensional material may be grown directly on the surface of the conductive cores 11 of the nanostructures 9. The nanostructures 9 may then be transferred to the conductive layer 7 of the electrodes 3A, 3B. The channel 5 of two dimensional material may be grown on a different substrate and may be transferred to the electrodes 3A, 3B after the nanostructures 9 have been deposited.

35

Fig. 4 illustrates another apparatus 1 which is similar to the apparatus 1 of Fig. 3. The example apparatus of Fig. 4 also comprises a source electrode 3A, a drain electrode 3B

9

and a gate electrode 17 and a channel 5 of two dimensional material configured to provide a GFET.

In the example of Fig. 4 the plurality of nanostructures 9 within the source and drain electrodes 3A, 3B have a lower packing density than in the example apparatus 1 of Fig. 1. Even with a low packing density the contact resistance between the electrodes 3A, 3B and the channel 5 of two dimensional material is improved compared to a direct connection between the conductive layer 7 and the channel 5 of two dimensional material.

Fig. 5 illustrates another example apparatus 1. The example apparatus of Fig. 5 also comprises a source electrode 3A, a drain electrode 3B and a gate electrode 17 and a channel 5 of two dimensional material configured to provide a GFET.

In the example apparatus 1 of Fig. 5 the source electrode 3A and the drain electrode 3B are configured with the nanostructures 9 provided overlaying the channel 5 of two dimensional material and a conductive layer 7 provided overlaying the plurality of nanostructures 9.

In the example of Fig. 5 the source electrode 3A and the drain electrode 3B comprise a first conductive layer 7A and a second conductive layer 7B. The conductive layers 7A, 7B may comprise a conductive material such as metal or any other suitable material. In some examples the first conductive layer 7A and the second conductive layer 7B may comprise the same material. In other examples different materials may be used for the different conductive layers 7A, 7B.

The first conductive layer 7A is provided on the surface of the dielectric 15. The channel 5 of two dimensional material is then provided overlaying the first conductive layer 7A. This channel 5 of two dimensional material is in direct contact with the first conductive layer 7A. This may enable charge transfer directly between the first conductive layer 7A and the channel 5 of two dimensional material.

The channel 5 of two dimensional material may be grown on a different substrate and then transferred to overlay the first conductive layer 7A and the dielectric 15. In other examples the channel 5 of two dimensional material could be grown directly on the first conductive layer 7A and the dielectric 15.

10

A plurality of nanostructures 9 are provided overlaying the channel 5 of two dimensional material. In the example of Fig. 5 the plurality of nanostructures 9 are provided in the region of the channel 5 which overlays the first conductive layer 7A. The plurality of nanostructures 9 are positioned so that portions of the channel 5 of two dimensional material are provided
5 between the first conductive layer 7A and the plurality of nanostructures 9. The nanostructures 9 comprise a conductive core 11 and a coating 13 of two dimensional material as described above.

A second conductive layer 7B is provided overlaying the plurality of nanostructures 9. In
10 the example of Fig. 5 the second conductive layer 7B is deposited over the plurality of nanostructures 9 so that portions of the second conductive layer 7B extend between the plurality of nanostructures 9. This may increase the contact surface area between the plurality of nanostructures 9 and the second conductive layer 7B.

15 The second conductive layer 7B is provided in contact with the first conductive layer 7A. At least one contact point 51 is provided between the first conductive layer 7A and the second conductive layer 7B. The contact point may provide a short between the first conductive layer 7A and the second conductive layer 7B.

20 The electron transport between the conductive layers 7A, 7B and the channel 5 of two dimensional material may occur as described above. The example apparatus 1 of Fig. 5 may provide an increased contact area between the two dimensional material and the conductive materials compared to the arrangements of Figs. 3 and 4. This may provide an improved contact resistance and allow for more efficient charge transfer. Having the
25 plurality of nanostructures 9 sandwiched between a first conductive layer 7A and a second conductive layer 7B may ensure that conductive cores 11 of the nanostructures 9 are at the same electrical potential as the conductive layers 7A, 7B. This may provide for improved tunnelling between the conductive layers 7A, 7B and the nanostructures 9.

30 Fig. 6 illustrates another example apparatus 1. The example apparatus of Fig. 6 also comprises a source electrode 3A, a drain electrode 3B and a gate electrode 17 and a channel 5 of two dimensional material configured to provide a GFET. In the example apparatus 1 of Fig. 6 the first electrode 3A and the second electrode 3B comprise a first conductive layer 7A and a second conductive layer 7B as described above in relation to
35 Fig. 5. It is to be appreciated that other arrangements of the electrodes 3A, 3B may be used in other examples of the disclosure.

In the example of Fig. 6 the channel 5 of two dimensional material extends between the first electrode 3A and the second electrode 3B and a plurality of nanostructures 9 are provided between the electrodes 3A, 3B in contact with channel 5 of two dimensional material. The plurality of nanostructures 9 between the electrodes 3A, 3B are provided in addition to the plurality of nanostructures 9 that form part of the electrodes 3A, 3B.

In the example of Fig. 6 the nanostructures 9 that are provided between the electrodes 3A, 3B comprise a conductive core 11 and a coating 13 of two dimensional material as described above. In some examples the conductive core 11 of the nanostructures 9 that are provided between the electrodes 3A, 3B may comprise the same conductive material as is used for the conductive core 11 of the nanostructures 9 that form part of the electrodes 3A, 3B. In other examples different conductive materials could be used.

The example apparatus 1 of Fig. 6 also comprises a plurality of quantum dots 61. The plurality of quantum dots 61 are provided overlaying the channel 5 of two dimensional material in the region between the source electrode 3A and the drain electrode 3B. The plurality of quantum dots 61 are provided so that the nanostructures 9 are positioned between the quantum dots 61 and the channel 5 of two dimensional material. This may provide for improved charge transfer between the quantum dots 61 and the channel 5 of two dimensional material.

The quantum dots 61 may comprise a nanocrystal in which there is quantum confinement in all three dimensions. The quantum dots 61 may comprise any suitable semiconductive material. The material that is used for the quantum dots 61 may be chosen dependent upon the application that the apparatus 1 is to be used for. For example, if the apparatus 1 is to be used for sensing, the material that is chosen for the quantum dots 61 may depend on the parameter that is to be sensed. In some examples the quantum dots 61 may comprise lead sulphide, cadmium sulphide, cadmium selenide or any other suitable material.

The example apparatus 1 of Fig. 6 also comprises at least one ligand 63. In the example of Fig. 6 the ligands 63 are coupled to the quantum dots 61. The ligands 63 may be configured to connect the quantum dots 61 to each other. The ligands 63 may also be configured to connect the quantum dots 61 to the nanostructures 9 and/or the channel 5 of two dimensional material.

The ligands 63 may comprise any suitable material. The material or materials that are used for the ligands 63 may be chosen dependent upon the application that the apparatus 1 is to be used for, the materials used for the quantum dots 61, the materials used within the nanostructures 9 or any other suitable factor. In some examples the ligands 63 may
5 comprise alkanedithiol; where the alkane comprises methane, ethane, propane, butane or any other suitable alkane; alkanethiol; amine such as butylamine; pyridine or any other suitable material.

The quantum dots 61 may be arranged to sense an incident parameter such as a pulse of
10 electromagnetic radiation. The quantum dots 61 may convert the incident parameter into electrical charge. The changes in charge distribution within the quantum dots 61 may be detected by the channel 5 of two dimensional material which produces a measurable electrical response.

In some examples the quantum dots 61 may generate excitons in response to an incident
15 parameter. The excitons may be separated into electron-hole pairs and either the holes or electrons may be removed by the channel of two dimensional material. This provides a doping effect in the channel 5 of two dimensional material so that the output of the apparatus 1 is indicative of the incident parameter.

In the examples of the disclosure the quantum dots 61 are coupled to the nanostructures 9
20 by the ligands 63. As the nanostructures 9 have a coating 13 of two dimensional material this increases the surface area of two dimensional material that the quantum dots 61 are connected to. Charges transferred from the quantum dots 61 to the coating 13 of the
25 nanostructures 9 may then be transferred to the channel 5 of two dimensional material. This provides for improved charge transfer.

In some examples the nanostructures 9 may also plasmonically enhance the absorption of
30 the incident parameter by the quantum dots 61. For example the nanostructures 9 may plasmonically enhance the absorption of photons by the quantum dots 61.

The plurality of nanostructures 9 may absorb photons by the excitation of surface plasmons
35 on the surface of the conductive core 11. The surface plasmons are created by the interaction between the electromagnetic field of the incident photons and the free electrons within the conductive material 11.

The excitation of localized surface plasmons by incident photons results in strong light scattering by the plurality of nanostructures 9, the appearance of intense surface plasmon absorption bands and an enhancement of the local electromagnetic fields of the plurality of nanostructures 9. A localized surface plasmon resonance is generated when the wavelength of the incident photons on the plurality of nanostructures 9 is in resonance with an eigenmode of the surface plasmon resonance for the nanostructure 9. From Mie scattering theory, the resonance condition for the extinction cross-section for an incident plane wave on a nanostructure comprising a conductive material, such as metal, is satisfied when

$$\Re[\varepsilon_{metal}(\lambda)] + \chi\varepsilon_{diel} = 0$$

Where ε_{metal} is the dielectric constant of the metal and the ε_{diel} is the dielectric constant of the material which forms the boundary with the conductive material. χ is a factor which depends on the geometry of the nanostructure. The value of χ is 2 for a sphere but will be different for other shapes of particles. For instance, for nanowires with a high aspect ratio the value of χ could be as large as 20.

Materials which possess a negative real and small positive imaginary dielectric constant are capable of supporting surface plasmons. Suitable materials comprise gold, silver and platinum. However the conditions for generating the surface plasmons are only satisfied if the plasmonic material forms a boundary with a material which has a smaller magnitude for the real dielectric constant. In the examples of the disclosure the conductive core 11 of the nanostructures 9 forms a boundary with the coating 13. This enables surface plasmon resonances to be generated on the boundary between the conductive core 11 and the coating 13. The localized surface plasmon resonances enhances the local electric field in the vicinity of the nanostructure which increases the amount of photons absorbed by the quantum dots 61 and increases the efficiency of the apparatus 1. The size of the nanostructures 9 and/or the materials used for the nanostructures 9 may be selected to tune the frequency of the surface plasmons so that the frequency of the photons where the local electric field enhancement is greatest corresponds to the frequency of the photons that are to be detected by the quantum dots 61.

Fig. 7 illustrates another apparatus 1 which is similar to the apparatus 1 of Fig. 6. The example apparatus of Fig. 7 also comprises a source electrode 3A, a drain electrode 3B and a gate electrode 17 and a channel 5 of two dimensional material configured to provide

14

a GFET with a plurality of quantum dots 61 and nanostructures 9 provided between the source electrode 3A and the drain electrodes 3B.

5

In the example of Fig. 7 the source electrode 3A and the drain electrode 3B comprise a single conductive layer 7 with a plurality of nanostructures 9 overlaying the single conductive layer 7. The channel 5 of two dimensional material is provided overlaying the nanostructures 9. It is to be appreciated that other arrangements of the electrodes 3A, 3B may be used in other examples of the disclosure.

10

In the apparatus of Fig. 7 the plurality of nanostructures 9 provided between the source electrode 3A and the drain electrodes 3B are provided on the surface of the dielectric 15. The channel 5 of two dimensional material is then provided overlaying the plurality of nanostructures 9. The quantum dots 61 and the ligands 63 are then deposited over the channel 5 of two dimensional material so that the channel 5 of two dimensional material is provided between the plurality of nanostructures 9 and the quantum dots 61.

15

The plurality of nanostructures 9 provided between the source electrode 3A and the drain electrode 3B may improve the efficiency of the apparatus 1 as described above.

20

In the example of Fig. 7 the plurality of nanostructures 9 between the source and drain electrodes 3A, 3B have a lower packing density than in the example apparatus 1 of Fig. 6.

25

In both the example of Fig. 6 and Fig. 7 the packing density of the nanostructures 9 between the source and drain electrodes 3A, 3B must be low enough to ensure that no conduction paths are provided between the nanostructures 9 as this would short circuit the channel 5 of two dimensional material.

30

In the examples of Figs. 6 and 7 the plurality of nanostructures 9 are deposited both within the source and drain electrodes 3A, 3B and between the source and drain electrodes 3A, 3B. This may enable the apparatus 1 to be formed without the need for patterning the nanostructures 9. This may provide for a simpler fabrication process.

Fig. 8 illustrates an example method according to examples of the disclosure. The method may be used to form an apparatus 1 such as the example apparatus 1 of Fig. 1 to 7.

35

15

The example method comprises, at block 81, forming at least one electrode 3 wherein the electrode 3 comprises a conductive layer 7 and plurality of nanostructures 9 wherein at least some of the nanostructures 9 comprise a conductive core 11 and a coating 13 of two dimensional material. The method also comprises, at block 83, configuring the at least one
5 electrode 3 to provide an electrical connection to a channel 5 of two dimensional material.

It is to be appreciated that the blocks of the method may be performed in any suitable order. For instance, in examples where the electrode comprises two or more conductive layers 7, such as the examples of Figs. 5 and 6, the first conductive layer 7A of the electrodes 3 could
10 be formed, then the channel 5 of two dimensional material can be connected to the first conductive layer 7A before the second conductive layer 7B is provided to complete the electrode 3.

It is to be appreciated that any suitable processes may be used to fabricate the apparatus
15 1. For example, any suitable processes may be used to deposit the nanostructures 9 over the conductive layers 7 and/or the channel 5 of two dimensional material. The suitable processes could comprise spin-coating, ink jet printing, pad printing, transfer printing, aerosol jet deposition or any other wet or dry deposition processes. The conductive layers 7 may be formed by evaporation or any other suitable technique.

20 Examples of the disclosure provide apparatus 1 with reduced contact resistance between a channel 5 of two dimensional material and one or more electrodes 3. The electrodes can be arranged in different configurations which may enable different fabrication methods to be used.

25 It is to be appreciated that different types of nanostructures 9 may be used in different examples of the disclosure. For instance, in some examples nanoparticles such as spherical nanoparticles may be selected. Such nanoparticles may be deposited using inks or aerosols which may make the apparatus 1 easier to fabricate. In other examples an
30 elongate nanostructure 9 such as a nanowire may be selected as this provide a larger effective surface area with a fewer number of nanostructures 9.

The term “comprise” is used in this document with an inclusive not an exclusive meaning. That is any reference to X comprising Y indicates that X may comprise only one Y or may
35 comprise more than one Y. If it is intended to use “comprise” with an exclusive meaning

then it will be made clear in the context by referring to “comprising only one...” or by using “consisting”.

5 In this brief description, reference has been made to various examples. The description of features or functions in relation to an example indicates that those features or functions are present in that example. The use of the term “example” or “for example” or “may” in the text denotes, whether explicitly stated or not, that such features or functions are present in at least the described example, whether described as an example or not, and that they can be, but are not necessarily, present in some of or all other examples. Thus “example”, “for
10 example” or “may” refers to a particular instance in a class of examples. A property of the instance can be a property of only that instance or a property of the class or a property of a sub-class of the class that includes some but not all of the instances in the class. It is therefore implicitly disclosed that a feature described with reference to one example but not with reference to another example, can where possible be used in that other example but
15 does not necessarily have to be used in that other example.

Although embodiments of the present invention have been described in the preceding paragraphs with reference to various examples, it should be appreciated that modifications to the examples given can be made without departing from the scope of the invention as
20 claimed.

Features described in the preceding description may be used in combinations other than the combinations explicitly described.

25 Although functions have been described with reference to certain features, those functions may be performable by other features whether described or not.

Although features have been described with reference to certain embodiments, those features may also be present in other embodiments whether described or not.

30 Whilst endeavoring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis
35 has been placed thereon.

CLAIMS

1. An apparatus comprising:
at least one electrode configured to provide an electrical connection to a channel of
5 two dimensional material wherein the electrode comprises a conductive layer and plurality
of nanostructures wherein at least some of the nanostructures comprise a conductive core
and a coating of two dimensional material.
- 10 2. An apparatus as claimed in any preceding claim wherein the conductive layer
comprises metal.
3. An apparatus as claimed in any preceding claim wherein the conductive core of at
least some of the nanostructures comprises metal.
- 15 4. An apparatus as claimed in any preceding claim wherein the nanostructures
comprise at least one of: nanoparticles, nanowires.
- 20 5. An apparatus as claimed in any preceding claim wherein the coating of two
dimensional material is formed on the conductive core of at least some of the
nanostructures.
- 25 6. An apparatus as claimed in any preceding claim wherein the channel of two
dimensional material and the coating of two dimensional material both comprise graphene.
7. An apparatus as claimed in any preceding claim wherein the nanostructures are
provided overlaying the conductive layer.
- 30 8. An apparatus as claimed in claim 7 wherein the channel of two dimensional material
is provided overlaying the nanostructures.
9. An apparatus as claimed in any of claims 1 to 6 wherein the conductive layer is
provided overlaying the nanostructures.
- 35 10. An apparatus as claimed in claim 9 wherein the nanostructures are provided
overlaying the channel of two dimensional material.

11. An apparatus as claimed in any preceding claim wherein the apparatus comprises a first electrode and a second electrode and the channel of two dimensional material extends between the first electrode and the second electrode and a further plurality of nanostructures are provided between the electrodes and in contact with the channel of two dimensional material.
12. An apparatus as claimed in any preceding claim wherein the apparatus comprises quantum dots.
13. An apparatus as claimed in claim 12 wherein the quantum dots are provided overlaying the channel of two dimensional material in the region between the first electrode and the second electrode.
14. A sensing device comprising an apparatus as claimed in any preceding claim.
15. A method comprising:
forming at least one electrode wherein the electrode comprises a conductive layer and plurality of nanostructures wherein at least some of the nanostructures comprise a conductive core and a coating of two dimensional material; and
configuring the at least one electrode to provide an electrical connection to a channel of two dimensional material.

1/4

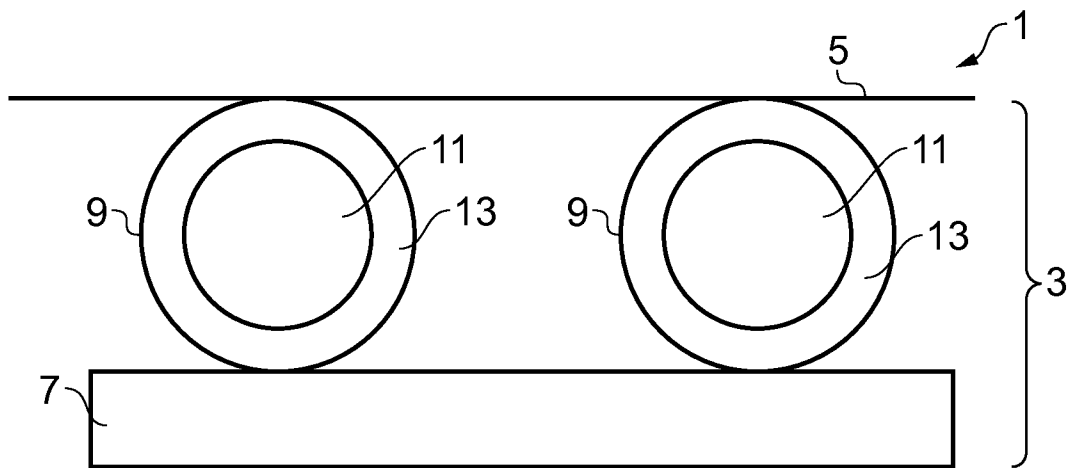


FIG. 1

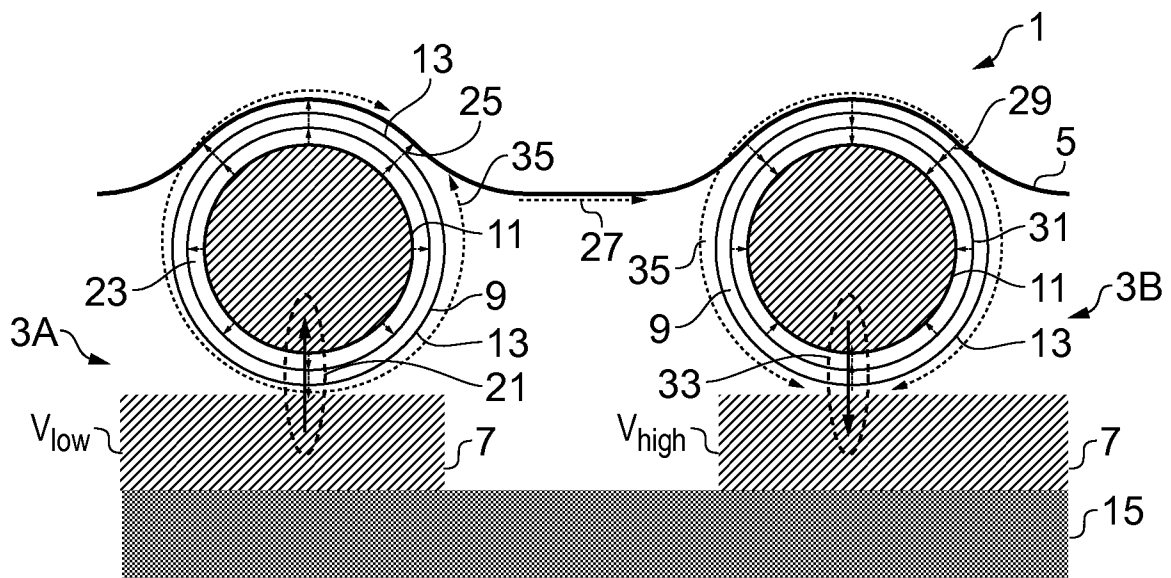


FIG. 2

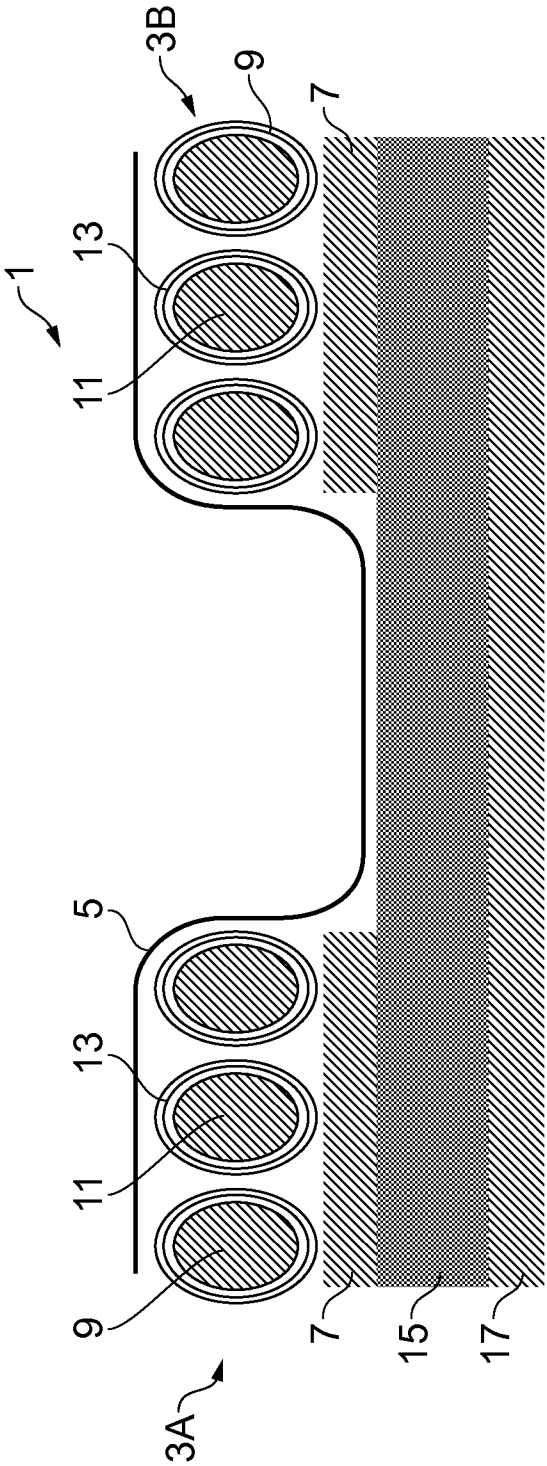


FIG. 3

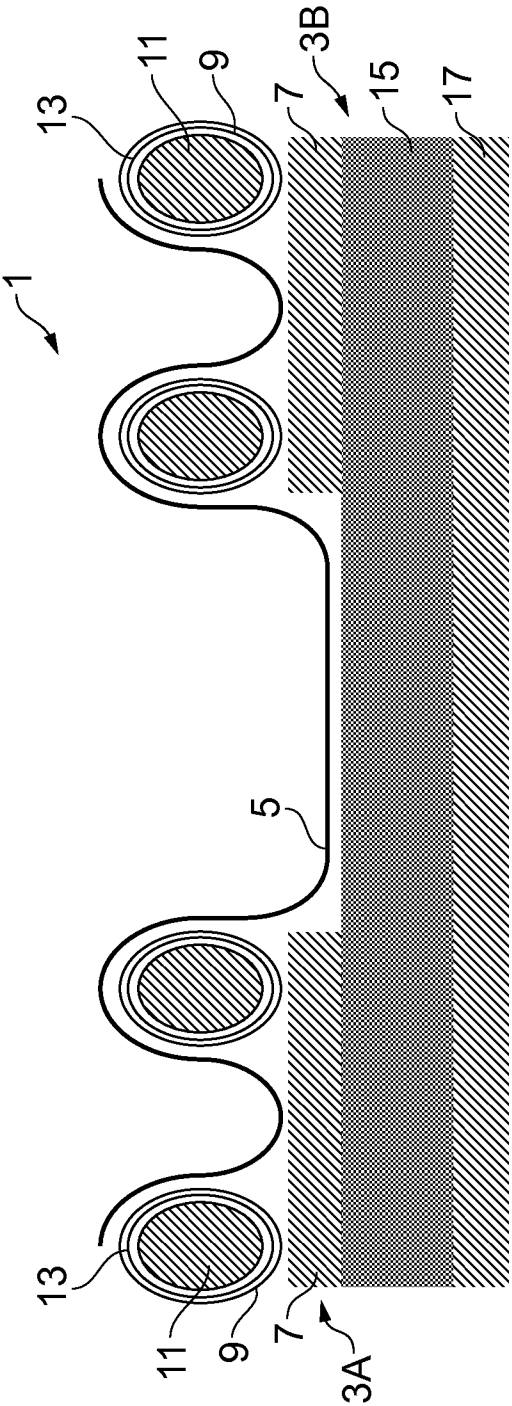


FIG. 4

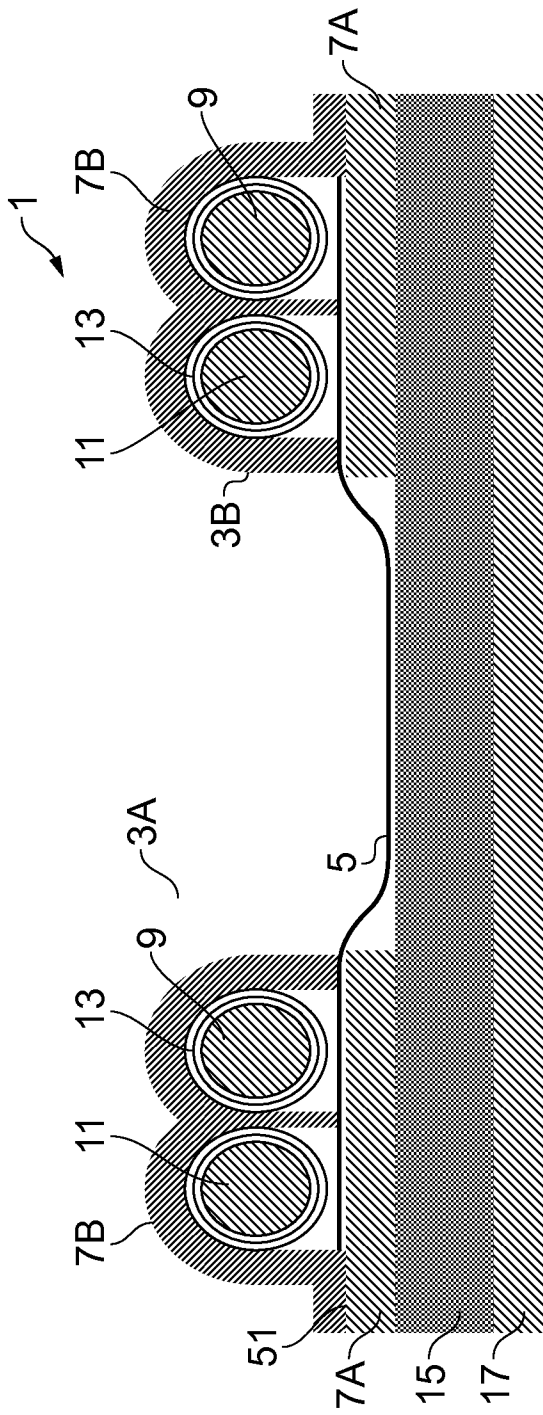


FIG. 5

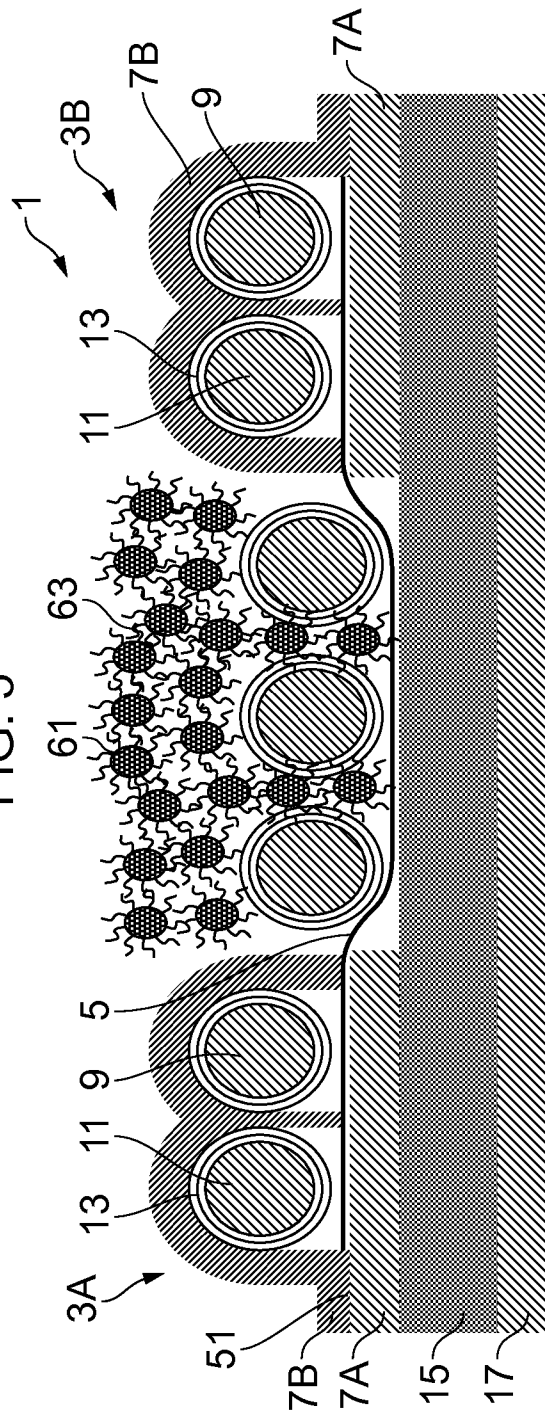


FIG. 6

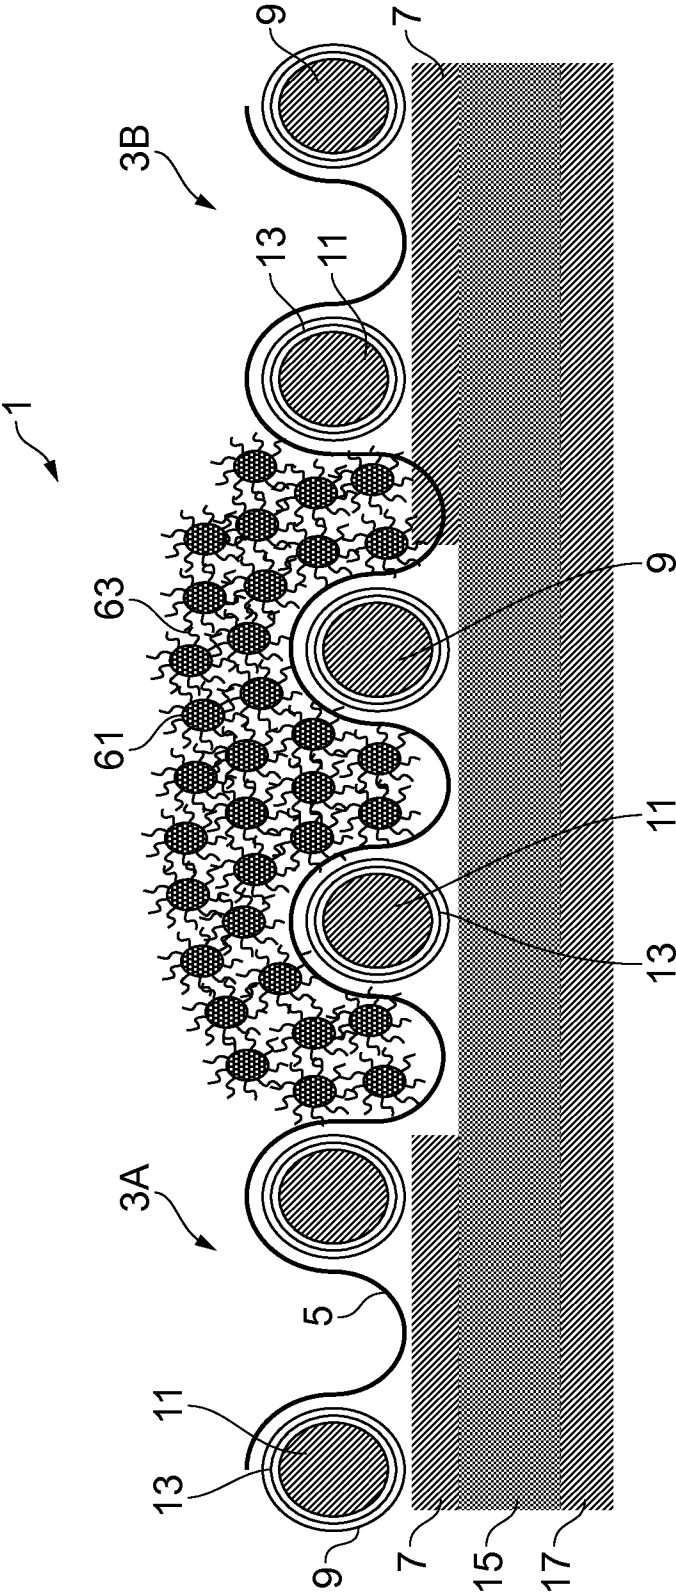


FIG. 7

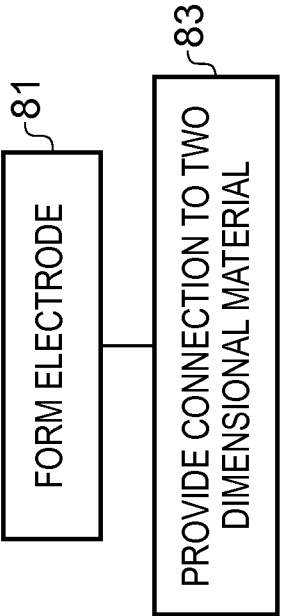


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/FI2017/050214

A. CLASSIFICATION OF SUBJECT MATTER INV. B82Y10/00 B82Y15/00 B82Y40/00 H01L29/417 H01L29/45 H01L29/66 H01L29/778 H01L31/0224 H01L31/028 H01L31/0352 H01L29/12 H01L29/16 H01L29/41		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B82Y H01L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	YUMI AHN ET AL: "Copper Nanowire-Graphene Core-Shell Nanostructure for Highly Stable Transparent Conducting Electrodes", ACS NANO, vol. 9, no. 3, 24 March 2015 (2015-03-24), pages 3125-3133, XP055307570, US ISSN: 1936-0851, DOI: 10.1021/acsnano.5b00053 Figs. 4, 7 and corresponding text, Conclusion.; page 3125 - page 3126 -----	1-15
Y	US 2010/258787 A1 (CHAE BYUNG-GYU [KR] ET AL) 14 October 2010 (2010-10-14) Fig. 2 and corresponding text, in particular pars. 51-55 ----- -/--	1-10,15
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 27 June 2017		Date of mailing of the international search report 05/07/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Dauw, Xavier

INTERNATIONAL SEARCH REPORT

International application No

PCT/FI2017/050214

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2014/162055 A1 (NOKIA CORP [FI]) 9 October 2014 (2014-10-09) Figs. 1A, 2A, 3 and corresponding text. -----	11-14
A	US 2015/137074 A1 (LEE JAE-HO [KR] ET AL) 21 May 2015 (2015-05-21) paragraphs [0048], [0050]; figure 1 -----	1-10,15
A	US 2015/144884 A1 (YAMAGUCHI JUNICHI [JP] ET AL) 28 May 2015 (2015-05-28) Figs. 6-8 and corresponding text.; paragraph [0090] -----	1-10,15
A	WO 2016/042210 A1 (NOKIA TECHNOLOGIES OY [FI]) 24 March 2016 (2016-03-24) Fig. 5, 8, 9 and corresponding text. -----	11-14
A	YU-CHIA LIANG ET AL: "Solid-State Microwave-Arcing-Induced Formation and Surface Functionalization of Core/Shell Metal/Carbon Nanoparticles", SMALL, vol. 4, no. 4, 1 April 2008 (2008-04-01), pages 405-409, XP055058261, ISSN: 1613-6810, DOI: 10.1002/smll.200700808 page 405 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/FI2017/050214

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010258787 A1	14-10-2010	KR 20100111999 A US 2010258787 A1	18-10-2010 14-10-2010
WO 2014162055 A1	09-10-2014	CN 105264672 A EP 2981988 A1 JP 6121615 B2 JP 2016520438 A US 2014299741 A1 WO 2014162055 A1	20-01-2016 10-02-2016 26-04-2017 14-07-2016 09-10-2014 09-10-2014
US 2015137074 A1	21-05-2015	CN 104659096 A KR 20150056372 A US 2015137074 A1	27-05-2015 26-05-2015 21-05-2015
US 2015144884 A1	28-05-2015	JP 2015101499 A US 2015144884 A1	04-06-2015 28-05-2015
WO 2016042210 A1	24-03-2016	EP 2998737 A1 WO 2016042210 A1	23-03-2016 24-03-2016