




- (51) International Patent Classification:
H01R 12/57 (2011.01) *H05K 13/04* (2006.01)
- (21) International Application Number:
PCT/US2013/076500
- (22) International Filing Date:
19 December 2013 (19.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/724,473 21 December 2012 (21.12.2012) US
- (71) Applicant: CONTINENTAL AUTOMOTIVE SYSTEMS, INC. [US/US]; One Continental Drive, Auburn Hills, Michigan 48326 (US).
- (72) Inventor: DUNN, Thomas Gregory; 28175 Quail Hollow Road, Farmington Hills, Michigan 48331 (US).
- (74) Agent: BENDER, Ronald P; Continental Automotive Systems, Inc., One Continental Drive, Auburn Hills, Michigan 48326 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: DYNAMICALLY STABLE SURFACE MOUNT POST HEADER

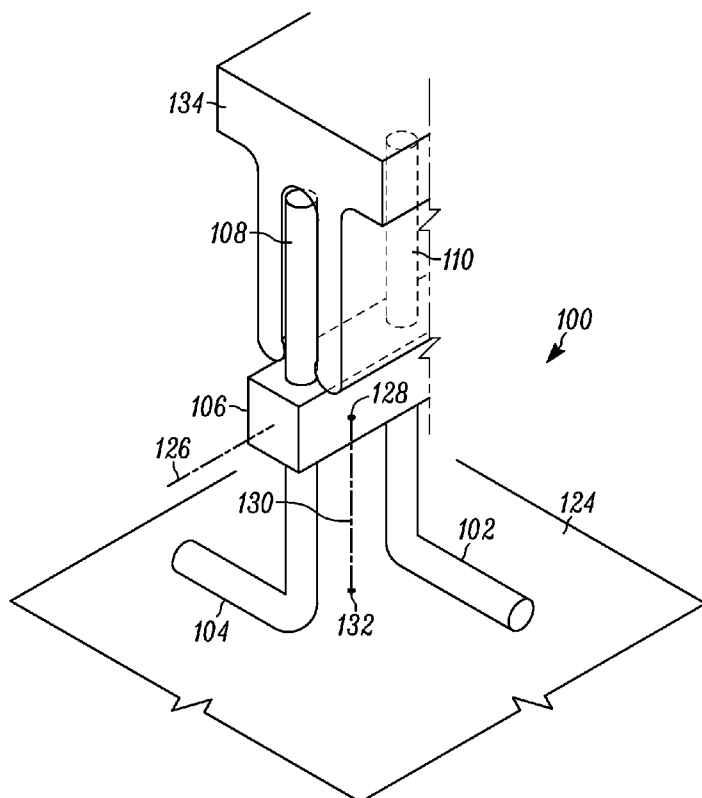

(57) Abstract: A surface mount post header comprising at least one post and at least one lead, the post and the lead extending from a body and being distinct from each other, the body defining body's longitudinal axis, the lead configured to at least partially define a base of support for the post header on a surface of a substrate; the lead comprising a foot portion distal from the body, wherein at least one longitudinal portion of the foot portion forms an angle between 0 and 90 degrees with a projection of the body's longitudinal axis on the base of support is disclosed. In addition, a surface mount post header with a pick and place pad, and an assembly comprising the header and the substrate are disclosed.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).

DYNAMICALLY STABLE SURFACE MOUNT POST HEADER**BRIEF DESCRIPTION OF THE DRAWINGS**

[0001] For a more complete understanding of the disclosure, reference should be made to the following detailed description and accompanying drawings wherein:

[0002] FIG. 1 comprises a perspective view of an exemplary post header;

[0003] FIGs. 2-4 comprise side views of various post header lead configurations;

[0004] FIGs. 5-13 comprise bottom views of various post header lead configurations.

[0005] Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the size dimensions and/or relative positioning of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various aspects of the present invention. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are often not depicted in order to facilitate a less obstructed view of these various aspects of the present invention. Furthermore, it will be appreciated that certain actions and/or steps may be described or depicted in a particular order of occurrence while those skilled in the art will understand that such specificity with respect to sequence is not actually required. It will also be understood that the terms and expressions used herein have the ordinary meaning as is accorded to such terms and expressions with respect to their corresponding respective areas of inquiry and study except where specific meanings have otherwise been set forth herein.

DETAILED DESCRIPTION

[0006] Automated pick and placement of surface mounted devices and components is a popular method for assembling electronic circuits. One type of surface mounted components are post headers, and in particular single row post headers. The post headers often comprise at least one electrically conductive post extending from one side of a body, typically an insulator body, and at least one lead extending from another side of the body, the post and the lead being electrically connected to each other. Moreover, the respective leads and the posts are often

integrated with each other or comprise a unitary component, where one section, often an end section, serves as the post and another section, often a different end section, serves as the lead.

[0007] To stabilize single-row surface mount post headers after placement on a substrate, for example a circuit board, and thus reduce their likelihood of toppling during assembly, some of today's single-row surface mount post headers feature staggered leads, extending outwardly from the header and typically bent perpendicular to the posts' longitudinal axes. While such a solution may sometimes be adequate for headers with a larger number of leads, it is often insufficient to stabilize two-lead surface mount post headers, especially with an attached pick and place pad. Nonetheless, additional stabilization may also be desirable for headers with more or less than two leads and headers with more than a single row.

[0008] The general approach to further stabilizing an object is to maximize the work needed to move a ray described by the net force vector acting on the object beyond the edge of the base of support, the base of support being the area within an outline of segments connecting all points of contact between the object and the object's support, the support at least partially counteracting the force. In usual applications the net force vector is a net gravity force vector acting at the object's center of gravity. However other vectors, for example a net centripetal force vector acting at the object's center of mass, or otherwise, may also be considered. Moreover, each such vector will have its own respective base of support that may or may not correspond to any other vectors' bases of support. Therefore, it should be understood that the instant disclosure, although described in terms of the net gravity force vector in a uniform gravitational field acting at the object's center of gravity, also applies *mutatis mutandi* to other force vectors, including sums of vectors, acting on respective points associated with the object, and being associated with respective bases of support.

[0009] Accordingly, the stability of an object is related to the intersection of a ray described by the net gravitational force vector acting on the center of gravity, hereafter the gravity ray, and the base of support. One way of further stabilizing an object is increasing the distance between the intersection and an edge of the base of support, often the edge closest to the intersection, a method commonly referred to as widening of the base of support. However, depending on the application it may

be desirable to reduce the distance from some edges, where the reduced stability is sufficient, and increase the distance from some other edges, where more stability is desirable. Another way of further stabilizing an object is increasing the object's mass, thus increasing the magnitude of the net gravitational force vector. Yet another is reallocating mass to move the center of gravity further in the direction of the net gravitational force vector, commonly referred to as lowering the center of gravity. Yet another is increasing the object's rotational inertia in the direction of typical toppling. Yet another is affixing an object to the base to add additional forces that at least partially counteract any toppling forces. For example, such affixing may take the form of placing a viscous material or otherwise between the object and the base or partially immersing the object in the viscous material, the viscous material also being in contact with the base. Other examples of affixing include soldering, welding, gluing, bolting, riveting, bonding, screwing, nailing or otherwise. A person skilled in the art will readily appreciate that the list of examples of affixing is non-exhaustive as a vast number methods of affixing an object to a base or another object are known. Moreover, a combination of any of these approaches may be used either alone or in combination with other approaches not described herein.

[0010] Thus, to further stabilize a surface mount post header, material may be added to the header or replaced with a denser material to increase the header's overall mass and rotational inertia. Since the leads often lie between the center of gravity of the object and the base of support at least partially, the additional mass is often distributed to the leads of the header to additionally move the center of gravity in the direction of the net gravitational force vector or to increase the header's rotational inertia. Moreover, the leads may be lengthened to increase the distance between the intersection and the edge of the base of support, often the edge closest to intersection or an edge in the direction of typical toppling of headers, or to increase the rotational inertia of the header. Furthermore, the leads can be formed or oriented so that the distance between the intersection and an edge of the base of support is increased or the rotational inertia of the header is increased. Also, a viscous material, such as for example solder paste or otherwise, may be placed adjacent to the leads to provide additional support or damping of disturbance forces.

[0011] With reference to **Fig. 1**, an exemplary header is a two-lead header **100**. However, in other aspects the header comprises more than two leads, including, but not limited to, leads arranged in a single row or multiple rows. The exemplary header **100** comprises the leads **102** and **104**, extending from a body **106**, and two posts **108** and **110**. The body **106** defines a longitudinal axis **126**. The header is configured to be placed on a substrate **124** so that the at least one lead **102** or **104** is configured to at least partially define the base of support on the substrate **124**. Moreover the header has an attached pick and place pad **134** configured to aid a pick and place mechanism in picking up and placing the header on the substrate **124**. While in this example the center of gravity **128** of the header is located inside the body **106**, in other examples the center of gravity may be located outside of the body, inside other elements of the header, or outside the header altogether. The gravity force ray **130** originates at the center of gravity **128**, and, in this example, defines an intersection **132** with the base of support.

[0012] With reference to **Figs. 2, 3, and 4** and continued reference to **Fig. 1**, at least one of the leads **102** or **104** comprises a respective foot portion **200**, the foot portion configured to come in contact with a surface of substrate **124**, but not penetrate to the opposite surface of the substrate **124**. At least one foot portion **200** longitudinally comprises a heel portion **210** and a toe portion **220**.

[0013] With reference to **Figs. 2 and 4** and continued reference to **Fig. 1**, the heel portion **210** forms an angle, other than a straight angle, with a leg portion **240** of the lead **102** or **104** if the leg portion is present, the leg portion being most proximal to the respective post **108** or **110**. Otherwise, with reference to **Fig. 3**, if the leg portion is not present, the heel portion **210** forms an angle, other than a straight angle, with respect to the respective post **108** or **110**.

[0014] With continued references to **Figs. 2-4** and **Fig. 1**, in an example, at least one toe portion **220** is configured to come in contact with a surface of the substrate **124**, but not penetrate to the opposite surface of the substrate. In an example, at least one heel portion **210** is configured to come in contact with a surface of the substrate **124**, but not penetrate to the opposite surface of the substrate **124**.

[0015] It should be understood that for the purposes of examples described herein, the exemplary geometric projections on the bases of support are constructed considering the direction of the initial steady state net gravitational force acting on

the center of gravity of the object and the initial steady state base of support. However, the projections may also be constructed with respect to bases of support or net forces acting on the object in other states including states other than the initial steady state, and used to determine a configuration of adequate stability for the respective state.

[0016] For the purposes of conciseness in the following examples continued reference to **Figs. 1-4** is made in addition to the respective explicit references to figures 5-13.

[0017] With reference to **Fig. 5**, in an example, at least one lead's 102 or 104 mass is greater such that stability is substantially increased. With reference to **Fig. 6**, at least one lead's 102 or 104 geometric projection on the base of support 310 is longer such that stability is substantially increased. With further reference to **Figs. 6**, and 8-13, at least one lead 102 or 104 is longer such that stability is substantially increased.

[0018] With reference to **Figs. 5** and 7-11, in an example, at least one lead 102 or 104 is formed **Figs. 8-11** or oriented **Fig. 7** to reconfigure the base of support 310 such that stability is substantially increased. With further reference to **Figs. 7-13**, in an aspect, at least one lead 102 or 104 is formed or oriented so that the respective toe portion 220 forms an angle between 0 and 90 degrees with the geometric projection of the longitudinal axis 126 of the body 106 on the base of support 310 such that stability is substantially increased. With further reference to **Figs. 6-13**, in an aspect, at least one lead 102 or 104 is formed or oriented so that the respective toe portion 220 forms an angle substantially greater than 0 but substantially less than 90 degrees with the geometric projection of the longitudinal axis 126 of the body 106 on the base of support 310 such that stability is substantially increased. With further reference to **Figs. 7-13**, in an aspect, at least one lead 102 or 104 is formed or oriented so that the respective toe portion 220 forms an angle of about 45 degrees with the geometric projection of the longitudinal axis 126 of the body 106 on the base of support 310 such that stability is substantially increased. With reference to **Figs. 9** and 11-13, in an example, at least one foot portion 112 or 114 at least partially follows a smooth curve such that stability is substantially increased. With reference to **Figs. 8**, 10-11, and 13 in an

example, at least one foot portion 112 or 114 is sharply bent such that stability is substantially increased.

[0019] In an aspect, at least one lead 102 or 104 is formed or oriented so that the distances from the edges of the base of support, the edges at least partially defined by the distal end of the respective toe portion 220, to the intersection are at least partially optimized. The distances are optimized when the stability of the header is substantially increased for a particular application. Accordingly, the distances are at least partially optimized when there is a noticeable improvement in stability. It will be understood that depending on the particular application more than one optimal or partially optimal configuration may be possible.

[0020] Those skilled in the art will recognize that a wide variety of modifications, alterations, and combinations can be made with respect to the above described embodiments without departing from the spirit and scope of the invention, and that such modifications, alterations, and combinations are to be viewed as being within the scope of the invention. Further, those skilled in the art will recognize that the approaches described herein may also be used to stabilize components and devices other than surface mounted post headers.

What is claimed is:

1. A surface mount post header comprising:
at least one post and at least one lead,
the post and the lead extending from a body and being distinct from each other,
the body defining body's longitudinal axis,
the lead configured to at least partially define a base of support for the post header on a surface of a substrate;
the lead comprising a foot portion distal from the body,
wherein at least one longitudinal portion of the foot portion forms an angle between 0 and 90 degrees with a projection of the body's longitudinal axis on the base of support.
2. The surface mount post header as recited in claim 1 wherein the angle is substantially greater than 0 and substantially less than 90 degrees.
3. The surface mount post header as recited in claim 1 wherein the angle is about 45 degrees.
4. The surface mount post header as recited in claim 1 wherein the angle is such that the stability of the surface mount post header is substantially increased.
5. The surface mount post header as recited in claim 1 wherein the foot portion at least partially follows a smooth curve along the base of support.
6. The surface mount post header as recited in claim 1 wherein the at least one longitudinal portion of the foot portion is a toe portion,
the toe portion being that portion of the foot most distal from the body and being less than the foot portion.

7. The surface mount post header as recited in claim 6 wherein the foot portion further comprises a heel portion, the heel portion being the portion of the foot more proximate to the body, the heel and toe portions being coupled to each other by a sharp bend.
8. The surface mount post header as recited in claim 1 further comprising a pick and place pad.
9. The surface mount post header as recited in claim 8 wherein the pick and place pad is attached to at least one of the at least one post.
10. The surface mount post header as recited in claim 1 wherein the foot portion is longer such that the stability of the surface mount post header is substantially increased.
11. The surface mount post header as recited in claim 1 wherein the foot portion is more massive such that the stability of the surface mount post header is substantially increased.
12. The surface mount post header as recited in claim 1 wherein mass of the header is distributed to the leads such that the stability of the surface mount post header is substantially increased.
13. An assembly comprising:
a substrate, and
a surface mount post header comprising at least one post and at least one lead, the post and the lead extending from a body and being distinct from each other, the lead at least partially defining a base of support of the post header on a surface of a substrate, the lead comprising a foot portion distal from the body, wherein at least one longitudinal portion of the foot portion forms an angle between 0 and 90 degrees with a projection of the body's longitudinal axis on the base of support.
14. The assembly as recited in claim 13 wherein the angle is substantially greater than 0 and substantially less than 90 degrees.

15. The assembly as recited in claim 13 wherein the angle is about 45 degrees.
16. The assembly as recited in claim 13 wherein the angle is such that the stability of the surface mount post header is substantially increased.
17. The assembly as recited in claim 13 wherein the foot portion is longer such that the stability of the surface mount post header is substantially increased.
18. The assembly as recited in claim 13 wherein the foot portion is more massive such that the stability of the surface mount post header is substantially increased.
19. The assembly as recited in claim 13 wherein at least one of the at least one lead is affixed to the substrate.
20. The assembly as recited in claim 19 wherein the at least one of the at least one lead is affixed to the substrate by soldering.

1/2

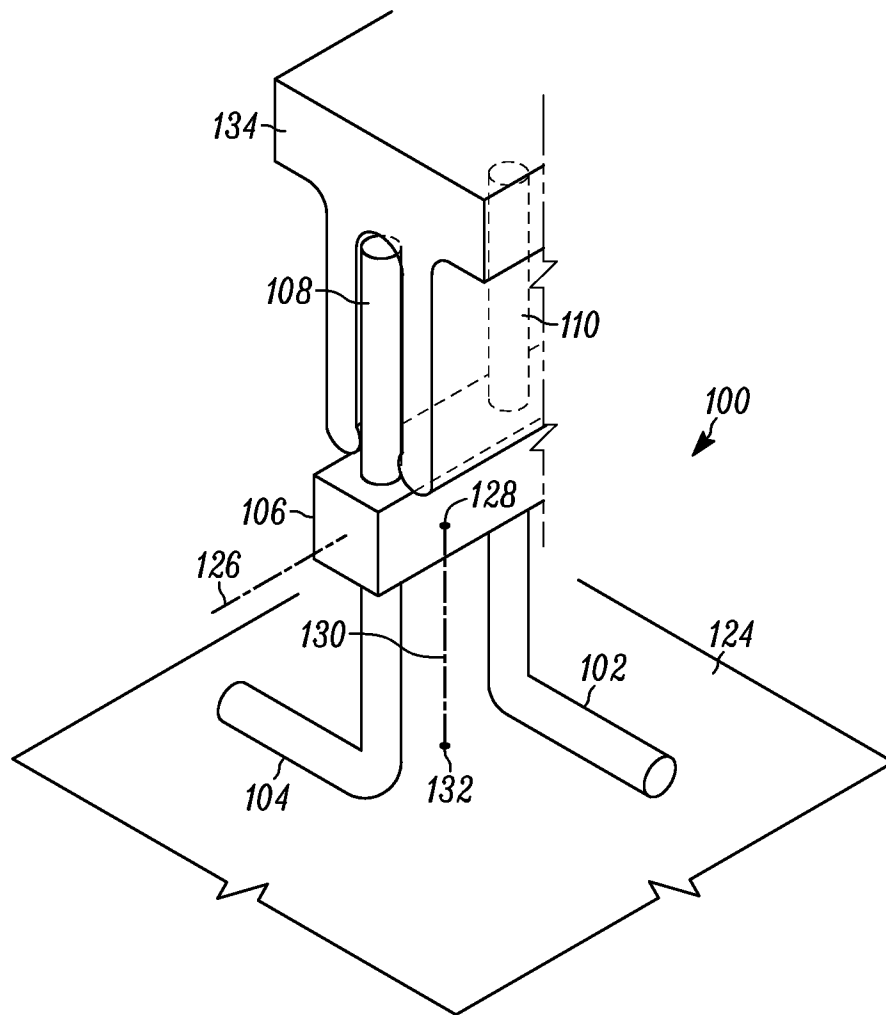


FIG. 1

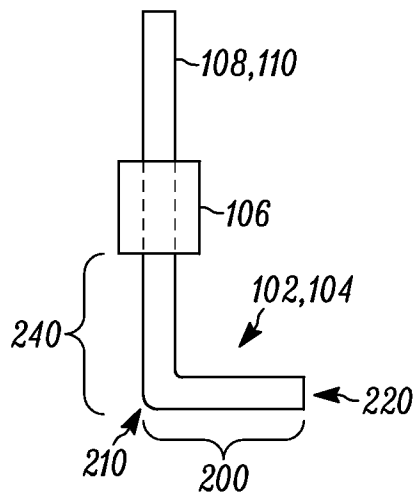


FIG. 2

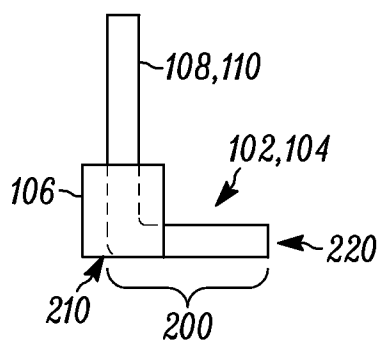


FIG. 3

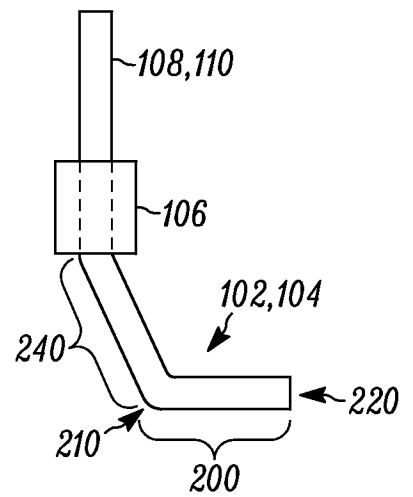


FIG. 4

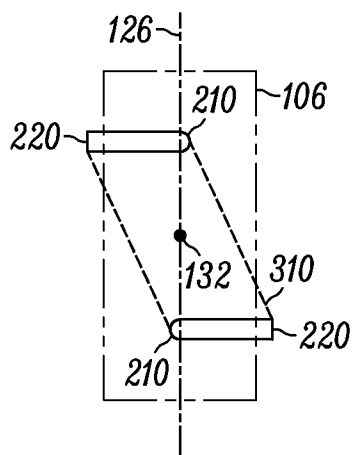


FIG. 5

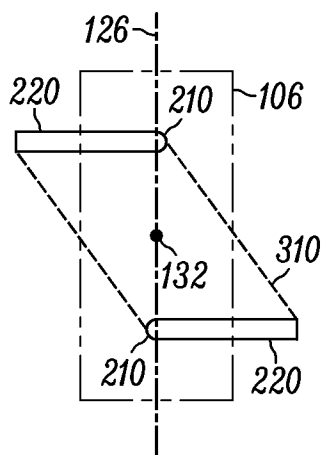


FIG. 6

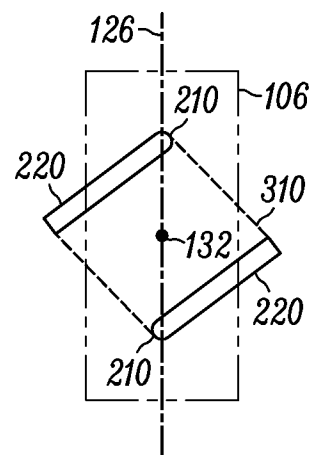


FIG. 7

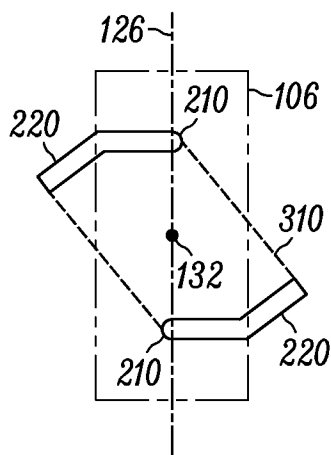


FIG. 8

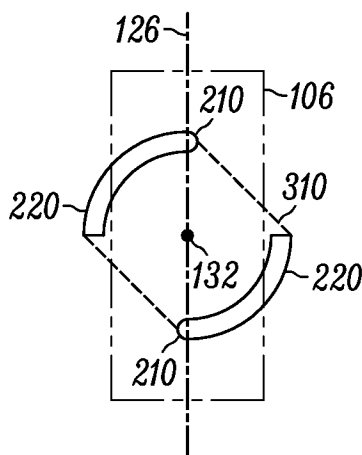


FIG. 9

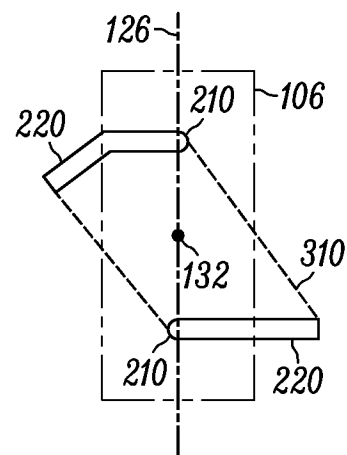


FIG. 10

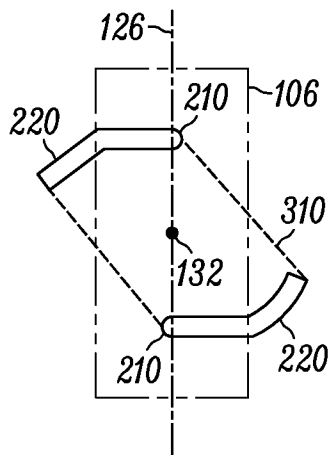


FIG. 11

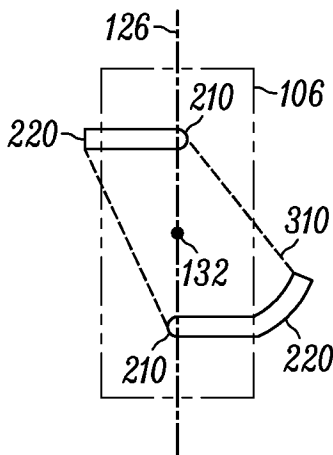


FIG. 12

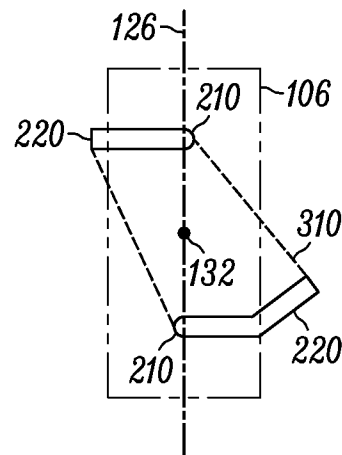


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/076500

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01R12/57 H05K13/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H05K H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 829 924 A2 (THOMAS & BETTS CORP [US]) 18 March 1998 (1998-03-18)	1,2,4,6, 8,10,11, 13,14, 16-20
Y	the whole document -----	3,5,15
X	DE 10 2006 030135 A1 (MC TECHNOLOGY GMBH [DE]) 3 January 2008 (2008-01-03) paragraph [0004] figures 19-20 -----	1,2,4, 6-9, 12-14, 16,19
Y	EP 0 373 003 A2 (MOLEX INC [US]) 13 June 1990 (1990-06-13) column 4, line 8 - line 16 figure 7 ----- -/--	3,15

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 March 2014

Date of mailing of the international search report

18/03/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Henrich, Jean-Pascal

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/076500

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 647 126 A (SOBOTA JR STEPHEN M [US]) 3 March 1987 (1987-03-03) column 2, line 49 - column 3, line 5 figures 3, 4	5
A	----- US 2012/193139 A1 (OKUYAMA TAKESHI [JP] ET AL) 2 August 2012 (2012-08-02) paragraph [0098] - paragraph [0099] figures 1A-1C, 5D -----	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/076500

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0829924 A2	18-03-1998	CA 2214656 A1	11-03-1998
		DE 69724369 D1	02-10-2003
		DE 69724369 T2	01-07-2004
		EP 0829924 A2	18-03-1998
		ES 2205129 T3	01-05-2004
		US 5931705 A	03-08-1999
DE 102006030135 A1	03-01-2008	DE 102006030135 A1	03-01-2008
		US 20080000078 A1	03-01-2008
EP 0373003 A2	13-06-1990	DE 68918415 D1	27-10-1994
		DE 68918415 T2	16-03-1995
		EP 0373003 A2	13-06-1990
		JP H0280970 U	21-06-1990
		JP H0424612 Y2	10-06-1992
		US 4955820 A	11-09-1990
US 4647126 A	03-03-1987	CA 1242253 A1	20-09-1988
		US 4647126 A	03-03-1987
US 2012193139 A1	02-08-2012	JP 2012160310 A	23-08-2012
		US 2012193139 A1	02-08-2012