

(12) **Patent Application Publication**
SARGENT et al.

(43) **Pub. Date:** **Nov. 8, 2018**

Publication Classification

(51) Int. Cl.

B32B 27/36 (2006.01)

B32B 27/30 (2006.01)

G02F 1/155 (2006.01)

(52) U.S. Cl.

CPC **B32B 17/1077** (2013.01); **B32B 17/10018**
(2013.01); **B32B 17/10853** (2013.01); **G02F**
I/155 (2013.01); **B32B 27/08** (2013.01); **B32B**
27/306 (2013.01); **B32B 27/36** (2013.01)


(57)

ABSTRACT

A packaged film assembly includes a packaging material and an insert film. The insert film is packaged in and attached to at least a portion of the packaging material. The packaging material is not laminated to another surface.

Related U.S. Application Data

(60) Provisional application No. 62/500,831, filed on May 3, 2017.

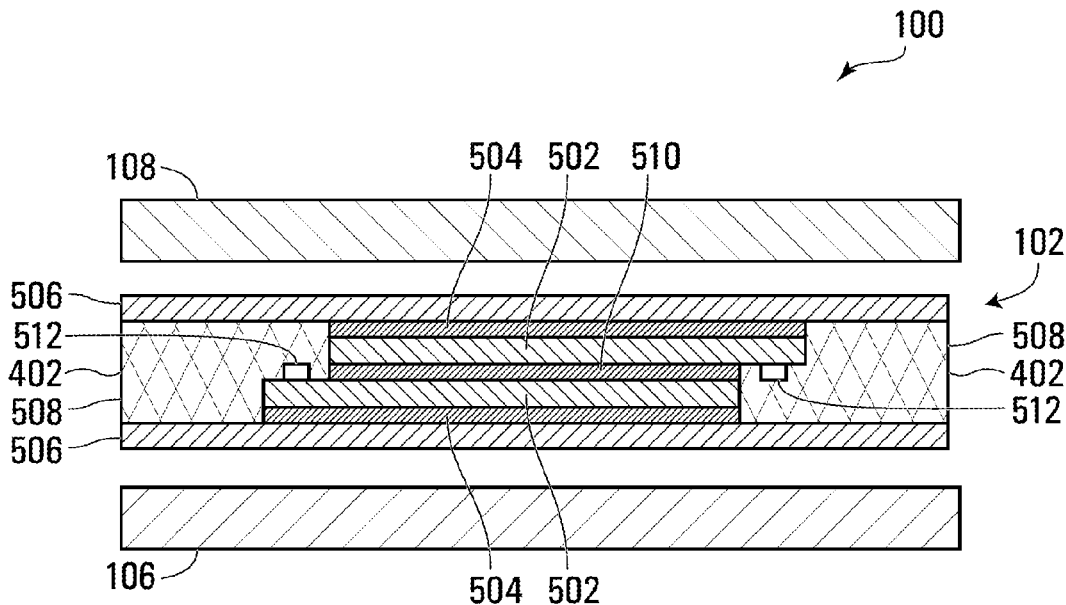

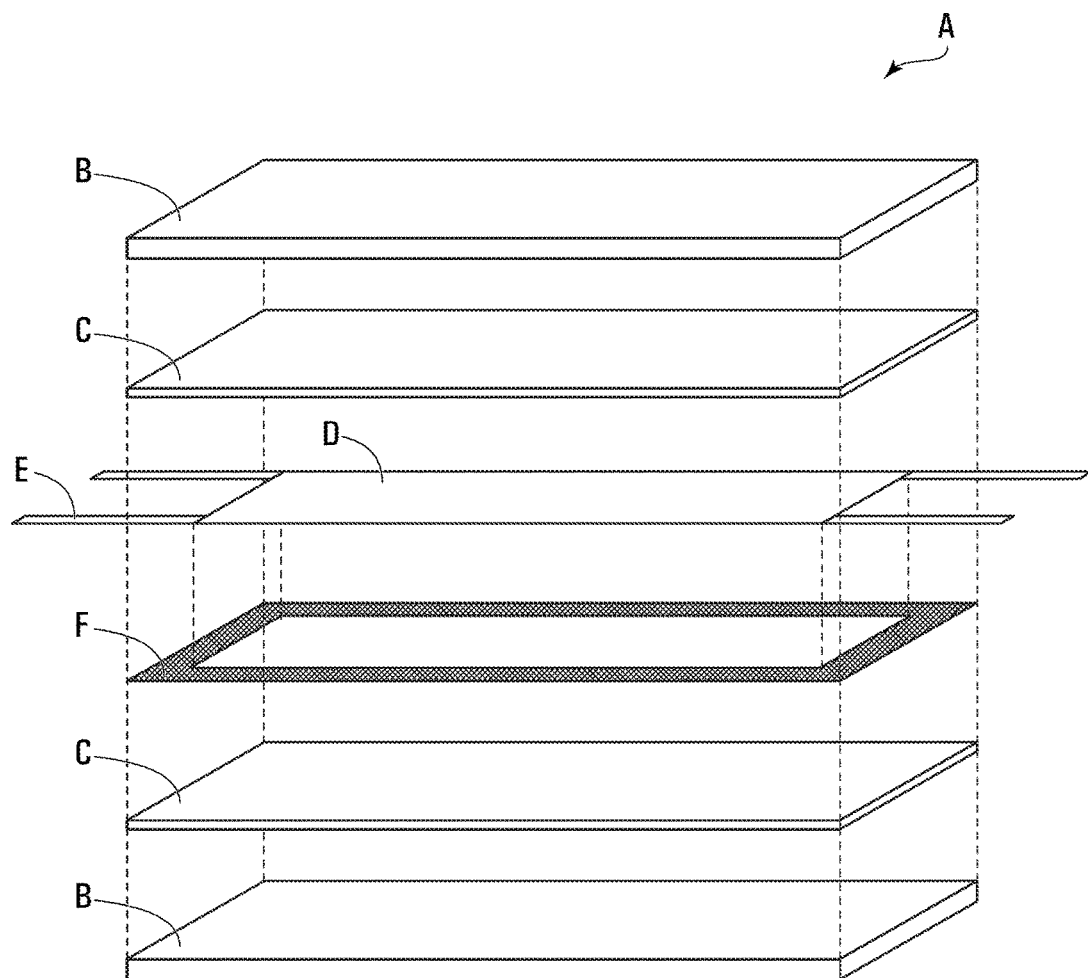


FIG. 1
Prior Art

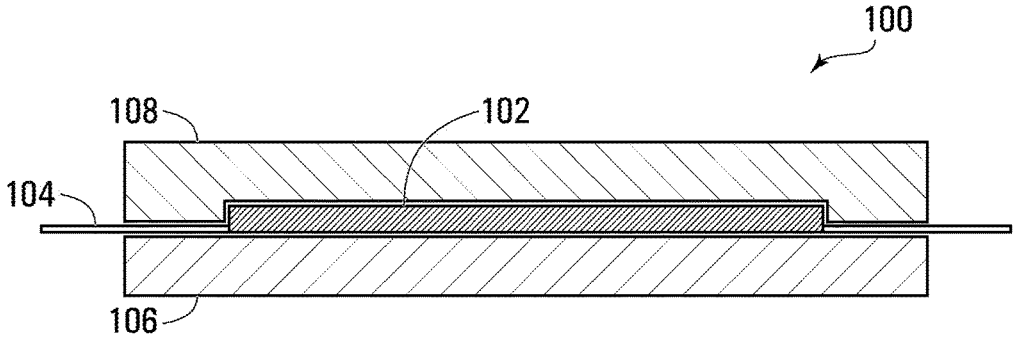


FIG. 2

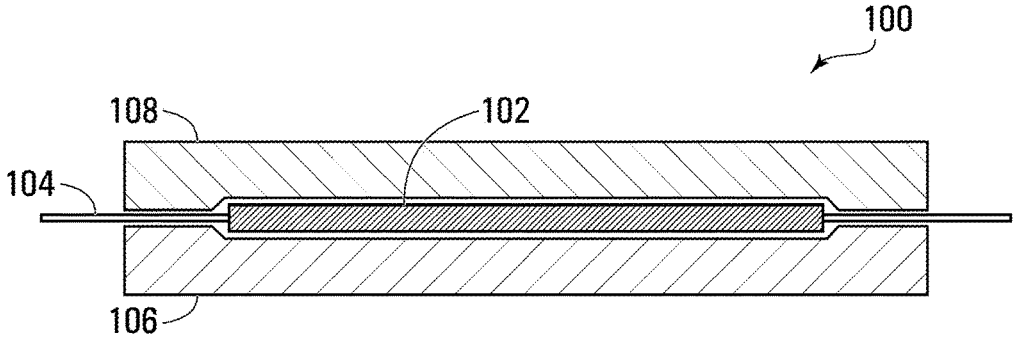


FIG. 3

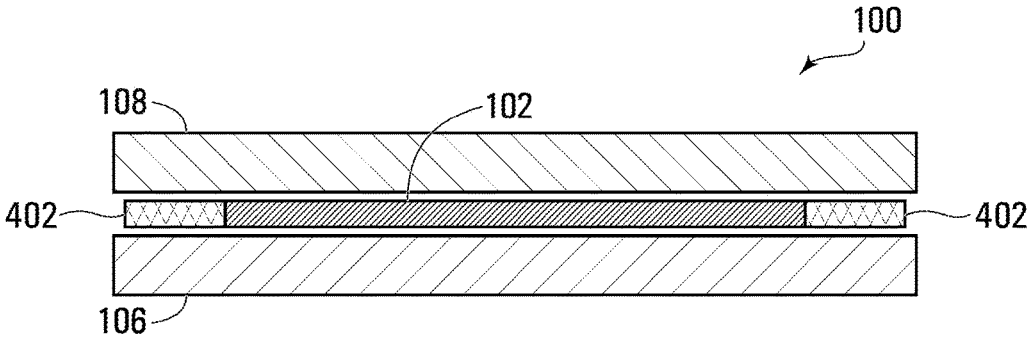


FIG. 4

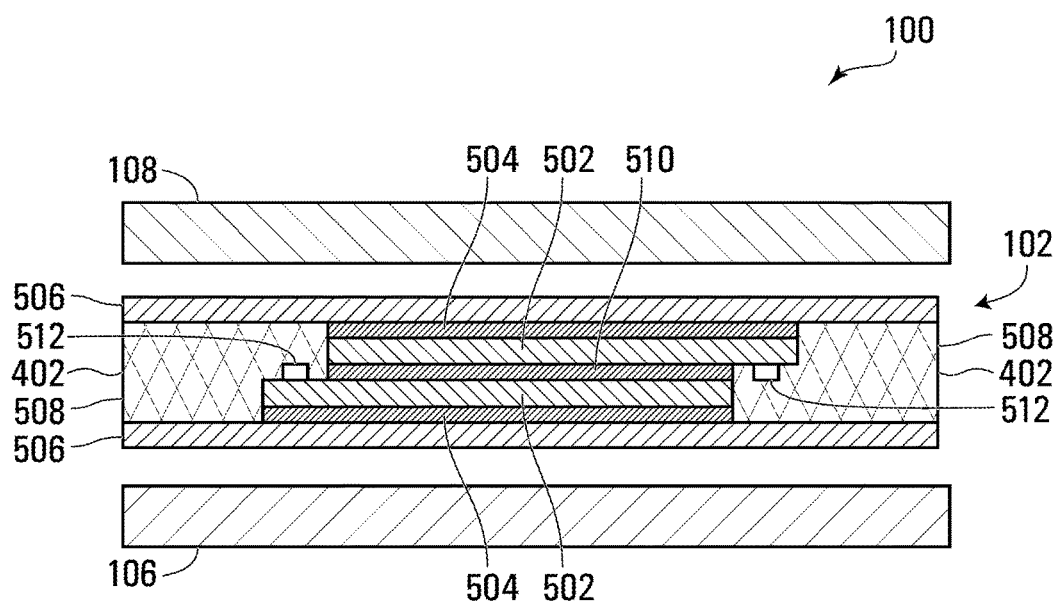


FIG. 5

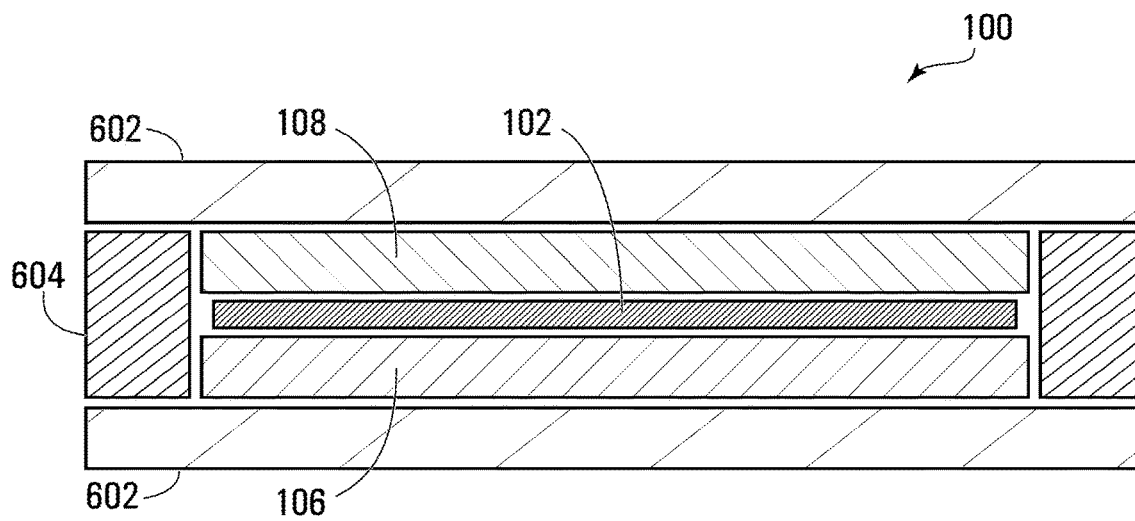


FIG. 6

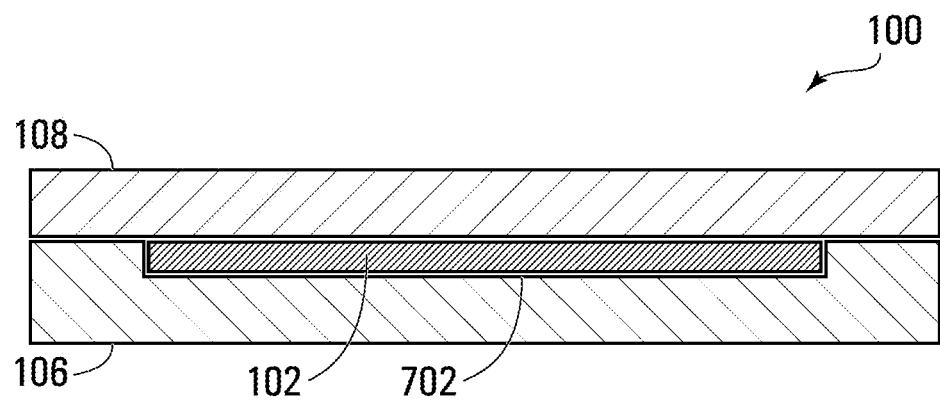


FIG. 7

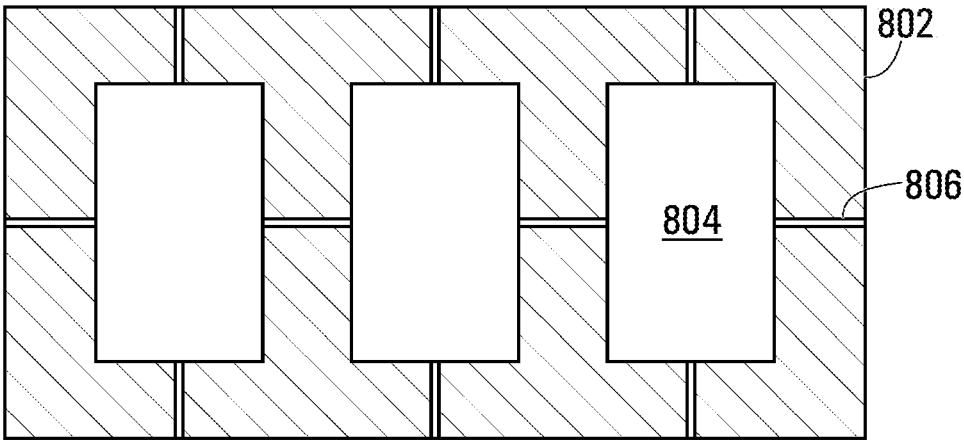


FIG. 8A

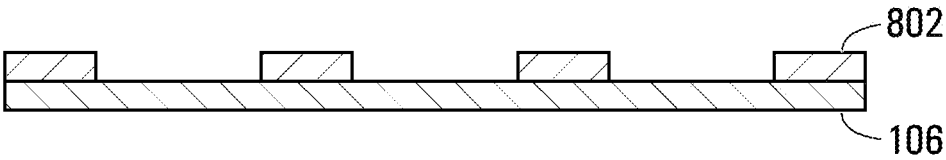


FIG. 8B

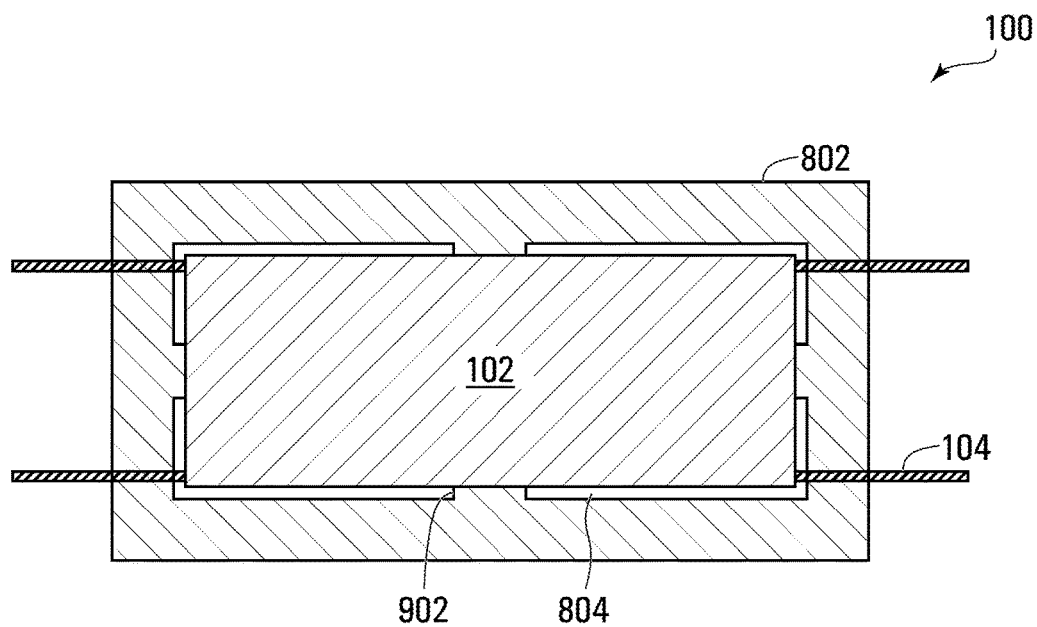


FIG. 9

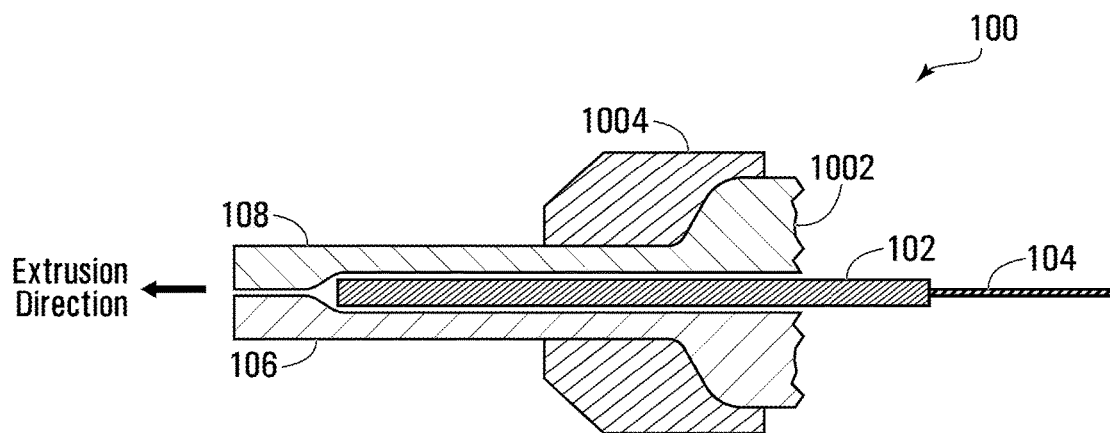


FIG. 10

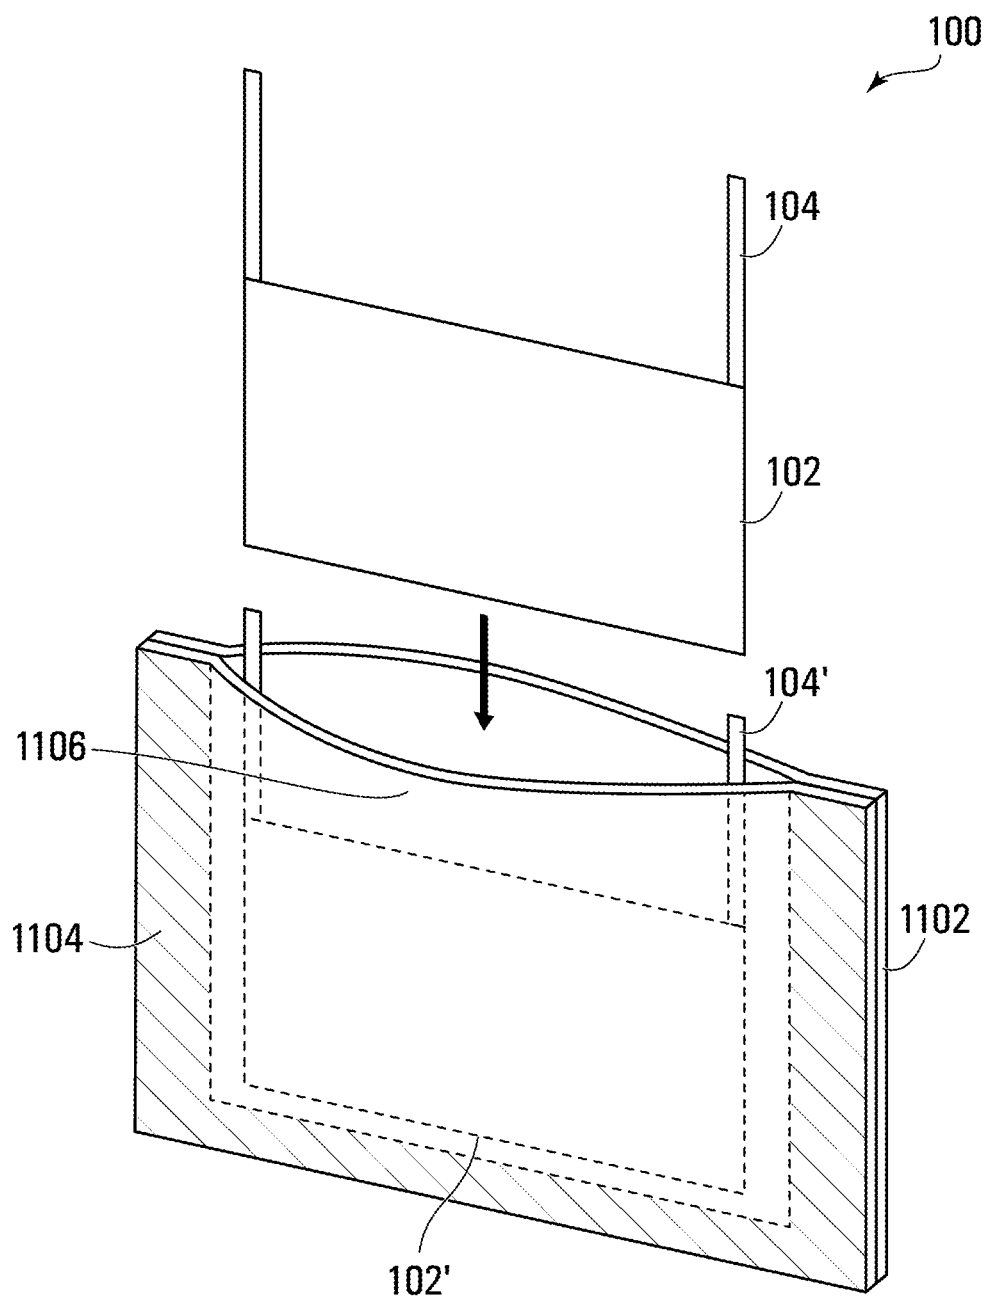


FIG. 11

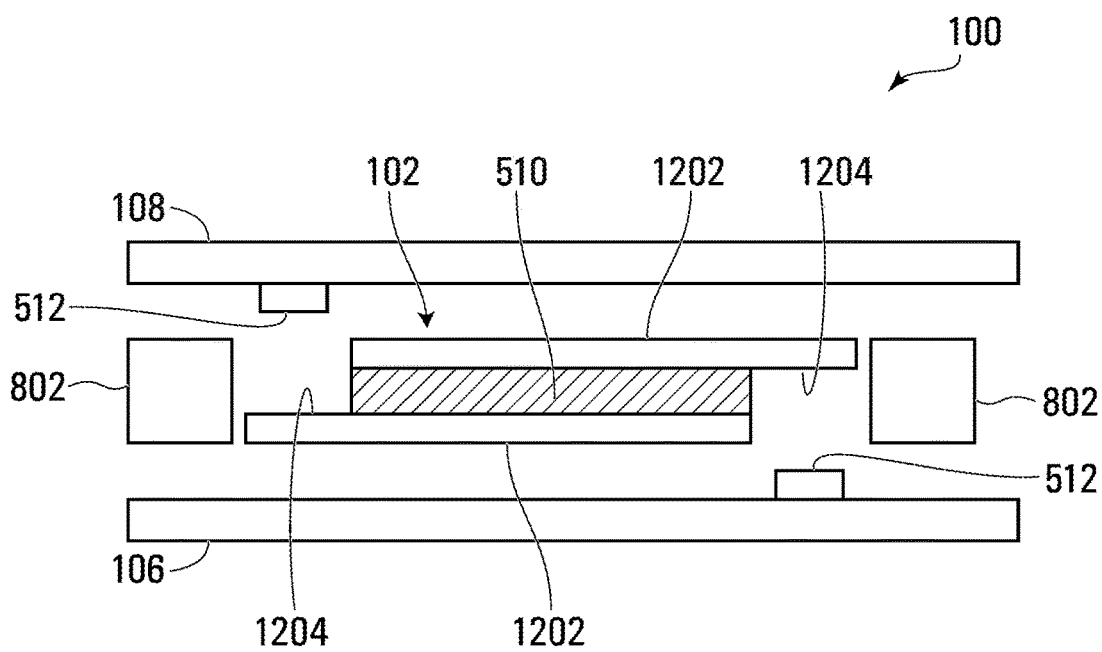
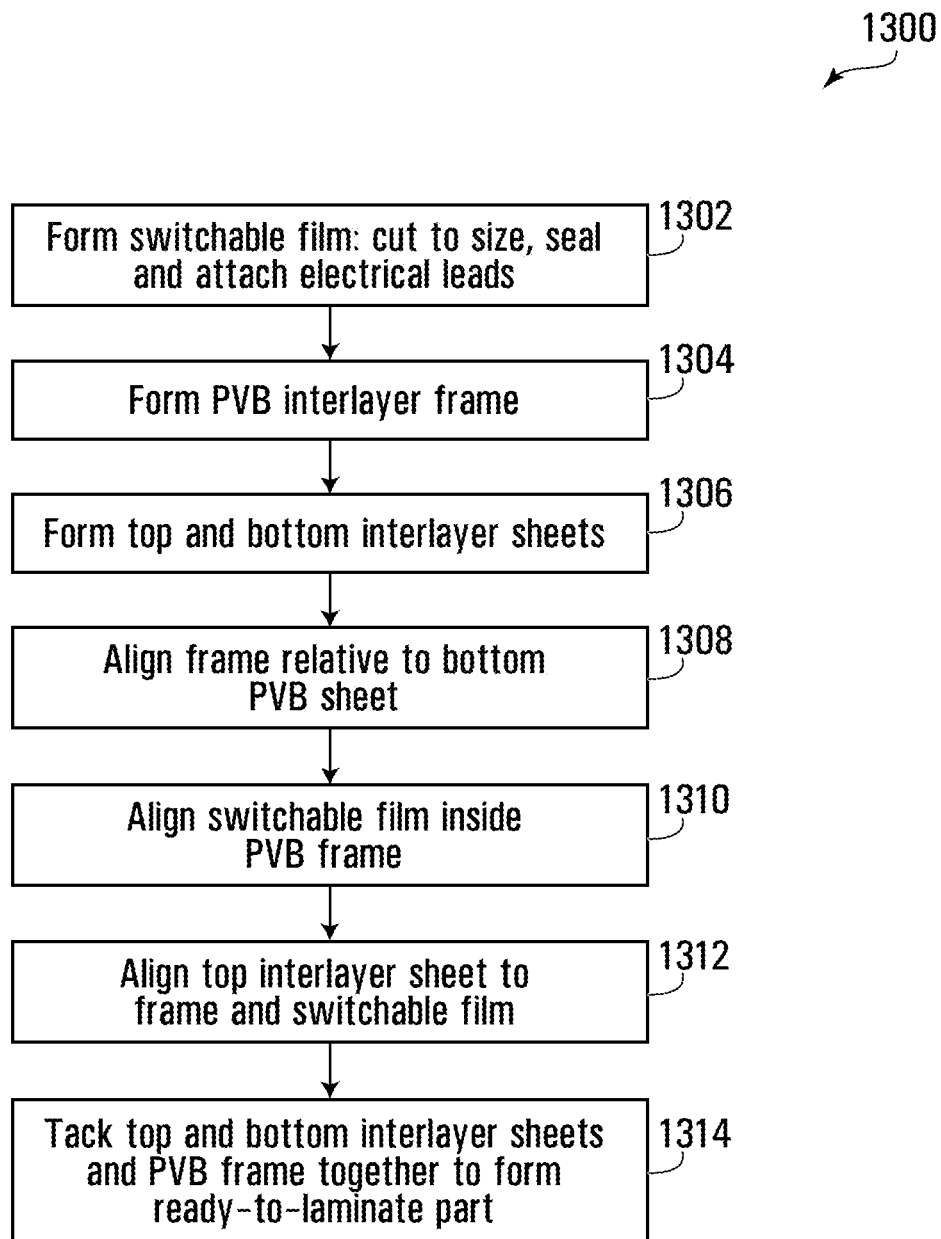


FIG. 12

**FIG. 13**

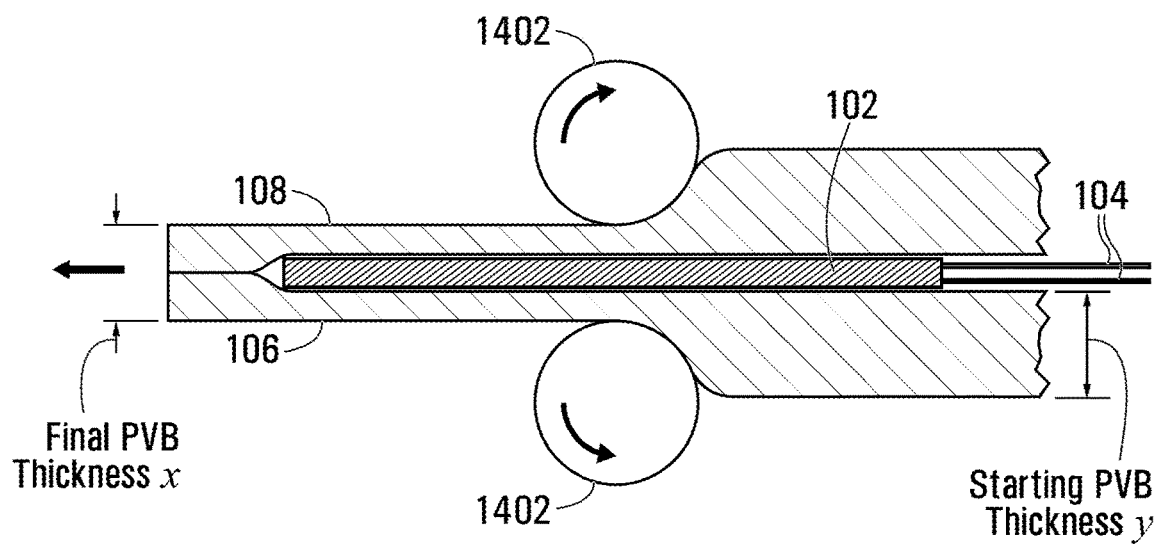


FIG. 14

PACKAGED FILM ASSEMBLY FOR LAMINATION BETWEEN SUBSTRATES

CROSS-REFERENCE TO RELATED APPLICATION

[0001] Pursuant to 35 U.S.C. § 119(e), the present application claims priority to United States provisional patent application no. 62/500,831, filed on May 3, 2017, and entitled “Packaged Film Assembly for Lamination Between Substrates”, the entirety of which is hereby incorporated by reference herein.

TECHNICAL FIELD

[0002] The present disclosure is directed at a packaged film assembly for lamination between substrates.

BACKGROUND

[0003] Conventional laminated glass comprises two glass panels between which is laminated a sheet of polyvinyl butyral (“PVB”). The PVB is laminated to the glass panels under a combination of heat and pressure and, once laminated, bonds the panels together. The PVB also acts as a protective and flexible interlayer to which glass fragments adhere should either of the panels fracture. Laminated glass is consequently commonly used in applications where safety is paramount, such as automobile windshield manufacturing.

[0004] In certain applications, laminated glass may comprise more than one interlayer. For example, FIG. 1 shows an exploded view of a prior art window assembly A prior to lamination. The assembly A comprises top and bottom glass panels B between which are three interlayers. Top and bottom PVB sheets C are the interlayers nearest the top and bottom panels B, respectively. Between the PVB sheets C are a PVB frame F and a switchable film D from which extend electrical leads E to which an electrical signal is applied to cause the switchable film D to transition from a dark state of relatively low optical transmittance to a light state of relative high optical transmittance, or vice-versa; the switchable film D comprises, for example, polyethylene terephthalate (“PET”). The PVB frame F circumscribes the switchable film D. Compared to laminating a single PVB sheet between two glass panels, manufacturing the assembly A of FIG. 1 requires cutting multiple sheets of interlayer and carefully aligning the frame F and switchable film D relative to each other and the rest of the assembly A.

[0005] Additionally, part of preparing the assembly A for lamination comprises eliminating the air bubbles between the glass panels B. Air that is trapped between the panels B during lamination can lead to one or both of optical and mechanical defects in the laminated window assembly A. Several involved techniques exist in the art for removing air bubbles as part of the overall lamination process; these include performing nip roll lamination or using a vacuum ring/bag.

[0006] Preparing and laminating the window assembly A is accordingly a time intensive process that is difficult to automate and that typically requires employing significant professional skill to perform successfully.

SUMMARY

[0007] According to a first aspect, there is provided a packaged film assembly. The packaged film assembly com-

prises a packaging material; and an insert film packaged in and attached to at least a portion of the packaging material, wherein the packaging material is not laminated to another surface.

[0008] According to another aspect, there is provided a packaged film assembly that comprises a packaging material comprising a first film laminable to a first substrate and a second film laminable to a second substrate, wherein each of the first and second films is translucent; and an insert film located between the first and second films, wherein the first film directly contacts a first side of the insert film and a second film directly contacts a second side of the insert film that is opposite to the first side. One or both of the first and second films may comprise polyvinyl butyral (“PVB”).

[0009] According to another aspect, there is provided a packaged film assembly that comprises a packaging material comprising a first film laminable to a first substrate and a second film laminable to a second substrate; and an insert film located between the first and second films, wherein the first film directly contacts a first side of the insert film and a second film directly contacts a second side of the insert film that is opposite to the first side. The first film comprises a rough outwardly facing surface that is opposite a surface of the first film that contacts the insert film, and the second film comprises a rough outwardly facing surface that is opposite a surface of the second film that contacts the insert film. One or both of the first and second films may comprise PVB.

[0010] The following are features that may be applied to any of the foregoing aspects of the packaged film assembly.

[0011] The packaging material may comprise PVB or ethylene-vinyl acetate (“EVA”).

[0012] The insert film may be a switchable film configured to switch between a dark state and a light state.

[0013] The switchable film may transition from the light state to the dark state upon exposure to sunlight and from the dark state to the light state when a voltage is applied across the switchable film absent exposure of the switchable film to sunlight.

[0014] The switchable film may comprise polyethylene terephthalate (“PET”).

[0015] The packaging material may comprise a first and a second interlayer, wherein the first interlayer comprises a first film laminable to a first substrate and in direct contact with a first side of the insert film and wherein the second interlayer comprises a second film laminable to a second substrate and in direct contact with a second side of the insert film that is opposite to the first side.

[0016] The first and second films may overlap and be secured to each other at one or more overlapping portions around the insert film.

[0017] The one or more overlapping portions may comprise a single overlapping portion that circumscribes at least part of the insert film.

[0018] The single overlapping portion may circumscribe the entirety of the insert film.

[0019] The assembly may further comprise a bonding material in the overlapping portion that bonds the first and second films to each other.

[0020] The one or more overlapping portions may comprise discrete regions located around the insert film.

[0021] The discrete regions may delimit a pouch that contains the insert film.

[0022] The first film may be bonded directly to the first side of the insert film and the second film may be bonded directly to the second side of the insert film.

[0023] The first and second films may be bonded to the insert film along a periphery of the insert film to form an edge seal.

[0024] The insert film may comprise a pair of PET coverlays located between the first and second films, wherein one of the PET coverlays is secured to the first film and the other of the PET coverlays is secured to the second film; a pair of electrically conductive electrodes located between the PET coverlays, wherein one of the electrodes is secured to one of the PET coverlays and the other of the electrodes is secured to the other of the PET coverlays, and wherein each of the electrodes comprises an overhanging portion that extends past an edge of the other of the electrodes; a pair of bus bars, wherein one of the bus bars is electrically coupled to the overhanging portion of one of the electrodes and the other of the bus bars is electrically coupled to the overhanging portion of the other of the electrodes; a switching material located between the electrodes; and an epoxy between and bonding the PET coverlays to each other.

[0025] The packaging material may comprise a frame that extends around at least a portion of the insert film.

[0026] The packaging material may circumscribe the entirety of the insert film.

[0027] The frame may comprise de-airing channels extending from an interior edge to an exterior edge of the frame.

[0028] The frame may comprise tabs extending towards the insert film, and the insert film may be attached to the tabs.

[0029] The packaging material may further comprise a first film laminable to a first substrate and in direct contact with a first side of the frame and a second film laminable to a second substrate and in direct contact with a second side of the frame that is opposite to the first side.

[0030] The assembly may further comprise a pair of bus bars located between the first and second films, wherein one of the bus bars is attached to the first film and the other of the bus bars is attached to the second film; a pair of PET substrates located between the first and second films, wherein one of the PET substrates is secured to the first film and the other of the PET substrates is secured to the second film, and wherein each of the PET substrates comprises an overhanging portion that extends past an edge of the other of the PET substrates; a pair of electrical coatings located between the PET substrates, wherein one of the electrical coatings is on one of the PET substrates and the other of the electrical coatings is on the other of the PET substrates; and a switching material located between the electrical coatings.

[0031] According to another aspect, there is provided a method for manufacturing a packaged film assembly. The method comprises forming a packaging material; forming an insert film; and packaging the insert film in the packaging material, wherein the packaging material is not laminated to another surface and wherein packaging the insert film comprises attaching the insert film to at least a portion of the packaging material.

[0032] Forming the packaging material may comprise forming a frame; and forming first and second sheets manufactured from a laminable material, and the method may further comprise laying the first sheet on a flat surface; aligning the frame on the first sheet; aligning the insert film

within the frame; aligning the second sheet on the frame and the insert film; and attaching each of the first and second sheets to opposing sides of the frame.

[0033] This summary does not necessarily describe the entire scope of all aspects. Other aspects, features and advantages will be apparent to those of ordinary skill in the art upon review of the following description of specific embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] In the accompanying drawings, which illustrate one or more example embodiments:

[0035] FIG. 1 is an exploded view of a laminated glass assembly, according to the prior art.

[0036] FIGS. 2 to 7, 9, 11, and 12 depicted various example embodiments of a packaged film assembly.

[0037] FIG. 8A depicts a PVB frame that comprises part of one example embodiment of the packaged film assembly, and FIG. 8B depicts a sectional view of the frame of FIG. 8A overlaid on a PVB sheet.

[0038] FIG. 10 depicts an example embodiment of the packaged film assembly being manufactured using extrusion.

[0039] FIG. 13 depicts an example embodiment of a method for manufacturing the packaged film assembly.

[0040] FIG. 14 depicts an example embodiment of the packaged film assembly being manufactured using calendaring.

DETAILED DESCRIPTION

[0041] Laminating a single interlayer such as PVB between two glass panels is a relatively straightforward process. Only a single sheet of the interlayer needs to be cut to size, and a laminator can eliminate any air bubbles that may exist between the interlayer and the glass panels relatively efficiently and reliably. However, laminating multiple interlayers between glass panels is significantly more challenging. Conventionally, the laminator needs to cut and align multiple sheets of interlayer. Furthermore, removing air bubbles is more difficult for the laminator when multiple interlayer sheets are used than when only a single sheet of interlayer is used.

[0042] The embodiments described herein are directed at a packaged film assembly that allows a laminator to approach multiple interlayer lamination in a manner more similar to single interlayer lamination than is possible using conventional lamination methods. An insert film that comprises, for example, PET, is packaged using a packaging material such as PVB, ethylene-vinyl acetate ("EVA"), thermoplastic polyurethane ("TPU"), or thermoplastic olefin ("TPO"). In some embodiments, the packaging material comprises sheets of laminating film between which the insert film is placed, and "packaged" refers to encapsulation of the insert film by the sheets of laminating film; i.e., the sheets of laminating film cover the edges and both sides of the insert film except for, in certain embodiments, electrical leads (see, e.g., the embodiment of FIG. 11). In some other embodiments in which the insert film is positioned between sheets of laminating film that act as the packaging material, "packaged" refers to coverage of both sides, but not the edges, of the insert film by the sheets of laminating film (see, e.g., the embodiment of FIG. 4). In still other embodiments, "packaged" refers to using the packaging material to form a

frame that circumscribes the periphery of the insert film (see, e.g., the embodiment of FIG. 9). In the depicted embodiments, the insert film is attached, directly or indirectly, to at least a portion of the packaging material.

[0043] The packaged film assembly is then delivered to a laminator who may proceed to laminate it between two substrates without having to cut multiple sheets of interlayer and without having to align the insert film and interlayers in the manner required during conventional multilayer lamination. Using the packaged film assembly as described herein accordingly simplifies the lamination process for the laminator, facilitating increased productivity. Examples of the substrates to which the interlayer and insert film are laminated include glass and polymer (e.g., polycarbonate), and in certain embodiments one of the substrates may be manufactured using one type of material and the other of the substrates may be manufactured using a different type of material. In one example embodiment, one or both of the substrates comprise a glass-plastics pane, which is a pane of laminated glass comprising one layer of glass and one or more layers of plastics material of which at least one acts as an interlayer.

[0044] While in the depicted embodiments the insert film comprises PET, in different embodiments (not depicted) the insert film may additionally or alternatively comprise one or more different thermoplastic polymers. For example, the insert film may additionally or alternatively comprise any one or more of polyethylene ("PE"), polypropylene ("PP"), polybutylene terephthalate ("PBT"), polyethylene naphthalate ("PEN"), polycarbonate ("PC"), and other engineering thermoplastics.

[0045] In the depicted embodiments, the insert film is a switchable film that is non-opaque in both the dark and light states; however, in non-depicted embodiments the insert film may comprise a non-switchable film that is non-opaque or opaque, or it may comprise a switchable film that is non-opaque in one of the states (e.g., comprise switchable film comprising a liquid crystal that is non-opaque only in the light state). The switchable film may be fabricated using photochromic, thermochromic, photochromic/electrochromic, liquid crystal, or suspended particle technologies. Photochromic optical filters tend to automatically darken when exposed to sunlight, and lighten in the absence of sunlight. Electrochromic, liquid crystal, and suspended particle technologies however, tend to alternate between dark and light operating states (or transmissive states) in response to electricity. Thermochromic optical filters darken or lighten when exposed to a change of temperature. Electrochromic optical filters, for example, tend to darken when a voltage differential is applied across a pair of terminals electrically coupled to different sides of the electrochromic material, and tend to lighten when the polarity of the voltage differential is reversed.

[0046] In the embodiments depicted herein, the switchable film is based on a hybrid photochromic/electrochromic technology, which darkens in response to sunlight, UV, or other particular wavelengths of electromagnetic radiation (hereinafter "light") and lightens or becomes transparent (hereinafter "lighten") in response to a non-zero voltage (hereinafter "voltage") applied across the electrical leads connected to the switchable film. The switchable film comprises a switching material having one or more chromophores that are reversibly convertible between colored (dark) and uncolored (light) states; the switching material

may further comprise a solvent portion, polymer(s) (such as PET), salts, or other components to support the conversion of the chromophore between colored and uncolored states when exposed to light or voltage. Some examples of chromophores include fulgides, diarylethenes or dithienylcyclopentenones. However, in different embodiments (not depicted), other types of optical filters comprising alternate switching materials with similar behavior to hybrid photochromic/electrochromic switching materials, may also be employed. Examples of various optical filters and their underlying chemistries may be found in U.S. Pat. No. 8,441,707, the entirety of which is hereby incorporated by reference.

[0047] Referring now to FIG. 2, there is shown a packaged film assembly 100, according to one embodiment. The assembly 100 comprises a first film 106 comprising a PVB film that is 0.76 mm or 0.38 mm thick. A switchable film 102 is laid down on to the first film 106 so that the switchable film 102 is spaced from all the edges of the first film 106; that is, the first film 106 circumscribes the border of the switchable film 102 when looking down at the switchable film 102 laid on the first film 106. In one example embodiment, the switchable film 102 is 0.46 mm thick; additionally or alternatively, in certain embodiments the border formed by the first film 106 around the switchable film 102 is anywhere from a few millimeters to several centimeters or tens of centimeters wide. The switchable film 102 comprises two PET layers and a switching material between the two PET layers; each of the PET layers is coated with a conductive coating, and the PET layers are electrically connected to at least a pair of electrical leads 104.

[0048] A second film 108 is then formed over the top of the first film 106 and switchable film 102 by casting a solution over the first and switchable films 106,102 that is allowed to dry. The solution is formed by dissolving a sheet of PVB that is suitable for use as an interlayer or by dissolving a resin formulation comprising, for example, PVB resin compound made up of PVB resin, a high boiling point plasticizer, and other additives such as UV absorbers or antioxidants, in a suitable low boiling point solvent that is a non-solvent for the PET comprising the switchable film 102; here, being a "non-solvent" for PET means that the solvent does not swell PET. A suitable solvent is, for example an alcohol such as IPA (isopropanol), hydrocarbon such as toluene, ether such as THF (tetrahydrofuran), or mixture of solvents. As shown in FIG. 2, once dry the switchable film 102 is encapsulated by the first and second films 106,108, with only the electrical leads 104 extending beyond the edges of the films 106,108.

[0049] As in FIG. 2, the embodiments depicted in FIGS. 3 to 13 the switchable film 102 comprises PET and each of the first and second films 106,108 comprises PVB. However, as described above, in different embodiments (not depicted) the films 102,106,108 may have different compositions. In certain embodiments, the films 106,108 and, in particular, PVB are translucent prior to lamination, at which time they become transparent.

[0050] Referring now to FIG. 3, there is shown another example embodiment of the encapsulated switchable film assembly 100. Similar to the embodiment of FIG. 2, the first film 106 is laid on a surface, the switchable film 102 and electrical leads 104 are laid on the first film 106, and the second film 108 is then laid on the switchable film 102 and first film 106. The switchable film 102 is positioned relative to the first and second films 106,108 such that it is spaced

from all the edges of those films **106,108**; this permits the peripheries of the first and second films **106,108** to directly contact each other, except where prevented by the electrical leads **104**.

[0051] After laying the films **106,102,108**, they are secured or attached together to facilitate shipping of the assembly **100** to a laminator. For example, the films **106,102,108** may be secured or attached to each other using an adhesive (e.g., one or both of pressure sensitive and low-tack adhesive, tape, and spray adhesive). Additionally or alternatively, localized heat may be applied to overlapping portions of the films **106,108** to cause them to flow and bond together at those overlapping portions; the localized heat in the depicted embodiments exceeds PVB's glass transition temperature, but is below PVB's melting temperature. For example, the localized heat may be applied continuously along the films **106,108** such that the switchable film **102** is circumscribed by a loop of bonded PVB; alternatively, the localized heat may be applied at discrete regions of overlapping portions of the films **106,108** such that the films **106,108** are adhered to each other at discrete regions of bonded PVB; using heat in this manner to secure or attach the films **106,108** together is referred to as "tacking" in this disclosure. Additionally or alternatively, the films **106,102,108** may be compressed using a press (e.g., rollers), as discussed in more detail in respect of FIG. 14 below. When the press is used, release liners or materials that help to ensure that the first and second films **106,108** do not adhere to the surface of the press are used as appropriate. Additionally or alternatively, the films **106,102,108** may comprise mechanical interlocking features that permit the first and second films **106,108** to directly interlock with each other, or that permit each of the first and second films **106,108** to directly interlock with the switchable film **102**.

[0052] In certain embodiments, the laminated films formed using the packaged film assembly **100** may be designed and tested to pass various tests for laminated glass such as ANSI Z26.1-1996, ANSI Z26.1-2006, and ECE R43.

[0053] In FIG. 3, each of the films **106,108** is identical and has a thickness of 0.38 mm, although in different embodiments (not depicted) the films **106,108** may differ in one or more dimensions from each other and be of different thicknesses. Similarly, in FIG. 3 the switchable film **102** has a thickness of approximately 0.25 mm, although in different embodiments (not depicted) it may have a different thickness.

[0054] FIG. 4 shows an embodiment of the packaged film assembly **100** in which the switchable film **102** is packaged between the first and second films **106,108**, and in which the first and second films **106,108** have the same or slightly larger width and height than the switchable film **102**. For example, in one embodiment each of the first and second films **106,108** has a width and height that is approximately 1 cm greater than the width and height of the switchable film **102**, respectively; in different embodiments, one or both of the first and second films **106,108** may have a width and/or height that is approximately 0.1 cm, 0.2 cm, 0.3 cm, 0.4 cm, 0.5 cm, 0.6 cm, 0.7 cm, 0.8 cm, or 0.9 cm greater than the width and/or height of the switchable film **102**. A moisture barrier or seal may be located in the edge region between the first and second films **106,108** through which the switchable film **102** does not extend. In FIG. 4, a zone of relatively high adhesion ("high adhesion zone") **402** is along the periphery of the switchable film **102** to edge seal the assembly **100**. An

epoxy, for example, may be used as an adhesive to create the high adhesion zone within the switchable film **102**. The switchable film **102** is then secured or attached to the first and second films **106,108** such that the position of the switchable film **102** is stable relative to the first and second films **106,108**. In certain embodiments this is achieved using an additional or temporary adhesive layer. Additionally or alternatively, tacking may be used to secure or attach the films **102,106,108** together. The assembly **100** is subsequently laminated and may then be sent to laminators for further lamination between glass using conventional single interlayer lamination techniques, as is done with the embodiment of FIG. 3.

[0055] Referring now to FIG. 5, there is shown another embodiment of the packaged film assembly **100**. In FIG. 5, the switchable film **102** is again located between the first and second films **106,108**. The switchable film **102** comprises a pair of PET coverlays **506** that each has approximately the same width and height than the films **106,108**. The films **106,108** are tacked or otherwise secured or attached to the coverlays **506**. In a different embodiment, one or both of the coverlays **506** has a slightly smaller width and/or height (e.g., approximately 1 cm smaller in one or both of width and height) than the films **106,108**.

[0056] A pair of transparent, conductive electrodes in the form of indium tin oxide ("ITO")-coated PETs **502** are adhered to the PET coverlays **506** using pressure sensitive adhesive **502**. Each of the ITO-coated PETs **502** is adhered to one of the coverlays **506**. The ITO-coated PETs **502** are positioned to face and to substantially overlap each other, with a portion of each of the ITO-coated PETs **502** extending past the edge of the other. The PET coverlays **506** have a greater surface area than the ITO-coated PETs **502**, and each of the ITO-coated PETs **502** is positioned on the PET coverlays **506** such that it is spaced from all the edges of the PET coverlay **506** to which it is adhered. A bus bar **512** is secured to the overhanging portion of each of the ITO-coated PETs **502** and a switching material **510** is located between the overlapping portions of the ITO-coated PETs **502**. An epoxy **508** fills the space between the PET coverlays **506** that is not occupied by the switching material **510**, ITO-coated PETs **502**, bus bars **512**, and pressure sensitive adhesive **502**. The epoxy **508** has good adhesion to the PET coverlays **506** and consequently provides a high adhesion zone **402** that helps to hold the assembly **100** together and acts as an edge seal.

[0057] The first and second films **106,108** may be tacked or otherwise bonded as described above in respect of FIG. 3 to the switchable film **102** after the switchable film **102** has been entirely assembled.

[0058] Referring now to FIG. 6, there is shown another example embodiment of the assembly **100**. In the embodiment of FIG. 6, the first and second films **106,108** have approximately the same dimensions as, or slightly larger dimensions than, the switchable film **102**, which is located between the films **106,108**. The films **106,108** are sandwiched between two glass panes **602**, with the second film **108** spaced from all the edges of the upper glass pane **602** in FIG. 6 and the first film **108** spaced from all the edges of the lower glass pane **602** in FIG. 6. A bonding material **604** that is approximately the same thickness as the combined thicknesses of the films **102,106,108** is also sandwiched between the glass panes **602** and circumscribes the films **102,106,108**, which comprises the area to be laminated. The

bonding material **604** may be any suitable material such as PVB or PVS **101** made by Royal Adhesives and Sealants™ of Michigan Centre, Mich. Certain bonding materials such as PVS **101** may also act as good sealants against oxygen and moisture.

[0059] In contrast to the embodiments above, the bonding material **604** bonds directly to the glass panes **602** as opposed to the films **106,108** bonding only each other or the switchable film **102**, as in FIGS. 4 and 5. The assembly **100** that is shipped to the laminator may comprise the bonding material **604** and the films **106,102,108**, with the bonding material **604** and films **106,102,108** being secured or attached together using tape.

[0060] FIG. 7 shows an embodiment of the encapsulated switchable film assembly **100** in which the first film **106** is manufactured by extruding PVB in a film that comprises a groove **702** shaped to receive the switchable film **102**. After the first film **106** sufficiently cools, the switchable film **102** is placed in the groove **702** and extruded strips of PVB are placed to abut against the ends of the groove **702** so that the switchable film **102** is framed on all edges by PVB. The second film **108** is placed over the first and switchable films **106,102** and the PVB portions that abut against the groove's **702** ends. The first and second films **106,108** and those PVB portions are then tacked together and sent to a laminator for lamination between glass. By virtue of being extruded, the groove **702** is shaped as a channel and has straight edges; consequently, for a close fit between the switchable film **102** and the edges of the groove **702**, the switchable film **102** in the depicted embodiment has straight edges as well. In different embodiments, the switchable film **102** may be differently shaped. Surface roughness can be imparted on the surface of one or both of the films **106,108** either as part of the extrusion process or after the extrusion process. The surface roughness may help with de-airing during subsequent lamination. In at least some example embodiments, surface roughness may be 15-25 μm (600-1,000 pinches), random in terms of amplitude variability and/or spatial frequency, or both.

[0061] FIGS. 8A and 8B depict frames **802** that may be used in various embodiments of the packaged film assembly **100**. FIG. 8A depicts an example frame **802** that comprises a PVB film in which are cut apertures **804**. Each of the apertures **804** is shaped to receive one switchable film **102**, and extending perpendicularly from the edges of each of the apertures **804** towards the edges of the frame **802** are de-airing channels **806** that may assist with de-airing during lamination. The frame **802** shown in FIG. 8A may be laminated to multiple panes of glass; for example, the frame **802** may be cut to separate the apertures **804** and each of the apertures **804** may be used in a packaged film assembly **100** that is used in a sunroof.

[0062] To manufacture the packaged switchable film assembly **100** using the frame **802**, the first film **106** is first laid on a surface and the frame **802** is laid on the first film **106**; FIG. 8B is a sectional view of the frame **802** looking lengthwise along the apertures **804** when laid on the first film **106**. One of the switchable films **102** (not depicted in FIG. 8B) is put in each of the apertures **804** that is backed by the first film **106**, and the second film **108** (not depicted in FIG. 8B) is then laid over the frame **802**. The second film **108** may be secured or attached to the frame **802** (e.g., using an adhesive or localized heat, as described above for FIG. 3) to form the assembly **100**. In different embodiments (not

depicted), the first and second films **106,108** may be directly bonded to each other around the frame **802**.

[0063] Referring now to FIG. 9, there is shown another embodiment of the packaged film assembly **100** comprising the frame **802** and the switchable film **102**. In FIG. 9, the aperture **804** in the frame **802** comprises four inwardly extending tabs **902** that attach to the switchable film **102** located within the aperture **804**. As discussed above in respect of FIG. 3, the tabs **902** may be secured or attached to the switchable film **102** using any suitable means such as adhesive, tape, localized heat to form a tack weld, a mechanical rivet, and mechanical interlocking features in the film **102** and frame **802**. FIG. 9 also shows the electrical leads **104** connected to the switchable film **102** and extending past the periphery of the frame **802**. Following manufacture, the assembly **100** is sent to a laminator who cuts the first and second films **106,108**, places the assembly **100** between them, and laminates the films **106,108** and assembly **100** to glass.

[0064] In the depicted embodiments of the assembly **100** comprising the frame **802**, the frame **802** and the first and second films **106,108** all comprise PVB. However, in different embodiments, the frame **802** and films **106,108** may have different compositions; for example, the frame may comprise a material that does not laminate (e.g., PET or a rigid substrate), or may comprise a material that does laminate but that nonetheless differs in composition from the films **106,108**. Additionally, while in the depicted embodiments the frame **802** and the switchable film **102** are approximately the same thickness, in different embodiments, such as those in which the frame **802** is manufactured using a compliant material such as PVB, they may have different thicknesses. In the depicted embodiments in which the switchable film **102** comprises PET and the frame **802** comprises PVB, the film **102** may be 18 mil thick and the frame **802** may be 15 mil thick. Additionally, while the frame **802** is shown in FIG. 9 as circumscribing the entire switchable film **102**, in different embodiments the entire switchable film **102** need not be circumscribed. For example, as shown in FIG. 8A, portions of the frame **802** may comprise the de-airing channels **806**. In different, non-depicted embodiments, a greater proportion of the switchable film **102** may not be circumscribed by the frame **802**.

[0065] FIG. 10 depicts an example method for manufacturing the packaged film assembly **100**. Molten or softened PVB is stored in a PVB reservoir **1002** that is pushed through the lips of an extrusion die **1004** simultaneously with the switchable film **102**. PVB films accordingly are deposited on the bottom and top of the switchable film **102**, which once dry are the first and second films **106,108**. Surface roughness can be imparted to the surface of substrates **108** and **106** either during the extrusion process or afterwards in order to help with de-airing during the lamination process. In at least some example embodiments, surface roughness may be 15-25 μm (600-1,000 pinches), random in terms of amplitude variability and/or spatial frequency, or both. The electrical leads **104** extend from a rear end of the switchable film **102** that is not pushed through the die **1004** to protect the leads **104** from being damaged. In some embodiments, the switchable film **102** is selected to have dimensions such that the extruded PVB covers its edges, thereby entirely encapsulating it. In different embodiments in which the switchable film **102** is not entirely encapsulated, one or both of the film's width and

height are long enough so at least one edge of the film 102 is not encapsulated by the PVB. In these embodiments, the film 102 may extend to the edge of the PVB (e.g., FIG. 4); additionally or alternatively, an additional material such as the bonding material 604 of FIG. 6 may be used to frame the film 102.

[0066] FIG. 11 depicts another embodiment of the packaged film assembly 100 comprising a pouch 1102 comprising the first and second films 106,108 having dimensions appropriate for the substrates to which they will eventually be laminated. In FIG. 11, the pouch 1102 comprises PVB and is formed by overlaying the first and second films 106,108 and then attaching three of the edges of the first and second films 106,108 together to form an attached PVB portion 1104. One edge of the pouch 1102 comprises a sealable pouch opening 1106 that is initially left open. The switchable film 102 and electrical leads 104 are inserted into the pouch 1102 through the opening 1106, following which the opening is closed similar to how the attached PVB portion 1104 is closed while still permitting the electrical leads 104 to protrude therefrom. In FIG. 11, the position of the switchable film 102 and electrical leads 104 after they are secured in the pouch 1102 is shown in dashed lines and labeled as 102' and 104', respectively. The pouch 1102 once assembled may then be placed between glass and laminated by a laminator using conventional lamination procedures. The switchable film 102 is secured or attached to the first and second films 106,108 once contained within the pouch 1102 notwithstanding that the switchable film 102 may be movable within the pouch 1102.

[0067] In one different embodiment (not depicted), the sealable pouch opening 1106 is not closed but instead is left unsealed; in this embodiment, friction retains the switchable film 102 within the pouch 1102.

[0068] Additionally, while in FIG. 11 the first and second films 106,108 are fused together to form the fused PVB portion 1104 and consequently form the pouch 1102, in a different embodiment (not depicted) an extra layer of PVB may be used to seal the periphery of the first and second films 106,108 to form the fused PVB portion 1104.

[0069] FIG. 12 depicts another embodiment of the packaged film assembly 100 in which the bus bars 512 are embedded directly into the PVB that comprises the first and second films 106,108. The assembly 100 of FIG. 12 comprises the PVB frame 802 located between and along the periphery of the first and second films 106,108. Two PET substrates 1202 with an electrically conductive coating 1204 act as electrodes and are positioned in the aperture 804 that the frame 802 defines and face and substantially overlap each other, and a portion of each of the PET coverlays 506 extends past the edge of the other. The switching material 510 is located between the overlapping portions of the PET substrates 1202. When assembled, one of the PET substrates 1202 is secured or attached to the first film 106 and the other of the substrates 1202 is secured or attached to the second film 108. One bus bar 512 is embedded into the second film 108 such that it contacts the electrically conductive coating 1204 of the PET substrate 1202 secured or attached to the first film 106 and another bus bar 512 is embedded into the first film 106 such that it contacts the electrically conductive coating 1204 of the PET substrate 1202 secured or attached to the second film 108.

[0070] During lamination, the bus bars 512 bond to the conductive coatings 1204 on the PET coverlays 506 with

which they are in contact, thereby forming the electrical connections to the switchable film 102. Manufacturing the assembly 100 in this manner may simplify the forming of the switchable film 102.

[0071] Other features and components may also be incorporated into the first and second films 106,108. For example, one or both of the films 106,108 may contain colored pigments or dyes to form a colored filter that facilitates different colors or transmittance levels once the assembly 100 is laminated to glass. Additionally or alternatively, one or both of the films 106,108 may comprise ultraviolet light blocking features that block ultraviolet light, which can help to extend the lifetime of the switchable film 102. Additionally or alternatively, pigments or dyes may be incorporated into one or both of the PET or other thermoplastic that comprises the switchable film 102, and into the substrates to which the assembly 100 is laminated.

[0072] FIG. 14 depicts an example embodiment of the packaged film assembly 100 being manufactured using calendaring and, more particularly, using two calendaring rollers 1402. The calendaring rollers 1402 may be heated in order to help flow the PVB comprising the first and second films 106,108 and form it to the desired thickness. The switchable film 102 between the first and second films 106,108 are fed through the calendaring rollers 1402. The gap labeled "x" in FIG. 14 between the rollers 1402 is set at the final thickness desired for the packaged film assembly 100. The calendaring rollers 1402 squeeze the PVB from an initial thickness labeled "y" in FIG. 14. The switchable film 102 is only minimally compressed by the calendaring process. In one example embodiment, the PVB is fed through the calendaring rollers 1402 in advance of the switchable film 102 so that the switchable film 102 may be encapsulated by fusing the PVB together in front of it. In this example embodiment the final thickness "x" is set less than "y/2" so the PVB is forced together even without the switchable film 102. At the point at which the switchable film 102 starts going through the calendaring rollers 1402, the PVB is pressed even thinner by the rollers 1402. In certain embodiments heat may be used to help with forming the PVB and to fuse it together on the leading edge. At the trailing edge and along the sides (not shown) of the first and second films 106,108, the PVB in certain embodiments also overhangs the switchable film 102 so the first and second films 106,108 fully encapsulate the switchable film 102. In the depicted embodiment, the electrical leads 104 are shown exiting from the back of the assembly 100, but in non-depicted embodiments they may also exit from the side or from the front of the assembly 100. The outer, curved surfaces of the calendaring rollers 1402 may be textured so they impart surface roughness to exterior surfaces of the first and second films 106,108; this texture may help with the de-airing process during any subsequent lamination. In at least some example embodiments, surface roughness may be 15-25 μm (600-1,000 pinches), random in terms of amplitude variability and/or spatial frequency, or both. The calendaring process can be done on a part-by-part batch process, or in a continuous process with many parts running through one after another. In certain embodiments, the rollers 1402 may be sufficiently heated such that the assembly 100 has sufficient structural integrity by virtue of heating and pressure alone; in different embodiments, other mechanisms such as an adhesive may additionally or alternatively be used to maintain the integrity of the assembly 100. Additionally, in

certain non-depicted embodiments, one or more additional rollers may be positioned to impart surface texture to one or both of the films **106,108** once they exit the rollers **1402**.

[0073] Referring now to FIG. **13**, there is shown an example method **1300** for manufacturing the packaged film assembly **100**, according to another embodiment. The method **1300** begins at block **1302** where the switchable film **102** is formed by cutting it to size, sealing it, and attaching the electrical leads **104** to it. The frame **802** is formed at block **1304** as described, for example, in respect of FIG. **8**. At block **1306** the first and second sheets **104,106** are formed and at block **1308** the frame **802** is aligned relative to the first sheet **104**, which in this embodiment is laid on a surface first and is consequently the bottom sheet. At block **1310** the switchable film **102** is aligned within the frame **802**, and at block **1312** the second film **108** is laid on the frame **802** and switchable film **102**. At block **1314** the first and second films **106,108** are tacked or otherwise attached together as described, for example, in FIG. **12**, to complete manufacture of the packaged film assembly **100**. A laminator may subsequently laminate the assembly **100** to appropriate substrates, such as glass panes for a window.

[0074] FIG. **13** is a flowchart of an example embodiment of a method. Some of the blocks illustrated in the flowchart may be performed in an order other than that which is described. Also, it should be appreciated that not all of the blocks described in the flowchart are required to be performed, that additional blocks may be added, and that some of the illustrated blocks may be substituted with other blocks.

[0075] The switchable film **102** in the depicted embodiments does not melt or flow at the temperatures used to laminate the first and second films **106,108**. Similarly, in embodiments that comprise the PET coverlays **506** or PET substrates **1202**, neither the coverlays **506** nor the substrates **1202** melt or flow at the temperatures used to laminate the first and second films **106,108**. While in the depicted embodiments the switchable film **102**, PET coverlays **506**, and PET substrates **1202** all comprise PET and the films **106,108** comprise PVB, in certain other embodiments in which the films **102,106,108**, coverlays **506**, and substrates **1202** comprise different materials, the switchable film **102**, coverlays, and substrates also do not melt or flow at the temperatures required to laminate the first and second films **106,108**. For example, the melting temperatures of the materials comprising the switchable film **102**, coverlays, and substrates may be higher than the temperature used for lamination. The glass transition temperatures of the materials can be lower or higher than the temperature used for laminating. In embodiments in which the first and second films **106,108** comprise PVB, the lamination temperature is typically between approximately 125° C. and 140° C.

[0076] As used herein, the terms “approximately” and “about” when used in conjunction with a value mean $\pm 10\%$ of that value.

[0077] Directional terms such as “top”, “bottom”, “upwards”, “downwards”, “vertically”, and “laterally” are used in this disclosure for the purpose of providing relative reference only, and are not intended to suggest any limitations on how any article is to be positioned during use, or to be mounted in an assembly or relative to an environment. Additionally, the term “couple” and variants of it such as “coupled”, “couples”, and “coupling” as used in this disclosure are intended to include indirect and direct connections

unless otherwise indicated. For example, if a first article is coupled to a second article, that coupling may be through a direct connection or through an indirect connection via another article. Furthermore, the singular forms “a”, “an”, and “the” as used in this disclosure are intended to include the plural forms as well, unless the context clearly indicates otherwise. Additionally, the term “and/or” when used in conjunction with a list of items means any one or more of the items of that list.

[0078] It is contemplated that any part of any aspect or embodiment discussed in this specification can be implemented or combined with any part of any other aspect or embodiment discussed in this specification.

[0079] While particular embodiments have been described in the foregoing, it is to be understood that other embodiments are possible and are intended to be included herein. It will be clear to any person skilled in the art that modifications of and adjustments to the foregoing embodiments, not shown, are possible.

1. A packaged film assembly, comprising:
 - (a) a packaging material; and
 - (b) an insert film packaged in and attached to at least a portion of the packaging material, wherein the packaging material is not laminated to another surface.
2. The assembly of claim 1 wherein the packaging material comprises polyvinyl butyral (“PVB”) or ethylene-vinyl acetate (“EVA”).
3. The assembly of claim 1 wherein the insert film is a switchable film configured to switch between a dark state and a light state.
4. The assembly of claim 3 wherein the switchable film transitions from the light state to the dark state upon exposure to sunlight and from the dark state to the light state when a voltage is applied across the switchable film absent exposure of the switchable film to sunlight.
5. The assembly of claim 3 wherein the switchable film comprises polyethylene terephthalate (“PET”).
6. The assembly of claim 1 wherein the packaging material comprises a first and a second interlayer, wherein the first interlayer comprises a first film laminable to a first substrate and in direct contact with a first side of the insert film and wherein the second interlayer comprises a second film laminable to a second substrate and in direct contact with a second side of the insert film that is opposite to the first side.
7. The assembly of claim 6 wherein the first and second films overlap and are secured to each other at one or more overlapping portions around the insert film.
8. The assembly of claim 7 wherein the one or more overlapping portions comprises a single overlapping portion that circumscribes at least part of the insert film.
9. The assembly of claim 8 wherein the single overlapping portion circumscribes the entirety of the insert film.
10. The assembly of claim 9 further comprising a bonding material in the overlapping portion that bonds the first and second films to each other.
11. The assembly of claim 7 wherein the one or more overlapping portions comprises discrete regions located around the insert film.
12. The assembly of claim 11 wherein the discrete regions delimit a pouch that contains the insert film.

13. The assembly of claim **6** wherein the first film is bonded directly to the first side of the insert film and the second film is bonded directly to the second side of the insert film.

14. The assembly of claim **13** wherein the first and second films are bonded to the insert film along a periphery of the insert film to form an edge seal.

15. The assembly of claim **6** wherein the insert film comprises:

- (a) a pair of PET coverlays located between the first and second films, wherein one of the PET coverlays is secured to the first film and the other of the PET coverlays is secured to the second film;
- (b) a pair of electrically conductive electrodes located between the PET coverlays, wherein one of the electrodes is secured to one of the PET coverlays and the other of the electrodes is secured to the other of the PET coverlays, and wherein each of the electrodes comprises an overhanging portion that extends past an edge of the other of the electrodes;
- (c) a pair of bus bars, wherein one of the bus bars is electrically coupled to the overhanging portion of one of the electrodes and the other of the bus bars is electrically coupled to the overhanging portion of the other of the electrodes;
- (d) a switching material located between the electrodes; and
- (e) an epoxy between and bonding the PET coverlays to each other.

16. The assembly of claim **1** wherein the packaging material comprises a frame that extends around at least a portion of the insert film.

17. The assembly of claim **16** wherein the packaging material circumscribes the entirety of the insert film.

18. The assembly of claim **16** wherein the frame comprises de-airing channels extending from an interior edge to an exterior edge of the frame.

19. The assembly of claim **16** wherein the frame comprises tabs extending towards the insert film, and wherein the insert film is attached to the tabs.

20. The assembly of claim **16** wherein the packaging material further comprises a first film laminable to a first substrate and in direct contact with a first side of the frame

and a second film laminable to a second substrate and in direct contact with a second side of the frame that is opposite to the first side.

21. The assembly of claim **20** further comprising:

- (a) a pair of bus bars located between the first and second films, wherein one of the bus bars is attached to the first film and the other of the bus bars is attached to the second film;
- (b) a pair of PET substrates located between the first and second films, wherein one of the PET substrates is secured to the first film and the other of the PET substrates is secured to the second film, and wherein each of the PET substrates comprises an overhanging portion that extends past an edge of the other of the PET substrates;
- (c) a pair of electrical coatings located between the PET substrates, wherein one of the electrical coatings is on one of the PET substrates and the other of the electrical coatings is on the other of the PET substrates; and
- (d) a switching material located between the electrical coatings.

22. A method for manufacturing a packaged film assembly, the method comprising:

- (a) forming a packaging material;
- (b) forming an insert film; and
- (c) packaging the insert film in the packaging material, wherein the packaging material is not laminated to another surface and wherein packaging the insert film comprises attaching the insert film to at least a portion of the packaging material.

23. The method of claim **22** wherein forming the packaging material comprises:

- (a) forming a frame; and
- (b) forming first and second sheets manufactured from a laminable material, and wherein the method further comprises:
 - (c) laying the first sheet on a flat surface;
 - (d) aligning the frame on the first sheet;
 - (e) aligning the insert film within the frame;
 - (f) aligning the second sheet on the frame and the insert film; and
 - (g) attaching each of the first and second sheets to opposing sides of the frame.

* * * * *