

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2012231686 B2

(54) Title
Processes for recovering rare earth elements from aluminum-bearing materials

(51) International Patent Classification(s)
C22B 3/10 (2006.01) **C22B 58/00** (2006.01)
C22B 3/38 (2006.01) **C22B 59/00** (2006.01)
C22B 3/46 (2006.01)

(21) Application No: **2012231686** (22) Date of Filing: **2012.03.19**

(87) WIPO No: **WO12/126092**

(30) Priority Data

(31) Number	(32) Date	(33) Country
61/535,435	2011.09.16	US
61/454,211	2011.03.18	US

(43) Publication Date: **2012.09.27**

(44) Accepted Journal Date: **2015.08.27**

(71) Applicant(s)

Orbite Aluminae Inc.

(72) Inventor(s)

**Boudreault, Richard;Primeau, Denis;Fournier, Joel;Simoneau, Raymond;Garcia, Maria
Cristina;Krivanec, Heinz;Dittrich, Carsten**

(74) Agent / Attorney

Shelston IP, L 21 60 Margaret St, Sydney, NSW, 2000

(56) Related Art

EP 0775753 A1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 September 2012 (27.09.2012)

(10) International Publication Number
WO 2012/126092 A1

(51) International Patent Classification:

C22B 3/10 (2006.01) *C22B 58/00* (2006.01)
C22B 3/38 (2006.01) *C22B 59/00* (2006.01)
C22B 3/46 (2006.01)

tenay-le-Fleury (FR). **KRIVANEC, Heinz** [AT/AT]; Schloss-See 224, A-2522 Oberwaltersdorf (AT). **DIT-TRICH, Carsten** [DE/DE]; Schlossweiherstr. 3-5, 52072 Aachen (DE).

(21) International Application Number:

PCT/CA2012/000253

(74) Agent: **BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.**, 40, King Street West, 40th floor, Toronto, Ontario M5H 3Y2 (CA).

(22) International Filing Date:

19 March 2012 (19.03.2012)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/454,211 18 March 2011 (18.03.2011) US
61/535,435 16 September 2011 (16.09.2011) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOUDREAU, Richard** [CA/CA]; 2723 Luce-Guilbeault, St-Laurent, Québec H4R 2T3 (CA). **PRIMEAU, Denis** [CA/CA]; 2166 Place de l'Eglise, Ste-Julie, Québec J3E 2G5 (CA). **FOURNIER, Joel** [CA/CA]; 1761 des Amarantes, Carignan, Québec J3L 4Z8 (CA). **SIMONEAU, Raymond** [CA/CA]; 4395 av. Walkley, Montreal, Québec H4B 2K4 (CA). **GARCIA, Maria Cristina** [CA/CA]; 1137 Place Heri-Gauthier, Montreal, Québec H2M 2S1 (CA). **MORIER, Francois** [FR/FR]; 14 rue de la Plaine, F-78330 Fon-

Published:

— with international search report (Art. 21(3))

(54) Title: PROCESSES FOR RECOVERING RARE EARTH ELEMENTS FROM ALUMINUM-BEARING MATERIALS

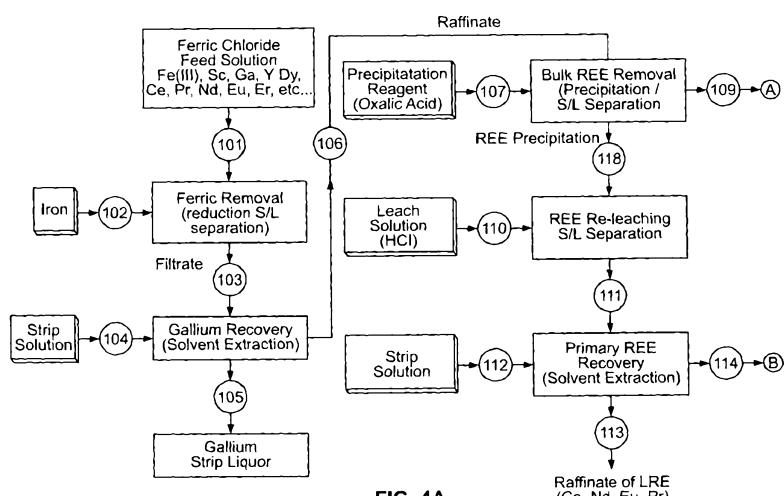


FIG. 4A

(57) Abstract: The present disclosure relates to processes for recovering rare earth elements from an aluminum-bearing material. The processes can comprise leaching the aluminum-bearing material with an acid so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, at least one rare earth element, and a solid, and separating the leachate from the solid. The processes can also comprise substantially selectively removing at least one of the at least one aluminum ion and the at least one iron ion from the leachate and optionally obtaining a precipitate. The processes can also comprise substantially selectively removing the at least one rare earth element from the leachate and/or the precipitate.

PROCESSES FOR RECOVERING RARE EARTH

ELEMENTS FROM ALUMINUM-BEARING MATERIALS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority on US 61/454,211 filed on March 18, 2011 and on US 61/535,435 filed on September 16, 2011. These documents are hereby incorporated by reference in their entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to improvements in the field of chemistry applied to the recovery, extraction and/or isolation of rare earth elements (REE). For example, such processes are useful for obtaining rare earth elements from various aluminum-bearing materials and derivatives thereof.

BACKGROUND OF THE DISCLOSURE

[0002a] Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

[0003] In various technologies, there is an increasing need for rare earth elements. In few countries, efforts to reestablish mining of rare earth elements have been undertaken. In the future, supplies of rare earth elements will considerably depend upon economic viability of the extraction and production processes and technological innovations requiring such rare earth elements.

[0004] There is thus a need for providing an alternative to the existing solutions for extracting rare earth elements.

SUMMARY OF THE DISCLOSURE

[0004a] According to a first aspect, the present invention provides a process for recovering at least one rare earth element and/or at least one rare metal chosen from In, Zr, Li and Ga from an aluminum-bearing material, said process comprising:

- 1a -

leaching said aluminum-bearing material with HCl so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga, and a solid, and separating said leachate from said solid;

substantially selectively removing said at least one aluminum ion from said leachate by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent and ion exchange resin, thereby obtaining a composition comprising said at least one iron ion, and said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga;

substantially selectively at least partially removing said at least one iron ion from said composition by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent, hydrolysis and ion exchange resin, thereby obtaining a liquor comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga; and

substantially selectively removing said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga from said liquor by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, adsorption, extracting agent, electrowinning and ion exchange resin.

[0004b] According to a second aspect, the present invention provides a process for recovering at least one rare earth element and/or at least one rare metal chosen from In, Zr, Li and Ga from an aluminum-bearing material, said process comprising:

leaching said aluminum-bearing material with HCl so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, and said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga, and a solid and separating said leachate from said solid;

substantially selectively removing said at least one iron ion from said leachate by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent, hydrolysis and ion exchange resin, thereby obtaining a composition comprising said at least one aluminum ion, and said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga;

substantially selectively at least partially removing said at least one aluminum ion from said composition by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent and ion exchange resin, thereby obtaining a liquor comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga; and

substantially selectively removing said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga from said liquor by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, adsorption, extracting agent, electrowinning and ion exchange resin.

[0004c] Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising", and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

[0005] According to one aspect, there is provided a process for recovering at least one rare earth element from an aluminum-bearing material, the process comprising :

leaching the aluminum-bearing material with an acid so as to obtain a leachate comprising aluminum ions, iron ions, and the at least one rare earth element; 

substantially selectively precipitating, extracting and/or isolating at least one of aluminum ions and iron ions from the leachate and optionally obtaining a precipitate; and

substantially selectively precipitating, extracting and/or isolating the at least one rare earth element from the leachate and/or the precipitate.

[0006] According to one aspect, there is provided a process for extracting at least one rare earth element from an aluminum-bearing material, the process comprising :

leaching the aluminum-bearing material with an acid so as to obtain a leachate comprising aluminum ions, iron ions, and the at least one rare earth element; and

selectively precipitating at least one member chosen from the at least one rare earth element, iron ions and aluminum ions.

[0007] According to one aspect, there is provided a process for recovering at least one rare earth element from an aluminum-bearing material, the process comprising :

leaching the aluminum-bearing material with an acid so as to obtain a leachate comprising aluminum ions, iron ions, and at least one rare earth element ;

optionally substantially selectively precipitating, extracting and/or isolating the at least one rare earth element from the leachate and/or the precipitate.

substantially selectively precipitating, extracting and/or isolating at least one of aluminum ions and iron ions from the leachate and optionally obtaining a precipitate; and

substantially selectively precipitating, extracting and/or isolating the at least one rare earth element from the leachate and/or the precipitate.

[0008] According to another example, there is provided a process for recovering at least one rare earth element from an aluminum-bearing material, the process comprising :

leaching the aluminum-bearing material with an acid so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, the at least one rare earth element, and a solid, and separating the leachate from the solid;

substantially selectively removing at least one of the at least one aluminum ion and the at least one iron ion from the leachate and optionally obtaining a precipitate; and

substantially selectively removing the at least one rare earth element from the leachate and/or the precipitate.

[0009] According to another example, there is provided process for recovering at least one rare earth element from an aluminum-bearing material, the process comprising :

leaching the aluminum-bearing material with an acid so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, and the at least one rare earth element, and a solid, and separating the leachate from the solid; and

substantially selectively removing at least one member chosen from the at least one rare earth element, the at least one iron ion and the at least one aluminum ion from the leachate.

[0010] According to another aspect, there is provided a process for preparing alumina and other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration higher than HCl azeotrope concentration (20.2 weight %) and reacting the composition with a further quantity of aluminum-containing material so as to leaching it.

[0011] According to another aspect, there is provided a process for preparing alumina and other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 25 to about 45 weight % and reacting the composition with a further quantity of aluminum-containing material so as to leaching it.

[0012] According to another aspect, there is provided a process for preparing alumina and other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 25 to about 45 weight % and using the composition for leaching the aluminum-containing material.

[0013] According to another aspect, there is provided a process for preparing alumina and other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with the leachate so as to precipitate the aluminum ions in the form of $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$.

BRIEF DESCRIPTION OF DRAWINGS

[0014] In the following drawings, which represent by way of example only, various embodiments of the disclosure :

[0015] Fig. 1 shows a bloc diagram of an example of a process for preparing alumina and various other products including rare earth elements, according to the present disclosure;

[0016] Fig. 2 shows a bloc diagram of another example of process for preparing alumina and various other products including rare earth elements, according to the present disclosure;

[0017] Fig. 3 shows a bloc diagram of an example of process for extracting rare earth elements according to the present disclosure; and

[0018] Figs. 4a and 4b show a bloc diagram of another example of a process for extracting rare earth elements according to the present disclosure.

DETAILED DESCRIPTION OF VARIOUS EMBODIMENTS

[0019] Further features and advantages will become more readily apparent from the following description of various embodiments as illustrated by way of examples.

[0020] It was found that that the rare earth element(s) recovery can be made, for example, in the processes described in the present disclosure at various stages. Moreover, it was found that such processes can be useful even if the rare earth elements are only found as traces. It was also found that such processes can be particularly useful for extracting rare earth elements from a solution that is substantially refined or purified. For example, these processes can be useful since they can be applied to solutions from which several of the main components have been removed (for example

precipitated) for example iron ions and aluminum ions. They can also be applied to solutions before removal of several of the main components.

[0021] The expression "at least one aluminum ion", as used herein refers, for example, to at least one type of aluminum ion chosen from all possible forms of Al ions. For example, the at least one aluminum ion can be Al^{3+} .

[0022] The expression "at least one iron ion", as used herein refers, for example, to at least one type of iron ion chosen from all possible forms of Fe ions. For example, the at least one iron ion can be Fe^{2+} , Fe^{3+} , or a mixture thereof.

[0023] The expression "at least one rare earth element", as used herein refers, for example, to at least one type of rare earth element chosen from all the rare earth elements described in the present disclosure in all their possible forms.

[0024] The expression "Ga-free solution", as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of gallium.

[0025] The expression "Ce-free solution", as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of cerium.

[0026] The expression "Sc-free solution", as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of scandium.

[0027] The expression "Sm-free solution", as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of samarium.

[0028] The expression "Eu-free solution", as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of europium.

[0029] The expression “Gd-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of gadolinium.

[0030] The expression “Y-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of yttrium.

[0031] The expression “Pr-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of praseodymium.

[0032] The expression “Nd-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of neodymium.

[0033] The expression “La-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of lanthanum.

[0034] The expression “Er-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of erbium.

[0035] The expression “Dy-free solution”, as used herein refers, for example, to a solution that comprises about less than 5 %, 2 % or 1 % w/v of dysprosium.

[0036] The expression “rare earth element” as used herein refers, for example, to a rare element chosen from scandium, yttrium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium, and lutetium, and/or a rare metal chosen from indium, zirconium, lithium, and gallium. These rare earth elements and rare metals can be in various form such as the elemental form (or metallic form), under the form of chlorides, oxides, hydroxides etc.

[0037] The expression "the at least one rare earth element" as used herein refers, for example, to a at least one rare element chosen from scandium, yttrium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium, and lutetium, and/or to at least one rare metal chosen from indium, zirconium, lithium, and gallium. These rare earth elements and rare metals can be in various form such as the elemental form (or metallic form), or under the form of chlorides, oxides, hydroxides etc.

[0038] In the processes of the present disclosure, after the leaching, the substantially selectively removing of the at least one member chosen from the at least one rare earth element, the at least one iron ion and the at least one aluminum ion from the leachate can be made in various manners. The at least one iron ion can be removed and then, the at least one aluminum ion can be removed and finally, the at least one rare earth element can be removed. Alternatively, the at least one aluminum ion can be removed, then the at least one iron ion can be removed and finally, the at least one rare earth element can be removed. According to another example, the at least one rare earth element can be removed, then, the at least one aluminum ion can be removed, and finally the at least one iron ion can be removed. Also, the at least one rare earth element can be removed, then, the at least one iron ion can be removed, and finally the at least one aluminum ion can be removed. Various other possible combinations can also be envisaged.

[0039] The acid used for leaching aluminum-bearing material can be HCl, H₂SO₄, HNO₃ or mixtures thereof. More than one acid can be used as a mixture or separately. Solutions made with these acids can be used at various concentration. For example, concentrated solutions can be used. For example, 6 M or 12 M HCl can be used. For example, up to 98 % or 100 % wt H₂SO₄ can be used.

[0040] For example, the aluminum-bearing material can be leached with HCl having a concentration of about 15 to about 45 weight %, of about 20 to about 45 weight %, of about 25 to about 45 weight %, of about 26 to about 42

weight %, of about 28 to about 40 weight %, of about 30 to about 38 weight %, or between 25 and 36 weight %.

[0041] For example, the aluminum-bearing material can be leached at a temperature of about 125 to about 225 °C, about 150 to about 200 °C, about 160 to about 180 °C, or about 165 to about 170 °C.

[0042] For example, the leaching can be carried out under pressure. For example, the pressure can be about 100 to about 300 or about 150 to about 200 psig. The leaching can be carried out for about 30 minutes to about 5 hours. For example, the leaching can be carried out at a temperature of about 60 °C to about 200 °C.

[0043] For example, the leaching can be carried out under pressure into an autoclave. For example, it can be carried out at a pressure of 5 KPag to about 850 KPag, 50 KPag to about 800 KPag, 100 KPag to about 750 KPag, 150 KPag to about 700 KPag, 200 KPag to about 600 KPag, or 250 KPag to about 500 KPag.

[0044] For example, the leaching can be carried out at a temperature of at least 80 °C, at least 90 °C, or about 100 °C to about 110 °C. In certain cases it can be done at higher temperatures so as to increase extraction yields of rare earth elements in certain ores. For example, the leaching can be carried out at a temperature of at least 100 °C, at least 120 °C, at least 130 °C, at least 140 °C, or about 140 °C to about 175 °C.

[0045] For example, in the leachate, the at least one rare earth element can be in the form of an ion.

[0046] For example, after the leaching, the at least one rare earth element can be solubilized into the solution and can be found as a soluble ion, associated to chlorine, a sulfate, a nitrate, or hydrates thereof. etc.

[0047] For example, after the leaching, (if required) various bases can be used for raising up the pH such as KOH, NaOH, Ca(OH)₂, CaO, MgO, Mg(OH)₂, CaCO₃, Na₂CO₃, NaHCO₃, CO₂, or mixtures thereof.

[0048] For example, the at least one iron ion can be precipitated. When precipitating the at least one iron ion, it can be precipitated by means of an ionic precipitation and it can precipitate in the form of various salts, hydroxides, chlorides or hydrates thereof. For example, the at least one iron ion can be precipitated as FeCl_2 , FeCl_3 , Fe(OH)_3 , Fe(OH)_2 , hematite, geotite, jarosite or hydrates thereof.

[0049] For example, after the precipitation of the at least one iron ion, the at least one rare earth element can be solubilized into the solution and can be found as a soluble ion, associated as an hydroxide or a salt, or hydrates thereof.

[0050] For example, the at least aluminum ion can be precipitated. When precipitating the at least aluminum ion, it can be precipitated by means of an ionic precipitation and it can precipitate in the form of various salts, (such as chlorides, sulfates) or hydroxides or hydrates thereof. For example, the at least one aluminum ion can be precipitated as Al(OH)_3 , AlCl_3 , $\text{Al}_2(\text{SO}_4)_3$, or hydrates thereof.

[0051] For example, after the precipitation of the at least one aluminum ion, the at least one rare earth element can be solubilized into the solution and can be found as a an ion associated to an hydroxide or a salt or hydrates thereof.

[0052] For example, after precipitation of the at least one of iron ion and precipitation of the at least one aluminum ion precipitation, the residual and substantially purified or refined solution can contain the at least one rare earth element into a mixture of residual solubles ions, such as Cl^- , SO_4^{2-} , Na^+ .

[0053] The processes of the present disclosure can be effective for treating various aluminum-bearing materials. The aluminum-bearing material can be an aluminum-bearing ore. For example, clays, argillite, mudstone, beryl, cryolite, garnet, spinel, bauxite, or mixtures thereof can be used as starting material. The aluminum-bearing material can also be a recycled industrial aluminum-bearing material such as slag. The aluminum-bearing material can also be red mud.

[0054] For example, the at least one rare earth element can be chosen from scandium, yttrium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium, and lutetium, and from at least one rare metal chosen from indium, zirconium, lithium, and gallium.

[0055] For example, rare earth elements can sometimes be divided into two categories, light rare earth elements (LRE) and heavy rare earth elements (HRE). The light rare earth elements can comprise lanthanum, cerium, praseodymium, neodymium, and samarium (atomic numbers 57-62), and they are usually more abundant than heavy ones.

[0056] For example, the at least one rare element can be extracted under the form of various salts, oxides, hydroxides, and hydrates thereof.

[0057] For example, the at least one rare earth element can be chosen from scandium, gallium, yttrium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, dysprosium, erbium, ytterbium and mixtures thereof.

[0058] For example, the at least one rare earth element is chosen from scandium, gallium, yttrium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, dysprosium and mixtures thereof.

[0059] For example, the at least one rare earth element is chosen from scandium, gallium, yttrium, cerium and mixtures thereof.

[0060] For example, the at least one rare earth element can be yttrium.

[0061] For example, the at least one rare earth element can be scandium.

[0062] For example, the at least one rare earth element can be gallium.

[0063] For example, the at least one rare earth element can be cerium.

[0064] For example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain the leachate comprising the at least one aluminum ion, the at least one

iron ion, and the at least one rare earth element, and the solid and separating the leachate from the solid;

substantially selectively removing the at least one aluminum ion from the leachate, thereby obtaining a composition comprising the at least one iron ion, and the at least one rare earth element; and

substantially selectively at least partially removing the at least one iron ion from the composition, thereby obtaining a liquor comprising the at least one rare earth element.

[0065] For example, the at least one aluminum ion can be substantially selectively removed from the leachate by substantially selectively precipitating it from the leachate and removing it therefrom by carrying out a solid-liquid separation.

[0066] For example, the at least one aluminum ion can be substantially selectively removed from the leachate by substantially selectively precipitating it under the form of AlCl_3 and removing it therefrom by carrying out a solid-liquid separation.

[0067] For example, the composition can comprise HCl, the at least one iron ion, and the at least one rare earth element.

[0068] For example, the composition can be an acidic composition that comprises, the at least one iron ion, and the at least one rare earth element.

[0069] For example, the at least one iron ion can be substantially selectively removed from the composition by carrying out an hydrolysis so as to convert the at least one iron ion into Fe_2O_3 and removing the precipitated Fe_2O_3 from the composition by carrying out a solid-liquid separation, thereby obtaining the liquor comprising the at least one rare earth element.

[0070] For example, after the removal of the precipitated Fe_2O_3 , the liquor containing the at least one rare earth element is recirculated back for being further concentrated by being used in precipitating the at least one aluminum.

[0071] For example, after the removal of the precipitated Fe_2O_3 , the liquor containing the at least one rare earth element is recirculated back for being further concentrated by being used in precipitating the at least one aluminum ion under the form of AlCl_3 .

[0072] For example, the at least one iron ion can be Fe^{3+} and it can be substantially selectively partially removed from the composition, and wherein the composition can be further treated with a reducing agent so as to convert Fe^{3+} into Fe^{2+} and then, Fe^{2+} , under the form of FeCl_2 , can be removed from the composition by carrying out a solid-liquid separation, thereby obtaining the liquor comprising the at least one rare earth element.

[0073] For example, the at least one rare earth element can be substantially selectively precipitated, extracted and/or isolated from the liquor by means of a liquid-liquid extraction.

[0074] For example, the at least one rare earth element can be extracted from the liquor by means of liquid-liquid extraction.

[0075] For example, the at least one rare earth element can be recovered from the liquor by means of liquid-liquid extraction.

[0076] For example, the at least one extracting agent can be chosen from di-(2-ethylhexyl) phosphoric acid (HDEHP), mono(2-ethylhexyl)2-ethylhexyl phosphonate (HEH/EHP), bis(2,4,4-trimethylpentyl)monothiophosphinic acid), octyl phenyl phosphate (OPAP), 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester (PC88A) and optionally toluene, tributyl phosphate, di-isoamylmethyl phosphonate, 7-(4-ethyl-1-methyloctyl)-8-hydroxyquinoline, di-(2-ethylhexyl) phosphinic acid, bis(2,4,4-trimethylpentyl) phosphinic acid, 8-hydroxyquinoline, and (2-ethylhexyl)phosphonic acid, and mixtures thereof.

[0077] For example, the at least one extracting agent can be di-(2-ethylhexyl) phosphoric acid.

[0078] For example, the at least one extracting agent can be 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester.

[0079] For example, the at least one extracting agent can be octyl phenyl phosphate.

[0080] For example, the at least one extracting agent can be tributyl phosphate.

[0081] For example, the at least one extracting agent can be chosen from diethylenetriamine-pentaacetic acid (DTPA), ethylenediaminetetraacetic (EDTA), 1,4,7,10-tetraazacyclododecane-1,4,7,10-tetraacetic acid (DOTA), bis(2,4,4-trimethylpentyl)monothiophosphinic acid and mixtures thereof.

[0082] According to one example, when substantially selectively precipitating, extracting and/or isolating the at least one rare earth element from the leachate and/or the precipitate, the at least one rare earth element found as an ion in the leachate can be precipitated.

[0083] For example, scandium can be precipitated in the form of $\text{Sc}(\text{OH})_3$, ScCl_3 , ScF_3 , and/or $[\text{ScF}_6]^{3-}$ (cation), wherein the cation can be sodium, potassium, magnesium, calcium etc

[0084] Scandium can be precipitated at a pH of about 7 to about 9, or about 7 to about 8.

[0085] For example, the leaching can be carried out at a pH of about 0.5 to about 2.5., about 0.5 to about 1.5, or about 1; then iron can be precipitated at a pH of at least about 9.5, 10, 10.5, 11, or 11.5; and then aluminum can be precipitated at a pH of about 8 to about 9.

[0086] For example, the at least one iron ion can be precipitated at a pH of about 10 to about 12.5, 10.5 to about 11.5, about 10.8 to about 11.2, about 11.5 to about 12.5, or between 10 and 11.

[0087] For example, the precipitation of the at least one aluminum ion can be carried out at a pH of about 7 to about 11, about 8 to about 10.5, about 8.5 to 10 or about 9 to about 10.

[0088] For example, the precipitation of the at least one iron ion can be carried out at a pH of about 3 to about 6, about 3.0 to about 5.5, about 3 to

about 5, about 3 to about 4, about 3.0 to about 3.5, about 3.5 to about 4.0, about 4.0 to about 5.0, about 4.0 to about 4.5, or about 4.5 to about 5.0.

[0089] For example, the precipitation of the at least one aluminum ion can be carried out at a pH of about 5 to about 6, about 5.0 to about 5.5, or about 5.5 to about 6.0.

[0090] For example, when precipitating AlCl_3 , highly concentrated dry gaseous HCl at about 90 to about 98 % can be bubbled into the composition comprising the at least one iron ion, the at least one aluminum ion and the at least one rare earth element.

[0091] For example, when carrying out the hydrolysis of the at least one iron ion so as to convert the at least one iron ion into Fe_2O_3 and removing the Fe_2O_3 , the pH during the hydrolysis can be about below 2.5, 2.0, 1.5 or 1.0.

[0092] According to another example, the liquor can comprise the at least one rare earth element under the form of a chloride, and wherein the liquor can be reacted with an extracting agent in order to substantially selectively extract gallium therefrom, thereby obtaining a Ga-free solution and an extracted gallium solution, and separating the solutions from one another. For example, gallium in the liquor can be under the form of GaCl_3 . For example, the extracting agent can be octyl phenyl phosphate, 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester and toluene, tri-butyl phosphate or mixtures thereof. For example, the extracted GaCl_3 can then be precipitated and then converted into Ga_2O_3 .

[0093] For example, the Ga-free solution can then be reacted with another an extracting agent in order to substantially selectively extract cerium therefrom, thereby obtaining a Ce-free solution and an extracted cerium solution, and separating the solutions from one another. For example, the cerium in the Ga-free solution can be under the form of CeCl_3 . For example, the another extracting agent can be tri-butyl phosphate, di-isoamylmethyl phosphonate, di-(2-ethylhexyl) phosphoric acid, 7-(4-ethyl-1-methyloctyl)-8-hydroxyquinoline or mixtures thereof. For example, the process can further comprise converting the extracted cerium into CeO_2 .

[0094] For example, the process can further comprise reacting the Ce-free solution with a further extracting agent in order to substantially selectively extract scandium therefrom, thereby obtaining a Sc-free solution and an extracted scandium solution, and separating the solutions from one another. For example, scandium in the Ce-free solution can be under the form of ScCl_3 . For example, the further extracting agent can be di-(2-ethylhexyl) phosphoric acid, di-(2-ethylhexyl) phosphinic acid or a mixture thereof. For example, the process can further comprise converting the extracted scandium into Sc_2O_3 . For example the extracted scandium can be converted into Sc_2O_3 by means of NaOH.

[0095] For example, the process can further comprise reacting the Sc-free solution with still a further extracting agent in order to substantially selectively extract samarium, europium or a mixture thereof, thereby obtaining a Sm-free solution and/or Eu-free solution and extracted samarium and/or europium solution, and separating the solutions from one another. For example, the still a further extracting agent can be chosen from bis(2,4,4-trimethylpentyl) phosphinic acid, di-(2-ethylhexyl) phosphoric acid and a mixture thereof.

[0096] For example, the process can further comprise reacting the Sm-free solution and/or Eu-free solution with still another extracting agent in order to substantially selectively extract gadolinium, thereby obtaining a Gd-free solution and an extracted gadolinium solution, and separating the solutions from one another. For example, the still another extracting agent can be 8-hydroxyquinoline.

[0097] For example, the process can further comprise reacting the Gd-free solution with yet another extracting agent in order to substantially selectively extract yttrium, thereby obtaining a Y-free solution and an extracted yttrium solution, and separating the solutions from one another. For example, the yet another extracting agent can be (2-ethylhexyl)phosphonic acid, di-(2-ethylhexyl)phosphonic acid or a mixture thereof.

[0098] For example, the process can further comprise reacting the Y-free solution with still yet another extracting agent in order to substantially

selectively extract dysprosium and/or erbium, thereby obtaining a Dy-free solution and/or an Er-free solution and an extracted dysprosium and/or erbium solution, and separating the solutions from one another.

[0099] According to another example, the liquor can be reacted with a first extracting agent in order to substantially selectively extract gallium therefrom, thereby obtaining a Ga-free solution and an extracted gallium solution, and separating the solutions from one another.

[0100] For example, gallium in the liquor can be under the form of GaCl_3 . For example, the first extracting agent can be tri-butyl phosphate optionally in kerosene.

[0101] For example, the Ga-free solution can be reacted with a precipitating agent for precipitating at least one rare earth element present in the Ga-free solution, thereby obtaining a precipitate containing the at least one rare earth element and recovering the precipitate via a solid-liquid separation.

[0102] For example, the process can further comprise leaching the precipitate with an acid so as to obtain a leach solution comprising the at least one rare earth element. For example the acid can be HCl. For example, the leach solution can be reacted with a second extracting agent so as to substantially selectively extract a first group of rare earth elements, thereby obtaining a solution comprising the extracted rare earth elements of the first group and a raffinate comprising a second group of rare earth elements, and separating the solution from the raffinate. For example, the first group can comprise yttrium and scandium. For example, the second group can comprise cerium, neodymium, europium and praseodymium. For example, the second extracting agent can be chosen from di-(2-ethylhexyl)phosphoric acid and 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester.

[0103] For example, the process can further comprise reacting the solution comprising the extracted rare earth elements of the first group with HCl at least once so as to remove impurities therefrom.

[00104] For example, the process can further comprise stripping the solution comprising the extracted rare earth elements of the first group with an acid so as to obtain a first group strip liquor. For example, the acid can be HCl.

[00105] For example, the process can further comprise repeating at least once the extraction with the second extracting agent.

[00106] For example, the first group strip liquor can be reacted with a third extracting agent so as to substantially selectively extracting at least one of scandium, erbium and dysprosium from the first group strip liquor, thereby obtaining a solution comprising the extracted at least one of scandium, erbium and dysprosium, and an yttrium raffinate, and separating the solution from the raffinate. For example, the third extracting agent can be tri-butyl phosphate.

[00107] For example, the process can further comprise stripping the solution comprising the extracted at least one of scandium, erbium and dysprosium solution with an acid so as to obtain another first group strip liquor. For example, the acid can be HCl.

[00108] For example, the another first group strip liquor can be reacted with a fourth extracting agent so as to substantially selectively extracting erbium and dysprosium from the another first group strip liquor, thereby obtaining a solution comprising the extracted erbium and dysprosium, and a scandium raffinate, and separating the solution from the raffinate.

[00109] For example, the another first group strip liquor can be reacted with a fourth extracting agent so as to substantially selectively extracting scandium from the another first group strip liquor, thereby obtaining a solution comprising the extracted scandium, and raffinate comprising erbium and dysprosium, and separating the solution from the raffinate.

[00110] For example, the at least one rare earth element can be substantially selectively precipitated, extracted and/or isolated by means of an adsorption on activated charcoal optionally modified with tributyl phosphate or on a polyurethane polyether foam (PUF).

[00111] For example, the at least one rare earth element can be substantially selectively removed by means of a liquid-liquid extraction. For example, the liquid-liquid extraction can be carried out by using an extracting agent.

[00112] For example, the process can comprise selectively precipitating at least two members chosen from the at least one rare earth element that is in the form of ions, the at least one iron ion and the at least one iron ion aluminum ion. For example, each of the members can be precipitated separately or together.

[00113] According to another example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain the leachate comprising the at least one aluminum ion, the at least one iron ion, and the at least one rare earth element, and the solid and separating the leachate from the solid;

substantially selectively removing the at least one iron ion from the leachate, thereby obtaining a composition comprising the at least one aluminum ion, and the at least one rare earth element; and

substantially selectively at least partially removing the at least one aluminum ion from the composition, thereby obtaining a liquor comprising the at least one rare earth element.

[00114] According to another example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain the leachate comprising the at least one aluminum ion, the at least one iron ion, and the at least one rare earth element, and the solid and separating the leachate from the solid;

substantially selectively removing the at least one iron ion from the leachate, thereby obtaining a composition comprising the at least one aluminum ion, and the at least one rare earth element; and

substantially selectively at least partially removing the at least one aluminum ion from the composition, thereby obtaining a liquor comprising the at least one rare earth element.

[00115] According to another example, the leaching can be carried out at a pH of about 0.5 to about 2.5., then the at least one iron can be precipitated at a pH of at least about 9.5, then the at least one aluminum ion can be precipitated at a pH of about 8 to about 9, and then at least one scandium ion can be precipitated at a pH of about 7 to about 8.

[00116] According to another example, the leaching can be carried out at a pH of about 0.5 to about 1.5., then the at least one iron can be precipitated at a pH of at least about 10.5, then the at least one aluminum ion can be precipitated at a pH of about 8 to about 9, and then at least one scandium ion can be precipitated at a pH of about 7 to about 8.

[00117] According to another example, the leaching can be carried out at a pH of about 0.5 to about 1.5., then the at least one iron can be precipitated at a pH of at least about 11, then the at least one aluminum ion can be precipitated at a pH of about 8 to about 9, and then at least one scandium ion can be precipitated at a pH of about 7 to about 8.

[00118] For example, scandium can be precipitated from a by-product generated during the process.

[00119] For example, scandium can be precipitated from a solution generated during the process. For example, scandium can be precipitated using HNO_3 .

[00120] For example, the at least one rare earth element can be substantially selectively precipitated, extracted and/or isolated by at least one

technique chosen from ion exchange resin, extraction by means of solvent(s) and adsorption.

[00121] For example, the at least one rare earth element can be substantially selectively precipitated, extracted and/or isolated by means of an ion exchange resin.

[00122] For example, the at least one rare earth element can be substantially selectively precipitated, extracted and/or isolated by means of a liquid-liquid extraction.

[00123] For example, the at least one rare earth element can be substantially selectively precipitated, extracted and/or isolated by means of an electrowinning process.

[00124] According to another example, the leaching can be carried out at a pH of about 0.5 to about 2.5., then the at least one iron can be precipitated at a pH of at least about 9.5, then the at least one aluminum ion can be precipitated at a pH of about 8 to about 9, and then and then the at least one rare earth element can be substantially selectively extracted.

[00125] According to another example, the leaching can be carried out at a pH of about 0.5 to about 1.5., then the at least one iron can be precipitated at a pH of at least about 10.5, then the at least one aluminum ion can be precipitated at a pH of about 8 to about 9, and then the at least one rare earth element can be substantially selectively extracted.

[00126] According to another example, the leaching can be carried out at a pH of about 0.5 to about 1.5., then the at least one iron can be precipitated at a pH of at least about 11, then the at least one aluminum ion can be precipitated at a pH of about 8 to about 9, and then the at least one rare earth element can be substantially selectively extracted.

[00127] For example, the aluminum-bearing material / acid ratio can be about 1 / 10 in weight by volume.

[00128] According to another example, the processes can further comprise at least one of

at least partially removing the at least one iron ion from the leachate by substantially complexing the at least one iron ion with an extracting agent;

selectively precipitating the at least one iron ion;

selectively precipitating the at least one aluminum ion;
and

at least partially removing the at least one aluminum ion from the leachate by substantially complexing the at least one aluminum ion with another extracting agent.

[00129] According to another example, the processes comprise :

leaching the aluminum-bearing material with HCl so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing the at least one iron ion from the leachate by substantially selectively precipitating the at least one iron ion by reacting the leachate with a base so as to obtain an Al-rich aqueous composition comprising the at least one rare element and a precipitate, and removing the precipitate from the composition;

purifying the Al-rich aqueous composition by substantially selectively precipitating the at least one aluminum ion, thereby obtaining another composition comprising the at least one rare element and another precipitate, removing the precipitate from the composition; and

substantially selectively extracting the at least one rare element from the another composition.

[00130] According to another example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing the at least one iron ion from the leachate by substantially selectively precipitating the at least one iron ion by reacting the leachate with a base so as to obtain an Al-rich aqueous composition comprising the at least one rare element and a precipitate, and removing the precipitate from the composition;

substantially selectively extracting the at least one aluminum ion from the Al-rich aqueous composition by means of a hollow fiber membrane, or by a liquid-liquid extraction, and removing the extracted at least one aluminum ion, thereby obtaining an Al-depleted aqueous composition comprising the at least one rare element; and

substantially selectively extracting the at least one rare element from the Al-depleted aqueous composition.

[00131] According to another example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing the at least one iron ion from the leachate by substantially selectively complexing the at least one iron ion with an extracting agent so as to obtain an Al-rich aqueous composition comprising the at least one rare earth element;

purifying the Al-rich aqueous composition by substantially selectively precipitating the at least one aluminum ion, thereby obtaining another composition comprising the at least one rare element and another precipitate, removing the precipitate from the composition; and

substantially selectively extracting the at least one rare element from the another composition.

[00132] According to another example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing the at least one iron ion from the leachate by substantially selectively complexing the at least one iron ion with an extracting agent so as to obtain an Al-rich aqueous composition comprising the at least one rare earth element;

substantially selectively extracting the at least one aluminum ion from the Al-rich aqueous composition by means of a hollow fiber membrane, or by a liquid-liquid extraction, and removing the extracted at least one aluminum ion, thereby obtaining an Al-depleted aqueous composition comprising the at least one rare element; and

substantially selectively extracting the at least one rare element from the Al-depleted aqueous composition.

[00133] According to another example, the processes can comprise :

leaching the aluminum-bearing material with HCl so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing the at least one aluminum ion from the leachate by substantially selectively precipitating the at least one aluminum so as to obtain an iron-rich aqueous composition comprising the at least one rare element and a precipitate, and removing the precipitate from the composition;

substantially selectively precipitating the at least one iron ion from the iron-rich aqueous composition, and removing the precipitate therefrom, thereby obtaining thereby obtaining an iron-depleted aqueous composition comprising the at least one rare element; and

substantially selectively extracting the at least one rare element from the iron-depleted aqueous composition.

[00134] For example, the at least one aluminum ion can be precipitated under the form of AlCl_3 in a crystallizer, for example, by sparging gaseous HCl.

[00135] For example, the at least one iron ion can be precipitated under the form of Fe_2O_3 by means, for example, of an hydrolysis.

[00136] For example, the Al-rich aqueous composition can be purified by complexing the at least one aluminum ion with an extracting agent so as to obtain a complex, separating the complex from the composition and precipitating the at least one aluminum ion.

[00137] For example, the Al-rich aqueous composition can be purified by complexing impurities contained in the Al-rich aqueous composition with an extracting agent, at least partially removing the complexed impurities from the composition and precipitating the aluminum ions.

[00138] According to another example the processes can comprise :

1- leaching argillite with an acid (for example a solution of HCl or gaseous HCl (for example at pH of about 0.5 to about 1.5 or about 0.8 to about 1.2). The leaching can also be carried out under pressure ;

- 2- removing iron by ionic precipitation by raising the pH of about 10 to about 12 or about 11 to about 12 (or extracting it with extracting agents) and filtering out all non-soluble hydroxides;
- 3- precipitating aluminum at a pH of about 7.5 to about 9.0 or about 7.8 to about 8.2 and filtering aluminium hydroxide as a solid;
- 4- optionally purifying aluminum (Al(OH)_3) using at least one of a liquid-liquid extraction, a membrane and an extracting agent suitable for complexing aluminum ions; and
- 5- precipitating, extracting and/or isolating at least one rare earth element can be carried out after at least one of steps 1, 2, 3 and 4.

[00139] For more details and explanations regarding at least certain portions of steps 1 to 4, WO2008141423, which is hereby incorporated by reference in its entirety, can be referred to.

[00140] According to another example the processes can comprise :

- 1- leaching argillite with an acid (for example a solution of HCl 18-32wt%. The leaching can also be carried out under pressure such as about 350 KPag to about 500 KPag during about 4 to about 7 hours ;
- 2- removing iron by ionic precipitation by raising the pH of about 10 to about 12 or about 11 to about 12 (or extracting it with extracting agents) and filtering out all non-soluble hydroxides;
- 3- precipitating aluminum at a pH of about 7.5 to about 9.0 or about 7.8 to about 8.2 and filtering aluminium hydroxide as a solid;
- 4- optionally purifying aluminum (Al(OH)_3) using at least one of a liquid-liquid extraction, a membrane and an extracting agent suitable for complexing aluminum ions; and
- 5- precipitating, extracting and/or isolating at least one rare earth element can be carried out after at least one of steps 1, 2, 3 and 4.

[00141] According to another example as shown in Fig. 1, the processes can involve the following steps (the reference numbers in Fig. 1 correspond to the following steps) :

1- The aluminum-bearing material is reduced to an average particle size of about 50 to about 80 μm .

2- The reduced and classified material is treated with hydrochloric acid which allows for dissolving, under a predetermined temperature and pressure, the aluminum with other elements like iron, magnesium and other metals including rare earth. The silica remains totally undissolved.

3- The mother liquor from the leaching step then undergoes a separation, a cleaning stage in order to separate the purified silica from the metal chloride in solution.

4- The spent acid (leachate) obtained from step 1 is then brought up in concentration with dry and highly concentrated gaseous hydrogen chloride by sparging this one into a crystallizer. This results into the crystallization of aluminum chloride hexahydrate (precipitate) with a minimum of other impurities. Depending on the concentration of iron chloride at this stage, further crystallization step(s) can be required. The precipitate is then separated from the liquid.

5- The aluminum chloride hexahydrate is then calcined (for example by means of a rotary kiln, fluid bed, etc) at high temperature in order to obtain the desired alumina. Highly concentrated gaseous hydrogen chloride is then recovered and excess is brought in aqueous form to the highest concentration possible so as to be used (recycled) in the acid leaching step.

6- Iron chloride (the liquid obtained from step 4) is then pre-concentrated and hydrolyzed at low temperature in view of the Fe_2O_3 (hematite form) extraction and acid recovery from its hydrolysis. All heat recovery from the calcination step (step 5), the leaching part exothermic

reaction (step 1) and other section of the process is being recovered into the pre-concentrator.

10- After the removal of hematite, a solution rich in rare earth elements can be processed by using any one of the processes described in the present disclosure for recovering rare earth elements from aluminum-bearing materials. For example, the recovered rare earth elements can be in various forms such oxides, chlorides, hydroxides etc. As previously indicated in the present disclosure, the expression "rare earth element" can also encompass "rare metal" and thus, in step 10, rare metals can also be recovered. For example, rare metals can be under the form of rare metals oxides. Thus, in Figs. 1 and 2, the step 10 can be, for example, the processes shown in Fig. 3 or in Figs. 4a and 4b.

Other non-hydrolyzable metal chlorides (Me-Cl) such as $MgCl_2$ and others then undergo the following steps:

7- The solution rich in magnesium chloride and other non-hydrolyzable products at low temperature is then brought up in concentration with dry and highly concentrated gaseous hydrogen chloride by sparging it into a crystallizer. This results into the precipitation of magnesium chloride as an hexahydrate.

8- Magnesium chloride hexahydrate is then calcined (either through a rotary kiln, fluid bed, etc.) and hydrochloric acid at very high concentration is thus regenerated and brought back to the leaching step.

9- Other Me-Cl undergo a standard pyrohydrolysis step where mixed oxides can be produced and hydrochloric acid at the azeotropic point (20.2% wt.) is regenerated.

[00142] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by

weight, to generate a composition comprising a liquid and precipitated hematite, and recovering the hematite.

[00143] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering the hematite; and recovering rare earths from the liquid. For example, the process can further comprise, after recovery of the rare earths, reacting the liquid with HCl so as to cause precipitation of $MgCl_2$, and recovering same.

[00144] As previously indicated, various aluminum-bearing materials can be used as starting material of the processes disclosed in the present disclosure. Examples with clays and bauxite have been carried out. However, the person skilled in the art will understand that the continuous processes can handle high percentages of silica (>55%) and impurities as well as relatively low percentages of aluminum (for example as low as about 15%) and still being economically and technically viable. Satisfactory yields can be obtained (>93-95%) on Al_2O_3 and greater than 75% on rare earth elements. No pre-thermal treatment in most cases are required. The processes disclosed in the present disclosure involve special techniques on leaching and acid recovery at very high strength, thereby offering several advantages over alkaline processes.

[00145] In step 1 the mineral, whether or not thermally treated is crushed, milled, dried and classified to have an average particle size of about 50 to about 80 μm .

[00146] In step 2, the milled raw material is introduced into the reactor and will undergo the leaching phase.

[00147] The leaching hydrochloric acid used in step 2 is a recycled or regenerated acid from steps 5, 6, 8 and 9 and its concentration can vary from 15% to 45% weight. percent. Higher concentration can be obtained using a membrane separation, a cryogenic and/or high pressure approach. The acid

leaching can be carried out under pressure and at temperature close to its boiling point thus, allowing a minimal digestion time and extended reaction extent (90%-100%). Leaching (step 2) can be accomplished in a semi-continuous mode where spent acid with residual free hydrochloric acid is replaced by highly concentrated acid at a certain stage of the reaction or allowing a reduced acid/mineral ratio, thereby reducing reaction time and improving reaction kinetics. For example, kinetic constant k can be : 0.5 – 0.75 g/mole.L

[00148] As previously indicated, alkali metals, iron, magnesium, calcium, potassium, rare earth elements and other elements will also be in a chloride form at different stages. Silica will remain undissolved and will undergo (step 3) a liquid/solid separation and cleaning stage. The processes of the present disclosure tend to recover maximum amount of free hydrochloric acid left and chlorides in solution in order to maximize hydrochloric acid recovery yield, using techniques such as rake classifying, filtration with band filters, centrifugation, and others. Mother liquor free of silica is then named as spent acid (various metal chlorides and water) and goes to the crystallization step (step 4).

[00149] In step 4, the spent acid (or leachate) with a substantial amount of aluminum chloride is then saturated with dry and highly concentrated gaseous hydrogen chloride obtained or recycled from step 5, which results in the precipitate of aluminum chloride hexahydrate ($\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$). The precipitate retained is then washed and filtered or centrifuged before being fed to the calcination stage (step 5). The remaining of the spent acid from step 4 is then processed to acid recovery system (steps 6 to 8) where pure secondary products will be obtained.

[00150] In step 5, aluminum oxide (alumina) is directly obtained from high temperature conditions. The highly concentrated hydrogen chloride in gaseous form obtained can be fed to steps 4 and 7 for crystallization. The excess hydrogen chloride is absorbed and used as regenerated acid to the leaching step 2 as highly concentrated acid, higher than the concentration at

the azeotropic point (>20.2%). For example, such a concentration can be about 25 to about 45 weight % or between 25 and 36 weight %.

[00151] After step 4, various chlorides derivatives of (mainly iron chlorides, magnesium chloride and rare earth element in the form of chlorides) are next subjected to an iron extraction step. Such a step can be carried out for example by using the technology disclosed in WO 2009/153321, which is hereby incorporated by reference in its entirety.

[00152] In step 6, a hydrolysis at low temperature (155-350°C) is carried out and pure Fe₂O₃ (hematite) is being produced and hydrochloric acid of at least 15% concentration is being regenerated. The method as described in WO 2009/153321 is processing the solution of ferrous chloride and ferric chloride, possible mixtures thereof, and free hydrochloric acid through a series of steps pre-concentration step, oxidation step where ferrous chloride is oxidized into ferric form, and finally through an hydrolysis step into an operational unit called hydrolyser where the ferric chloride concentration is maintained at 65 weight % to generate a rich gas stream where concentration ensures a hydrogen chloride concentration of 15-20.2% and a pure hematite that will undergo a physical separation step. Latent heat of condensation is recovered to the pre-concentration and used as the heating input with excess heat from the calcination stage (step 5).

[00153] The mother liquor left from the hydrolyser (step 6), after iron removal, is rich in other non-hydrolysable elements and mainly comprises magnesium chloride or possible mixture of other elements (various chlorides) and rare earth elements.

[00154] Rare earth elements in form of chlorides are highly concentrated in percentage into the hydrolyser operational unit (step 6) and are extracted from the mother liquor (step 10) where the processes defined in the present disclosure for recovering rare earth elements from aluminum-bearing materials can be employed. For example, rare earth elements under various forms can thus be extracted. For example, it can be under the form of oxides. REO. The processes of the present disclosure for recovering rare earth

elements can allow, for example, to concentrate to a high concentration the following rare earth elements, within the hydrolyser: scandium (Sc), gallium (Ga), yttrium (Y), dysperosium (Dy), cerium (Ce), praseodymium (Pr), neodymium (Nd), europium (Eu), samarium (Sm), gadolinium (Gd), lanthanum (La), erbium (Er). Of course, the at least one rare earth element that will be recovered will depend upon the nature of the startin material (aluminum-bearing material).

[00155] The spent acid liquor from steps 6 and 10 rich in value added metals, mainly magnesium, is processed to step 7. The solution is saturated with dry and highly concentrated gaseous hydrogen chloride from step 5, which results in the precipitation of magnesium chloride hexahydrate. The precipitate retained, is fed to a calcination stage step 8 where pure MgO (>98% wt.) is obtained and highly concentrated hydrochloric acid (for example of at least 38 %) is regenerated and diverted to the leaching step (step 2). An alternative route for step 7 is using dry gaseous hydrochloric acid from step 8.

[00156] In step 9, metal chlorides unconverted are processed to a pyrohydrolysis step (700-900°C) to generate mixed oxides and where hydrochloric acid from 15-20.2% wt. concentration can be recovered.

[00157] According to another example as shown in Fig. 2, the processes can be similar to the example shown in Fig. 1 but can comprise some variants as below discussed.

[00158] In fact, as shown in Fig. 2, the process can comprise (after step 6 or just before step 10) an internal recirculation back to the crystallization step 4. In such a case, The mother liquor from the hydrolyser (step 6) can be recirculated fully or partially to the crystallization of step 4 where a concentration increase will occur with respect to the non-hydrolyzable elements including rare earth elements.

[00159] Such a step can be useful for significantly increasing the concentration of rare earth elements, thereby facilitating their extraction in step 10.

[00160] With respect to step 7, the solution rich in magnesium chloride and other non-hydrolyzable products at low temperature is, as previously discussed, then brought up in concentration with dry and highly concentrated gaseous hydrogen chloride by sparging it into a crystallizer. This can result into the precipitation of magnesium chloride as an hexahydrate (for example after sodium and potassium chloride removal).

[00161] As shown in Fig. 2, an extra step 11 can be added. Sodium chloride can undergo a chemical reaction with sulfuric acid so as to obtain sodium sulfate and regenerate hydrochloric acid at the azeotropic point. Potassium chloride can undergo a chemical reaction with sulfuric acid so as to obtain potassium sulfate and regenerate hydrochloric acid at the azeotropic point.

[00162] Certain prophetic examples are hereby provided in the present disclosure for substantially selectively recovering, precipitating, extracting and/or isolating at least one rare earth element. This can be done, for example from the leachate and/or the precipitate and any other downstream derivatives, solutions, precipitates, compositions or liquors.

[00163] For example, recovering, precipitating, extracting and/or isolating at least one rare earth element can be carried out by :

- precipitating least one rare earth element (for example at a pH of about 6 to about 8, 7 to about 8, or 7 to about 7.5);
- using an ion exchange resin (for example, as described in US 4,816,233 (hereby incorporated by reference in its entirety));
- extraction by means of solvent(s) (for example a liquid-liquid extraction can be carried out using di-(2-ethylhexyl) phosphoric acid (HDEHP (also called DEHPA or D2EHPA)), mono(2-ethylhexyl)2-ethylhexyl phosphonate (HEH/EHP), octyl phenyl phosphate (OPAP), 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester (PC88A) and optionally toluene (for example as described in Kao et al. in Chemical Engineering Journal, Volume 119, Issues 2-3, June 15, 2006, pages

167-174 (hereby incorporated by reference in its entirety)) or by means of extracted using an alkyl phosphate (for example as described in US 3,013,859 (hereby incorporated by reference in its entirety));

- using an extracting agent (for example using bis(2,4,4-trimethylpentyl)monothiophosphinic acid or a derivative thereof);
- adsorption on activated charcoal (activated carbon adsorption) optionally modified with tributyl phosphate or on a polyurethane polyether foam (PUF); (for example as described in Zhou et al. in RARE METALS, Vol. 27, No. 3, 2008, p223-227 (hereby incorporated by reference in its entirety))
- extraction with hollow fiber membranes; and
- using an electrowinning technology (for example as described in US 2004/0042945 (hereby incorporated by reference in its entirety)).

[00164] For example, scandium can be precipitated (optionally using HNO_3) from a residual solution generated during the process (for example when iron is precipitated and/or when aluminum is precipitated).

[00165] For example, when substantially selectively precipitating, extracting and/or isolating at least one rare earth element from the leachate and/or the precipitate and any other downstream derivatives, various sequences can be carried out i.e. depending on the nature of the starting material and the rare earth elements present, a given rare earth element can be more easily extracted before or after another given rare earth element.

[00166] For example, as shown in Fig. 3, in a mixture or liquor comprising HCl, water and rare elements in the form of chlorides, the mixture can be treated with an extracting agent in order to extract GaCl_3 therefrom, thereby obtaining a Ga-free solution. Such an extracting agent can be, for example, octyl phenyl phosphate (OPAP) or 2-ethylhexylphosphonic acid mono-2-

ethylhexyl ester (PC88A) and toluene. GaCl_3 can then be precipitated and then converted into Ga_2O_3 by heating it.

[00167] Then, the Ga-free solution can be treated with an extracting agent (for example SME 529TM, tri-butyl phosphate or di-isoamylmethyl phosphonate, di-(2-ethylhexyl) phosphoric acid, 7-(4-ethyl-1-methyloctyl)-8-hydroxyquinoline (Kelex 100TM) in n-heptane with the addition of 10% n-decanol.) for substantially selectively extracting cerium chloride therefrom so as to obtain a Ce-free solution. CeCl_3 can be eventually converted into CeO_2 .

[00168] Then, the Ce-free solution can be treated with an extracting agent such as di-(2-ethylhexyl) phosphoric acid or di-(2-ethylhexyl) phosphinic acid so as substantially selectively extract Sc and to provide a Sc-free solution. The extracted Sc can be treated with an oxidizer (such as NaOH) so as to provide Sc_2O_3 .

[00169] Then, the various remaining rare earth elements (Pr, Nd, Sm, Eu, La, Gd, Y, Dy, Er etc.) in the Sc-free solution can be extracted in different possible orders.

[00170] For example, it has to be noted that the process schematized in Fig. 3 can be used as a component of various other processes such as the process schematized in Fig. 1 or in Fig. 2. For example, the step 10 of Figs. 1 and 2 can be the process schematized in Fig. 3.

[00171] For example, as shown in Figs. 4a and 4b, a process for extracting rare earth elements can comprise :

Ferric reduction to ferrous using iron;

Separation of gallium from the ferrous chloride solution;

Precipitation and pre-concentration of rare earth elements from the raffinate;

Re-leaching and fractioning of the rare earth elements into light (LRE) and heavy (HRE) groups;

Separation of yttrium from scandium and heavy rare earth elements;
and

Separation of scandium and heavy rare earth elements

[00172] The reduction of ferric to ferrous with a reducing agent (such as metallic iron) can be used so as to prevent iron coextraction or iron precipitation. The reaction time can be very short and it can generate heat.

[00173] As shown in Figs. 4a and 4b, The ferric chloride feed solution 101 can be fed to an agitated reaction tank and a reducing agent (for example metallic iron 102) can added so as to allow for converting ferric chloride to ferrous chloride (see "Ferric Removal"). After a solid-liquid separation (s/l separation), the resulting filtrate 103 can be further treated in a gallium extraction circuit. A filter cake, containing solid material and iron, can be dewatered and the resulting slurry can then be prepared for disposal.

[00174] Gallium can then be extracted with an organic solution containing an extracting agent (for example tri-butyl phosphate (TBP) dissolved in kerosene) (see "Gallium Recovery"). The rare earth and iron can thus be left in the raffinate. The extraction can vary as a function of the chloride ion concentration. For example, the higher chloride ion concentration, the stronger tendency for gallium complex formation and the better extraction.

[00175] For example, for gallium (recovery from hydrochloric acid solutions, reagents such as tri-butyl phosphate or tertiary amines (e.g. Alamine 336) can be used. For example, when increasing hydrochloric acid (HCl) concentration, gallium extraction can rise to a maximum and can then decrease again. For example, HCl concentration can be increased up to about 4 M HCl for the gallium extraction. Under these conditions, gallium can be present in the form of HGaCl_4 complex and TBP extracted gallium as a trisolvate ($\text{HGaCl}_4 \cdot 3\text{TBP}$) (for example when the extracting agent is TBP).

[00176] Co-extracted iron, accumulated in the organic phase can be scrubbed with hydrochloric acid (see "Gallium Strip Liquor"). The resulting organic solution, containing gallium can be fed to a stripping circuit where gallium is stripped with water 104. The raffinate 106, containing ferrous chloride and the rare earth elements, can then be fed to the rare earth precipitation section (see "Bulk REE Removal"). The final strip liquor 105 contains gallium.

[00177] For example, oxalate precipitation of rare earth elements result in very low solubility of the compounds in aqueous solution. The precipitation of rare earth oxalates can be achieved by addition of a precipitation reagent 107. For example, oxalic acid 107 can be used for the precipitation. For example, precipitating agent that are effective for precipitating rare earth elements of the trivalent (such as oxalate (from oxalic acid)) can be used. For example, such precipitating agents can have provide a very low solubility in aqueous solution to so-formed precipitate.

[00178] An overflow from the primary rare earth elements precipitation 109 can be fed to a ferrous treatment circuit. After filtration, the filter cake, containing the rare earth elements, can be fed to a washing and dewatering unit. A resulting slurry 108 can then be prepared for re-leaching (see "REE-Re-leaching"). Re-leaching of the rare earth filter cake can be carried out using hydrochloric acid 110.

[00179] From a pre-concentrated and pH adjusted chloride solution 111, that contains for example about 150 to about 250 g/L, rare earth elements yttrium, scandium and the heavy rare earth (HRE) are extracted (see "Primary REE Recovery") with an extracting agent (for example (di-(2-ethylhexyl)phosphoric acid (D2EHPA) or 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester (PC88A (also called IonquestTM 801) in kerosene)). Scandium, the other HRE and also yttrium can be extracted and leaving the light rare earth elements (LRE) in a raffinate 113.

[00180] A loaded organic phase can then be selectively scrubbed with hydrochloric acid (2 M HCl) to remove the co-extracted LRE. A secondary scrubbing section can remove europium by using weak hydrochloric acid (1 to 1.5 M HCl). The extract, containing yttrium, scandium and the HRE, can then be stripped with strong acid (3.5 M HCl) 112.

[00181] The HRE strip liquor 114, containing yttrium and scandium, can be treated further to obtain more than 90 % Y_2O_3 and Sc_2O_3 in a first circuit of a double solvent extraction purification process. In a first step, the aqueous solution, containing about 25 g / L (of rare earth elements in the form of oxides) and 0.4 M HCl, can be brought into contact with an extracting agent (for example (di-(2-ethylhexyl)phosphoric acid (D2EHPA) or 2-ethylhexylphosphonic acid mono-2-ethylhexyl ester (PC88A (also called IonquestTM 801) in kerosene)) (see "Secondary REE Recovery"). The loaded organic phase is then scrubbed with diluted hydrochloric acid. Scandium, yttrium and HRE can be extracted by the reagent and finally stripped with strong hydrochloric acid 115 at a high oxide / acid ratio. The final strip liquor would have a concentration in rare earth elements oxides of about 40 g/L and about 1 M HCl. This solution is partially neutralized.

[00182] This pre-treated strip liquor 116 can be further extracted with an extracting agent (for example tri-butyl phosphate (TBP) in kerosene). The treatment can be done in a multi stage procedure, and ending up in a final stripping of the loaded organic with water 117. All HRE and scandium can thus extracted, leaving yttrium in a raffinate 119. A final strip liquor 118, containing HRE, forms the source for further separation of scandium and heavy rare earth. In order to do so, various possible extracting agents can be used such as di-(2-ethylhexyl) phosphoric acid.

[00183] The separation of scandium from other HRE, (for example dysprosium and erbium) can be carried out using a further solvent extraction purification circuit, similar to the yttrium separation and purification process and previously described. Thus, the extracting agent can be the same or a different one, the strip solution 120 can be the same than 117, thereby

providing a scandium raffinate 121 and a strip liquor 122 comprising europium and erbium.

[00184] As an alternative, yttrium can be extracted as described in US 3,751,553 (hereby incorporated by reference in its entirety). In fact, yttrium can be extracted starting from a xenotime concentrate. It can be done by using three solvent extraction circuits. In a first step, DEHPA can be used to separate yttrium. In a second step, tri (caprylmethyl) ammonium nitrate (Aliquat 336) can be used to extract and separate cerium and leave yttrium in the raffinate. In a third step, Tm, Yb, and Lu can be extracted by means of tri (caprylmethyl) ammonium thio cyanate. In this extraction loop, yttrium behaves like a cerium element. From this step, high-purity of yttrium oxide can be obtained.

[00185] According to another alternative, yttrium oxide can be extracted in two steps i.e. tri (caprylmethyl) ammonium nitrate can be used to separate a mixture La – Er/Y – Lu and then, a purification of yttrium is carried out using versatic acid.

[00186] Solvent extraction is a selective separation procedure for isolating and concentrating valuable elements from an aqueous solution with the aid of an organic solution. In the procedure the aqueous solution containing the element of interest, often at a low concentration and together with other dissolved substances (pollutants), is mixed (extraction) with an organic solvent containing a reagent. The element of interest reacts with the reagent to form a chemical compound that is more soluble in the organic than in the aqueous solution. As a consequence, the element of interest is transferred to the organic solution.

[00187] Subsequently, in order to recover the extracted substance, the organic solution is mixed (stripping) with an aqueous solution whose composition is such that the chemical compound between the element and the reagent is split and, thus, the element is recovered in the "new" aqueous solution, in a pure form. The concentration of the element in the "new"

aqueous solution may be increased, often to 10-100 times that of the original aqueous solution, through adjustment of the liquid flow rates. Freed from the extracted element, the organic solution is returned for further extraction, either directly or after a fraction of it has been cleansed of impurities.

[00188] Important factors that govern this solvent extraction process can be, for example, the number of extraction, scrubbing and stripping stages, organic solvent concentration and diluent.

[00189] In a typical solvent extraction process, the aqueous phase, containing the rare earth elements, can be for example a chloric or nitric acidic solution. The organic phase comprises an extracting agent as those recited in the present disclosure or alternatives in an organic solvent such as an aliphatic diluent.

[00190] Solvent extraction technique can be used as separation and purification procedure for the rare earth elements. Some of the following properties are particularly relevant when selecting an extracting agent or chemical extractant:

High selectivity over other unwanted metals and acids during the extraction process,

High transfer capacity on the extractant,


Good chemical stability,

Fast kinetics.

[00191] For example, precipitation denotes the removal of the rare earth elements from solution by the addition of a chemical reagent to form a new, less soluble (solid) compound. For example, a complete precipitation can be carried out by oxalate, hydroxide, or other compounds.

[00192] Hydroxide precipitation and double sulphate can also be used. For large scale operation, ammonia can be used for carrying out hydroxide

precipitation from nitrate or chloride solutions. The double sulphates $\text{RE}_2(\text{SO}_4)_3 \cdot \text{Na}_2\text{SO}_4 \cdot n\text{H}_2\text{O}$ can be precipitated by either addition of sodium sulphate to the solution containing rare earth elements. The precipitation reaction of trivalent rare earth elements in aqueous solution is according to the following equation:



[00193] The below presented examples are non-limitative and are used to better exemplify the processes of the present disclosure.

Example 1

Preparation of an aluminum-bearing material sample

[00194] The aluminum-bearing material (for example argillite) can be finely crushed in order to help along during the following steps. For example, micronization can shorten the reaction time by few hours (about 2 to 3 hours). In order to remove most of the iron, a leaching step at room temperature is optionally carried out between the crushing step and the calcination step. This operation is, for example, carried out with hydrochloric acid HCl (12 M or 32 wt%) and an argillite / acid ratio (weight / volume) of 1:5 is used. Depending on experimental conditions (sizes of the particles, time of treatment, agitation system), about 65 % to about 93 % of the iron can then be dissolved. However, this leaching step can also bring in a certain percentage of the aluminum (0 - 5 %). The last step of the preparation of argillite comprises calcining the pretreated argillite. This can be accomplished at a calcinating temperature greater than 550 °C for a period of about 1 to 2 hours. For example, a heat treatment makes it possible to increase the quantity of extracted aluminum by about 30 % to about 40 % for the same period of time. In others words, the quantity of extracted aluminum is doubled. When leaching at room temperature is carried out, a phase separation before calcination can be made in order to recover the acid and reduce heating costs.

Acid leaching

[00195] Acid leaching can comprise reacting the crushed and roasted argillite with an acid solution (for example HCl) at elevated temperature during a given period of time. For example, the argillite / acid ratio can be of about of 1:10 (weight / volume), the HCl concentration can be of about 6 M or about 18 to 20 wt%, the temperature can be of about 100 °C to about 110 °C, and the reaction time can be of about 30 minutes to about 7 hours. Under such conditions, more than about 90 % of the aluminum and about 100 % of the iron can be extracted in addition to impurities. Alternatively, the leaching can be carried out at a temperature of about 150 °C to about 175 °C at a pressure of about 350 KPag to about 500 KPag during about 4 to about 7 hours.

[00196] During the second half of such a treatment (for example the last 2 or 3 hours), a portion of the excess acid can be recovered by flashing and condensation. Once the extraction is terminated, the solid (argillite impoverished in metals) can be separated from the liquid by decantation or by filtration, after which it is washed. The residual leachate and the washing water may be completely evaporated. The corresponding residue can thereafter be counter currently washed many times with water so as to decrease acidity and to lower the quantities of base used (for example, NaOH, KOH, Ca(OH)₂, Mg(OH)₂, etc.) that are required to adjust the pH during iron removal. The acid recovered will can be re-utilized after having adjusted its titer either by adding either gaseous HCl, or by adding concentrated HCl (12 M). After the reaction, the titer of the acid can vary from about 4 M to about 6 M depending on experimental conditions. With respect to the solid, it represents about 65 % to about 75 % of the initial mass of argillite, it can be valorized and be used again either as an ion exchange resin, or as an adsorbent.

[00197] Alternatively, the HCl leaching can be carried out under pressure (so to increase the reaction temperature) into an autoclave.

[00198] The rare earth element(s) recovery can be made, for example, at this stage, after carrying out the above mentioned acid leaching.

Removal of iron

[00199] Several alternatives are proposed in the present disclosure for carrying out iron removal. For example, iron removal can be carried out by substantially selectively precipitating iron ions at certain pH values. Alternatively, some extracting agents can be used as described in WO2008141423. A membrane can also be used in combination with such extracting agents

[00200] For example, removal of iron can be carried out by ionic precipitation of the latter in basic medium for example at a pH of at least 10 or at a pH of about 11.5 to about 12.5. The pH can also be about 3 to about 6, or about 3 to about 5 or about 3 to about 4. Such a step can be made by adding a solution of NaOH, for example at a concentration of 10 M. Other bases such as KOH can also be used. Then, all that is required is to separate the solid portion from the liquid portion by filtration, decantation or centrifugation and to rinse the solid by means of a diluted base, such as a solution of NaOH (for example NaOH at a concentration of 0.01 M to 0.02 M). Then, the solid is washed counter currently with water. The liquid portion comprises aluminum and alkaline-earths A substantially complete removal of the iron and of nearly all the impurities (other metals) can thus be achieved as insoluble and washed hydroxides. Optionally, it is possible to recover iron by using a refining step by liquid-liquid extraction through a hollow fiber membrane.

[00201] Alternatively, removal of iron can be carried out by using an extracting agent and a hollow fiber membrane. Various extracting agents that could substantially selectively complex iron ions over aluminum ions (or aluminum ions over iron ions) could be used in such a step depending an Al / Fe ratio. For example, extraction can be carried out by using HDEHP (or DEHPA) di(2-ethylhexyl)phosphoric acid) as an extracting agent adapted to

complex iron ions. A concentration of about 1 M of HDEHP can be used in an organic solvent, such as heptane or any hydrocarbon solvent. Such an extraction can require relatively short contact times (few minutes). For example, the pH of the order of 2 can be used and aqueous phase / organic phase ratio can be of about 1:1. It was observed that is possible to extract from 86 % to 98 % iron under such conditions. It will be understood that in the present case, iron is trapped in the organic phase. To recover iron in an aqueous phase, a reverse extraction with hydrochloric acid (2 M or 6 M) and organic phase / acidic phase ratio of about 1:0.5 can then be carried out. In such a case, the resulting aqueous phase is rich in Fe^{3+} ions.

[00202] The rare earth element(s) recovery can be made, for example, at this stage, after carrying out the above mentioned iron recovery.

[00203] With solvent extraction using countercurrent techniques, hydrochloric acid stripping and then contacting with MgO solution, therefore precipitating the rare earth elements in the form of hydroxide and then converting the products into their corresponding oxide into a calcination device.

Aluminum recovery

[00204] This step can also be carried in various ways. For example, aluminum ions can be precipitated under the form of $Al(OH)_3$ (for example an hydrated form of $Al(OH)_3$) at a pH of about 7 to about 9 or about 7.5 to about 8.5 or about 8. Alternatively, the aluminum ions can be reacted with an extracting agent as desctried in WO2008141423.

[00205] The solution obtained from the previous step using either the precipitation or the extraction technique is relatively clean and mainly contains aluminum for example about 90 % to about 95 % or even as high as about 90 % to about 99.8 % (without the alkaline-earths in the case of precipitation). Recovery of the latter can be carried out by liquid-liquid extraction for example by using a same hollow fiber membrane and an extracting agent that is

adapted to complex at least substantially selectively aluminum over other metals or residues. For example, bis(2,4,4-trimethylpentyl) phosphinic acid (such as the one sold under the name Cyanex™ 272) can be used as an extracting agent specific to aluminum. For example, this extracting agent can be used at a concentration of about 20 % v/v in an organic solvent such as heptane. The ratios between the aqueous phase and the organic phase can be of about 1:1 to about 1:3. For example, the extraction temperatures can be of about 40 °C and the pH can be maintained at about 2.5 to about 3.5. It was observed that such a technique makes it possible to extract more than 70 - 90 % of the aluminum. After the aluminum has been trapped in the organic phase, it can be recovered in the form of a concentrate of Al³⁺ ions by using a back extraction. For example, the reverse extraction can be carried out at a temperature of about 40 °C with hydrochloric acid (for example at a concentration of 6 M). Under this condition, more than 90 % of aluminum can be recovered.

[00206] The rare earth element(s) recovery can be made, for example, at this stage, after carrying out the above mentioned aluminum recovery.

[00207] Then, Al³⁺ can be converted into aluminum hydroxide (for example an hydrated form of Al(OH)₃) by addition of a base such as NaOH. Finally, Al(OH)₃ can be converted into alumina (alumina Al₂O₃) by calcinating Al(OH)₃ for example at a temperature of about 800 °C to 1200 °C.

[00208] Further purification can be performed by recrystallization.

Rare earth elements recovery

[00209] Rare earth elements recovery can then be made, for example, at this stage by using any of the technology previously mentioned for doing so. For example, the at least one rare earth element contained in the residual solutions obtained from the above-mentioned process. For example, the at least one rare earth element can be in low concentration for example at a concentration of less than about 50, about 25, 15, 10, 5, 4, 3, 2 or 1 ppm in

the lixiviate or leachate or a solution obtained during the process. The rare earth elements can be concentrated in the latter stage of the process prior to extraction with solvent(s). It was demonstrated that through an internal concentration loop, concentration can be significantly increased (for example from 100 to 1000 times) thereby providing more effective conditions for substantially selectively precipitating, extracting and/or isolating at least one rare earth element.

Example 2

[00210] As a starting material a sample of clay (argillite) was obtained from the Grande Vallée area in Québec, Canada.

[00211] These results represent an average of 80 tests carried out from samples of about 900 kg each. These tests were carried out by a using a process as shown in Fig. 1.

[00212] Crude clay in the freshly mined state after grinding and classification had the following composition:

Al_2O_3 : 15% - 26%;

SiO_2 : 45% - 50%;

Fe_2O_3 : 8% - 9%;

MgO : 1% – 2%;

Rare earth elements : 0.04% - 0.07%;

LOI : 5% - 10%.

[00213] This material is thereafter leached in a two-stage procedure at 140-170 °C with 18-32 weight % HCl. The HCl solution was used in a stoichiometric excess of 10-20% based on the stoichiometric quantity required for the removal of the acid leachable constituents of the clay. In the first leaching stage of the semi-continuous operation (step 2), the clay was contacted for 2.5 hours with required amount or certain proportion of the total

amount of hydrochloric acid. After removal of the spent acid, the clay was contacted again with a minimum 18 weight % hydrochloric acid solution for about 1.5 hour at same temperature and pressure.

[00214] The leachate was filtered and the solid was washed with water and analyzed using conventional analysis techniques (see step 3 of Fig. 1). Purity of obtained silica was of 95.4% and it was free of any chlorides and of HCl.

[00215] After the leaching and silica removal, the concentration of the various metal chlorides was :

AlCl_3 : 15-20%;

FeCl_2 : 4-6%;

FeCl_3 : 0.5-2.0%;

MgCl_2 : 0.5-2.0 %;

Free HCl : 5-50 g/l

[00216] Spent acid was then crystallized using about 90 to about 98% pure dry hydrochloric acid in gas phase in two stages with less than 25 ppm iron in the aluminum chloride hexahydrate formed. The concentration of HCl in solution (aqueous phase) was about 25 to about 32 % The recovered crystallized material (hydrate form of AlCl_3 having a minimum purity of 99.8 %) was then calcined at 930°C or 1250°C, thus obtaining the α -portion of the alumina.

[00217] HCl concentration in gas phase exiting the calcination stage was having a concentration of about 21 to about 32 % by weight and was used (recycled) for crystallization of the AlCl_3 and MgCl_2 . Excess of hydrochloric acid is absorbed at the required and targeted concentration for the leaching steps.

[00218] Iron chloride (about 90% to about 95% in ferric form) is then sent to a hydrothermal process in view of its extraction as pure hematite (Fe_2O_3). This can be done by using the technology described in WO 2009/153321 of low

temperature hydrolysis with full heat recovery from calcining, pyrohydrolysis and leaching stage.

[00219] Before step 10 (in both processes of Figs. 1 and 2) it was demonstrated that about 90 to about 98 % by weight of the elements (Al, Fe, Mg and rare earths elements such as (Sc, Ga, Y, Ce) found in the starting material were recovered. It can be estimated that the processes for recovering rare earth elements from an aluminum-bearing material disclosed in the present disclosure can be efficient for recovering about 90 % of the rare earth elements. Thus, with respect to the examples of processes provided in Figs. 1 and 2, it can be estimated that the overall yield for recovering the at least one rare earth element from the aluminum-bearing material would be about 80 % to about 90 %.

[00220] Rare earth elements can be extracted from the mother liquor of the hydrolyzer (where silica, aluminum, iron and a great portion of water have been removed) following pre-concentration from crystallization to the hydrolyzer. In the form of chlorides the rare earth elements (RECl) are considerably concentrated and ready to be extracted. Rare earth elements have demonstrated to concentrate by a factor 5 to 10 in average within the hydrolyzer itself on a single pass through it (without any concentration loop). The concentration factors obtained within the hydrolyser (single pass) were as follows :

Ce : > 6

La : > 9

Nd: > 7

Y : > 9

[00221] The person skilled in the art would thus clearly understand that such a concentration could be considerably more increased when carrying out a concentration loop.

[00222] Remaining magnesium chloride is sparged with dry and highly concentrated hydrochloric acid and then calcinated to MgO while recovering acid at its azeotropic point.

[00223] Mixed oxides containing other non-hydrolyzable components were then undergoing a pyrohydrolysis reaction at 700-800°C and recovered acid (15-20.2% wt.) was rerouted for example to the leaching system.

Overall yields obtained:

Al_2O_3 : 93-95% recovery;

Fe_2O_3 : 98-99.5% recovery;

Rare earth elements : 95% minimum recovery (mixture);

MgO : 96-98% recovery;

Material discarded : 0-5% maximum;

HCl global recovery : 99.75% minimum;

HCl strength as feed to leaching 15-32%;

Red mud production : none.

Example 3

[00224] A similar feed material (bauxite instead of clay) was processed as per in example 2 up to the leaching stage and revealed to be easily leachable under the conditions established in example 2. It provided an extraction percentage of 100% for the iron and over 95 % for aluminum. The process was found to be economically viable and no harmful by-products (red mud) were generated. A rare earth elements recovery (as a mixture) of about 90 to about 95 % (by weight as compared to the starting material) was observed Samples tested had various concentrations of Al_2O_3 (up to 51%), Fe_2O_3 (up to 27%) and MgO (up to 1.5%).

[00225] The processes of the present disclosure provide a plurality of important advantages and distinction over the known processes

[00226] The processes of the present disclosure can provide fully continuous and economical solutions that can successfully extract alumina from various type of minerals while providing ultra pure secondary products of high added value including highly concentrated rare earth elements. The technology described in the present disclosure can allow for an innovative amount of total acid recovery and also for a ultra high concentration of recovered acid. When combining it to the fact that combined with a semi-continuous leaching approach that favors very high extraction yields and allows a specific method of crystallization of the aluminum chloride and concentration of other value added elements such as rare earth elements.

[00227] Specifically through the type of equipment used (for example vertical roller mill) and its specific operation, raw material grinding, drying and classifying can be applicable to various kinds of mineral hardness (furnace slag for example), various types of humidity (up to 30%) and incoming particle sizes. The particle size established provides the advantage, at the leaching stage, of allowing optimal contact between the minerals and the acid and then allowing faster kinetics of reaction. Particles size employed reduces drastically the abrasion issue and allows for the use of a simplified metallurgy/lining when in contact with hydrochloric acid.

[00228] A further advantage of the processes of the present disclosure is the combined high temperature and high incoming hydrochloric acid concentration. Combined with a semi continuous operation where the free HCl driving force is used systematically, iron and aluminum extraction yields do respectively reach 100% and 98% in less than about 40 % of the reference time of a basic batch process. Another advantage of higher HCl concentration than the concentration at azeotropic point is the potential of capacity increase. Again a higher HCl concentration than the concentration of HCl at the azeotropic point and the semi-continuous approach represent a substantial advance in the art.

[00229] Another advantage in that technique used for the mother liquor separation from the silica after the leaching stage countercurrent wash, is that band filters provide ultra pure silica with expected purity exceeding 98%.

[00230] The crystallization of AlCl_3 into $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ using dried, cleaned and highly concentrated gaseous HCl as the sparging agent allows for a pure aluminum chloride hexahydrate with only few parts per million of iron and other impurities. A minimal number of stages can be required to allow proper crystal growth.

[00231] The direct interconnection with the calcination of $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 which does produce very high concentration of gas allows the exact adjustment in continuous of the HCl concentration within the crystallizer and thus proper control of the crystal growth and crystallization process.

[00232] The applicants have now discovered fully integrated and continuous processes with total hydrochloric acid recovery for the extraction of alumina and other value added products such as rare earth elements from various materials that contain aluminum (clay, bauxite, slag, red mud etc.) containing aluminum. In fact, the processes allows for the production of pure alumina and other value added products purified such as purified silica, pure hematite, pure other minerals (ex: magnesium oxide) and rare earth elements. In addition, the processes do not require thermal pre-treatment before the acid leach operation. Acid leach can be carried out using semi-continuous techniques with high pressure and temperature conditions and very high regenerated hydrochloric acid concentration.

[00233] The advantage of the high temperature calcination stage, in addition for allowing to control the α -form of alumina required, is effective for providing a concentration of hydrochloric acid in the aqueous form (>38%) that is higher than the concentration of HCl at the azeotropic point and thus providing a higher incoming HCl concentration to the leaching stage. The calcination stage hydrochloric acid network can be interconnected to two (2) crystallization systems and by pressure regulation excess HCl can be being absorbed at the highest possible aqueous concentration. The advantage of

having a hexahydrate incoming feed allows for a continuous basis to recover acid at a concentration that is higher than the azeotropic concentration. This HCl balance and double usage into three (3) common parts of the process and over azeotropic point is a substantial advance in the art.

[00234] Another advantage is the use of the incoming chemistry (ferric chloride) to the iron oxide and hydrochloric acid recovery unit where all excess heat load from any calcination part, pyrohydrolysis and leaching part is being recovered to preconcentrate the mother liquor in metal chloride, thus allowing, at very low temperature, the hydrolysis of the ferric chloride in the form of very pure hematite and the acid regeneration at the same concentration than at its azeotropic point.

[00235] A further major advantage of the instant process at the ferric chloride hydrolysis step is the possibility to concentrate rare earth elements in form of chlorides at very high concentration within the hydrolyser reactor. The advantage is that the processes of the present disclosure benefit from the various steps where gradual concentration ratios are applied. Thus, at this stage, having the silica, the aluminum, the iron and having in equilibrium a solution close to saturation (large amount of water evaporated, no presence of free hydrochloric acid) allows for taking rare earth elements in parts per million into the incoming feed and to concentrate them in high percentage portion directly at the hydrolyser. Purification of the specific oxides of the rare earth elements (REO) can then be performed using known techniques when in percentage levels. The advantage is doubled here: concentration at very high level of rare earth elements using integrated process stages and most importantly the approach prevents from having the main stream (very diluted) of spent acid after the leaching step with the risk of contaminating the main aluminum chloride stream and thus affecting yields in Al_2O_3 . Another important improvement of the art is that on top of being fully integrated, selective removal of components allows for the concentration of rare earth elements to relatively high concentration (percentages).

[00236] Another advantage of the process is again a selective crystallization of MgCl₂ through the sparging from either the alumina calcination step or the magnesium oxide direct calcination where in both cases highly concentrated acid both in gaseous phase or in aqueous form are being generated. As per aluminum chloride specific crystallization, the direct interconnection with the calciner, the HCl gas very high concentration allows for exact adjustment in continuous of the crystallizer based on quality of magnesium oxide targeted. Should this process step (MgO production or other value added metal oxide) be required based on incoming process feed chemistry, the rare earth elements extraction point then be done after this additional step; the advantage being the extra concentration effect applied.

[00237] The pyrohydrolysis allows for the final conversion of any remaining chloride and the production of refined oxides that can be used (in case of clay as starting material) as a fertilizer and allowing the processing of large amount of wash water from the processes with the recovery hydrochloric acid in close loop at the azeotropic point for the leaching step. The advantage of this last step is related to the fact that it does totally close the process loop in terms of acid recovery and the insurance that no residues harmful to the environment are being generated while processing any type of raw material, as previously described.

[00238] A major contribution to the art is that the proposed fully integrated processes of the present disclosure is really allowing, among others, the processing of bauxite in an economic way while generating no red mud or harmful residues. In addition to the fact of being applicable to other natural of raw materials (any suitable aluminum-bearing material or aluminous ores), the fact of using hydrochloric acid total recovery and a global concentration that is higher than the concentration at the azeotropic point (20% to 38%), the selective extraction of value added secondary products and compliance (while remaining highly competitive on transformation cost) with environmental requirements, represent major advantages in the art.

[00239] It was thus demonstrated that the present disclosure provides fully integrated processes for the preparation of pure aluminum oxide using a hydrochloric acid treatment while producing high purity and high quality products (minerals) and recovering rare earth elements.

[00240] The person skilled in the art will thus understand that the processes of the present disclosure can be used in combination with various processes for treating aluminum-bearing materials. In fact, various different treatments can be carried out to the aluminum-bearing materials in the processes of the present disclosure including recovery of at least one rare element.

[00241] While a description was made with particular reference to the specific embodiments, it will be understood that numerous modifications thereto will appear to those skilled in the art. Accordingly, the above description and accompanying drawings should be taken as specific examples and not in a limiting sense.

CLAIMS:

1. A process for recovering at least one rare earth element and/or at least one rare metal chosen from In, Zr, Li and Ga from an aluminum-bearing material, said process comprising:

leaching said aluminum-bearing material with HCl so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga, and a solid, and separating said leachate from said solid;

substantially selectively removing said at least one aluminum ion from said leachate by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent and ion exchange resin, thereby obtaining a composition comprising said at least one iron ion, and said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga;

substantially selectively at least partially removing said at least one iron ion from said composition by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent, hydrolysis and ion exchange resin, thereby obtaining a liquor comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga; and

substantially selectively removing said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga from said liquor by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, adsorption, extracting agent, electrowinning and ion exchange resin.

2. The process of claim 1, wherein said at least one aluminum ion is substantially selectively removed from said leachate by substantially selectively precipitating it from said leachate and removing it therefrom by carrying out a solid-liquid separation.
3. The process of claim 1, wherein said at least one aluminum ion is substantially selectively removed from said leachate by substantially selectively crystallizing it under the form of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ and removing it therefrom by carrying out a solid-liquid separation.

4. The process of any one of claims 1 to 3, wherein said composition comprises HCl, said at least one iron ion, said at least one rare earth element and said at least one rare metal chosen from In, Zr, Li and Ga.

5. The process of any one of claims 1 to 3, wherein said composition comprises HCl, said at least one iron ion, and said at least one rare earth element.

6. The process of any one of claims 1 to 5, wherein said at least one iron ion is substantially selectively removed from said composition by carrying out an hydrolysis.

7. The process of any one of claims 1 to 5, wherein said at least one iron ion is substantially selectively removed from said composition by carrying out an hydrolysis so as to convert said at least one iron ion into Fe_2O_3 and removing said precipitated Fe_2O_3 from said composition by carrying out a solid-liquid separation, thereby obtaining said liquor comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga.

8. The process of any one of claims 1 to 7, wherein said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga is substantially selectively removed from said liquor by means of an ion exchange resin.

9. The process of any one of claims 1 to 7, wherein said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga is substantially selectively removed from said liquor by using an extracting agent.

10. The process of any one of claims 1 to 7, wherein said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga is substantially selectively precipitated, extracted and/or isolated from said liquor by means of a liquid-liquid extraction.

11. The process of claim 10, wherein said liquor comprises said at least one rare earth element under the form of a chloride and said at least one rare metal chosen from In, Zr, Li and Ga under the form of a chloride, and wherein said liquor is reacted with an extracting agent in order to substantially selectively extract gallium therefrom, thereby obtaining a Ga-free solution and an extracted gallium solution, and separating said Ga-free solution from said extracted gallium solution.

12. The process of claim 11, wherein said gallium in said liquor is under the form of GaCl_3 .

13. The process of claim 12, wherein said GaCl_3 is then precipitated and then converted into Ga_2O_3 .

14. The process of any one of claims 11 to 13, wherein the Ga-free solution is then reacted with another extracting agent in order to substantially selectively extract cerium therefrom, thereby obtaining a Ce-free solution and an extracted cerium solution, and separating said Ce-free solution from said extracted cerium solution.

15. The process of claim 14, wherein said cerium in said Ga-free solution is under the form of CeCl_3 .

16. The process of claim 14 or claim 15, further comprising converting said extracted cerium into CeO_2 .

17. The process of any one of claims 14 to 16, further comprising reacting the Ce-free solution with a further extracting agent in order to substantially selectively extract scandium therefrom, thereby obtaining a Sc-free solution and an extracted scandium solution, and separating said Sc-free solution from said extracted scandium solution.

18. The process of claim 1, wherein said process comprises selectively precipitating at least two members chosen from said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga that is in the form of ions, said at least one iron ion and said at least one iron ion aluminum ion.

19. The process of claim 18, wherein said at least two members are precipitated together.

20. A process for recovering at least one rare earth element and/or at least one rare metal chosen from In, Zr, Li and Ga from an aluminum-bearing material, said process comprising:

leaching said aluminum-bearing material with HCl so as to obtain a leachate comprising at least one aluminum ion, at least one iron ion, and said at least one rare earth

element and/or said at least one rare metal chosen from In, Zr, Li and Ga, and a solid and separating said leachate from said solid;

substantially selectively removing said at least one iron ion from said leachate by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent, hydrolysis and ion exchange resin, thereby obtaining a composition comprising said at least one aluminum ion, and said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga;

substantially selectively at least partially removing said at least one aluminum ion from said composition by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, hollow-fiber membrane, extracting agent and ion exchange resin, thereby obtaining a liquor comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga; and

substantially selectively removing said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga from said liquor by carrying out at least one technique chosen from precipitation, liquid-liquid extraction, adsorption, extracting agent, electrowinning and ion exchange resin.

21. The process of claim 1, wherein said process comprises:

leaching said aluminum-bearing material with HCl so as to obtain a leachate and a solid residue, and separating said leachate from said solid residue;

at least partially removing said at least one aluminum ion from said leachate by substantially selectively precipitating said at least one aluminum so as to obtain an iron-rich aqueous composition comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga and a precipitate, and removing said precipitate from said composition;

substantially selectively precipitating said at least one iron ion from said iron-rich aqueous composition, and removing said precipitate therefrom, thereby obtaining an iron-depleted aqueous composition comprising said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga; and

substantially selectively extracting said at least one rare earth element and/or said at least one rare metal chosen from In, Zr, Li and Ga from said iron-depleted aqueous composition.

22. The process of claim 21, wherein said at least one aluminum ion is precipitated under the form of AlCl_3 in a crystallizer by sparging gaseous HCl and said at least one iron ion is precipitated under the form of Fe_2O_3 by means of an hydrolysis.
23. The process of any one of claims 1 to 22, wherein said aluminum-bearing material is chosen from clays.
24. The process of any one of claims 1 to 22, wherein said aluminum-bearing material is red mud or a recycled industrial aluminum-bearing material.
25. The process of any one of the preceding claims, substantially as herein described with reference to any one of more of the examples but excluding comparative examples.

1/5

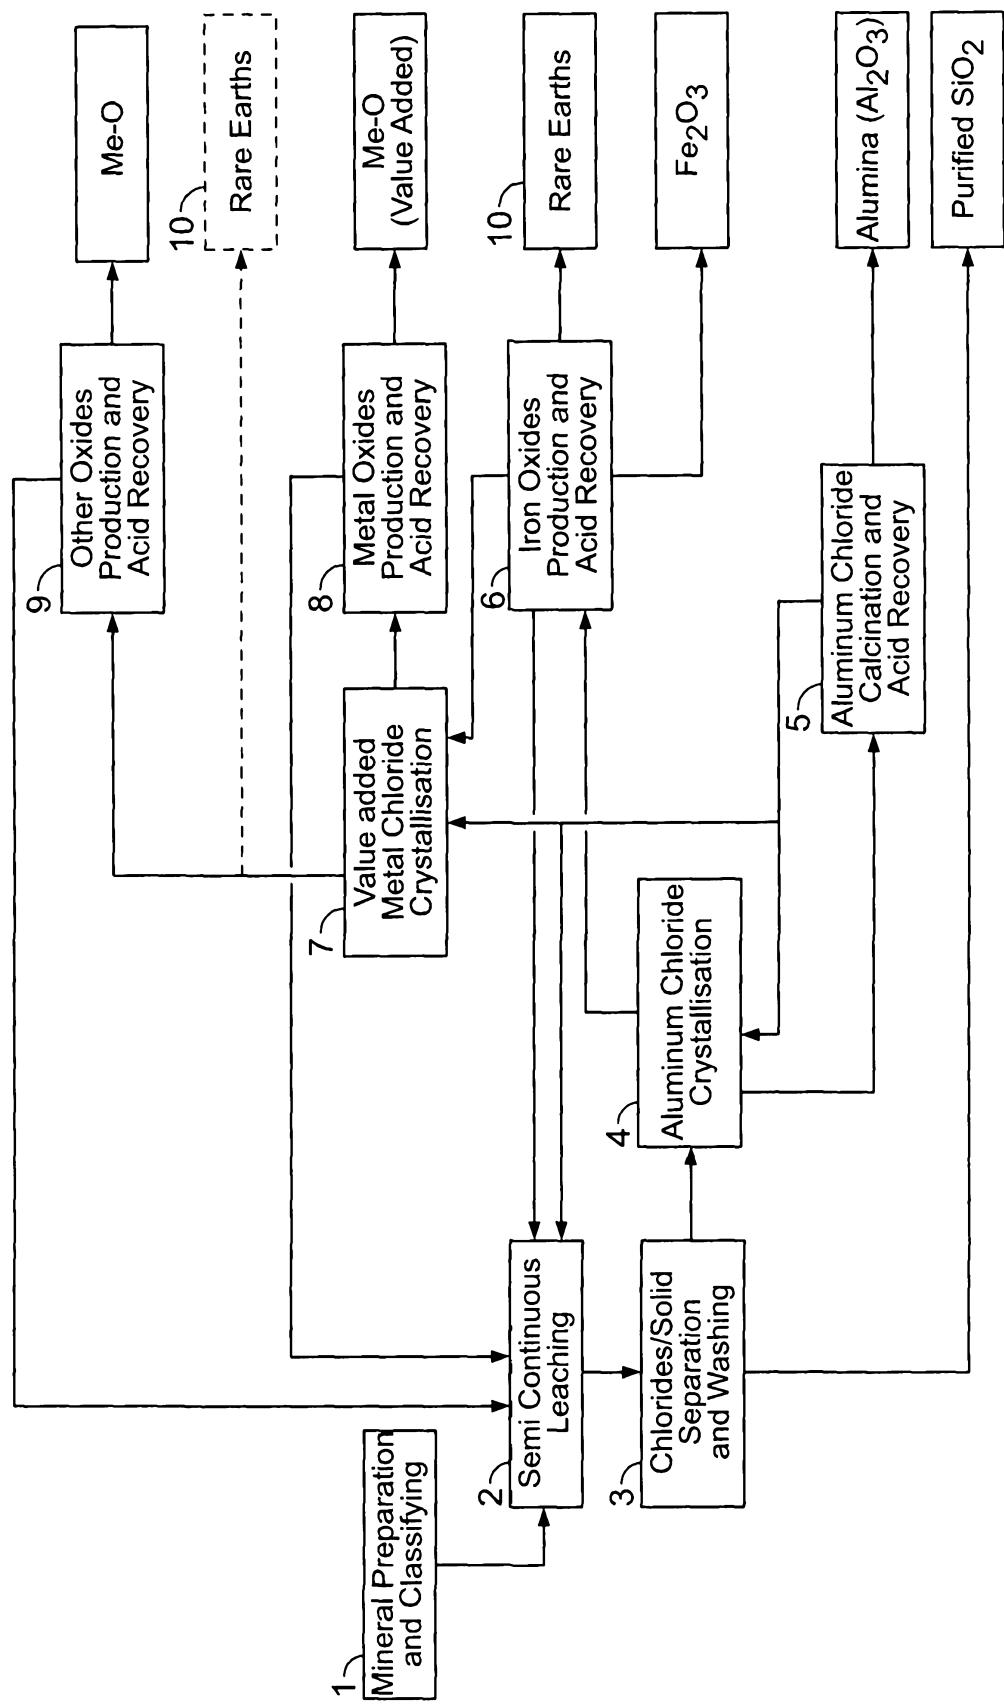


FIG. 1

2/5

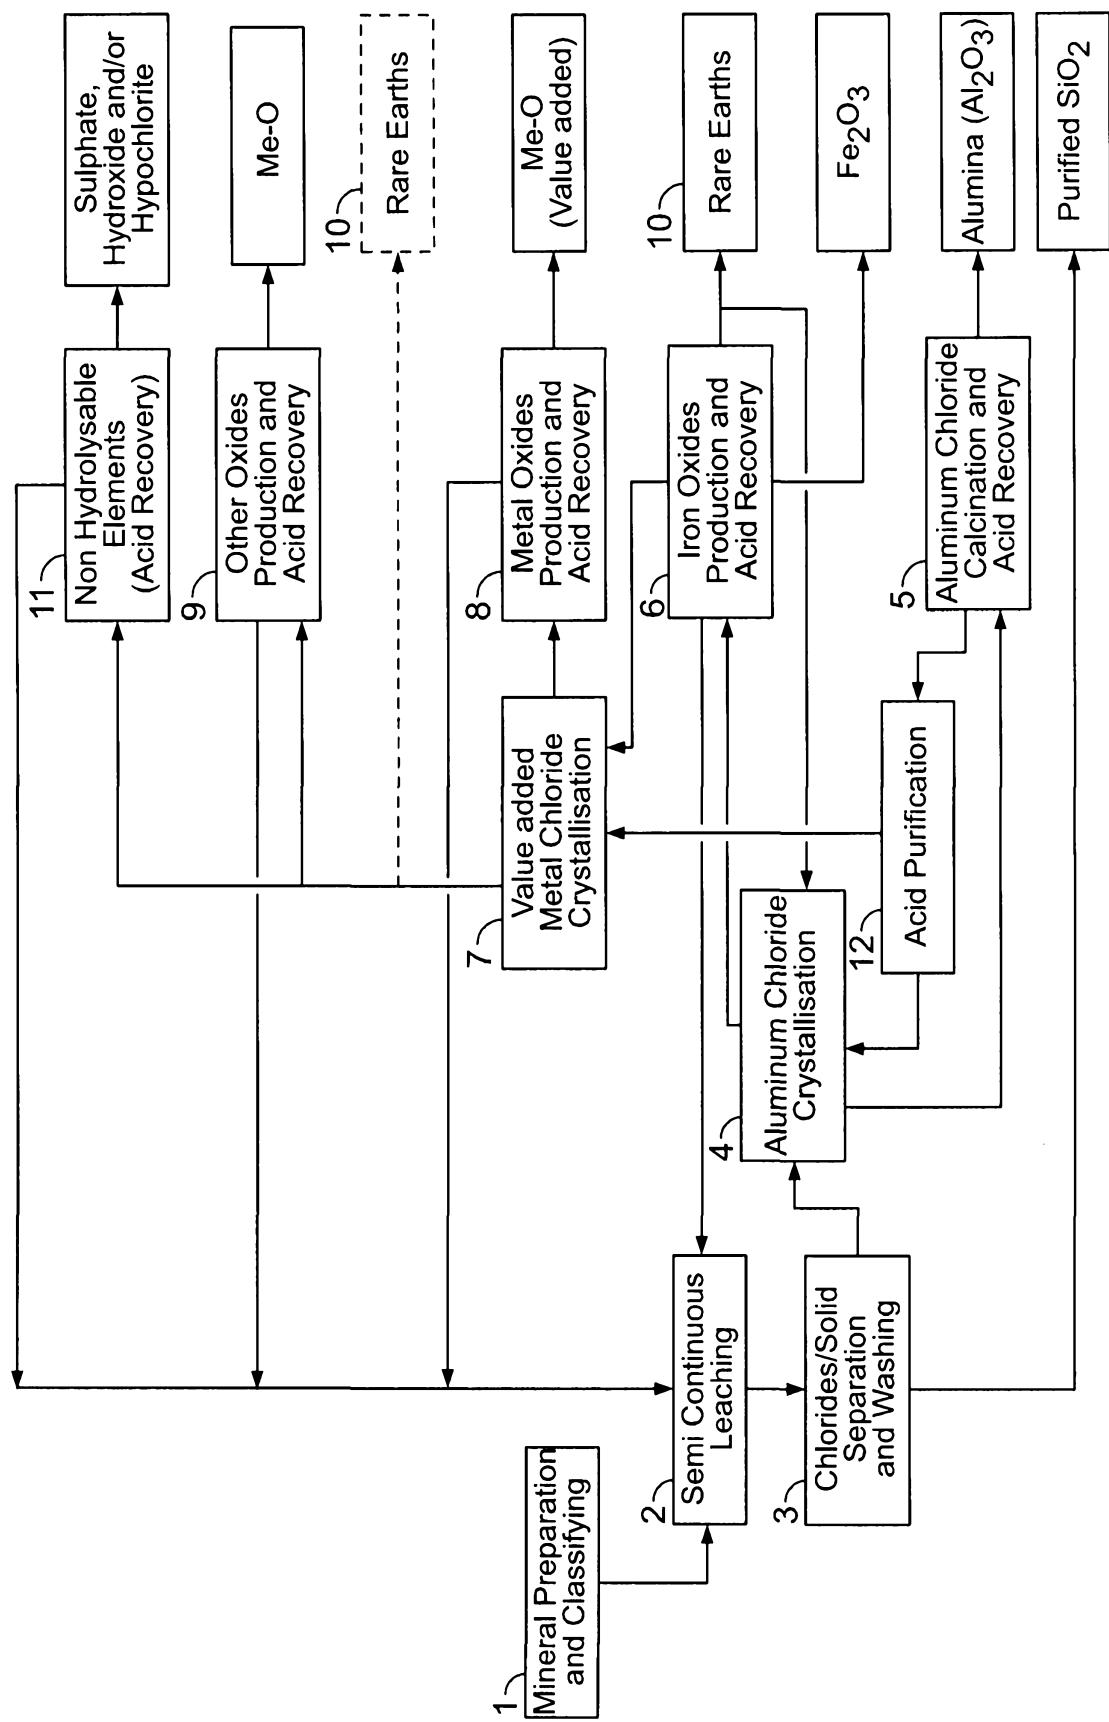


FIG. 2

3/5

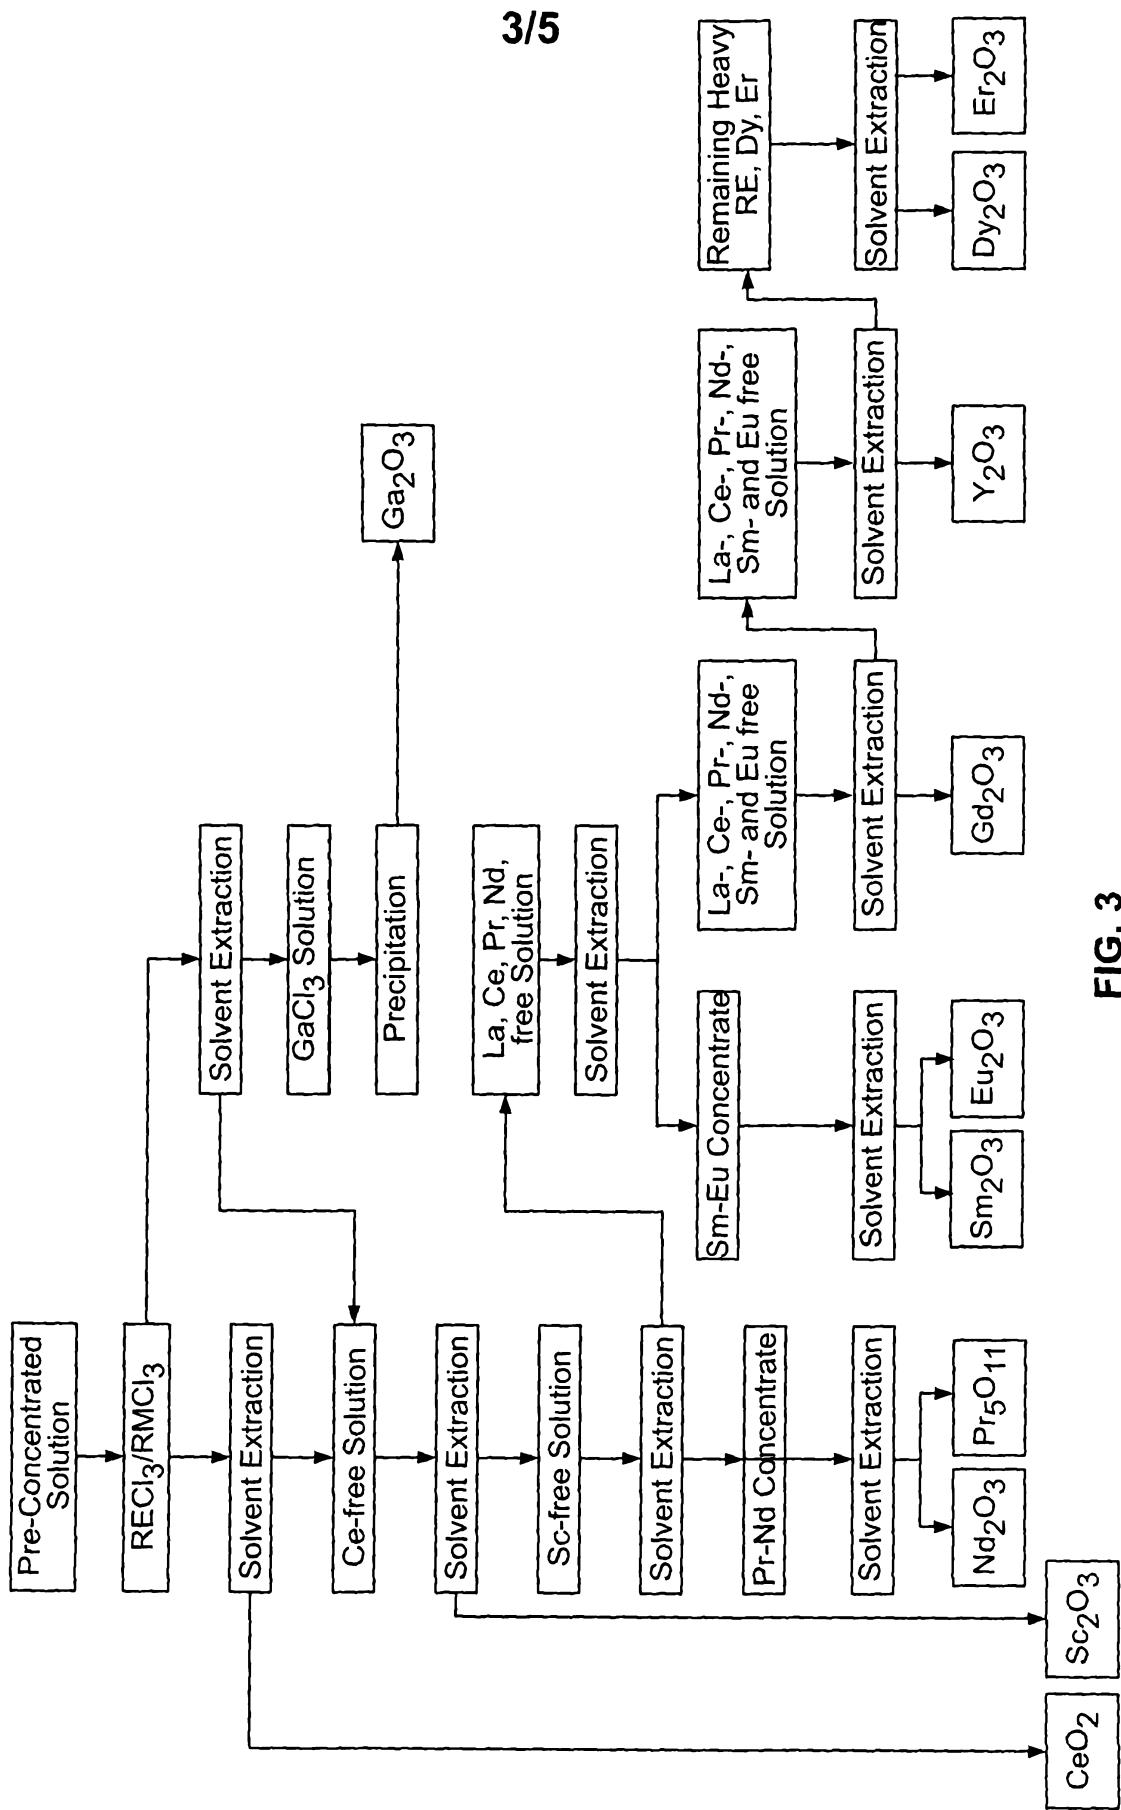


FIG. 3

4/5

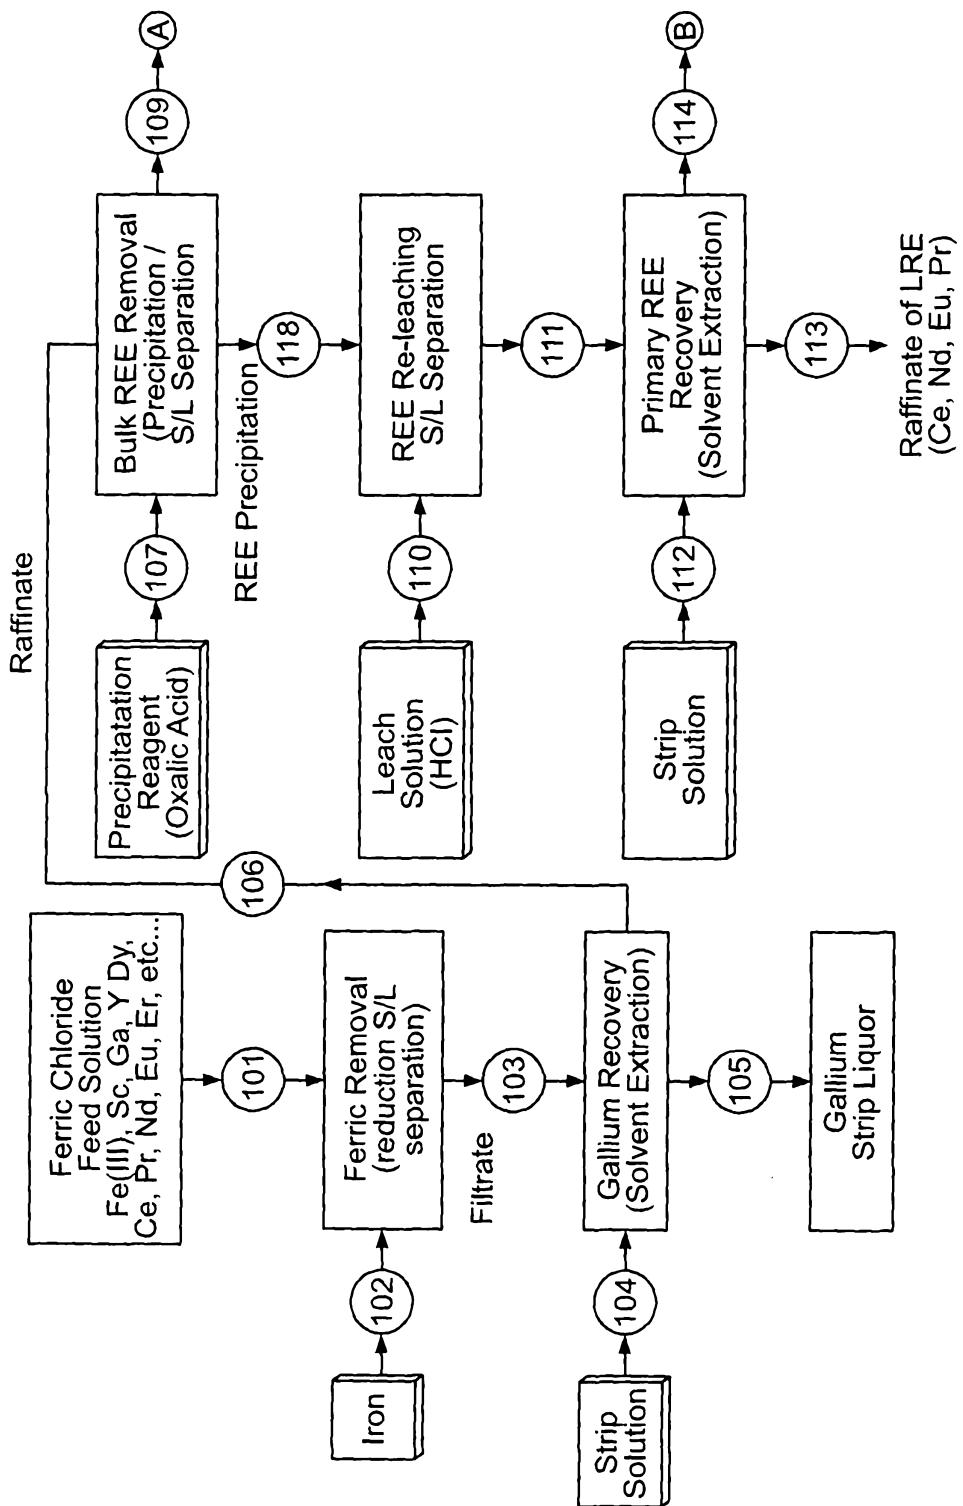


FIG. 4A

5/5

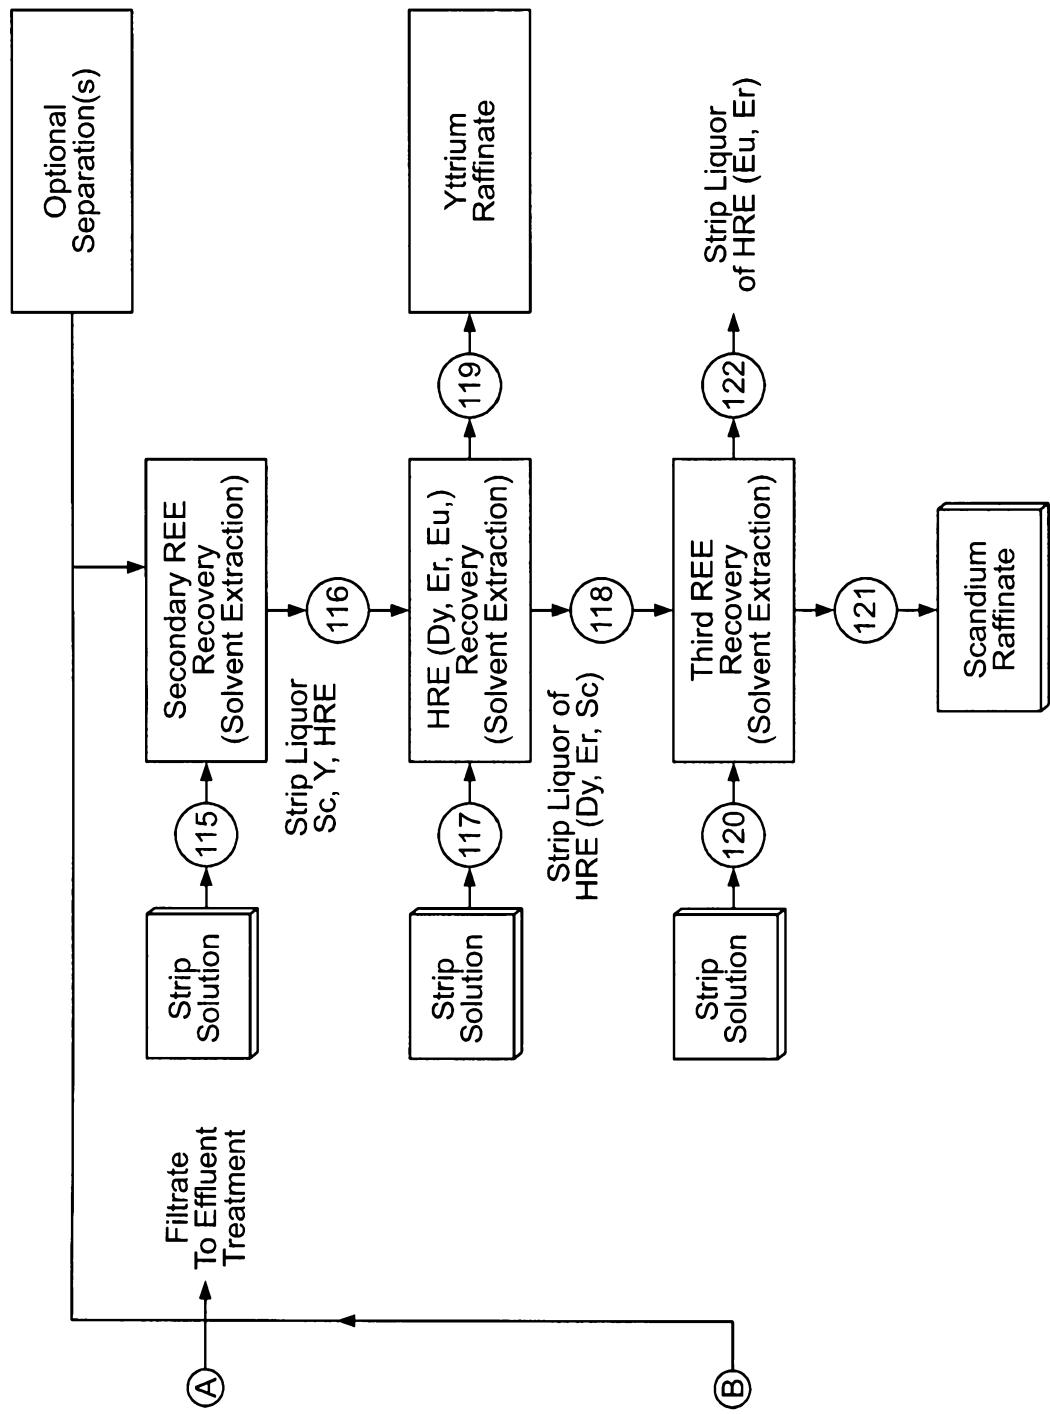


FIG. 4B