

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199517127 B2
(10) Patent No. 702165

(54) Title
Fish hook

(51)⁶ International Patent Classification(s)
A01K 083/00 **A01K 097/14**

(21) Application No: **199517127** (22) Application Date: **1995.02.21**

(87) WIPO No: **WO95/22251**

(30) Priority Data

(31) Number (32) Date (33) Country
94/1203 **1994.02.22** **ZA**

(43) Publication Date : **1995.09.04**
(43) Publication Journal Date : **1995.10.19**
(44) Accepted Journal Date : **1999.02.18**

(71) Applicant(s)
Nicolaas Phillipus Jacobus Van Der Hoven; Henry Justus Herman Van Der Hoven

(72) Inventor(s)
Nicolaas Phillipus Jacobus Van Der Hoven; Henry Justus Herman Van Der Hoven

(74) Agent/Attorney
WRAY ASSOCIATES, PO Box 6292, Hay Street, EAST PERTH WA 6892

(56) Related Art
US 2924482
US 2629959

OPI DATE 04/09/95 APPLN. ID 17127/95
AOJP DATE 19/10/95 PCT NUMBER PCT/GB95/00358




AU9517127

IR

(51) International Patent Classification 6: A01K 83/00, 97/14	A1	(11) International Publication Number: WO 95/22251 (43) International Publication Date: 24 August 1995 (24.08.95)
(21) International Application Number: PCT/GB95/00358		(81) Designated States: AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, SK (Utility model), TJ, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).
(22) International Filing Date: 21 February 1995 (21.02.95)		
(30) Priority Data: 94/1203 22 February 1994 (22.02.94) ZA		
(71) Applicant (for all designated States except US): NEWBY, Martin, John [GB/GB]; The Port House, Wicker Bonham, Saffron Walden, Essex CB11 2UG (GB).		Published With international search report.
(71)(72) Applicants and Inventors: VAN DER HOVEN, Nicolaas, Phillipus, Jacobus [ZA/ZA]; 51 Klaassens Road, Constantia, 7800 Cape Town (ZA). VAN DER HOVEN, Henry, Justus, Herman [ZA/ZA]; 51 Klaassens Road, Constantia, 7800 Cape Town (ZA).		
(74) Agent: NEWBY, Martin, John; J.Y. & G.W. Johnson, Furnival House, 14-18 High Holborn, London WC1V 6DE (GB).		



(54) Title: FISH HOOK

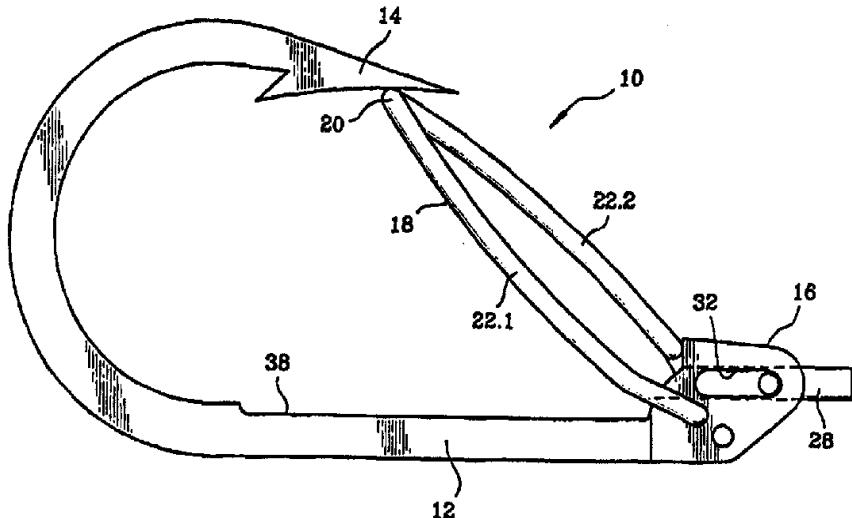

(57) Abstract

A fish hook comprises a shank (12) terminating at one end in a barbed hook formation (14) and at the other end in a head (16). A hook-closing element (18) which is of resiliently flexible steel wire is mounted on the head (16) and is displaceable between a retracted position in which it lies adjacent the shank, and an extended position in which it extends across the gap between the shank and the tip of the hook formation. A detent pin (28) holds the hook-closing element in the retracted position. When the detent pin is pulled, the hook-closing element is released so that it moves, under action of its bias, from the retracted to the extended position.

THIS INVENTION relates to a fish hook.

The term "fish hook," in this specification is used in a broad sense and should be interpreted as including also a gaff and other fishing accessories having a hook whereby a fish can be hooked.

5 According to a first aspect of this invention there is provided a fish hook comprising a shank which terminates at one end in a hook formation and at the other end in a shank head, a hook-closing element having a mounted end and a free end remote from the mounted end, the hook closing element being displaceable between a retracted position in which it lies adjacent the shank and

10 an extended position in which it extends across the gap between the shank and the tip of the hook formation, and a detent mounted so as to be displaceable with respect to the shank in the longitudinal direction of the shank, between a first position in which it acts to hold the hook-closing element in the retracted position, and a second position in which it releases the hook-closing element for

15 displacement to the extended position, the hook-closing element having an abutment on which the detent acts when holding the hook-closing element in the retracted position, **characterised in that** the abutment is between the free end and the mounted end of the hook-closing element, spaced from the free end.

According to a second aspect of this invention there is provided a fish hook

20 comprising a shank which terminates at one end in a hook formation and at the other end in a shank head, a hook-closing element having a mounted end and a free end remote from the mounted end, the hook-closing element being displaceable between a retracted position in which it lies adjacent the shank and an extended position in which it extends across the gap between the shank and

25 the tip of the hook formation, and a detent mounted so as to be displaceable with respect to the shank in the longitudinal direction of the shank, between a first position in which it acts to hold the hook-closing element in the retracted position, and a second position in which it releases the hook-closing element for displacement to the extended position, the hook-closing element having an



- 1/2 -

abutment on which the detent acts when holding the hook-closing element in the retracted position, **characterised in that** the mounted end of the hook-closing element is at or near the shank head and the hook-closing element, when in the retracted position, extends from the shank head along the shank towards the

5 hook formation.

The hook-closing element may be resiliently biased towards the extended position.

The detent may be provided with an eye for use in securing the fish hook to a fishing line. With this arrangement, when a fish pulls on the hook, the tension

10 in the fishing line will be effective to displace the detent from the first position to the second position, thus releasing the hook-closing element for displacement from the retracted position to the extended position.

The eye may be in the form of a ring which



-2-

passes through a transversely extending opening in the detent. There may also be a transverse opening in the shank head, the ring passing through the transverse opening in the shank head as well. The transverse opening in the shank head should be large enough to permit slidable displacement of the detent between the first and second positions without interference. With this arrangement the ring will serve to hold the detent captive with respect to the shank head.

10 The shank may have a recess therein in which the hook-closing element is at least partly accommodated when in the retracted position.

15 The hook-closing element may be in the form of a length of spring steel wire which has a hairpin bend therein, to form the hook-closing element with a limb on each opposite side of the bend, the end of each limb being bent through right angles so that the two ends extend towards one another, the two ends being offset with respect to one another, and each of the 20 ends entering in a corresponding hole in the shank head.

One of the limbs of the hook-closing element may have a transversely extending portion, the arrangement being such that when the detent is in the 25 first position it is capable of engaging with the transversely extending portion to hold the hook-closing element in the retracted position.

30 The shank head may be provided with a shoulder whose arrangement is such that, when the hook-closing element is in the extended position, said transversely extending portion abuts on the shoulder.

The invention will now be described in more

-3-

detail, by way of example, with reference to the accompanying drawings.

In the drawings:

Figure 1 is a side view of a fish hook in 5 accordance with the invention, being shown in its triggered condition;

Figure 2 is a side view of the fish hook when in its set condition;

Figure 3 is a view in the direction of arrow III 10 in Figure 2;

Figure 4 shows the various component parts of the fish hook, in a disassembled condition; and

Figure 5 is a detail section on V-V in Figure 2.

Referring now to the drawings in more detail, 15 reference numeral 10 generally indicates a fish hook which comprises a shank 12 which terminates at one end in a barbed hook formation 14. At the end opposite the hook formation 14, the shank 12 has a head 16.

As can best be seen in Figure 3, the 20 thickness of the material from which the shank 12, the hook formation 14, and the shank head 16 is made is greater in the region of the head 16 than it is in the region of the shank 12 and hook formation 14.

The fish hook 10 further comprises a hook- 25 closing element 18 which is in the form of a length of resiliently flexible stainless steel wire which has a hairpin bend therein at 20, to form the hook-closing element with limbs 22.1 and 22.2 on opposite sides of the bend. Each limb 22.1, 22.2 has the free end 24 30 thereof bent through right angles, the ends extending towards one another and being offset with respect to one another. Each of the ends 24 is received in a corresponding transversely extending hole 26 in the

shank head 16. When the hook-closing element 18 is in the position illustrated in Figures 2 and 3 it is in a strained condition, urging the end 20 thereof towards the tip of the hook formation 14.

The fish hook 10 further comprises a detent which is in the form of a pin 28

- 5 having a grooved head 30. The detent pin 28 is a sliding fit in a longitudinally extending hole in the shank head 16, ie extending in a direction which is in line with the shank 12. The pin 28 crosses a slotted opening 32 in the shank head 16. A ring 34 (not shown in Figures 1 to 4) is fitted to the pin 28, the ring passing through an opening 36 in the pin and through the opening 32. The ring 34 serves
- 10 to keep the pin 28 captive with respect to the shank head 16 and also serves as an eye by means of which the fish hook can be tied to the end of a fishing line.

The pin 28 is slidable between a first position as illustrated in Figures 2 and 3, in which the head 30 holds the hook-closing element 18 in the retracted position, and a second position as illustrated in Figure 1, in which it releases the

- 15 hook-closing element for displacement to the extended position.

It will be seen that the shank 12 has a recess 38 therein, in which the hook-closing element 18 is accommodated when in the retracted position.

In use, the fish hook 10 is secured to a fishing line via the ring 34. The hook-closing element 18 is moved to the retracted position as illustrated in Figure 2 and

- 20 3, and the pin 28 slid to the position illustrated in Figures 2 and 3. In this position the pin 28 holds the hook-closing element in the retracted



-5-

position. A transversely extending part 40 of the limb 22.2 seats in the groove of the head 30, to offer a certain degree of resistance to movement of the pin 28 from the position illustrated in Figures 2 and 3.

- 5 The head 16 has a shoulder 42 whose arrangement is such that the part 40 of the limb 22.2 abuts on the shoulder when the hook-closing element 18 is in the extended position as illustrated in Figure 1. This will act as an end stop for the hook-closing element, to prevent or limit pressure exerted by the end 20 on the hook formation 14.
- 10

The effect of a fish biting and pulling on the hook 10 will be to cause the pin 28 to move from the position illustrated in Figures 2 and 3 to the 15 position illustrated in Figure 1, thereby releasing the hook-closing element 18. This causes the hook-closing element 18, under action of its resilient bias, to move to the extended position illustrated in Figure 1, making it difficult if not impossible for the fish to 20 shake loose.

In the case of a gaff, in which the shank 12 will be connected to the shaft of the gaff, a part corresponding to the shank 12 will be slid able with respect to the shaft, and a part corresponding to the 25 pin 28 (ie the detent) will be fixed to the shaft.

CLAIMS:

1. A fish hook comprising a shank (12) which terminates at one end in a hook formation (14) and at the other end in a shank head (16), a hook-closing element (18) having a mounted end (24) and a free end (20) remote from the mounted end, the hook closing element being displaceable between a retracted position (Fig 2) in which it lies adjacent the shank (12) and an extended position (Fig 1) in which it extends across the gap between the shank (12) and the tip of the hook formation (14), and a detent (28) mounted so as to be displaceable with respect to the shank (12) in the longitudinal direction of the shank, between a first position (Fig 2) in which it acts to hold the hook closing element (18) in the retracted position, and a second position (Fig 1) in which it releases the hook-closing element (18) for displacement to the extended position, the hook closing element having an abutment (40) on which the detent (28) acts when holding the hook closing element in the retracted position, **characterised in that** the abutment (40) is between the free end (20) and the mounted end (24) of the hook closing element, spaced from the free end.
2. A fish hook comprising a shank (12) which terminates at one end in a hook formation (14) and at the other end in a shank head (16), a hook-closing element (18) having a mounted end (24) and a free end (20) remote from the mounted end, the hook closing element being displaceable between a retracted position (Fig 2) in which it lies adjacent the shank (12) and an extended position (Fig 1) in which it extends across the gap between the shank (12) and the tip of the hook formation (14), and a detent (28) mounted so as to be displaceable with respect to the shank (12) in the longitudinal direction of the shank, between a first



position (Fig 2) in which it acts to hold the hook-closing element (18) in the retracted position, and a second position (Fig 1) in which it releases the hook-closing element (18) for displacement to the extended position, the hook-closing element having an abutment (40) on which the detent (28) acts when holding the hook-closing element in the retracted position, **characterised in that** the mounted end (24) of the hook-closing element (18) is at or near the shank head (16) and the hook-closing element, when in the retracted position, extends from the shank head along the shank (12) towards the hook formation (14).

3. A fish hook as claimed in claim 1 or claim 2, **characterised in that** the hook-closing element (18) is resiliently biased towards the extended position (Fig 1).
4. A fish hook as claimed in anyone of the preceding claims, **characterised in that** the detent (28) is provided with an eye (36, 34) for use in securing the fish hook to a fishing line.
5. A fish hook as claimed in claim 4, **characterised in that** the eye is in the form of a ring (34) which passes through a transversely extending opening (36) in the detent.
6. A fish hook as claimed in claim 5, **characterised in that** there is a transverse opening (32) in the shank head (16), the ring (34) passing through the transverse opening in the shank head.
7. A fish hook as claimed in any one of the preceding claims, **characterised in that** the shank (12) has a recess (38) therein in which the hook-closing element (18) is at least partly accommodated when in



-8-

the retracted position (Fig 2).

8. A fish hook as claimed in any one of the preceding claims, characterised in that the hook-closing element (18) is in the form of a length of spring steel wire which has a hairpin bend (20) therein, to form the hook-closing element with a limb (22.1, 22.2) on each opposite side of the bend, the end (24) of each limb being bent through right angles so that the two ends extend towards one another, the two ends (24) being offset with respect to one another, and each of the ends (24) entering in a corresponding hole (26) in the shank head.

9. A fish hook as claimed in claim 8, characterised in that said abutment is formed by a transversely extending portion (40) of one of the limbs (22.2).




10. A fish hook as claimed in claim 9, characterised in that the shank head (16) is provided with a shoulder (42) whose arrangement is such that, when the hook-closing element (18) is in the extended position (Fig 1), said transversely extending portion (40) abuts on the shoulder (42).

11. A fish hook substantially as herein described and illustrated.



AMENDED SHEET

TOTAL P. 04

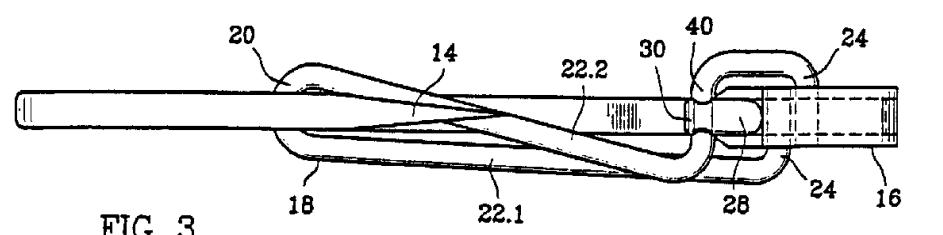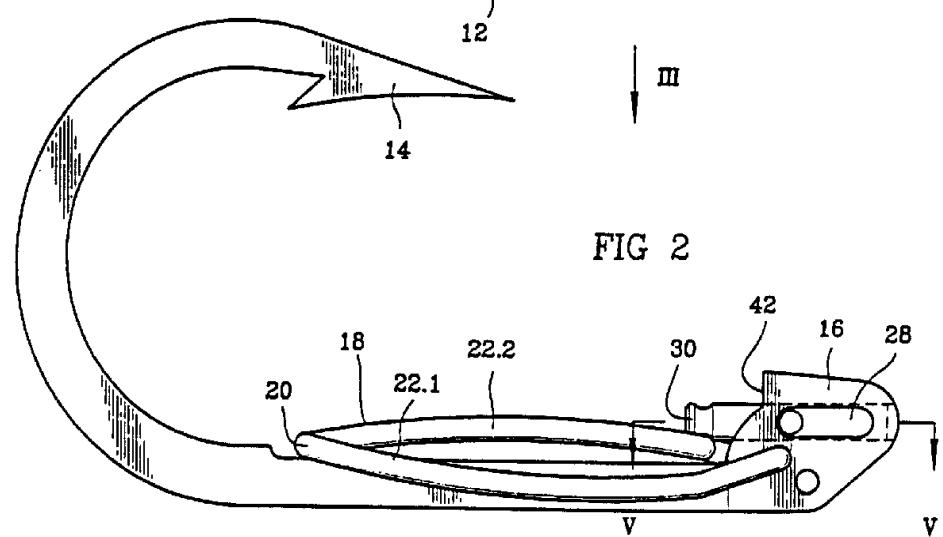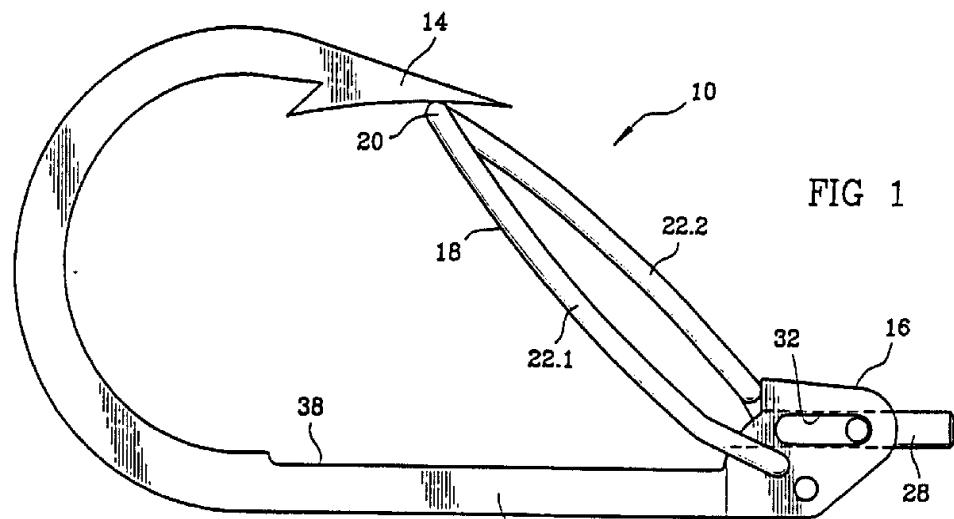

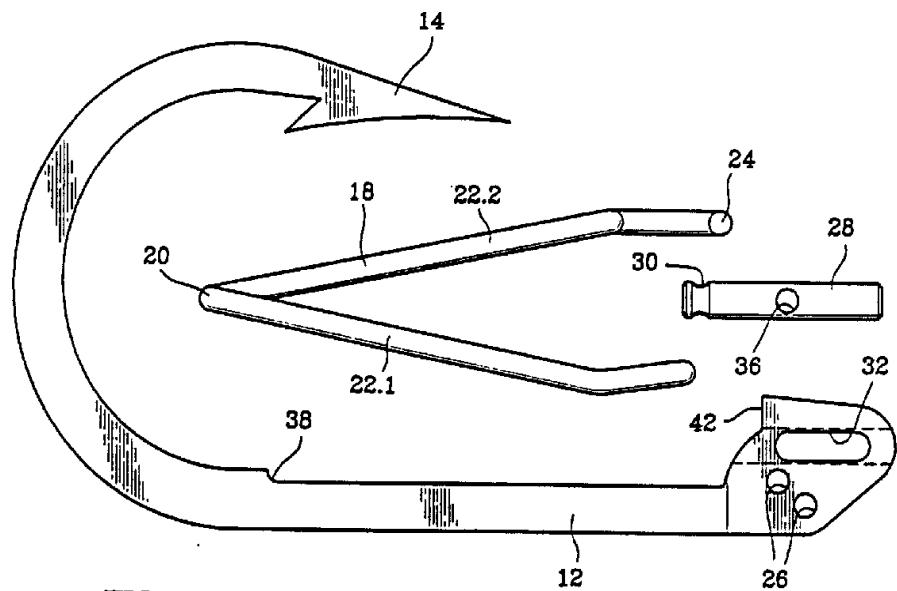


FIG. 4

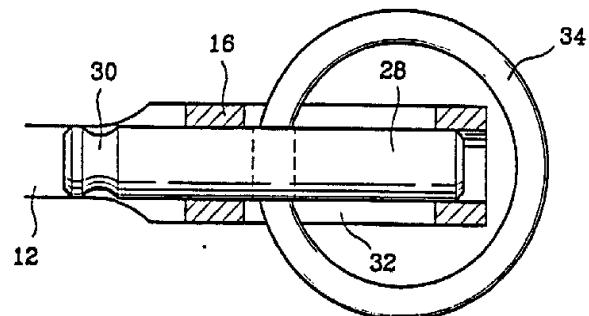


FIG. 5