




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 13/00	A1	(11) International Publication Number: WO 96/25655 (43) International Publication Date: 22 August 1996 (22.08.96)
(21) International Application Number: PCT/SE96/00187 (22) International Filing Date: 13 February 1996 (13.02.96) (30) Priority Data: 9500513-8 13 February 1995 (13.02.95) SE (71)(72) Applicant and Inventor: LÖNNÖ, Anders [SE/SE]; Hölländargatan 9A, S-111 36 Stockholm (SE). (74) Agent: FÖRSVARETS MATERIELVERK; Patentenheten, S-115 88 Stockholm (SE).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>	

(54) Title: WETTING INDICATOR FOR COMPOSITES

(57) Abstract

The invention relates to a device for obtaining, in the manufacture of a high-strength composite, an indication that the reinforcement (1) of the composite has been wetted throughout by the matrix of the composite. The reinforcement at issue is of the type which mainly consists of threads or fibre bundles which do not become translucent/transparent when wetted by the matrix, for instance bundles of carbon fibres or aramide and the matrix of thermosetting plastic which is applied in liquid state in the manufacture according to, for instance, the technique of hand lay-up. The reinforcement includes indicating threads/bundles (4) which become translucent/transparent when wetted by the matrix. A good indication is obtained if the indicating threads/bundles have such properties that they become translucent only when the adjoining reinforcing material has been completely wetted throughout. Preferably, the indicating threads/bundles are uniformly distributed across the reinforcement and in an amount that does not affect the properties of the composite in an impermissible manner.

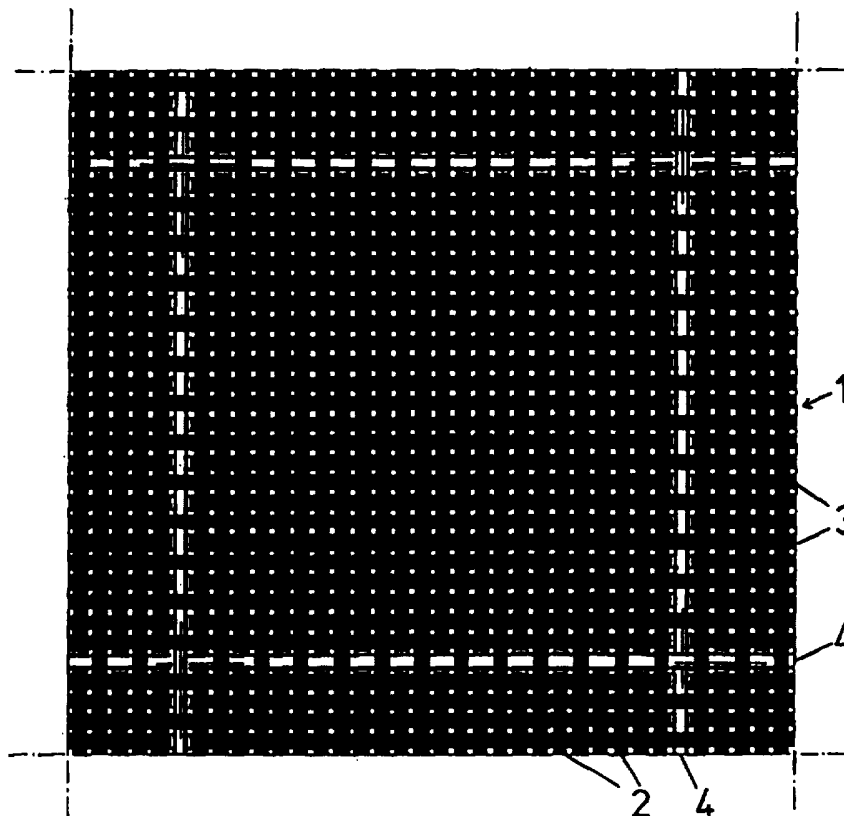

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LT	Lithuania	SK	Slovakia
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	SZ	Swaziland
CS	Czechoslovakia	MC	Monaco	TD	Chad
CZ	Czech Republic	MD	Republic of Moldova	TG	Togo
DE	Germany	MG	Madagascar	TJ	Tajikistan
DK	Denmark	ML	Mali	TT	Trinidad and Tobago
EE	Estonia	MN	Mongolia	UA	Ukraine
ES	Spain	MR	Mauritania	UG	Uganda
FI	Finland			US	United States of America
FR	France			UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

WETTING INDICATOR FOR COMPOSITES

Technical Field

The invention relates to a device according to the preamble of claim 1 for indicating that a reinforcing material, which is made of fibres and included in a composite material and which does not become translucent or transparent in wetting, has become wetted throughout by the matrix of the composite material while making the composite material. The device can indicate, for instance, that the carbon fibre reinforcement for the material of a hull or the like has been completely wetted throughout by liquid thermosetting plastic in the manufacture of the hull.

Description of the Prior Art

An object of a composite material can be made by the material, which contains a reinforcement and a matrix that is liquid at certain stages of the manufacture, being supplied to a mould where the object obtains its shape when the matrix sets. Depending on whether the mould is of the type having a cavity or only a surface determining the shape of the object, the shape will be substantially determined by all its surface portions or only the inside or outside of the object. When manufacturing e.g. hulls of reinforced thermosetting plastic, moulds determining only the outer surface of the hull, so-called female moulds, are used in most cases.

One technique of manufacturing hulls is laminating by hand lay-up. The fibre reinforcement consisting of cut-out parts of a fabric or mat is arranged on a layer of liquid plastic which has been rolled on with a roller onto the mould surface. The reinforcement is then worked with a soft roller or brush so as to be impregnated and wetted with plastic. Finally, air and excess plastic are pressed out by means of a metal roller from the layer and the space between the layer and the underlying surface. Moreover, minor inclusions of air that are bound to the surfaces of the reinforcing fibres are removed. Owing to such working, wetting is further improved. The entire surface of each fibre of the reinforcement will then be substantially completely coated with matrix material.

To this first layer, additional layers are applied, as described above for the first layer. For large objects, use can be made of intermediate curings when making the

laminate. Otherwise, all the layers can be applied in succession, curing taking place after application of the last layer.

5 After the application of each layer, it is necessary to make sure that the reinforcement of the layer has been properly wetted throughout. If the composite material should contain inclusions of air or voids, the hull will have an inferior quality with a risk of inferior strength since the composite can delaminate adjacent the inclusions of air and water can diffuse in the inclusions and cause chemical degradation of the material and cracking by frost. Insufficient wetting also reduces
10 the resistance to compression of the composite, which may cause breaking of the hull.

For high-strength composite materials, a reinforcement consisting of practically merely carbon fibres or aramide fibres or a mixture thereof has recently come into
15 use. The drawback of these materials is that it is difficult to visually form an opinion whether they have become well wetted throughout. To make sure that the wetting has been sufficient, ultrasonic testing and other testing techniques have been applied, which has contributed much to these composites being very expensive. The fact that the manufacture must be particularly precise owing to the lack of easy
20 checking has also contributed to the increased cost.

Description of the Invention

Technical Problem

- 25 The object of the invention is to provide a device as mentioned in the introduction and having the following properties:
- When manufacturing composite materials, it should be easy to make sure whether a reinforcing material has been well wetted throughout. This applies to reinforcing fibres in e.g. high-strength composite materials, the wetting of which has
30 previously been difficult to estimate.
 - It should be possible to carry out the inspection in a short time and without expensive and complicated equipment.

The Solution

- 35 The object is achieved by the device having the features as defined in the appended claims.

According to the invention, it is suggested that, intermixed with the reinforcing material, elements are added which have the same wetting properties as the reinforcing material, preferably as fibres in the form of threads, bundles, flakes, wads or the like of a material which becomes translucent or transparent by a shade
5 of colour that depends on the nature of the material when its surface has been wetted by the matrix material. This indicating material, which preferably should also serve as reinforcement, should be added in an amount that is relatively small, such that the properties of the composite material are not changed to an unacceptable extent, but yet sufficient to obtain a good indication. The amount, which in the
10 preferred embodiment is selected to be 4%, should in normal applications be less than about 5%. The elements added should be uniformly spread in the reinforcing material in such a manner that if they have all become wetted throughout, it can be assumed that the reinforcing material in the areas round the elements has also become wetted. The distances between the elements should not be chosen to be
15 greater than to make these surrounding areas together cover the entire reinforcing material. Mixed reinforcements containing e.g. carbon fibre and glass fibre materials are already available, but the purpose of these reinforcements is to obtain other properties or a less expensive reinforcement. The admixture of glass fibres therefore is much greater, about 50%, as compared with reinforcements according
20 to the present invention.

The reliability of the indication will be improved if the elements have such properties that they will be translucent/transparent only when the adjoining reinforcing material has become completely wetted throughout. These properties can be affected by the
25 choice of the material of the elements and surface treatment.

When the composite material is a reinforced thermosetting plastic intended for hulls, use is often made of ester plastic or epoxy plastic as matrix material. In their liquid state, these materials are transparent in ordinary light. The indicating
30 elements may then consist of certain polymers or glass fibre materials which from being, for instance, white in dry state become translucent or transparent when wetted. They will then let through the colour of the base, which can be the colour of the gel coat or the black colour of the subjacent carbon fibre reinforcement. Of course, a colour of the elements should be selected that is different from that of the
35 base in order to obtain a clear change of colour. For other matrix and indicator materials, it may be necessary to use a light of a different wave range, for instance,

the fluorescence from elements that have become wetted can be used for indicating purposes.

5 Reinforcing materials of carbon fibres often are in the form of a fabric or a stitched so-called multiaxial mat. The warp and weft threads of the fabric consist of flat bundles of a large number of carbon fibres or fibrils. The mat, which is used if a more rigid composite having a higher fibre content is desired, may consist of two plies, each comprising parallel threads of the same type as those used in the fabric. The threads of the various plies are allowed to be oriented in different directions.

10 When two plies are used, the threads of the second ply are often directed perpendicular to the threads of the first ply. For fixing the threads, seams are made through the plies. A reinforcement of aramide fibres is carried out in a similar manner.

15 According to the invention, it is further suggested that a fabric or mat comprises, as elements, threads or bundles of the above-mentioned material, which is suitable for indicating. By using such threads of a colour contrasting with that of the reinforcing material, such as a bright colour in the black carbon fibre material, they will be easy to spot in inspection. The threads, which can have the same thickness as the

20 threads of the reinforcing material, are inserted preferably at the same distance from each other in the warp and in the weft as well as in both plies or all plies. This distance should give the elements a spreading in the reinforcing material that, as stated above, is determined by the used materials, the type of composite, the manufacturing technique etc.

25 When indicating threads, which become translucent or transparent when wetted, are inserted in both the warp and the weft and in the two plies of the mat, spots arise where the threads intersect, i.e. parts of the built-up layer which, when wetted, become translucent or transparent throughout the layer. If more than two plies are

30 used in a mat, the indicating threads are arranged in the additional plies, such that they extend in the above-mentioned spots or restricted parts. In this manner, indication is obtained throughout the layer. As a result, it is possible to make sure that the layer has been wetted throughout its thickness, not only in its uppermost ply.

35 If the layers include a reinforcing fabric or mat having threads or bundles in one ply only, the reinforcement is usually laid with the threads oriented in different

directions in the layers. In the intersection of indicating threads, spots for indicating in two layers will be obtained.

5 The invention is not restricted to manufacture by simple hand lay-up. It can also be used in vacuum infusion using a transparent coating foil and for preimpregnated reinforcing materials, the wetting being checked before manufacturing the composite object.

Advantages

- 10 - According to the invention, it is possible to have a quality control of e.g. high-strength composite materials with reinforcement of carbon fibres and aramides. The appearance of these materials does not change when wetted, and therefore it has previously been necessary to use time-consuming and expensive techniques.
- 15 - The device according to the invention causes an indication in depth throughout the layer last applied, in some cases throughout the thickness of the entire applied material.
- The inspection can be carried out more systematically since a checked pattern or the like is available for assistance.
- 20 - It is possible to avoid expensive preparation of the carbon fibre material, which is often regarded as necessary for complete wetting, such as preimpregnation and subsequent cold storage to prevent the curing of the impregnation.

Description of the Drawing

25

A preferred embodiment will be further described with reference to the accompanying drawing, which shows a reinforcing material in the form of a fabric containing elements according to the invention.

30 The Preferred Embodiment

The Figure illustrates a portion of a plain weave fabric 1 to be used as reinforcement in a composite. The fabric, which is of standard type with the exception of the inserted indicating elements which will be described below,
35 comprises bundles of the same type for both the warp 2 and the weft 3 of the fabric. The bundles are of an ordinary kind and are elongate in cross-section having a height which is small in relation to the length and consist of a large number of


parallel longitudinal fibres of fibrils of carbon fibre. Instead of every twenty-fifth carbon fibre bundle in warp as well as weft, indicating elements 4 in the form of bundles of glass fibres are inserted. In the preferred embodiment, these bundles are of a cross-section corresponding to that of the carbon fibre bundles so as to prevent the thickness of the fabric from being irregular. The ratio 4% of the amount of indicating material, glass fibres, to the amount of reinforcing material, carbon fibres and glass fibres, has been selected empirically. In other types of fabrics, other ratios can be selected. If narrower bundles of glass fibres are used, the ratio can, of course, be reduced to, for instance, 2.5% which in respect of strength is more favourable, or the distance between the glass fibre bundles can be reduced at the same ratio. This ratio should not be so great that the reinforcement is impaired in an impermissible manner. Also the manufacturing technique is of importance. If, for instance, during application, the layers are worked more between the bundles than on the bundles, the ratio can be decreased without the risk of error in indication being unacceptable.

The manufacture of composite is carried out in the same manner whether the reinforcing material comprises elements according to the invention or not. However, the inspection after application of each layer is effected more systematically by making sure that all the fibre glass threads and especially their intersections have changed from the original colour to a colour which depends on, inter alia, the base of the previously applied layer.

Claims

1. A device for obtaining, in the manufacture of a composite containing a matrix material of thermosetting plastic and a reinforcement (1), an indication that the reinforcement has been wetted by the matrix material, the reinforcement comprising
5 a fabric or mat consisting of mutually parallel threads or fibre bundles, which have different orientations of reinforcement in warp, weft and two adjoining mat plies, respectively, and which do not become translucent/transparent when wetted by the matrix, for instance, fibre bundles of carbon fibres or aramide,
c h a r a c t e r i s e d i n
10 that the device consists of indicating threads/bundles (4) which become translucent/transparent when wetted by the matrix,
that said indicating threads/bundles are inserted, in at least the warp or weft of the fabric or one of the plies of the mat, in parallel with the associated reinforcing threads/bundles, and
15 that the volume of the indicating threads/bundles is so small in relation to the volume of the reinforcing threads/bundles that the properties of the composite are not affected to an unacceptable extent.
2. The device as claimed in claim 1, c h a r a c t e r i s e d i n that the indicating threads/bundles (4) are adapted to become translucent/transparent only
20 when the adjoining reinforcing threads/ bundles have become wetted throughout.
3. The device as claimed in claim 1, c h a r a c t e r i s e d i n that the indicating threads/bundles (4) are uniformly distributed across the reinforcement.
4. The device as claimed in claim 1, c h a r a c t e r i s e d i n that the indicating threads/bundles (4) are made of a material which also serves as
25 reinforcement, e.g. glass fibres or polymer.
5. The device as claimed in any one of the preceding claims, c h a r a c t e -
r i s e d i n that the volume of the indicating threads/bundles amounts to a maximum of about 5% of the total volume of reinforcement, preferably 4%.
6. The device as claimed in claim 1, c h a r a c t e r i s e d i n that
30 indicating threads/bundles are included in both the warp and weft of the fabric, and that they form intersections which, when wetted, become translucent/ transparent throughout the fabric.
7. The device as claimed in claim 1, c h a r a c t e r i s e d i n
that the mat comprises at least two plies, and
35 that indicating threads/bundles are inserted in each ply and adapted to form intersections which, when wetted, become translucent/ transparent throughout the mat.

1/1

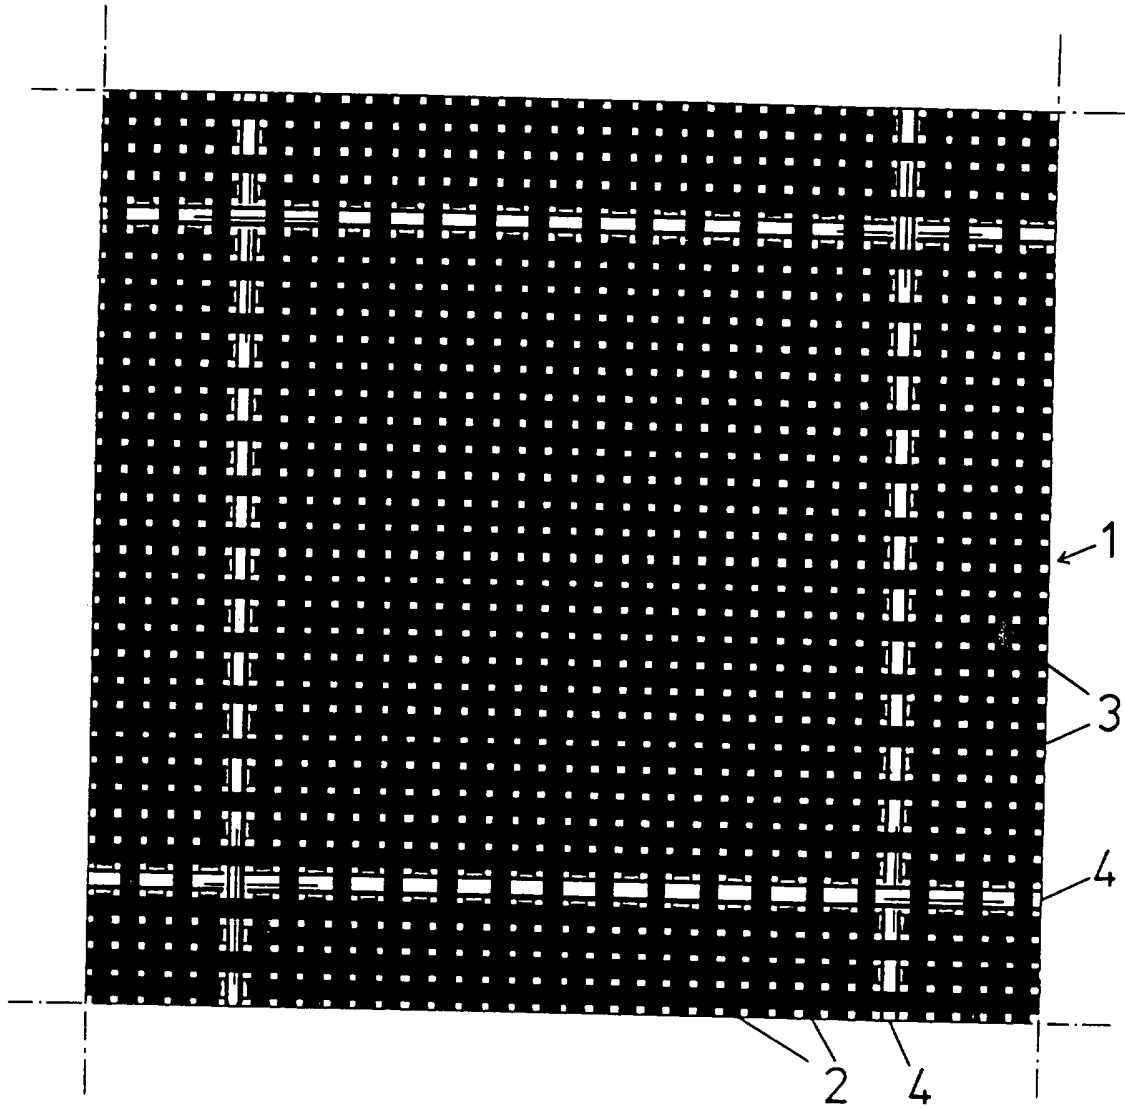

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00187

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G01N 13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI, CLAIMS/US PATENTS, JAPIO, CA SEARCH

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Chemical Abstracts, Volume 113, No 23, 3 December 1990 (03.12.90), (Columbus, Ohio, USA), Jackson, P. et al., "Defect detection in carbon fiber composite structures by magnetic resonance imaging", page 36, THE ABSTRACT No 213181y, J. Mater. Sci. Lett. 1990, 9 (10), 1165-1168, (Eng.) -- -----	1

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 May 1996

Date of mailing of the international search report

07 -05- 1996

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

INGA-KARIN PETERSSON

Telephone No. +46 8 782 25 00