



- (51) International Patent Classification:
F15B 1/08 (2006.01)
- (21) International Application Number:
PCT/US2015/032552
- (22) International Filing Date:
27 May 2015 (27.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/004,012 28 May 2014 (28.05.2014) US
- (71) Applicant: **FLEXCON INDUSTRIES, INC.** [US/US];
300 Pond Street, Randolph, MA 02368 (US).
- (72) Inventor: **MURPHY, Lucas**; 111 Center Street, North Easton, MA 02356 (US).
- (74) Agents: **MAGIDOFF, Barry, G.** et al.; Sutton Magidoff LLP, 909 Third Avenue, 27th Floor, New York, NY 10022 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: THROUGH WALL CONNECTOR FOR A MULTI-CHAMBER PRESSURE VESSEL

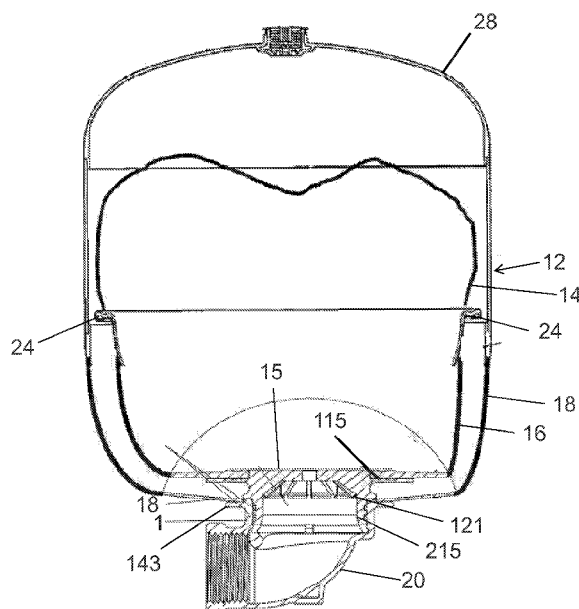


Fig. 1

(57) Abstract: A gas and liquid-tight inlet connector to the inner chamber of a multi-chamber pressure vessel is provided, comprising : a male gland extending through an orifice in the bottom of the flexible wall of the inner chamber and the lower wall of the rigid outer shell of the vessel, the male gland comprising an upper flange permanently, sealingly connected, with the lower surface of the flexible inner wall, so as to form a gas- and liquid-tight seal therewith, and a lower elongated member extending through the outer shell to be sealingly connected with a liquid inlet pipe, permitting liquid flow into the inner chamber, while maintaining the seal between the inner and outer chambers of the tank, thus maintaining pressurization in the outer chamber, as fluid enters the inner chamber, pushing the flexible wall upwardly into the outer chamber.

THROUGH WALL CONNECTOR FOR A MULTI-CHAMBER PRESSURE VESSEL**BACKGROUND OF INVENTION****Field of the Invention**

5 [0001] This application relates to a novel connector for providing a gas and liquid-tight connection between an inlet water pipe and the inner chamber of a multi-chamber pressure vessel.

Background

10 [0002] Such multi-chamber tanks, usually comprising two chambers separated by a at least a partially flexible, non-metal diaphragm, are quite common in the water storage field, for holding, e.g., potable well water. Most commonly used for holding aqueous liquids, such multi-chamber vessels usually comprise a metal, e.g., steel or aluminum, outer vessel, and a non-metallic, inner water-holding vessel. There has been an ongoing difficulty in maintaining a water-tight and air-tight separation between the two volumes. The difficulty, 15 and long term problem, has involved the connection between the metal inlet tube to the non-metallic inner vessel wall with a long-lasting gas-tight and liquid-tight seal, that also forms a tight seal with the outer metal wall.

[0003] The present invention differs from the prior art in providing for a permanently affixed connection between the inner wall (partially formed of a flexible diaphragm) 20 separating the water liquid chamber from the air gas chamber of the tank, which provides for a fully secure watertight and airtight connection to avoid any potential likelihood of leakage of gas into the liquid, e.g., potable water, within the diaphragm chamber, or of potentially damaging liquid into the gas chamber, and indirect contact with the metal tank wall.

[0004] In accordance with the present invention, a diaphragm tank is provided, which 25 comprises an outer rigid shell, generally made of steel or other strong, usually metallic, material, but sometimes formed of rigid and reinforced, polymeric, composite materials; an inner tank separated from the outer tank wall by walls formed from the combination of a flexible diaphragm sealably connected to a lower more rigid wall, so as to separate the chamber containing liquid from the gas pressure chamber outside of the flexible diaphragm, 30 between the two chambers; and a rigid liner sealingly connected with the flexible diaphragm and combining with the diaphragm to separate the water liquid chamber from the air gas

chamber. A “liner” can also be substituted by a second diaphragm, wherein the water chamber is secured between the two diaphragms, one of which can be fully flexible and the second partially flexible or substantially rigid; at the location of the permanent seal between the lower wall and the liquid inlet connection, the lower wall becomes substantially rigid.

- 5 The connector of this invention is preferably secured to the lower wall of the inner volume, i.e., a more rigid wall or flexible diaphragm separating the inner and outer tank volumes.

[0005] Further defining the present invention, the liquid inlet includes a male connection gland permanently affixed to, or integrated with, the interior liquid chamber wall, preferably the more rigid lower wall. The interior liquid chamber wall is preferably, a rigid or partially
10 flexible diaphragm, separated from the rigid gas chamber outer wall within the pressure vessel so as to provide a gas and liquid-tight attachment between the inner chamber wall and the liquid inlet. The substantial integration of the male gland and inner chamber serves to eliminate additional elements or assemblies previously required to render fluid-tight a
15 through wall connector, thereby avoiding and preventing manufacturing errors which often occurred during assembly.

SUMMARY OF INVENTION

[0006] The present invention provides for a substantially complete integration of the inner chamber wall and the through wall connector, referred to as a “male gland” so as to provide the necessary air and liquid fluid tightness in both directions between the pressure gas
5 chamber and the inner liquid chamber, while eliminating complex mechanisms previously used in the industry. The portion of the male gland extending through lower inner wall into the liquid inner chamber is preferably a continuation of a flow pipe having a generally circular cross-section of a sufficient diameter to carry the intended flow of liquid into the inner chamber. Surrounding the pipe, but below the upper outer end of the flow pipe, a solid
10 upper flange extends outwardly. The solid flange is formed integral with the pipe, and preferably of the same material as the pipe portion. The outer circumference of the upper flange is also preferably circular and has a diameter preferably at least about twice the outer diameter of the pipe portion extending through the lower inner wall into the inner chamber.

[0007] The pipe portion of the male gland extends downwardly through the outer gas-filled
15 intermediate chamber and preferably is sufficiently long to extend through and below the bottom surface of the rigid outer wall of the tank. A lower flange extends outwardly from the pipe portion of the male gland longitudinally, vertically below the upper flange, at a location along the pipe designed to rest upon the inner surface of the rigid outer wall of the tank. The portion of the male gland extending below the rigid outer wall contains circumferential
20 sealing means to maintain a gas and liquid tight seal between the male gland and the inlet pipe for the liquid flowing into the inner chamber. The male gland portion of the liquid inlet to the inner chamber is connected, in accordance with this invention, to the lower diaphragm, or liner, and is so formed as to assist in maintaining the separation between the outer chamber between the diaphragms and the outer rigid walls and the inner chamber within the inner
25 diaphragm/liner walls.

[0008] The portion of the male gland extending below the rigid outer wall of the tank extends into, and is sealably secured to, the external liquid inlet pipe, which is preferably an elbow extending below the rigid bottom wall of the outer tank. The inner surface of the upper, vertically extending portion of the external inlet pipe forms a tight fit with the lower
30 portion of the male gland. Extending outwardly around the outer circumference of the upper end of the external inlet pipe is a flange and a short lip extending upwardly from the flange

and through the rigid outer wall of the tank, preferably to contact the lower surface of the lower flange of the male gland. The connection between the external inlet pipe and the male gland is maintained in a way so as to continue the integrity of the system and isolating the pressure chamber from any liquid contamination.

- 5 [0009] In operation, this system provides for the varying of pressure within this pressure gas chamber as the liquid chamber fills with the liquid, pushing the flexible diaphragm upwardly and outwardly, thereby reducing the volume of the sealed intermediate chamber and necessarily increasing gas pressure within the sealed intermediate gas chamber volume regardless of exterior pressure on the outer rigid tank wall. With the displacement of volume
10 by the water liquid entering the water liquid chamber the pressure in both the water liquid and air gas chambers vary concurrently. Generally, the inner chamber is intended to hold a liquid, usually an aqueous liquid, and the outer chamber holds a compressible gas, which can be air or if desired an inert material such as nitrogen, helium or other inert gas that will preferably remain gaseous under any expected pressure at any potential ambient condition.
- 15 [0010] Further defining the present invention, the water inlet includes a male connection gland permanently affixed to, or formed as a part of, the lower interior chamber wall. The lower interior chamber wall can be a liner on the inner surface of the outer steel wall or an inner shell, which can be less flexible than the upper diaphragm, separate from the rigid chamber wall, in either case sealably connected to the male connection gland so as to
20 maintain the gas and watertight attachment between the inner chamber wall and the water inlet. The substantial integration of the male gland and inner chamber serves to eliminate additional elements or assemblies previously required to render fluid-tight a through wall connector, thereby avoiding and preventing manufacturing errors which often occurred during assembly.
- 25 [0011] The male gland is connected to an external water liquid inlet in a manner so as to insure that the liquid remains within the male gland and the inlet, exiting into the inner chamber, and without exiting into the pressure chamber of the tank. The usual plumbing sealing elements can be used between the portion of the exterior water liquid inlet extending out from the pressure tank and the water inlet pipe. In addition, there are further provided
30 sealing elements between the exterior water liquid inlet and the pressure chamber outer tank

wall so as to prevent the passage of air gas or water liquid into the pressure chamber, and thereby the changing of pressure within the tank pressure chamber.

BRIEF DESCRIPTION OF DRAWINGS

[00012] This invention will be more clearly understood after referring to the following detailed description considered in conjunction with the following drawings:

[00013] Fig. 1 is a cutaway, front elevation view of a two-chamber pressure tank having a partially extended inner diaphragm and a partially magnified view of the inlet connection between the inner liquid chamber and the liquid inlet;

[00014] Fig. 2 is a magnified isometric view of the lower portion of the tank of Fig. 1 showing, in greater detail, the connection linkages and fluid gas isolating element of the joints;

[00015] Fig. 3 is an exploded front elevation view of a two-chamber pressure tank of this invention;

[00016] Fig. 4 is a magnified isometric view of the lower portion of the inner tank of Fig. 1;

[00017] Fig. 5 is an enlarged front elevation view of one embodiment of the male gland of this invention;

[00018] Fig. 6 is a cross-section view of the male gland of Fig. 5, taken along lines A-A;

[00019] Fig. 7 is a top isometric view of the male gland of Fig. 5;

[00020] Fig. 8 is a side isometric view of the inlet elbow to the outer tank of Fig. 1;

[00021] Fig. 9 is a partial cutaway, front elevation view of a two-chamber pressure tank of this invention; and

[00022] Fig. 10 is a magnified cross-sectional view of the male gland 15 with the immediately surrounding rigid outer tank wall, the inner liner wall and the sealing connections.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS OF THE PRESENT INVENTION

5 [00023] The assembly of the present invention provides fluidic communication between the exterior of the pressure vessel and the inner chamber, while maintaining the integrity of the pressure vessel and isolating the pressure gas chamber of the pressure vessel from the inner liquid holding chamber. The pressure gas chamber isolation from the inner chamber provides for pressure variance without being affected by the atmospheric pressure exterior of the pressure tank.

10 [00024] The outer wall of the tank 12 is preferably a steel shell formed from three sections, a top cap 28, a central cylinder 26 and a lower cup 18, formed of steel or other rigid, preferably metallic, material. Within the outer walls of the tank 12 is supported an inner liquid chamber defined by at least one flexible diaphragm 14 and one liner lower section 16; the lower section may be flexible, or rigid, or can be a liner secured, at least partially to the inner surface of the outer rigid tank wall 18. The lower section 16, in turn, is connected to the male gland 15 of the present invention. Other rigid materials which can be used for forming the rigid outer tank walls include other metals, especially aluminum or aluminum alloys, and certain polymers, such as polycarbonates or a composite structure.

15 [00025] The lower inner liner section 16 and the diaphragm 14 define an inner chamber for holding liquid entering through the inlet elbow 20 and male gland 15. As the liquid fills the inner volume, the pressure in the intermediate gas volume (between the diaphragm and the outer rigid tank walls) increases as the flexible diaphragm 14 is pushed upwardly and outwardly by the filling water, reducing the volume of the intermediate space, between the inner chamber and the outer rigid tank walls. The two portions of the wall of the inner volume, the diaphragm 14 and lower liner 16 are held together by a clamp ring 24, which provides a permanent bond without likelihood of either gas leaking into the inner volume or liquid leaking outwardly into the intermediate gas space. The flexible diaphragm 14 and liner 16 can be formed of polymers, such as polypropylene or polyethylene, or in the case of the flexible diaphragm, elastomeric compounds such as butyl or EPDM or SBR or neoprene or latex rubbers.

20 [00026] The male gland, generally designated by the numeral 15, is preferably rigid and can be formed of, e.g., reinforced polypropylene or polyethylene or any suitable copolymer, or

from a polycarbonate, or other polymer, preferably a cross-linked thermoset polymer. The connection between the male gland and the liner/diaphragm is formed by, e.g., fusing the upper flange 115 of the male gland to the outer surface of the bottom of the lower liner 16. The fusion can be achieved by welding, i.e., melting a thermoplastic copolymer material, thereby welding the two elements permanently together, or by using an intermediate material compatible with the material forming both the upper flange 115 and the inner lower liner 16.

5 [00027] The male gland 15 is formed of generally rigid polymeric substances, such as reinforced polycarbonate, polypropylene or polyethylene or a suitable copolymer thereof, or a thermoset polymer. The connection between the male gland 15 and the lower surface of the inner liner wall 16 is formed by fusing the upper flange 115 of the male gland to the outer surface of the lower liner 16. The connection between the flange 115 and the outer surface of the liner 16 can be obtained by, for example, welding or by the use of intermediate materials that will fuse permanently to both materials, depending upon the relative weldability of the materials forming the flange and the lower liner.

10 [00028] As shown in the drawings, the male gland has a grating formed by vane elements 116, 121, 126 at its upper end, surrounded by the upper flange 115. These grating elements extend a short distance above the upper flange 115, surrounded by the stub pipe portion 146, and serve to direct any flow upwardly or downwardly from or to the metal inlet elbow 20.

[00029] The inlet elbow 20 is sealably connected to the lower extension 215 extending vertically downwardly from the outer wall of the tank. The metal inlet elbow 20 is joined with the lower portion of the male gland by a slip fit sealed by the use of O-rings 136 in the circumferential indentations 137 in the lower circumference 215 of the male gland. The distal end 140 of the elbow 20 can be connected by any suitable plumbing connection to an inlet and outlet line. Such connections include brazing, threaded connectors or other suitable means, which do not form a part of this invention.

20 [00030] The upper flange 143 of the inlet elbow 20 is circumferentially welded to the outer surface of the metal outer wall of the tank 24. To further complete the sealing of the metal elbow to the metal outer wall of the tank, an additional O ring is provided between the outer circumference of the upper end 142 of the elbow, the rigid outer wall 138 of the tank, and the lower flange 118 of the male gland. In this manner the seals are formed between two different materials, i.e., the metal forming the elbow and the outer wall of the tank and the

30

polymer forming the male gland 15 and the outer wall of the tank, so as to ensure that when water enters the inner chamber and expands the volume of the inner chamber by pushing the flexible diaphragm 14 upwardly and outwardly, and the pressure in the intermediate volume between the inner tank and the outer tank increases as a result, there is no leakage and,
5 therefore, loss of pressure from the gas volume either into the liquid or to the exterior of the outer tank.

[00031] It is noted, indeed, that the way the system is mechanically connected, as water fills the inner chamber the force against the lower wall of the inner liner 16 increases, thereby pressing that inner liner wall against the upper flange 115 of the male gland, and thereby
10 reinforcing the seal. Similarly, the male gland, around its lower flange 135, is similarly pressed against the interior of the outer shell wall 2. In this manner, as the water fills the tank and the pressure in the intermediate chamber between the diaphragm and the outer tank wall increases, the mechanical stressors on the gland and the wall of the two volumes increase, thereby increasing the bonding pressures between the surfaces, and thus reducing the
15 likelihood of any leakage between the two volumes.

CLAIMS:

What is claimed is

1. An expansion tank comprising a rigid outer shell and a bladder disposed within the outer shell wherein the bladder comprises a flexible diaphragm having a peripheral
5 edge and a second diaphragm having a peripheral edge wherein the peripheral edges of the diaphragms are sealed to one another to form a circumferential seam and wherein the inner chamber defined by the bladder is fluidically isolated from an intermediate chamber between the bladder and the outer tank shell;
a male gland extending through an orifice in the bottom of the second diaphragm to
10 and through the lower wall of the rigid outer shell of the expansion tank, wherein the male gland comprises an upper flange which is permanently, sealingly connected with the lower surface of the second diaphragm, so as to form a tight seal which would be fully fluid tight to both gas and liquids; and
the second, lower portion of the male gland extending below the second diaphragm to
15 extend through the outer rigid tank wall to be sealingly connected with a liquid inlet pipe, so as to permit liquid to flow into the inner chamber, which would be fully sealed away from the intermediate chamber of the tank to allow for pressurization of the gas in the intermediate chamber, as water fills the inner chamber, pushing the flexible diaphragm upwardly and outwardly into the intermediate chamber.
- 20 2. The expansion tank of Claim 1, wherein the upper flange of the male gland is permanently, sealingly connected with the lower surface of the second diaphragm, by welding the two surfaces together, and the two surfaces are formed of compatible thermoplastic materials.
3. The expansion tank of Claim 1, further comprising an intermediate layer of
25 mutually compatible material between the upper flange of the male gland and the lower surface of the second diaphragm to permanently, sealingly connect the upper flange of the male gland with the lower surface of the second diaphragm, by welding the mutually compatible material to both of the two surfaces.
4. The expansion tank of Claim 1, further comprising an intermediate layer of
30 mutually compatible material between the upper flange of the male gland and the lower surface of the second diaphragm to permanently, sealingly connect the upper flange of the

male gland with the lower surface of the second diaphragm, by adhesively connecting the two surfaces.

5 5. The expansion tank of Claim 1, wherein the liquid inlet pipe is sealingly connected with the male gland by an intermediate circumferential sealing member, so as to form a tight seal therebetween.

6. The expansion tank of Claim 1, wherein the liquid inlet pipe is sealingly connected with the outer rigid wall by welding, the inlet pipe and the rigid outer tank wall both being formed of compatible metals.

10 7. The expansion tank of Claim 1, wherein the lower liner is formed of a substantially rigid polymeric material.

8. The expansion tank of Claim 1, wherein the upper flexible diaphragm is formed of a material selected from flexible thermoplastic materials and elastomeric polymers.

1/10

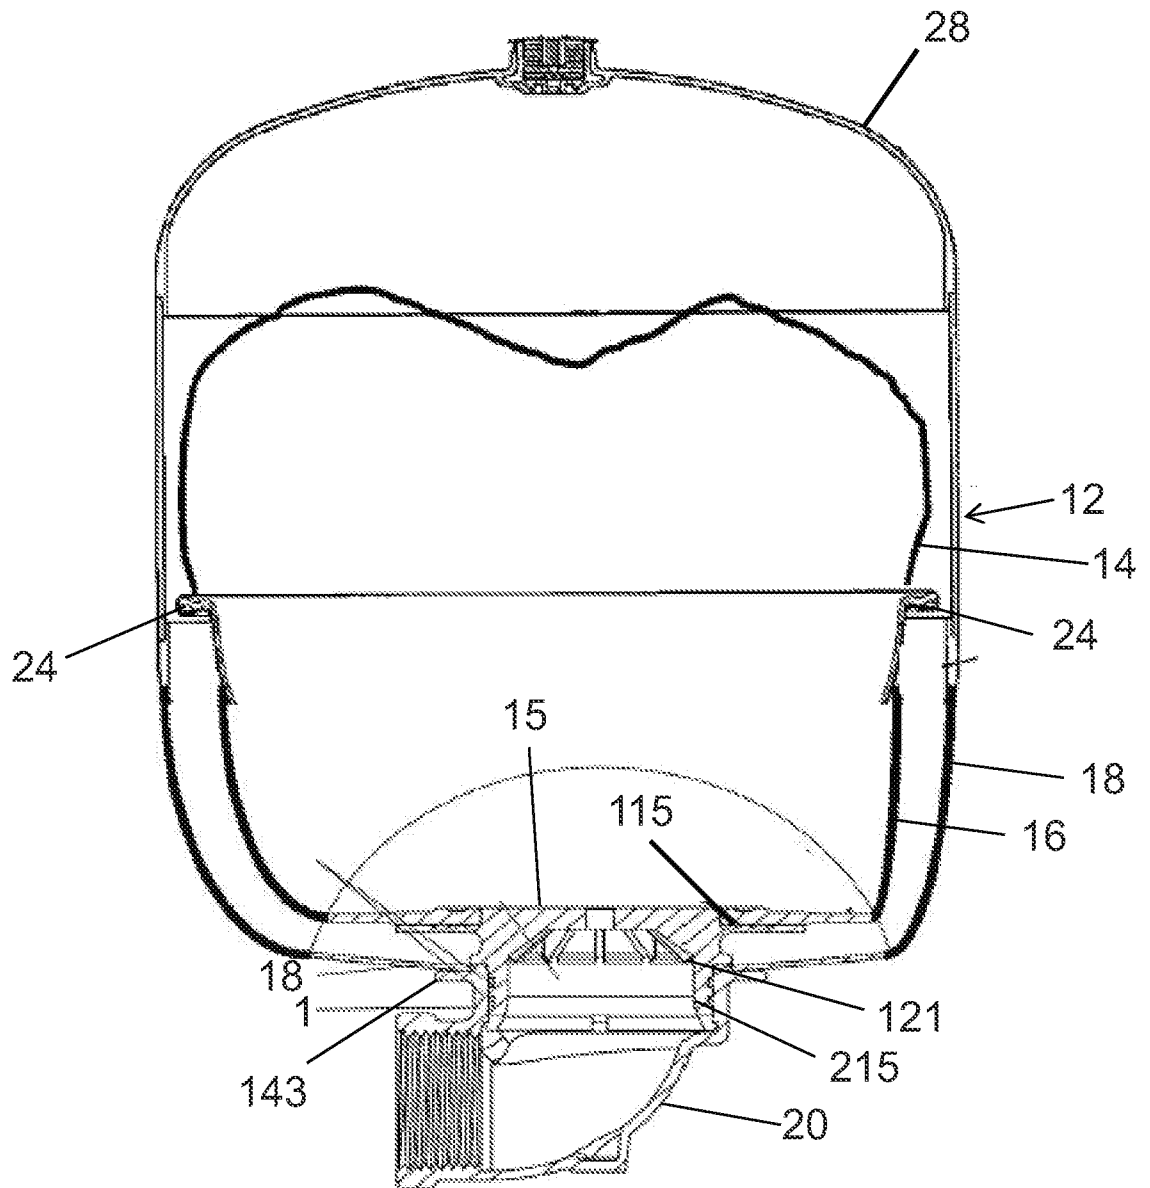


Fig. 1

2/10

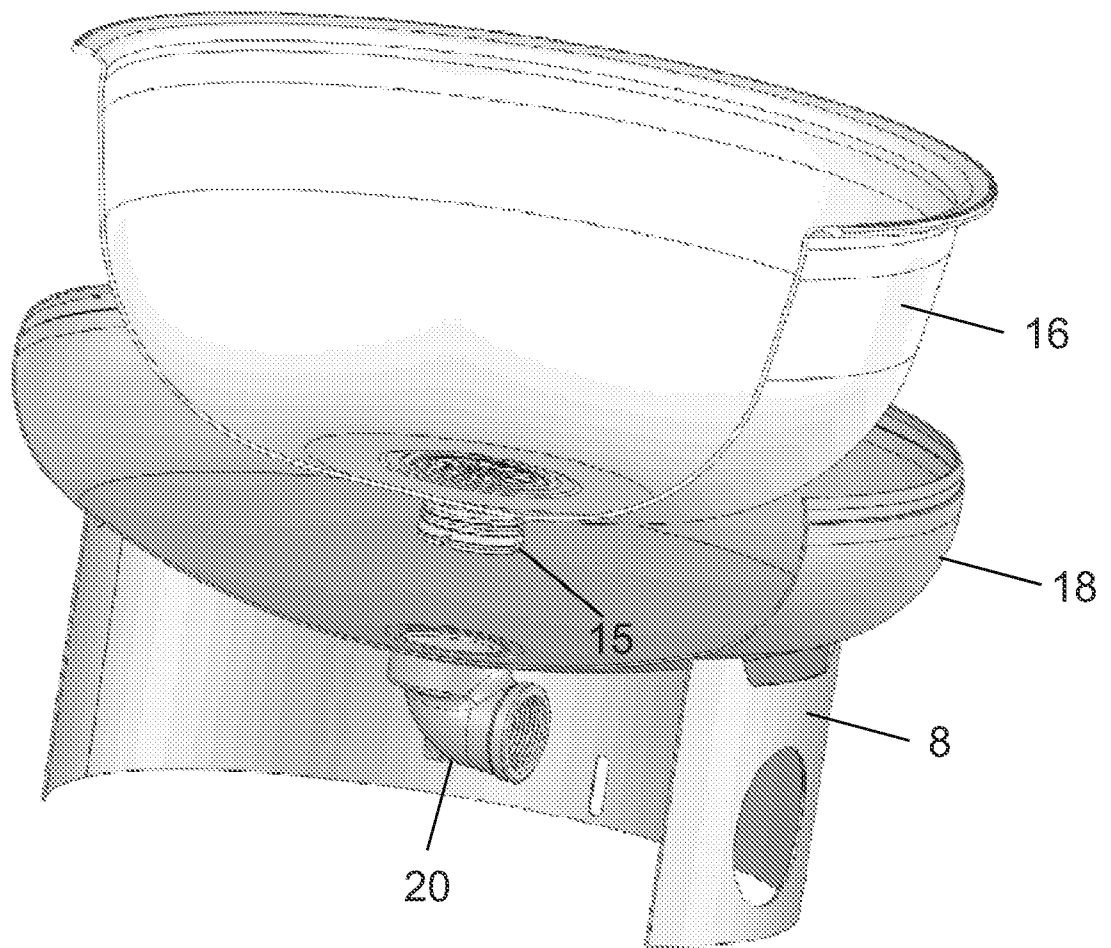


Fig. 2

3/10

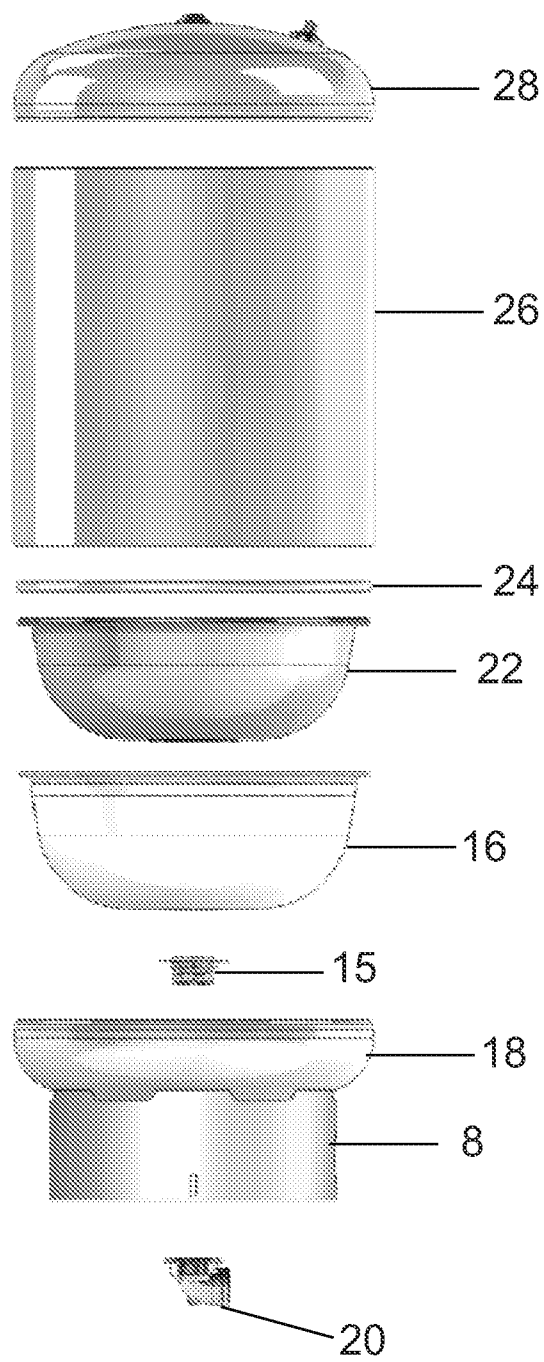


Fig. 3

4/10

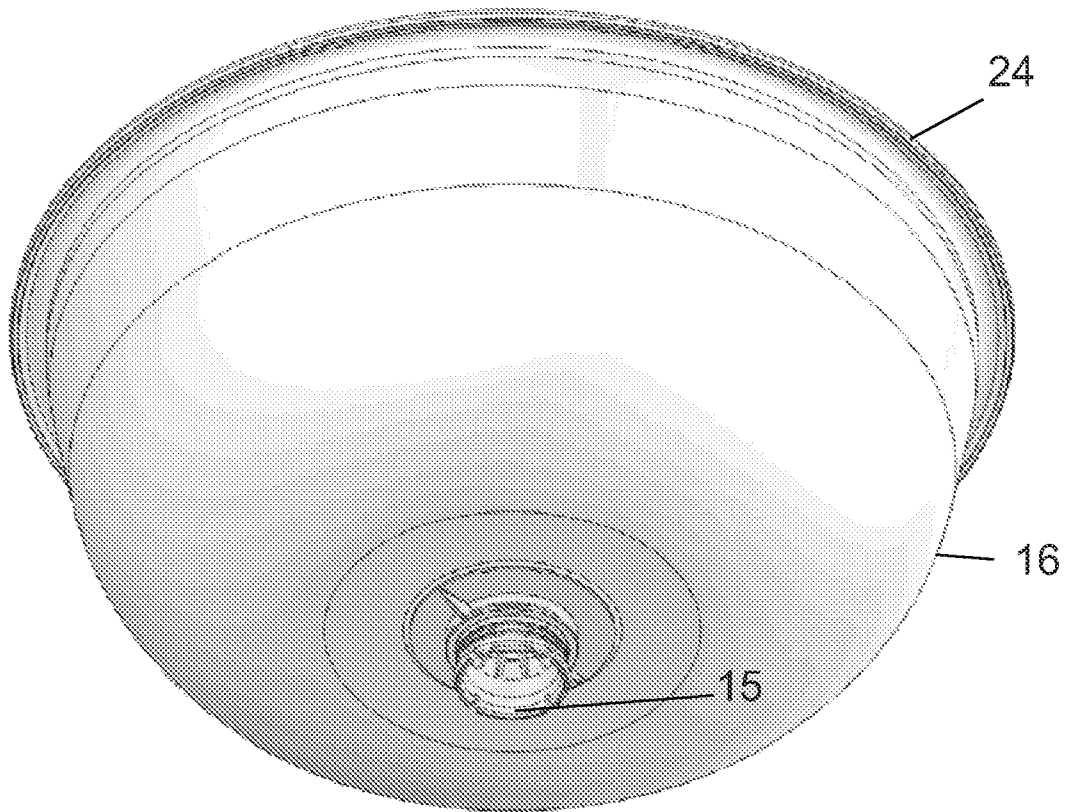


Fig. 4

5/10

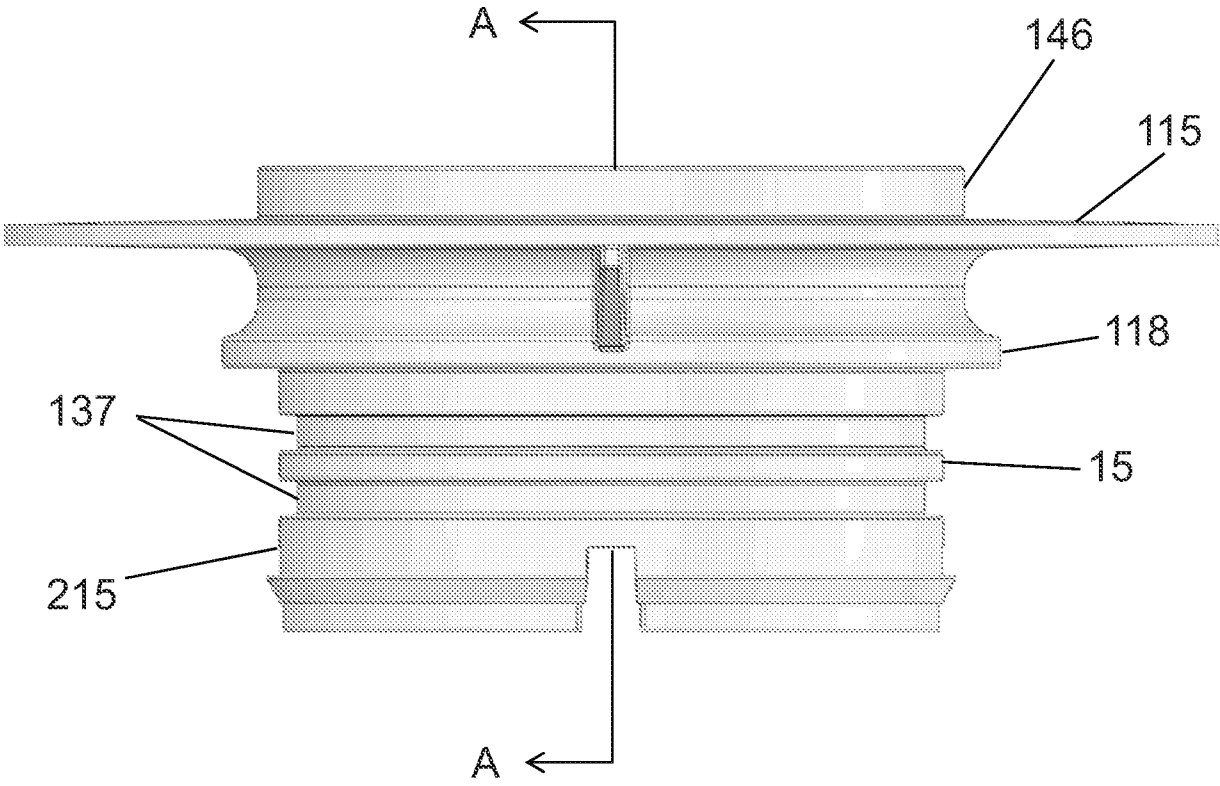


Fig. 5

6/10

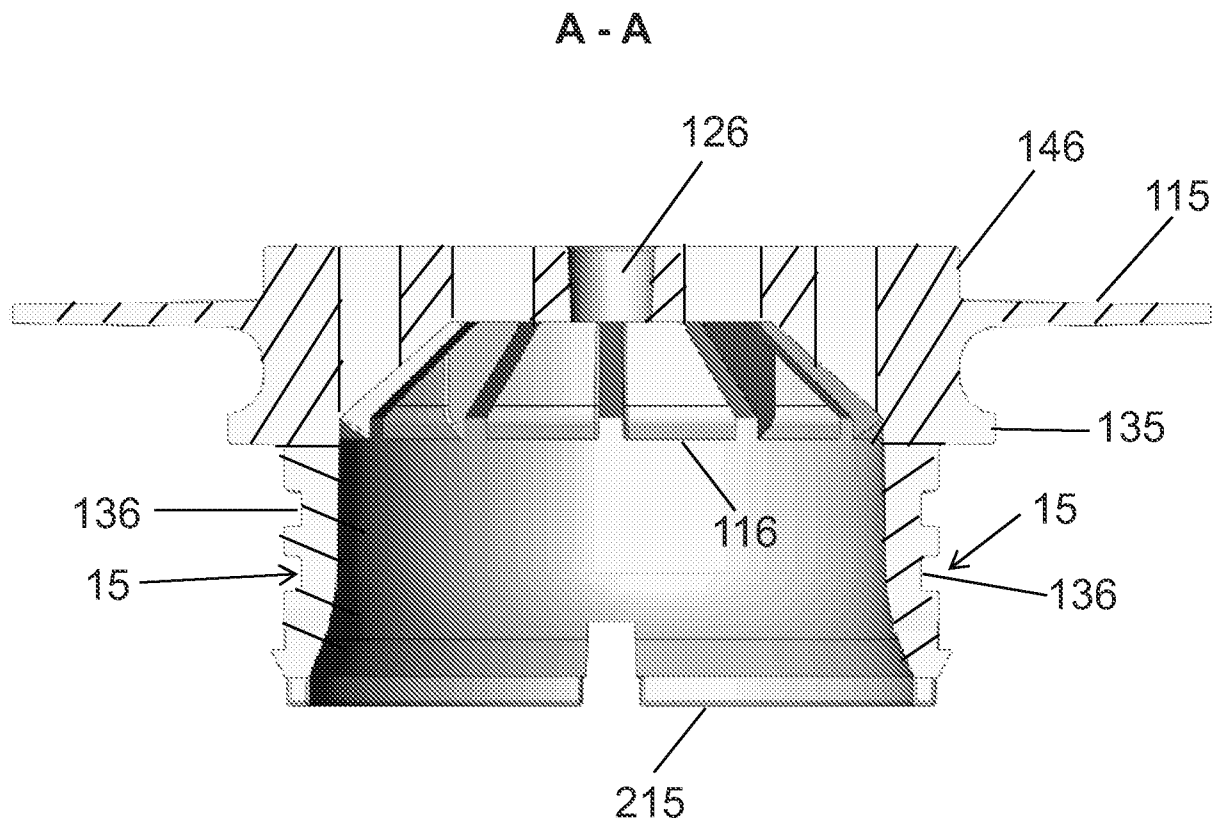


Fig. 6

7/10

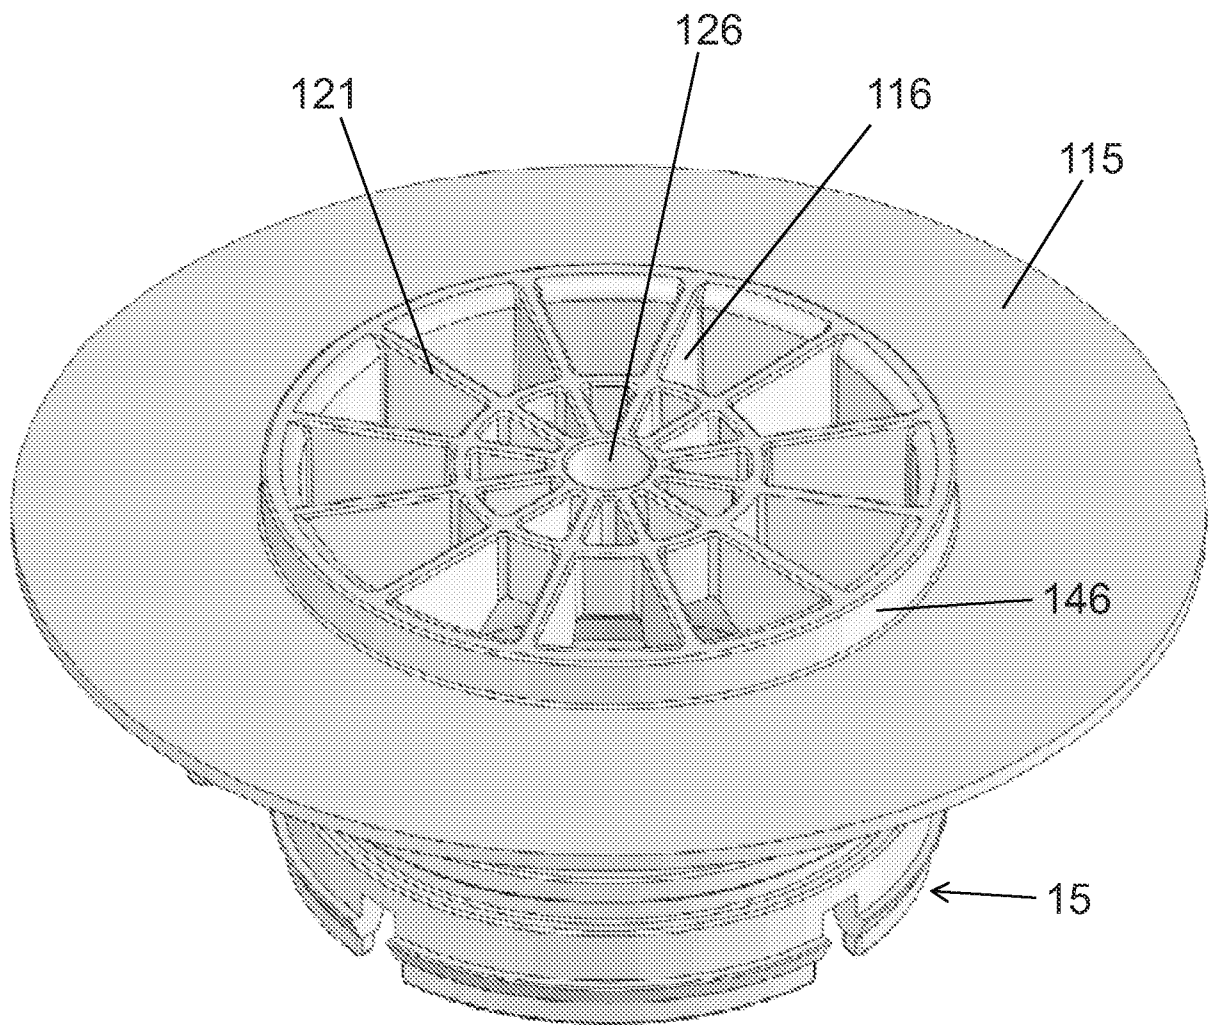


Fig. 7

8/10

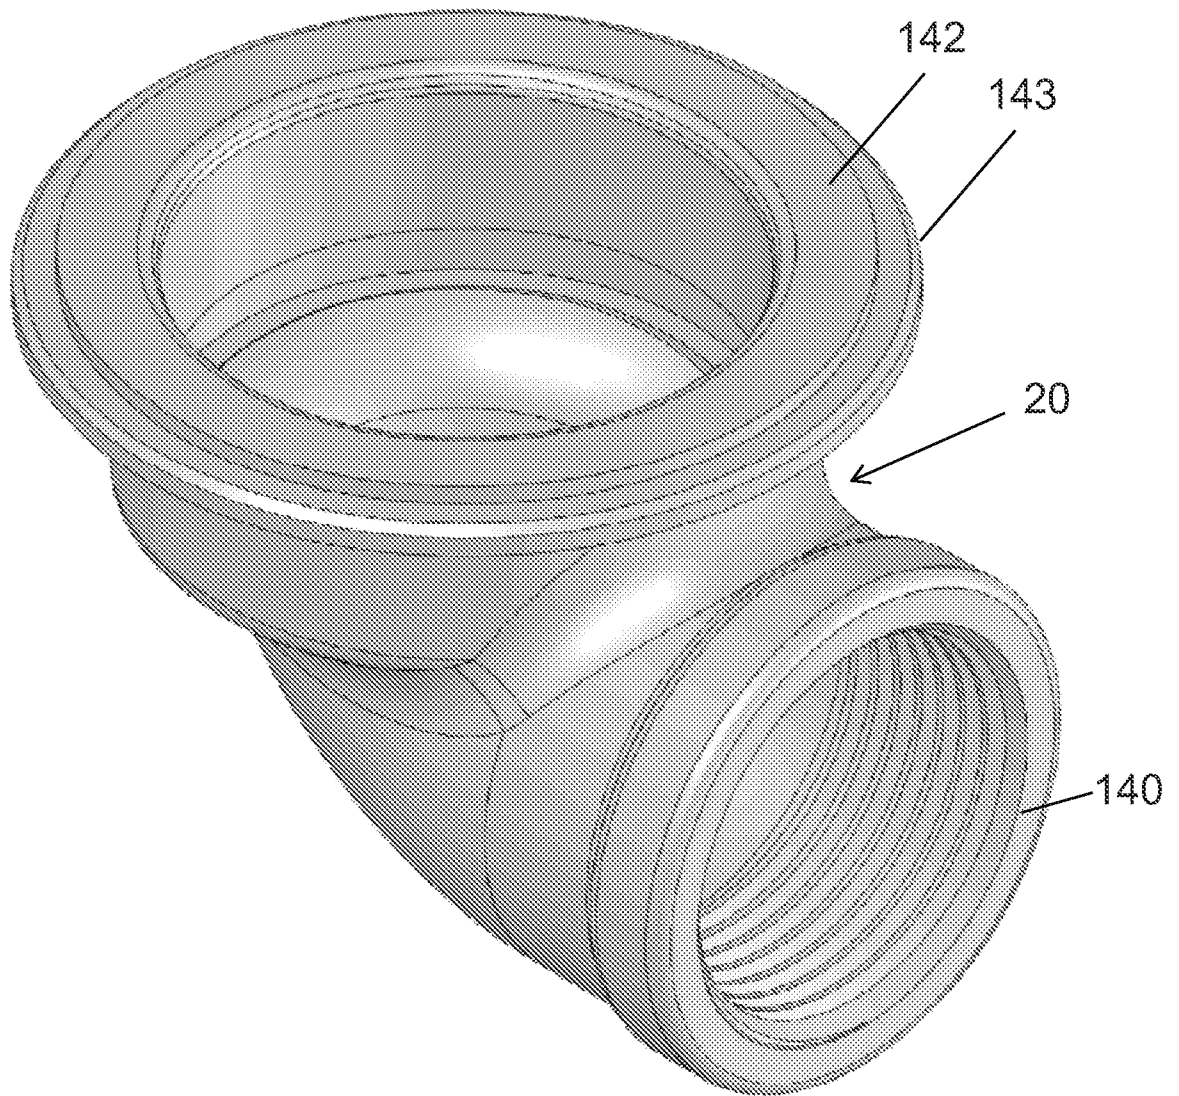
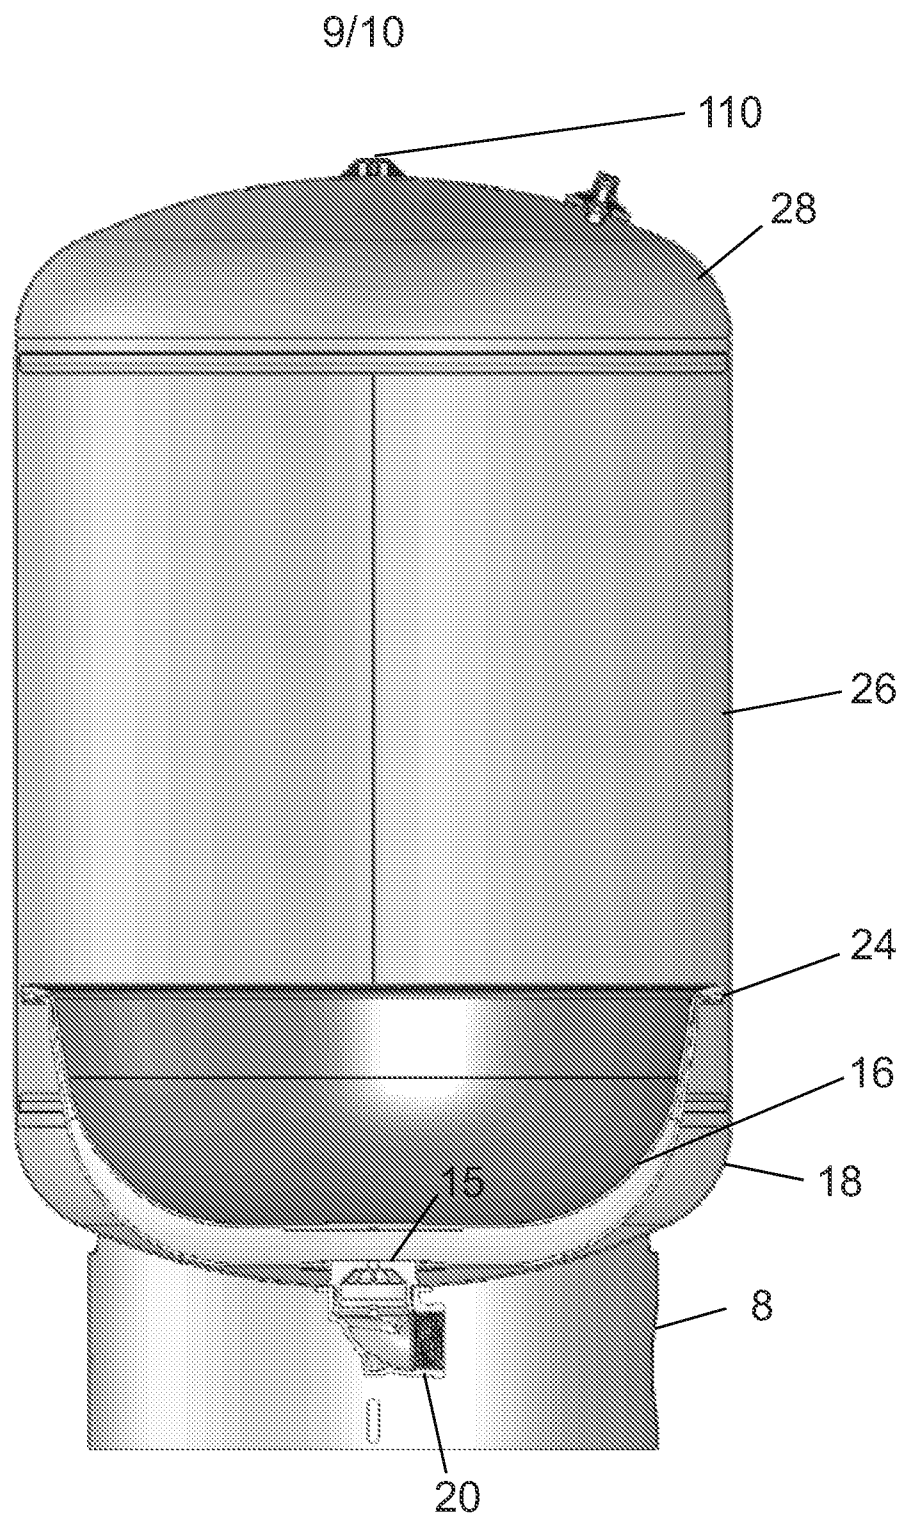


Fig. 8

**Fig. 9**

10/10

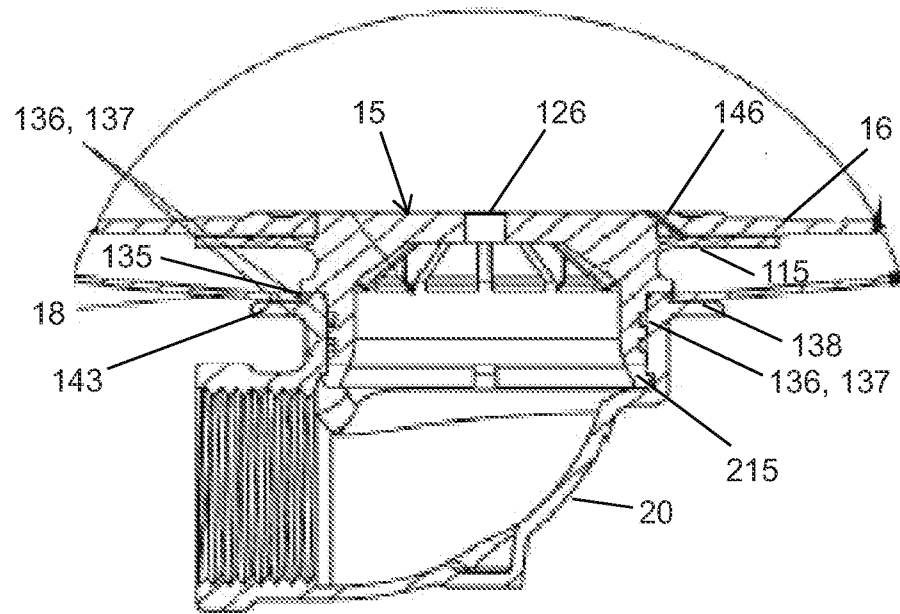


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 15/32552

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F15B 1/08 (2015.01)

CPC - F15B 1/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): F15B 1/08 (2015.01)

CPC: F15B 1/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

IPC(8): F15B 1/10, B01D 21/00, F15B 1/22, F15B 1/12, B65D 25/04 (2015.01) CPC: F15B 2201/3156, F15B 2201/3152, F15B 2201/435, F15B 2201/3151, B01D 21/00, E03B 11/02, E03B 11/04, C02F 2011/007, B01D 21/02, F15B 1/10, F15B 1/22, B65D 25/4

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase; ProQuest Dialog; Google Patents; Google Web; Google Scholar

Search Terms: bladder, diaphragm, bottom, lower, disc, disk, connector, coupler, inlet, entry, seal%, male, coupling, fitting, gland, water, plumbing, reservoir, plate, connection, shell, multi-piece, multi-component, composite, two piece, two-piece, sack%, sac%, me

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 7,322,488 B2 (Lombardi et al.) 29 January 2008 (29.01.2008). Figs. 1-2, 4, 6; col 1, ln 16-19; col 3, ln 45-50, 55-60; col 5, ln 40-48, 65-66.	1-8
A	US 2012/0080438 A1 (Beretta, III et al.). 05 April 2012 (05.04.2012). Fig. 3; para [0053], [0057].	1-8
A	US 3,931,834 A (Cailliet). 13 January 1976 (13.01.1976). Fig. 1; col 1, ln 65-col 2, ln 2; col 2, ln 3-5.	1-8
A	GB 2077243 A (Malpas et al.). 16 December 1981 (16.12.1981). Fig. 8; col 6, ln 114-129.	1-8

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 July 2015 (28.07.2015)

Date of mailing of the international search report

14 AUG 2015

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774