

[54] **FACIAL MASSAGER**

[76] Inventor: **Sohji Kawada**, 49-6 Nakano
5-chome, Tokyo, Japan

[22] Filed: **Mar. 8, 1973**

[21] Appl. No.: **339,046**

Related U.S. Application Data

[62] Division of Ser. No. 92,687, Nov. 25, 1970, Pat. No.
3,736,921.

[52] **U.S. Cl.**..... **128/56, 128/40, 128/65,**
128/297

[51] **Int. Cl.**..... **A61h 7/00**

[58] **Field of Search**..... **128/38-40,**
128/56, 297, 65

[56] **References Cited**

UNITED STATES PATENTS

2,218,443 10/1940 Tweddle 128/297

2,266,931 12/1941 Wheeler..... 128/38

Primary Examiner—Lawrence W. Trapp
Attorney, Agent, or Firm—George B. Oujevolk

[57] **ABSTRACT**

A facial massager wherein at the opening end of a case an elastic friction plate is mounted on the rotary shaft of a motor contained in the case, projected fins are provided on the surface of the friction plate, an inlet hole is bored between the projected fins, a piston in a cylinder provided in projection at right angles to the case is reciprocated by a crank of the rotary shaft, and stains on the face are absorbed by the absorbing action of the piston, massaging the face with the friction plate.

2 Claims, 4 Drawing Figures

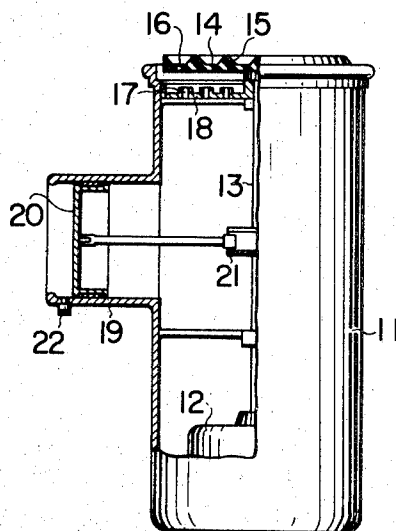


FIG. 1

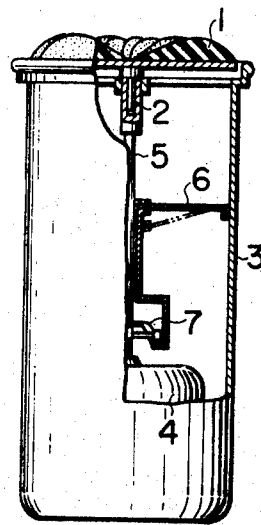


FIG. 2

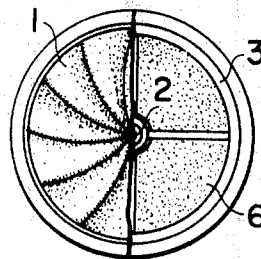


FIG. 3


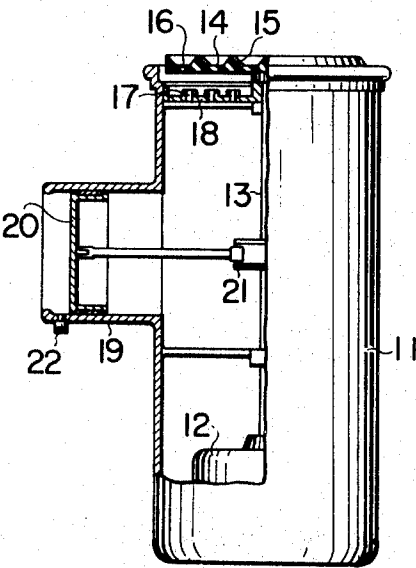


FIG. 4

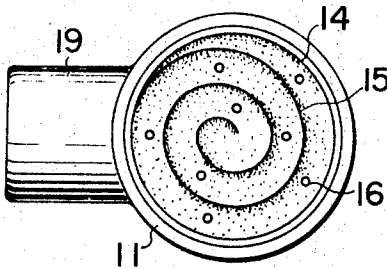

FACIAL MASSAGER

This is a divisional application of Ser. No. 92,687 filed Nov. 25, 1970 and now U.S. Pat. No. 3,736,921.

This invention is characterized in that an elastic friction plate on the surface of which arc-shaped or spiral projected fins are radially formed, is detachably mounted on the shaft of a motor contained in a case at the opening end of the case, in this case a suction rubber film or a piston is provided and stains on the face are absorbed from around of the friction plate by the absorbing action of the suction rubber or the piston which is reciprocated by means of an optional interlocking device, massaging the face with the friction plate being rotated by the motor.

Further, this invention is characterized in that between said projected fins in said massager, an inlet port is bored in said friction plate and still more an oil basin provided in projection with numberless suction pipes is fitted onto the lower surface of said friction plate and a piston in a cylinder provided in projection at right angles to the case is reciprocated by means of a crank of a rotary shaft and stains on the face are absorbed by the absorbing action of the piston, massaging the face with the friction plate or stains at the root of hair are sucked out, putting the outer end of the cylinder on the face and regulating a suction pressure by a regulating screw.

Appended drawings show two embodiments of this invention:

FIG. 1 is a partial longitudinal section side view of a first embodiment;

FIG. 2 is a partially broken plan view;

FIG. 3 is a partial longitudinal section side view of a second embodiment; and

FIG. 4 is a plan view.

The first embodiment of this invention will now be described with reference to the accompanying drawings.

A support shaft 2 of an elastic friction plate 1 on the surface of which arc-shaped projected fins 8 are radially formed is detachably fitted onto a rotary shaft 5 of a motor 4 contained in a case 3 at the opening end of the case 3 and a suction rubber film 6 or a piston provided in the case is adapted to be reciprocated, for instance, by means of an interlocking device consisting of a cam 7 mounted on said shaft 5 and a follower 9 connected to said rubber film 6.

In this invention, the motor 4 is rotated by an optional power source and a suitable cleansing cream is applied on the surface of the friction plate 1 and whereby the face is massaged and at the same time stains on the face are absorbed from around the friction plate by the absorbing action of the reciprocating suction rubber film 6 or the piston. Namely, impurities at the root of hair are pushed out, holding oil films with the projected fins 8 of the friction plate 1 and these impurities are absorbed by the absorbing action around

the friction plate 1, so that stains on the skin of the face are completely removed and circulation of the blood is accelerated and an ideal massage takes place and removing the friction plate, stains on the face can be absorbed by the absorbing action alone.

Next, in the second embodiment, at the opening end of a case 11 an elastic friction plate 14 is mounted on a rotary shaft 13 of a motor 12 contained in the case 11, spiral projected fins 15 are provided on the surface of the friction plate and an inlet port 16 is bored between the fins 15 and further an oil basin 18 provided in projection with numberless suction pipes 17 is fitted on the lower surface of the friction plate 14 and a piston 20 is a cylinder provided in projection at right angles to the case 11 is adapted to be reciprocated by a crank 21 of the rotary shaft 13 and the outer end of the cylinder 19 is provided with a suction pressure regulating screw 22.

In this embodiment, the elastic friction plate 14 is rotated by the rotation of the motor 12 through the rotary shaft 13, a cleansing cream or the like is applied on the surface of the friction plate 14, with which the face is massaged, and by the absorbing action of the piston 20 being reciprocated by the crank 21, stains on the face are absorbed from around the friction plate 14 or the inlet port 16, so that in this case the oil basin 18 receives oil or impurities and stains in the case is prevented and stains or impurities at the root of hair or the like are directly sucked out by the absorbing action of the piston, putting the outer end of the cylinder 19 on the face. In this case a suction pressure can be regulated at will by the regulating screw 22.

As mentioned above, in this invention, there is a special feature that a massage takes place, holding an oil film such as cleansing cream and at the same time impurities at the root of hair are pushed out and absorbed or by directly sucking out stains with the cylinder, stains on the skin of the face are completely removed and thus an ideal effect of facial massage can be obtained.

What is claimed is:

1. A facial massager, characterized in that at the opening end of a case an elastic friction plate is mounted on the rotary shaft of a motor contained in the case, projected fins are provided on the surface of the friction plate, an inlet hole is bored between the projected fins, a piston in a cylinder provided in projection at right angles to the case is reciprocated by a crank of the rotary shaft, and stains on the face are absorbed by the absorbing action of the piston, massaging the face with the friction plate.

2. A facial massager as claimed in claim 1 in which an oil basin provided in projection with numberless suction pipes is fitted on to the lower surface of the friction plate in said case and whereby the oil basin is adapted to receive oil or impurities.

* * * * *