



(11) **EP 4 183 958 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
25.12.2024 Bulletin 2024/52

(51) International Patent Classification (IPC):
E05B 41/00 ^(2006.01) **E05B 47/06** ^(2006.01)
E05B 47/00 ^(2006.01)

(21) Application number: **21306598.0**

(52) Cooperative Patent Classification (CPC):
E05B 41/00; E05B 47/0615; E05B 2047/0067

(22) Date of filing: **17.11.2021**

(54) **DOORLOCK WITH LOCK STATUS DETERMINATION**

TÜRSCHLOSS MIT SCHLOSSZUSTANDSBESTIMMUNG

VERROUILLAGE DE PORTE AVEC DÉTERMINATION DE L'ÉTAT DE VERROUILLAGE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **KAUFFMANN, Edouard**
92130 Issy-les-Moulineaux (FR)
- **CHEN, Minglai**
92360 Meudon la Forêt (FR)

(43) Date of publication of application:
24.05.2023 Bulletin 2023/21

(74) Representative: **Atout PI Laplace**
Immeuble Up On
25 Boulevard Romain Rolland
CS 40072
75685 Paris Cedex 14 (FR)

(73) Proprietor: **NETATMO**
92100 Boulogne Billancourt (FR)

(72) Inventors:

- **GERARD, Clémence**
92190 Meudon (FR)

(56) References cited:
WO-A1-2005/066440 JP-A- 2006 118 229
JP-A- 2012 144 950 US-A1- 2019 218 826

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD

[0001] The invention relates to the field of smart doorlock and concerns a doorlock configured to switch between a locked state and an unlocked state. The invention also concerns a method for determining a locked state and an unlocked state of a doorlock.

BACKGROUND

[0002] Electromechanical lock and key with identification code, or key with a specific shape without identification code, are widespread. They enable authorized key holders to have access to locked rooms if the identification code of the key, or the shape of the key, corresponds to a predetermined code, or a predetermined shape, in relation with the electromechanical lock. The key may be an ordinary looking key to insert into the lock or an access badge to pass in front of the lock.

[0003] In case of a key with an identification code, the electromechanical lock comprises a processor configured to compare the identification code of the key with the predetermined code. If the identification code corresponds to the predetermined code, the electromechanical lock switches from its locked state to its unlocked state.

[0004] Commonly locks are formed with a body that can be easily unscrewed by a locksmith to facilitate rekeying. The body has the function to lock and unlock the lock. A lock body may be found under the form of a European cylinder (defined by the DIN18251). A European cylinder is a type of lock cylinder. There exist other profiles of lock bodies like the oval cylinder that is used in the Nordic countries. A body may not be in the form of a cylinder. A lock body may be inserted into a lock or a mortise lock or a slot-in lock. This function offers the advantage of allowing its change without altering the boltwork hardware. Removing the body typically requires only loosening a set screw, then sliding the body from the boltwork.

[0005] As depicted in figure 1, a lock mechanism, or doorlock, 5 has a deadbolt 6 that may be entirely positioned inside the housing of the door 7 in the unlocked state. In the locked state (state depicted in figure 1), this deadbolt 6 projects beyond the door 7 and is inserted into a slot of the door frame (not represented), thus locking the door to the frame. The movement of the deadbolt 6 can be mechanically obtained, for example by a rotation of a key inserted into the doorlock or by rotation of a handle 8, preferably an indoor handle. The rotation of the key clockwise, respectively anticlockwise, causes a pin to rotate accordingly, thereby making the deadbolt 6 translate either outside the door to be inserted into the slot of the door frame, or inside the door. To switch from the locked state of the door to the unlocked state of the door, a user has to rotate the key with the corresponding

rotation of the key inside the doorlock, or rotate the indoor handle 8 with the corresponding rotation (which means with the adapted angular displacement in the corresponding direction 3, 4) to generate a rotation of the pin that actuates in translation the deadbolt 6. The door may comprise a handle 9 to activate the latch 2 of the door. This handle 9 (together with the latch 2) enables to open and close the door in its unlocked state, to enter or leave the room.

[0006] Therefore, the rotation of the indoor handle enables to make the deadbolt translate between various positions, from a position totally inserted in the door to a position where the deadbolt extends beyond the door, so as to be inserted into the corresponding slot of the door frame, and vice versa depending on the direction of the rotation of the indoor handle (clockwise and/or anticlockwise).

[0007] However, after having turned the handle clockwise and/or anticlockwise, it is difficult for a user to estimate the position of the deadbolt in the door or in the slot of the door frame. The existing doorlocks do not offer the possibility to determine if the doorlock is locked or unlocked.

[0008] WO2005066440A1 provides a mechanism for monitoring the respective position of a window handle from a distance. A handle shaft and/or handle bearing bears a circuit slide which controls the sensors associated with the individual positions of the handle. The output signals of the sensors are transmitted by radio or via a line to a report centre.

[0009] US2019/218826 Presents an interchangeable electro-mechanical lock core for use with a lock device having a locked state and an unlocked state is disclosed. The interchangeable electromechanical lock core may include a moveable plug having a first position relative to a lock core body which corresponds to the lock device being in the locked state and a second position relative to a lock core body which corresponds to the lock device being in the unlocked state.

[0010] There is consequently a need for a doorlock configured to enable to retrieve the status of the doorlock to know whether the doorlock is in its locked state or in its unlocked state.

SUMMARY OF THE INVENTION

[0011] A solution to overcome this drawback is to provide a doorlock enabling to retrieve the lock status of the doorlock by analyzing the rotation and the direction of the rotation of the handle.

[0012] To this end, the subject of the invention is a doorlock configured to switch between a locked state and an unlocked state, the doorlock extending along a first axis between a first end and a second end, the doorlock comprising:

- a handle positioned at the first end of the doorlock, the handle being mobile in rotation around the first

axis,

- a pin positioned between the first end and the second end of the doorlock, the pin extending radially from the first axis, the pin being mobile in rotation around the first axis, and configured to be rotatably driven by a rotation of the handle, thereby making the doorlock switch between the locked state and the unlocked state,
- a PCB secured in an immovable manner inside the handle,
- a ring centered around the first axis, and fixed to the handle so that the rotation of the handle makes the ring rotate,
- at least one magnet positioned on the ring,
- two reed switches positioned on the PCB, preferably facing the ring,

wherein the PCB comprises a processor configured to determine an angular displacement of the handle and a direction of the rotation of the handle around the first axis, based on an electric field generated by the two reed switches when the handle is actuated in rotation around the first axis and to determine a locked/unlocked state of the doorlock.

[0013] Advantageously, the doorlock of the invention comprises at least two magnets, two adjacent magnets of the at least two magnets forming an angular portion from the first axis with a predefined angle.

[0014] Advantageously, the processor is further configured to send to a remote control through a communication link the angular displacement of the handle and the direction of the rotation of the handle around the first axis.

[0015] Advantageously each of the at least two magnets comprises a north pole and a south pole superimposed on the north pole according to a second axis parallel to the first axis, respectively in a first direction and in a second direction, opposite to the first direction, for two adjacent magnets of the at least two magnets.

[0016] Advantageously the at least two magnets are distributed regularly on the ring.

[0017] Advantageously the processor comprises a memory configured to store a position of the handle.

[0018] Advantageously the processor is configured to read an identification code of an identification key and configured to cause the doorlock to switch from the locked state to the unlocked state if the identification code of the identification key is an authorized code of the doorlock.

[0019] The invention also relates to a method for determining a locked state and an unlocked state of a doorlock, the doorlock extending along a first axis between a first end and a second end, the doorlock comprising:

- a handle positioned at the first end of the doorlock, the handle being mobile in rotation around the first axis,
- a pin positioned between the first end and the second

end of the doorlock, the pin extending radially from the first axis, the pin being mobile in rotation around the first axis, and configured to be rotatably driven by a rotation of the handle, thereby making the doorlock switch between the locked state and the unlocked state,

- a PCB secured in an immovable manner inside the handle, the PCB comprising a processor,
- a ring centered around the first axis, and fixed to the handle so that the rotation of the handle makes the ring rotate,
- at least one magnet positioned on the ring,
- two reed switches positioned on the PCB, preferably facing the ring,

the method comprising the following steps:

- rotation of the handle about the first axis according to an angular displacement of the handle and a direction of the rotation of the handle around the first axis,
- generation of a first electrical signal and a second electrical signal by the two reed switches,
- determination of the angular displacement of the handle and the direction of the rotation of the handle around the first axis by the processor based on the first electrical signal and the second electrical signal,
- determining a locked/unlocked state of the doorlock.

[0020] Advantageously the method of the invention comprises a step of storing a position of the handle.

[0021] Advantageously the method of the invention further comprises a step of determining the locked state and the unlocked state of the doorlock from the stored position and the angular displacement of the handle and the direction of the rotation of the handle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings illustrate various non-limiting, exemplary, innovative aspects in accordance with the present descriptions:

- Figure 1 schematically represents a lock mechanism of a door of the prior art;
- Figure 2 schematically represents a doorlock according to the invention;
- Figure 3 schematically represents a doorlock according to the invention;
- Figure 4 schematically represents the working principle of a reed switch included in a doorlock according to the invention;
- Figure 5 schematically represents a ring of the doorlock according to the invention;
- Figure 6 schematically represents the principle of the doorlock according to the invention;
- Figure 7 schematically represents the principle of the doorlock according to the invention;

- Figure 8 schematically represents the analysis of the direction of the rotation of the handle of the doorlock of the invention;
- Figure 9 represents an example of the reed switch states for a clockwise rotation of the handle of the doorlock of the invention;
- Figure 10 represents an example of the reed switch states for anticlockwise rotation of the handle of the doorlock of the invention;
- Figure 11 represents a block diagram of the steps of a method for determining a locked state and an unlocked state of a doorlock according to the invention.

[0023] For the sake of clarity, the same elements have the same references in the various figures.

DETAILED DESCRIPTION

[0024] As previously mentioned, although many of the features of this invention are described in relation to a door, it is understood that they are generally applicable to any opening unit, such as a window.

[0025] In order to illustrate the invention, the explanations are related to a door. Note that these explanations may be applied similarly to any opening unit. A door is an opening unit enabling the access to a room (or from a room to the outside) through an aperture. The door is connected to a door frame that frames the aperture and is fixed to the walls around the aperture. In an unlocked state of the door, the door is mobile in relation to the door frame, typically mobile in rotation around doors hinges (or in translation in the case the door and the door frame are configured to let the door slide through a part of the door frame and into the wall). The door may be in an open configuration or a closed configuration. In the closed configuration, the door covers the aperture (i.e. no one can go through the aperture). Typically the door is equipped with a lock mechanism. The lock mechanism has a latch that is either inserted into a slot of the door frame (the door is closed) or retracted inside the door (the door is no longer attached to the door frame and may be open). In the closed configuration, the latch is inserted into the slot of the door frame. In existing lock mechanisms, a lock clutch is connected to the latch. The lock clutch is usually engaged with both the indoor and outdoor door knobs. This enables a user to activate the lock clutch to make the latch move by moving one of the door knobs or handles. Therefore a user has to move a door knob of the door to switch from the closed configuration of the door to the open configuration of the door. Indeed, the lock clutch being engaged with the knob, the movement of the knob leads to the movement of the latch. Moving the door knob makes the latch retract into the door. The user can pull or push the door to open it.

[0026] In the closed configuration of the door, the lock mechanism can be either in a locked state or an unlocked state. The unlocked state corresponds to the case dis-

cussed above. The door may be open by a user when activating a door knob and pushing or pulling the door. As explained in the introduction, the lock mechanism has a deadbolt entirely positioned inside the locking mechanism in the unlocked state. In the locked state, this deadbolt projects beyond the lock mechanism and is inserted into a slot of the door frame, thus locking the door to the frame. To switch from the locked state of the door to the unlocked state of the door, a user has to rotate the key with the corresponding rotation of the key inside the lock mechanism, or rotate the indoor handle with the corresponding rotation (which means with the adapted angular displacement in the corresponding direction).

[0027] This previous case corresponds to a single-point lock mechanism (i.e. with a single deadbolt). The invention similarly applies to a multi-point lock mechanism. A multi-point lock, also known as a safety lock, provides extra security as it distributes the locking points (i.e. a plurality of deadbolts) over the entire door. The most common multi-point lock is the three-point lock composed of a main deadbolt in the center and two other bolts at the top and at the bottom actuated by a rod. Some multi-point locks may have up to ten locking points.

[0028] Figure 1 schematically represents a lock mechanism of a door of the prior art and was discussed in the introduction.

[0029] Figure 2 schematically represents a doorlock 10 according to the invention. The doorlock 10 is configured to switch between a locked state and an unlocked state.

[0030] The doorlock extends along a first axis X between a first end 11 and a second end 12. The doorlock comprises a handle 13 positioned at the first end 11 of the doorlock, the handle 13 being mobile in rotation around the first axis X. The doorlock comprises a pin 14 positioned between the first end 11 and the second end 12 of the doorlock, the pin 14 extending radially from the first axis X, the pin being mobile in rotation around the first axis X, and configured to be rotatably driven by a rotation of the handle 13 or by a rotation of an associated key inserted into the outdoor handle at the second end 12, thereby making the doorlock switch between the locked state and the unlocked state.

[0031] The doorlock 10 may be configured to cooperate with at least one identification key 17. The doorlock 10 may comprise at its second end 12 a key hole 16 shaped to accept insertion of the identification key 17. A rotation of the identification key may lead to the rotation of the pin, thereby making the doorlock switch between the locked state and the unlocked state. Alternatively, or in addition, the doorlock 10 may comprise a processor configured to read an identification code of the identification key 17 and configured to cause the doorlock 10 to switch from the locked state to the unlocked state if the identification code of the identification key 17 is an authorized code of the doorlock 10. The processor of the doorlock 10 may comprise an algorithm that is able to generate a plurality of codes. When inserting the identi-

fication key 17 into the key hole or having the identification key 17 or a smartphone close to the doorlock 10, (i.e. until about 10 meters of the doorlock, for example thanks to the BLE technology (acronym of Bluetooth™ Low Energy technology)), one of the code generated by the algorithm of the processor is transmitted from the processor to the identification key 17 when this one is inserted into the key hole 16. In return, the processor should receive from the identification key 17 an authorized code, that is to say an identification code corresponding to the code transmitted by the processor. There is a communication between the doorlock 10 and the identification key 17. And if the processor receives from the identification key 17, as a response to its code, an authorized code, the identification key 17 is considered as an authorized key for switching between the locked state and the unlocked state. The communication between the identification key and the doorlock may use a direct electrical contact, an RF communication link (NFC™, Bluetooth™, Wi-Fi™, Zigbee™ or other low power RF communication standard or proprietary means), an optical or an acoustical communication means.

[0032] More details of the core of the invention are given thereafter.

[0033] Figure 3 schematically represents a doorlock according to the invention. According to the invention, the doorlock 10 comprises a PCB 18 (Printed Circuit Board) secured in an immovable manner inside the handle 13. The doorlock 10 comprises a ring 19 centered around the first axis X, and fixed to the handle 13 so that the rotation of the handle 13 makes the ring 19 rotate. In other words, a clockwise rotation of a defined angle of the handle 13 around the first axis X makes the ring 19 rotate clockwise of the same defined angle around the first axis X. Similarly, an anticlockwise rotation of another defined angle of the handle 13 around the first axis X makes the ring 19 rotate anticlockwise of the same another defined angle around the first axis X.

[0034] The doorlock 10 comprises at least one magnet, but preferably at least two magnets 20 positioned on the ring 19. The doorlock 10 comprises two reed switches 23 positioned on the PCB 18, preferably facing the ring 19. A reed switch is an electrical switch operated by an applied magnetic field. The reed switch is closed when a magnet is closed of the reed switch and the reed switch is open when the magnet is too far. This principle is described in detail below.

[0035] The PCB 18 comprises a processor configured to determine an angular displacement of the handle 13 and a direction of the rotation of the handle 13 around the first axis X, based on an electric field generated by the two reed switches 23 when the handle 13 is actuated in rotation around the first axis X.

[0036] Figure 4 schematically represents the working principle of a reed switch included in a doorlock according to the invention. A reed switch is an electrical switch operated by an applied magnetic field. The reed switch is closed when a magnet is closed of the reed switch (on

the left hand side of the figure) and the reed switch is open when the magnet is too far (on the right hand side of the figure). This should be clear to a person skilled in the art but it may be nevertheless noted that the state of the reed switch is not the state of the doorlock.

[0037] The operating mode of the reed switch described above is an example of a so-called "normally opened" reed switch (i.e. a reed switch that is normally in its open state and is closed when an magnetic field is applied in its vicinity). The invention similarly applies to a so-called "normally closed" reed switch (i.e. a reed switch that is normally in its closed state and is open when a magnetic field is applied in its vicinity).

[0038] As the magnet 20 are positioned on the ring 19, when rotating the handle, the ring rotates similarly and so do the magnets 20 that pass in front of the reed switches positioned on the PCB. The rotation of the handle leads to the approach and distancing of a magnet in regards of a reed switch. Each reed switch changes accordingly its state between open and close.

[0039] Figure 5 schematically represents the ring 19 of the doorlock according to the invention. In a preferred embodiment, each of the at least two magnets 20 comprises a north pole and a south pole superimposed on the north pole according to a second axis Y parallel to the first axis X, respectively in a first direction and in a second direction, opposite to the first direction, for two adjacent magnets 20 of the at least two magnets. This alternance of the north and south pole ensures that between two adjacent magnets the magnetic field is zero, which causes the reed switch to open. This technical feature ensures all reed switches are open when passing between two magnets. The reed switch is closed when it approaches a magnet. Nevertheless, this alternance of the poles is not compulsory.

[0040] Figure 6 schematically represents the principle of the doorlock according to the invention. In this figure, the magnets 20 are labelled from 1 to 6 and the reed switches 23 are labelled A and B and installed on the main PCB. With this configuration, the processor of the doorlock is configured to analyse the angular distance of the rotation (how many degrees compared to the previous position) and its direction (clockwise or anti-clockwise), as explained thereafter.

[0041] Figure 7 schematically represents the principle of the doorlock according to the invention. This figure depicts a non-limitative example of the ring having 6 magnets. The invention applies similarly with less than 6 magnets, for example 2 or 3, or with more than 6 magnets, for example 10 or 12. The magnets are preferably distributed regularly on the ring.

[0042] As mentioned before, the doorlock 10 comprises at least two magnets 20 positioned on the ring 19. As depicted, two adjacent magnets 20 of the at least two magnets form an angular portion 21 from the first axis X with an angle 22 predefined by the position of the magnets. In this example the angle is 60°. Should the ring have 12 magnets, the angle 22 would be 30°. The angle

22 may take other values depending on the position of the magnets 20 on the ring 19.

[0043] The two reed switches 23 are placed on the PCB 18, forming an angular portion from the first axis X with an angle 24. For the sake of explanation, the angle 24 is 45° in the depicted example, but it could have other values, for example 40° or 50°. In the depicted example, the magnets and reed switches have a 15° precision since there are 4 reed switch events for a 60° rotation. Also, the angle 22 may be less than the angle 24. A person skilled in the art understands that the values of the angles 22, 24 depend on the position of the magnets 20 on the ring 19, the distance of the PCB from the ring and the distance between the reed switches. These geometrical parameters may be adapted according to the desired accuracy of the detection. This means that, when considering the angular portion 21 having an angle 22 of 60° during the anticlockwise rotation of the handle (i.e. the rotation of the ring 19), the first magnet 20-1 of the two adjacent magnets delimiting the said angular portion pass in front of the first reed switch 23-1, then pass in front of the second reed switch 23-2, and then the second magnet 20-2 of the two adjacent magnets delimiting the said angular portion pass in front of the first reed switch 23-1, then pass in front of the second reed switch 23-2. There are 4 events that can be noted:

- 20-1 in front of 23-1;
- 20-1 in front of 23-2;
- 20-2 in front of 23-1;
- 20-2 in front of 23-2.

[0044] Figure 8 schematically represents the analysis of the direction of the rotation of the handle of the doorlock of the invention, based on the relative movement of the magnets passing in front of the two reed switches.

[0045] The indoor handle 13 is turned clockwise in one of these cases:

- Reed switch A is at the high level + reed switch B has a rising level;
- Reed switch A is at the low level + reed switch B has a falling level;
- Reed switch B is at the high level + reed switch A has a falling level;
- Reed switch B is at the low level + reed switch A has a rising level.

[0046] The indoor handle 13 is turned anti-clockwise in one of these cases:

- Reed switch A is at the low level + reed switch B has a rising level;
- Reed switch A is at the high level + reed switch B has a falling level;
- Reed switch B is at the low level + reed switch A has a falling level;
- Reed switch B is at the high level + reed switch A has a rising level.

has a rising level.

[0047] Figure 9 represents an example of the reed switch states for a clockwise rotation of the handle of the doorlock of the invention. When considering a case wherein the magnets are placed every 60 degrees on the ring of the doorlock, it means that during a 60° rotation, the two reed switches will measure four changes of state (4 events). This means that the indoor handle turns 15° for each event on reed switches (see figure 9 and figure 10).

[0048] Let now consider the following initial condition for the clockwise rotation: reed switches A and B are low which means that the two reed switches are between two magnets (see figure 9):

- Turning clockwise, reed switch A rises and B is low,
- Continue the rotation, reed switch B rises, A remains high,
- Continue the rotation, reed switch A falls, B remains high,
- Continue the rotation, reed switch B falls, A remains low, the initial conditions are back.

[0049] Figure 10 represents an example of the reed switch states for an anticlockwise rotation of the handle of the doorlock of the invention.

[0050] Let now consider the following initial condition for the anticlockwise rotation: reed switches A and B are low which means that the two reed switches are between magnets (see figure 10):

- Turning anticlockwise, reed switch B rises and A is low,
- Continue the rotation, reed switch A rises, B remains high,
- Continue the rotation, reed switch B falls, A remains high,
- Continue the rotation, reed switch A falls, B remains low, the initial conditions are back.

[0051] Therefore, as the level of the electrical signal from each of the two reed switches depends on the magnetic field to which it is subjected, analyzing the evolution of the signal indicates the direction of the rotation (clockwise and anticlockwise) and the angle of the rotation performed by the handle.

[0052] The processor of the doorlock may comprise a memory configured to store a position of the handle. After analyzing the evolution of the signal and determining the direction and the angle of the rotation, and based on the previously stored position of the handle, it is possible to determine an updated position of the handle, that can also be stored in the memory.

[0053] The processor may further be configured to send to a remote control through a communication link the angular displacement of the handle and the direction of the rotation of the handle around the first axis. The

processor may also calculate, based on the previous stored position of the handle, its angular displacement and the direction of the rotation whether the doorlock is in its locked or unlocked state. This information can be further sent to a remote control, for example to a smart-phone via a web application.

[0054] Figure 11 represents a block diagram of the steps of a method for determining a locked state and an unlocked state of the doorlock 10 according to the invention. According to the invention, the method comprises following steps:

- rotation (step 100) of the handle 13 about the first axis (X) according to an angular displacement of the handle and a direction of the rotation of the handle around the first axis,
- generation (step 110) of a first electrical signal and a second electrical signal by the two reed switches 23,
- determination (step 120) of the angular displacement of the handle and the direction of the rotation of the handle around the first axis by the processor based on the first electrical signal and the second electrical signal.

[0055] The method may further comprise a step 130 of storing a position of the handle.

[0056] The method may further comprise a step 140 of determining the locked state and the unlocked state of the doorlock from the stored position and the angular displacement of the handle and the direction of the rotation of the handle.

[0057] The examples disclosed in this specification are therefore only illustrative of some embodiments of the invention. They do not in any manner limit the scope of said invention which is defined by the appended claims.

Claims

1. A doorlock (10) configured to switch between a locked state and an unlocked state, the doorlock extending along a first axis (X) between a first end (11) and a second end (12), the doorlock comprising:
 - A handle (13) positioned at the first end (11) of the doorlock, the handle (13) being mobile in rotation around the first axis (X),
 - A pin (14) positioned between the first end (11) and the second end (12) of the doorlock, the pin (14) extending radially from the first axis (X), the pin being mobile in rotation around the first axis (X), and configured to be rotatably driven by a rotation of the handle (13), thereby making the doorlock switch between the locked state and the unlocked state,
 - a PCB (18) secured in an immovable manner inside the handle (13),

- a ring (19) centered around the first axis (X), and fixed to the handle (13) so that the rotation of the handle (13) makes the ring (19) rotate,
- at least one magnet (20) positioned on the ring (19),
- two reed switches (23) positioned on the PCB (18), preferably facing the ring (19),

wherein the PCB (18) comprises a processor configured to determine an angular displacement of the handle (13) and a direction of the rotation of the handle (13) around the first axis (X), based on an electric field generated by the two reed switches (23) when the handle (13) is actuated in rotation around the first axis (X), and to determine a locked/unlocked state of the doorlock.

2. The doorlock (10) according to claim 1, wherein the at least one magnet (20) is at least two magnets (20), two adjacent magnets (20) of the at least two magnets forming an angular portion (21) from the first axis (X) with a predefined angle (22).
3. The doorlock (10) according to claim 1 or 2, wherein the processor is further configured to send to a remote control through a communication link the angular displacement of the handle and the direction of the rotation of the handle around the first axis.
4. The doorlock (10) according to any one of claim 2 or 3, wherein each of the at least two magnets (20) comprises a north pole and a south pole superimposed on the north pole according to a second axis (Y) parallel to the first axis (X), respectively in a first direction and in a second direction, opposite to the first direction, for two adjacent magnets (20) of the at least two magnets.
5. The doorlock (10) according to any one of the claims 2 to 4, wherein the at least two magnets (20) are distributed regularly on the ring (19).
6. The doorlock (10) according to any one of the claims 1 to 5, wherein the processor comprises a memory configured to store a position of the handle.
7. The doorlock (10) according to any one of the claims 1 to 6, wherein the processor is configured to read an identification code of an identification key and configured to cause the doorlock (10) to switch from the locked state to the unlocked state if the identification code of the identification key is an authorized code of the doorlock (10).
8. A method for determining a locked state and an unlocked state of a doorlock (10), the doorlock extending along a first axis (X) between a first end (11) and a second end (12), the doorlock comprising:

- A handle (13) positioned at the first end (11) of the doorlock, the handle being mobile in rotation around the first axis (X),
- A pin (14) positioned between the first end (11) and the second end (12) of the doorlock, the pin extending radially from the first axis (X), the pin (14) being mobile in rotation around the first axis, and configured to be rotatably driven by a rotation of the handle (13), thereby making the doorlock switch between the locked state and the unlocked state,
- a PCB (18) secured in an immovable manner inside the handle (13), the PCB comprising a processor,
- a ring (19) centered around the first axis (X), and fixed to the handle (13) so that the rotation of the handle makes the ring rotate,
- at least one magnet (20) positioned on the ring (19),
- two reed switches (23) positioned on the PCB (18), preferably facing the ring,

the method comprising the following steps:

- rotation (100) of the handle (13) about the first axis (X) according to an angular displacement of the handle and a direction of the rotation of the handle around the first axis,
 - generation (110) of a first electrical signal and a second electrical signal by the two reed switches (23),
 - determination (120) of the angular displacement of the handle and the direction of the rotation of the handle around the first axis by the processor based on the first electrical signal and the second electrical signal
 - determining a locked/unlocked state of the doorlock.
9. The method of claim 8, further comprising a step (130) of storing a position of the handle.
10. The method of claim 9, further comprising a step (140) of determining the locked state and the unlocked state of the doorlock from the stored position and the angular displacement of the handle and the direction of the rotation of the handle.

Patentansprüche

1. Türschloss (10), das dafür konfiguriert ist, zwischen einem verschlossenen Zustand und einem unverschlossenen Zustand umzuschalten, wobei sich das Türschloss entlang einer ersten Achse (X) zwischen einem ersten Ende (11) und einem zweiten Ende (12) erstreckt, wobei das Türschloss Folgendes umfasst:

- einen Griff (13), der an dem ersten Ende (11) des Türschlosses positioniert ist, wobei der Griff (13) um die erste Achse (X) drehbar beweglich ist,
- einen Stift (14), der zwischen dem ersten Ende (11) und dem zweiten Ende (12) des Türschlosses positioniert ist, wobei sich der Stift (14) radial von der ersten Achse (X) erstreckt, wobei der Stift um die erste Achse (X) drehbar beweglich ist und dafür konfiguriert ist, durch eine Drehung des Griffs (13) drehend angetrieben zu werden, wodurch das Türschloss zwischen dem verschlossenen Zustand und dem unverschlossenen Zustand umgeschaltet wird,
- eine Leiterplatte (18), die unbeweglich innerhalb des Griffs (13) gesichert ist,
- einen Ring (19), der um die erste Achse (X) zentriert und an dem Griff (13) befestigt ist, so dass der Ring (19) durch die Drehung des Griffs (13) gedreht wird,
- mindestens einen Magneten (20), der auf dem Ring (19) positioniert ist,
- zwei Reedschalter (23), die auf der PCB (18) positioniert sind, die vorzugsweise zum Ring (19) weisen,

wobei die Leiterplatte (18) einen Prozessor umfasst, der dafür konfiguriert ist, eine Winkelverschiebung des Griffs (13) und eine Richtung der Drehung des Griffs (13) um die erste Achse (X) basierend auf einem elektrischen Feld zu bestimmen, das durch die zwei Reedschalter (23) erzeugt wird, wenn der Griff (13) drehend um die erste Achse (X) betätigt wird, und einen verschlossenen/unverschlossenen Zustand des Türschlosses zu bestimmen.

2. Türschloss (10) nach Anspruch 1, wobei es sich bei dem mindestens einen Magneten (20) um mindestens zwei Magneten (20) handelt, wobei zwei angrenzende Magnete (20) der mindestens zwei Magnete einen Winkelabschnitt (21) von der ersten Achse (X) mit einem vordefinierten Winkel (22) bilden.
3. Türschloss (10) nach Anspruch 1 oder 2, wobei der Prozessor ferner dafür konfiguriert ist, die Winkelverschiebung des Griffs und die Richtung der Drehung des Griffs um die erste Achse durch eine Kommunikationsverbindung an eine Fernsteuerung zu senden.
4. Türschloss (10) nach Anspruch 2 oder 3, wobei jeder von den mindestens zwei Magneten (20) einen Nordpol und einen Südpol umfasst, der dem Nordpol entlang einer zweiten Achse (Y) parallel zur ersten Achse, jeweils in einer ersten Richtung und in einer zweiten Richtung entgegengesetzt zur ersten Richtung, bei zwei angrenzenden Magneten (20) der mindestens

tens zwei Magnete überlagert ist.

5. Türschloss (10) nach einem der Ansprüche 2 bis 4, wobei die mindestens zwei Magnete (20) gleichmäßig auf dem Ring (19) verteilt sind. 5
6. Türschloss (10) nach einem der Ansprüche 1 bis 5, wobei der Prozessor einen Speicher umfasst, der dafür konfiguriert ist, eine Position des Griffs zu speichern. 10
7. Türschloss (10) nach einem der Ansprüche 1 bis 6, wobei der Prozessor dafür konfiguriert ist, einen Identifikationscode eines Identifikationsschlüssels zu lesen und dafür konfiguriert ist, das Türschloss (10) zu veranlassen, von dem verschlossenen Zustand in den unverschlossenen Zustand umzuschalten, sofern der Identifikationscode des Identifikationsschlüssels ein autorisierter Code des Türschlosses (10) ist. 20
8. Verfahren zum Bestimmen eines verschlossenen Zustands und eines unverschlossenen Zustands eines Türschlosses (10), wobei sich das Türschloss entlang einer ersten Achse (X) zwischen einem ersten Ende (11) und einem zweiten Ende (12) erstreckt, wobei das Türschloss Folgendes umfasst: 25
 - einen Griff (13), der an dem ersten Ende (11) des Türschlosses positioniert ist, wobei der Griff um die erste Achse (X) drehbar beweglich ist, 30
 - einen Stift (14), der zwischen dem ersten Ende (11) und dem zweiten Ende (12) des Türschlosses positioniert ist, wobei sich der Stift radial von der ersten Achse (X) erstreckt, wobei der Stift (14) um die erste Achse drehbar beweglich und dafür konfiguriert ist, durch eine Drehung des Griffs (13) drehend angetrieben zu werden, wodurch das Türschloss zwischen dem verschlossenen Zustand und dem unverschlossenen Zustand umgeschaltet wird, 35
 - eine Leiterplatte (18), die unbeweglich innerhalb des Griffs (13) gesichert ist, wobei die Leiterplatte einen Prozessor umfasst, 40
 - einen Ring (19), der um die erste Achse (X) zentriert und an dem Griff (13) befestigt ist, so dass der Ring durch die Drehung des Griffs gedreht wird, 45
 - mindestens einen Magneten (20), der auf dem Ring (19) positioniert ist, 50
 - zwei Reedschalter (23), die auf der Leiterplatte (18) positioniert sind, die vorzugsweise zum Ring weisen,

wobei das Verfahren die folgenden Schritte umfasst: 55

- Drehen (100) des Griffs (13) um die erste Achse (X) gemäß einer Winkelverschiebung des

Griffs und einer Richtung der Drehung des Griffs um die erste Achse,

- Erzeugen (110) eines ersten elektrischen Signals und eines zweiten elektrischen Signals durch die zwei Reedschalter (23),
- Bestimmen (120) der Winkelverschiebung des Griffs und der Richtung der Drehung des Griffs um die erste Achse durch den Prozessor basierend auf dem ersten elektrischen Signal und dem zweiten elektrischen Signal,
- Bestimmen eines verschlossenen/unverschlossenen Zustands des Türschlosses.

9. Verfahren nach Anspruch 8, ferner umfassend einen Schritt (130) zum Speichern einer Position des Griffs.

10. Verfahren nach Anspruch 9, ferner umfassend einen Schritt (140) zum Bestimmen des verschlossenen Zustands und des unverschlossenen Zustands des Türschlosses anhand der gespeicherten Position und der Winkelverschiebung des Griffs und der Richtung der Drehung des Griffs.

Revendications


1. Serrure de porte (10) configurée pour basculer entre un état verrouillé et un état déverrouillé, la serrure de porte s'étendant le long d'un premier axe (X) entre une première extrémité (11) et une deuxième extrémité (12), la serrure de porte comprenant :
 - une poignée (13) positionnée à la première extrémité (11) de la serrure de porte, la poignée (13) étant mobile en rotation autour du premier axe (X),
 - une goupille (14) positionnée entre la première extrémité (11) et la deuxième extrémité (12) de la serrure de porte, la goupille (14) s'étendant radialement à partir du premier axe (X), la goupille étant mobile en rotation autour du premier axe (X) et configurée pour être entraînée en rotation par une rotation de la poignée (13), faisant ainsi basculer la serrure de porte entre l'état verrouillé et l'état déverrouillé,
 - une carte à circuit imprimé (18) retenue d'une manière immobile à l'intérieur de la poignée (13),
 - une bague (19) centrée autour du premier axe (X), et fixée à la poignée (13) de sorte que la rotation de la poignée (13) fait tourner la bague (19),
 - au moins un aimant (20) positionné sur la bague (19),
 - deux commutateurs à lames (23) positionnés sur la carte à circuit imprimé (18), de préférence faisant face à la bague (19),

- dans laquelle la carte à circuit imprimé (18) comprend un processeur configuré pour déterminer un déplacement angulaire de la poignée (13) et un sens de la rotation de la poignée (13) autour du premier axe (X), sur la base d'un champ électrique généré par les deux commutateurs à lames (23) lorsque la poignée (13) est actionnée en rotation autour du premier axe (X), et pour déterminer un état verrouillé / déverrouillé de la serrure de porte. 5
2. Serrure de porte (10) selon la revendication 1, dans laquelle l'au moins un aimant (20) est au moins deux aimants (20), deux aimants adjacents (20) des au moins deux aimants formant une partie angulaire (21) à partir du premier axe (X) selon un angle prédéfini (22). 10
3. Serrure de porte (10) selon la revendication 1 ou 2, dans laquelle le processeur est configuré en outre pour envoyer à une télécommande *via* une liaison de communication le déplacement angulaire de la poignée et le sens de la rotation de la poignée autour du premier axe. 20
4. Serrure de porte (10) selon l'une quelconque de la revendication 2 ou 3, dans laquelle chacun des au moins deux aimants (20) comprend un pôle nord et un pôle sud superposé sur le pôle nord selon un deuxième axe (Y) parallèle au premier axe (X), respectivement dans une première direction et dans une deuxième direction opposée à la première direction, pour deux aimants adjacents (20) des au moins deux aimants. 25 30
5. Serrure de porte (10) selon l'une quelconque des revendications 2 à 4, dans laquelle les au moins deux aimants (20) sont répartis de façon régulière sur la bague (19). 35
6. Serrure de porte (10) selon l'une quelconque des revendications 1 à 5, dans laquelle le processeur comprend une mémoire configurée pour stocker une position de la poignée. 40
7. Serrure de porte (10) selon l'une quelconque des revendications 1 à 6, dans laquelle le processeur est configuré pour lire un code d'identification d'une clé d'identification et configuré pour amener la serrure de porte (10) à basculer de l'état verrouillé à l'état déverrouillé si le code d'identification de la clé d'identification est un code autorisé de la serrure de porte (10). 45 50
8. Procédé pour déterminer un état verrouillé et un état déverrouillé d'une serrure de porte (10), la serrure de porte s'étendant le long d'un premier axe (X) entre une première extrémité (11) et une deuxième extrémité (12), la serrure de porte comprenant :

- une poignée (13) positionnée à la première extrémité (11) de la serrure de porte, la poignée étant mobile en rotation autour du premier axe (X),
- une goupille (14) positionnée entre la première extrémité (11) et la deuxième extrémité (12) de la serrure de porte, la goupille s'étendant radialement à partir du premier axe (X), la goupille (14) étant mobile en rotation autour du premier axe, et configurée pour être entraînée en rotation par une rotation de la poignée (13), faisant ainsi basculer la serrure de porte entre l'état verrouillé et l'état déverrouillé,
- une carte à circuit imprimé (18) retenue d'une manière immobile l'intérieur de la poignée (13), la carte à circuit imprimé comprenant un processeur,
- une bague (19) centrée autour du premier axe (X) et fixée à la poignée (13) de sorte que la rotation de la poignée fait tourner la bague,
- au moins un aimant (20) positionné sur la bague (19),
- deux commutateurs à lames (23) positionnés sur la carte à circuit imprimé (18), de préférence faisant face à la bague,

le procédé comprenant :

- la rotation (100) de la poignée (13) autour du premier axe (X) selon un déplacement angulaire de la poignée et un sens de la rotation de la poignée autour du premier axe,
 - la génération (110) d'un premier signal électrique et d'un deuxième signal électrique par les deux commutateurs à lames (23),
 - la détermination (120) du déplacement angulaire de la poignée et du sens de la rotation de la poignée autour du premier axe par le processeur sur la base du premier signal électrique et du deuxième signal électrique, et
 - la détermination d'un état verrouillé / déverrouillé de la serrure de porte.
9. Procédé selon la revendication 8, comprenant en outre une étape (130) de stockage d'une position de la poignée.
10. Procédé selon la revendication 9, comprenant en outre une étape (140) de détermination de l'état verrouillé et de l'état déverrouillé de la serrure de porte à partir de la position stockée et du déplacement angulaire de la poignée et du sens de la rotation de la poignée.

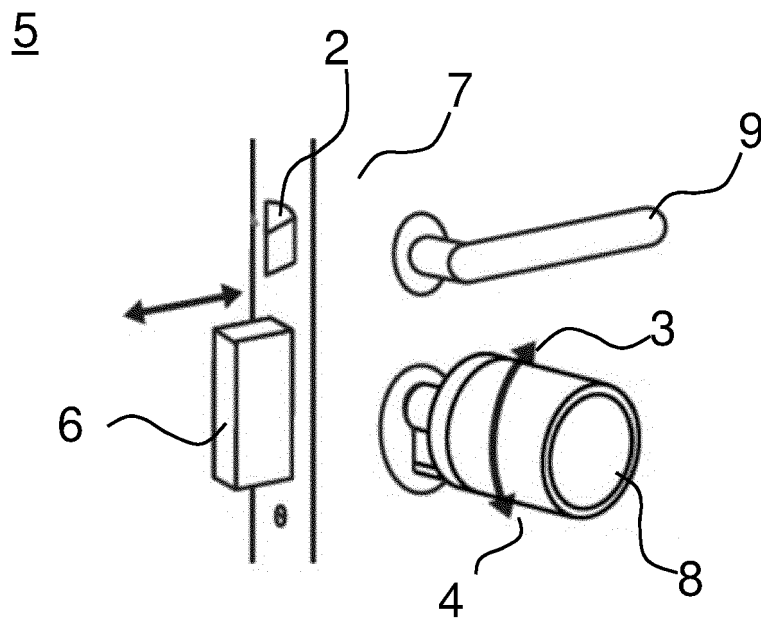

(Prior Art)
FIG. 1

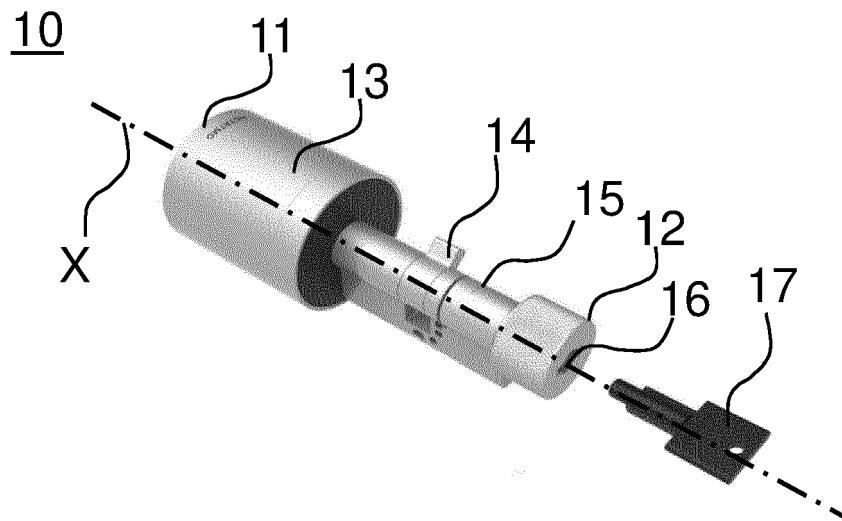
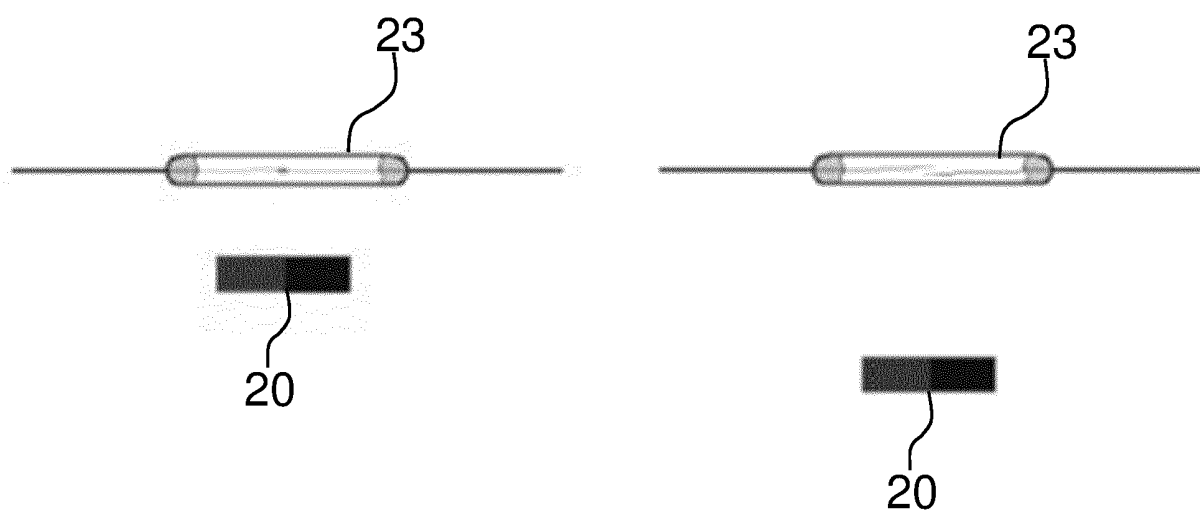
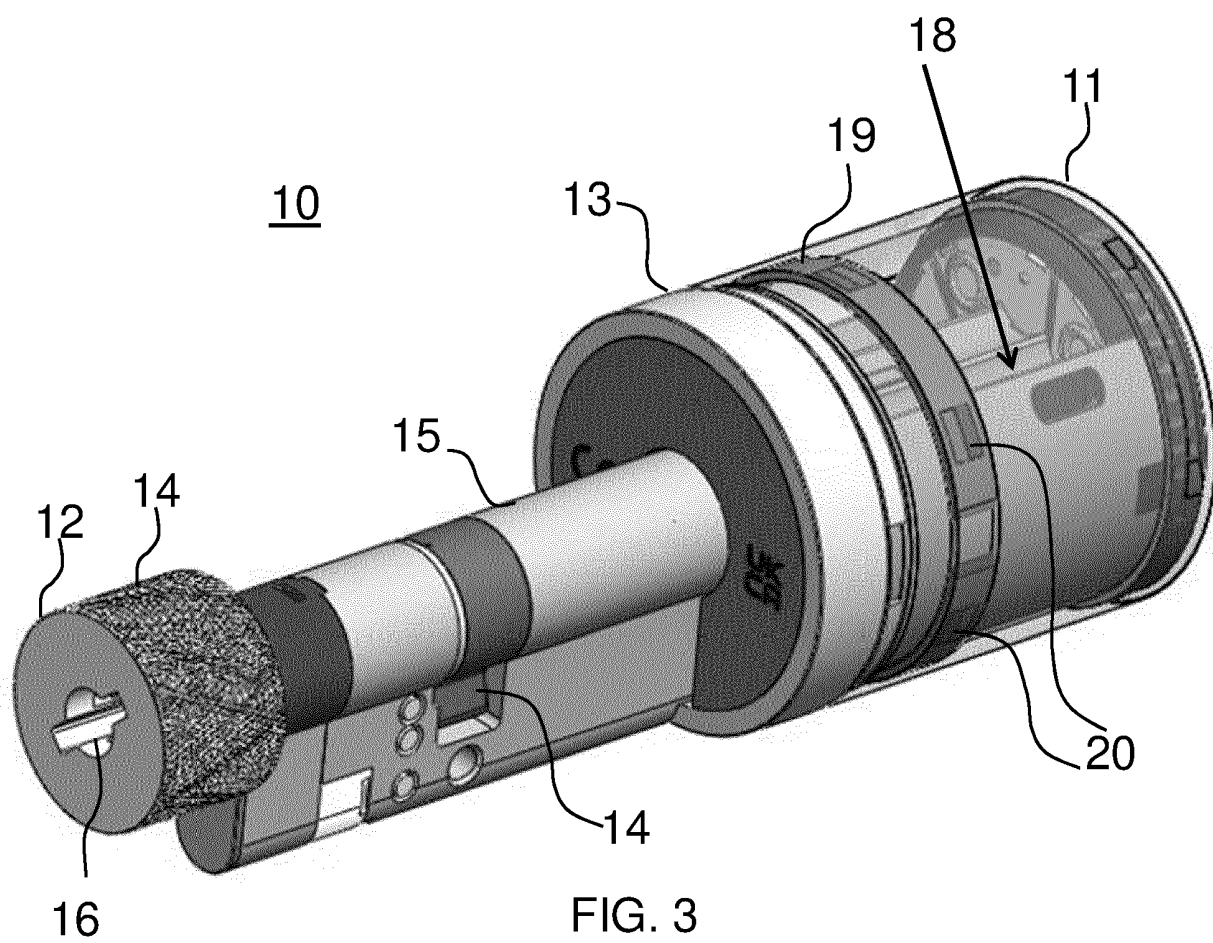


FIG. 2



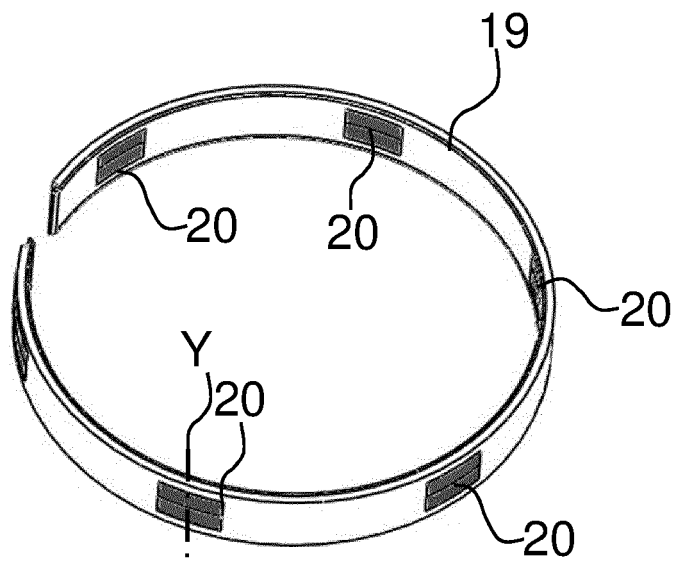


FIG. 5

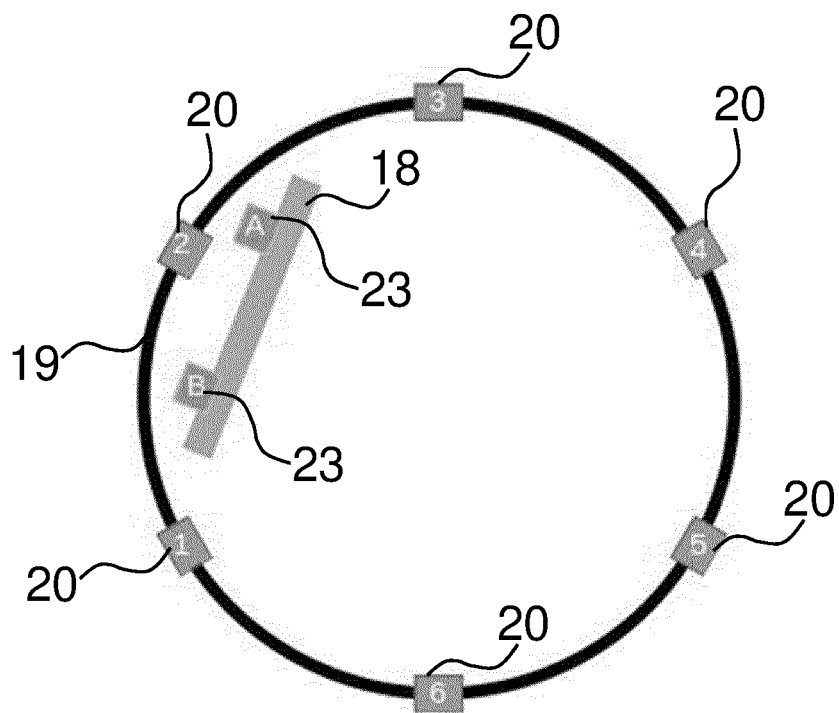


FIG. 6

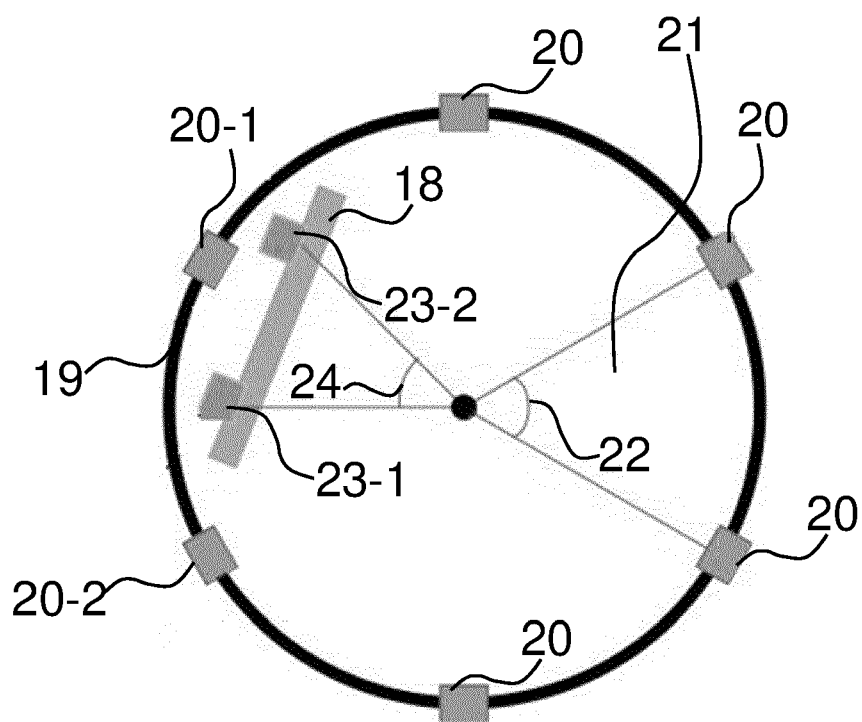


FIG. 7

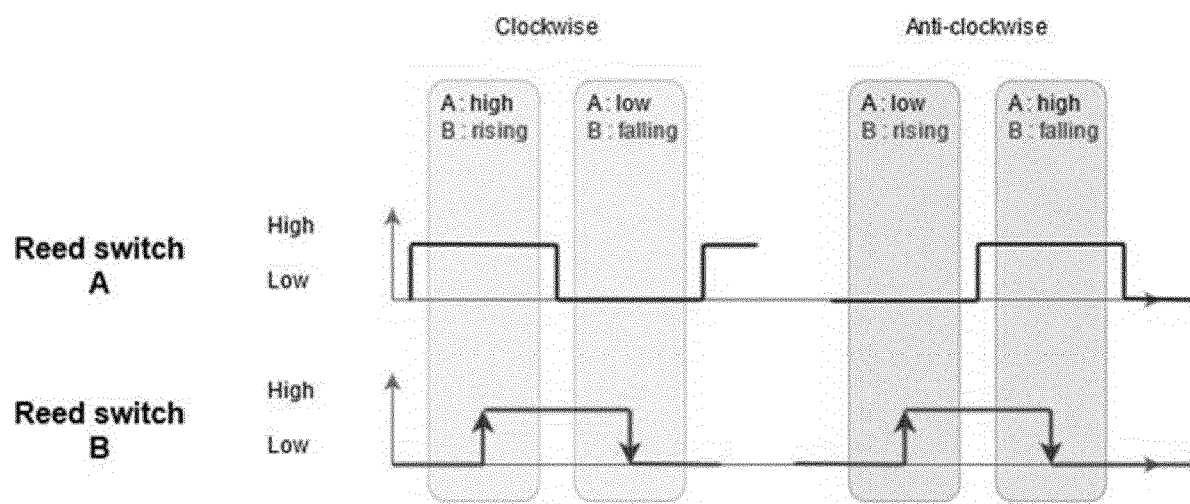


FIG. 8

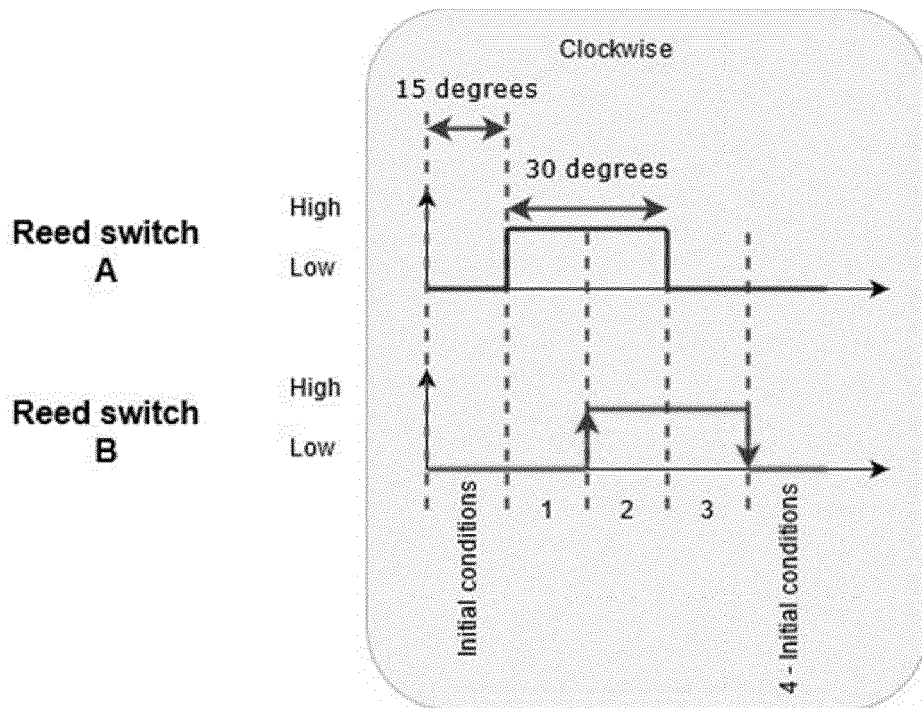


FIG. 9

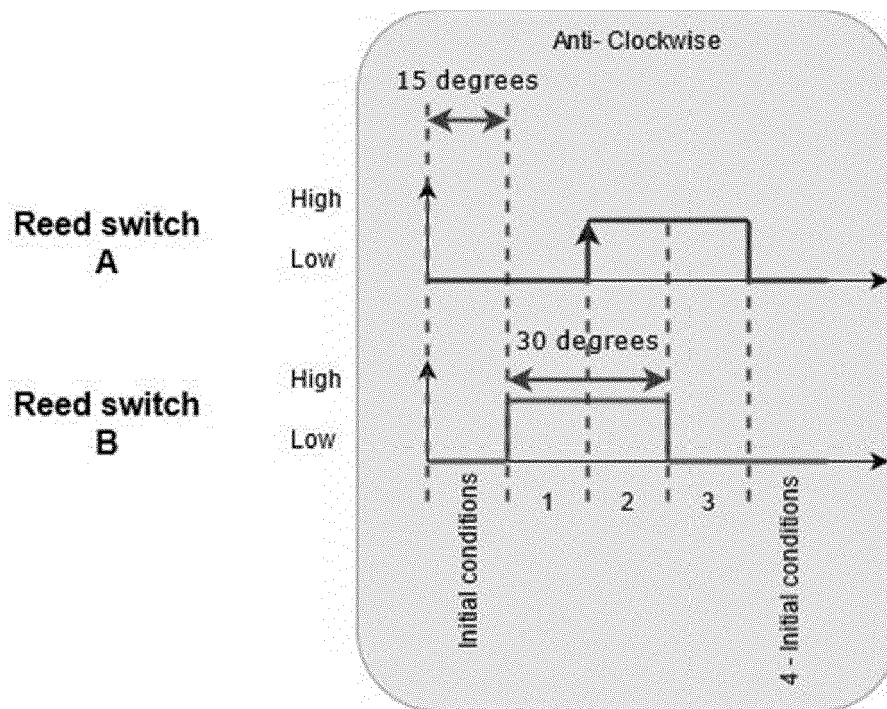


FIG. 10

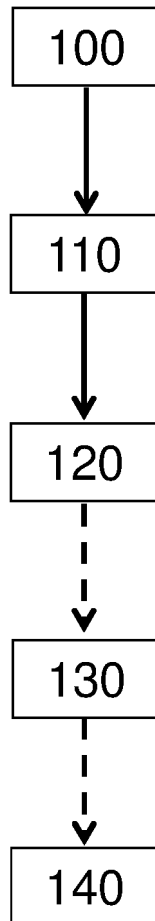


FIG. 11

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2005066440 A1 [0008]
- US 2019218826 A [0009]