

July 17, 1928.


1,677,578

S. U. BARR

DOUBLE HUNG WINDOW

Filed March 16, 1927

3 Sheets-Sheet 1

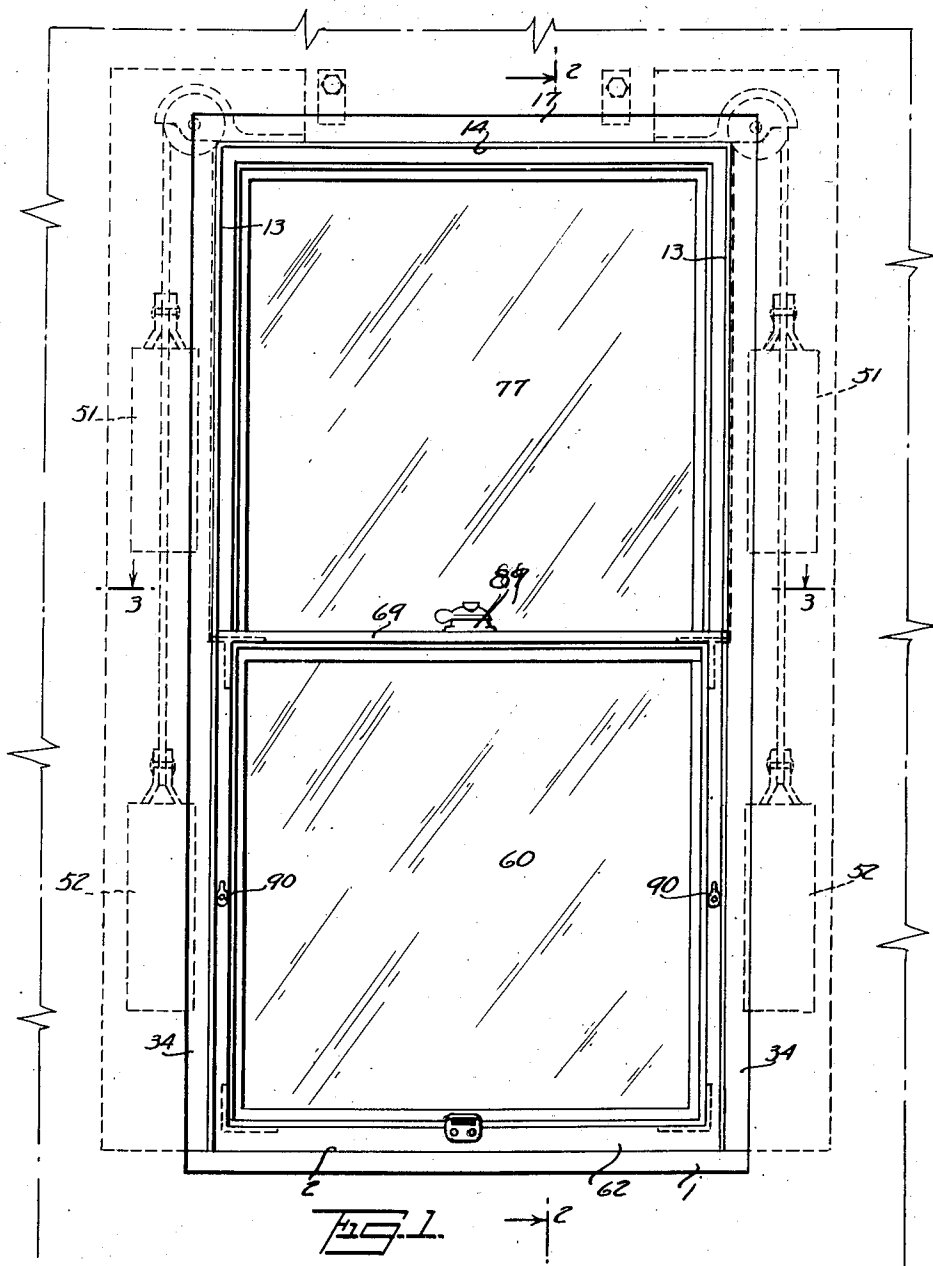

INVENTOR

Sidney U. Barr

BY

Edmund S. Beach

ATTORNEY

July 17, 1928.

1,677,578


S. U. BARR

DOUBLE HUNG WINDOW

Filed March 16, 1927

3 Sheets-Sheet 2

Fig. 2.

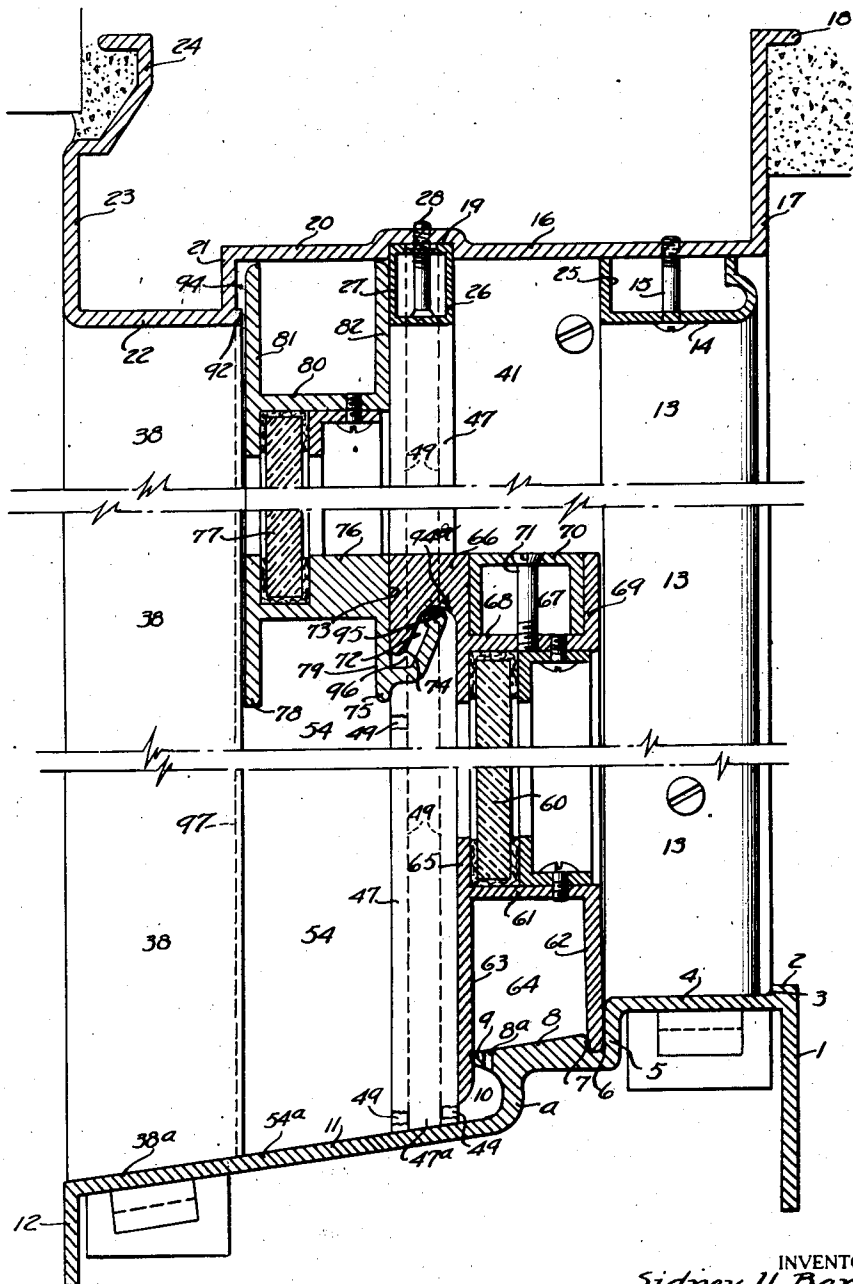

INVENTOR
Sidney U. Barr
BY
Edwin S. Beards
ATTORNEY

July 17, 1928.

1,677,578

S. U. BARR

DOUBLE HUNG WINDOW

Filed March 16, 1927

3 Sheets-Sheet 3

Fig. 3.


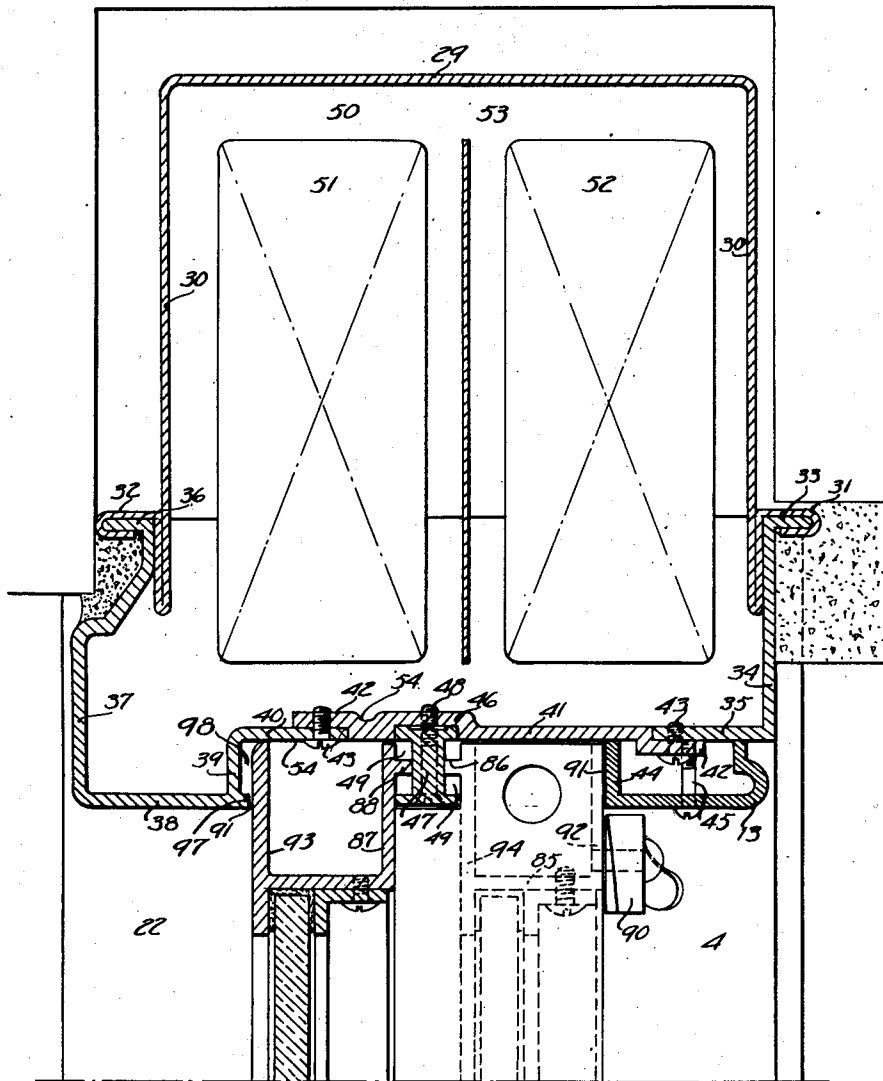


Fig. 4.

INVENTOR

Sidney U. Barr

BY

Edward J. Beach

ATTORNEY

Patented July 17, 1928.

1,677,578

UNITED STATES PATENT OFFICE.

SIDNEY U. BARR, OF BROOKLYN, NEW YORK.

DOUBLE-HUNG WINDOW.

Application filed March 16, 1927. Serial No. 175,679.

This invention relates to double hung windows and is in the nature of an improvement on the class of windows shown in my United States Patents No. 1,459,668 of June 19, 1923 and No. 1,512,741 of Oct. 21, 1924.

The present invention and improvements are directed to features of sill; lower sash stile; parting strip, and sliding side sash stiles and meeting stiles, as more fully described hereinafter.

In the accompanying drawings forming a part hereof and illustrating this invention,

Fig. 1 is an interior, elevational view of a metal window frame and metal sash assembly embodying the present invention.

Fig. 2 is a vertical, elevational view partially in vertical cross section at line 2—2 of Fig. 1; and

Fig. 3 is a transverse, horizontal view partially in horizontal cross section at line 3—3 of Fig. 1.

In Fig. 2 the illustration is broken into three parts by wavy lines. It is to be noted that the structure of the two opposed sides of the window frame are of identical construction and therefore that only one side as illustrated in Fig. 3 is described. Similarly the two vertical sides of each sash are of identical construction and only one side is described.

Fig. 4 is an elevational detail showing the horizontal and vertical, joint-forming ribs of the window frame, back of the upper sash.

Referring to the drawings:

Window frame construction.—The metal window sill (Fig. 2) has a dependent, interior flange 1 the upper portion of which extends into a flat, horizontal ledge 2 at the outward side of which there is a downwardly extending shoulder 3 that merges into a horizontal sill portion 4. Following the structure outwardly in the direction of the outside of a building, sill portion 4 merges in a vertical wall 5 which forms the interior side of a trough 6 the outward wall of which is a joint wall 7. From this joint wall the upper surface of the sill slopes downwardly and outwardly at 8 and terminates in a shoulder 9 which overhangs a drift water receiving cove 10 formed by a forwardly projecting bend α of the metal below shoulder 9. From bend α the sill extends outwardly and downwardly at 11 and terminates in an outward or exterior, dependent flange 12. The sill is a one piece metal

structure which extends transversely along the bottom of the window frame.

Each of the two front, interior, vertical stop moldings 13 has its under end against an end portion of sill portion 4, and at their upper ends the stop moldings severally meet the interior, transverse, horizontal, top stop molding 14 which is of the same cross sectional contour as the vertical stop moldings 13. The latter and the top stop molding are held in place by screws 15, the molding 14 being held to the under side of a transverse, horizontal, top jamb 16 having a front, upwardly extending flange 17 which terminates in a horizontal flange 18 for engagement with structural material. Outwardly of flange 17, top jamb 16 is offset to form on its under side a three-walled, transverse recess 19 for reception of the upper portion of a transverse, horizontal parting strip. Outwardly of recess 19 the top jamb has a portion 20 the under surface of which forms an upper stop for the outside, upper sash. Portion 20 merges, in the outward direction, in a downwardly extending wall 21 which merges with a flat, horizontal portion 22 that outwardly merges with an upwardly extending portion 23 which terminates in a bent end 24 for engagement with structural material and forming a receptive space for caulking between the metal jamb and the masonry and opposedly to the bent interior end 18.

The open side of the top stop molding 14 is next the under side of the top jamb 16, and has an outward vertical wall 25. The recess 19, along the under side of top jamb 16 receives the upper end portion of a cross sectional, quadrangular, horizontal, top parting strip having an inward, horizontal, transverse wall 26 and a parallel back wall 27. This cross sectional, quadrangular parting strip is chambered, its upper end is entrant in recess 19 and it is clamped in place by a screw 28.

At each of its vertical sides, one of which is shown in Fig. 3, the window frame or jamb structure is provided with a vertical, three-sided, sheet metal, weight-pocket receiving member 29 having vertical parallel sides 30 one of which terminates in an inward hook 31. The outward or rearward side 30 terminates in a hook 32. The hooks serve as anchorages in structural material.

Hook 31 receives the forwardly turned, flange 33 of a vertical, right angular, side

jamb member having a front portion 34 and a thereto right angularly, rearwardly extending portion 35.

Hook 32 receives the outwardly turned flange 36 of a vertical side jamb member which has an outside forming portion 37 parallel to portion 34. Portion 37 merges into a forwardly turned, straight portion 38 which merges into a portion 39 bent in the direction of the weight-receiving pocket. Portion 39 merges into a forward, turned bent portion 40 which is transversely aligned with the portion 35 of the front member. The opposed ends of said portions 35 and 40 are spaced apart and connected together by a vertical weight pocket or jamb plate 41. Each vertical edge of this plate is offset, the front offset, overlapping portion 35 and the rear offset portion 42 overlapping the portion 40. The offset ends are secured to the overlapping portions by screws 43 and the inward, vertical surfaces of the assemblies face towards the window jamb opening.

The inward stop molding 13 is clamped to jamb portion 35 by a screw 45 and offset margin 42 is similarly clamped to portion 40 by a screw 43. Each molding 13 has an inwardly and laterally projecting, vertical wall 44 which forms the front wall of a vertical, front sash receiving groove. Wall 44 is parallel to and spaced apart from the vertical wall portion 39 and wall 39 forms the outward vertical wall of an outer sash receiving groove.

Jamb plate 41, between its vertical margins, is offset to form a vertical groove 46 for reception of a side of a vertical parting strip 47 which is clamped in the groove by a screw 48. Each vertical parting strip 47 is oppositely formed, on its forward and backward sides, with a lengthwise extending, vertical groove 49 for reception of sash members. The under, forward sash thus vertically movable between the stop molding wall 44 and the bottom of the forward groove 49, the upper and outward sash being movable between the rearward wall of the bottom of the rear groove 49 and the wall 39.

The weight receiving chamber is indicated by 50, the back weight for the upper sash by 51, the front weight for the under sash by 52 and a vertical weight separator by 53.

Looking at Fig. 2, it will be seen that the inward surface of vertical jamb plate 41 forms the bottom of the vertical groove in which the edge of the under, forward sash slides, while Fig. 3 shows that the inward and flush surfaces 54 of portion 40 and of plate 41 form the bottom of the groove in which an edge of the upper and outer sash slides.

The under end of parting strip 47 is beveled outwardly and downwardly at 47^a; the under end of portion 40, the inward side of which forms the surface 54, is also slanted

outwardly and downwardly at 54^a, and the under end of the outer portion 38 is similarly slanted downwardly and outwardly at 38^a, so that these three members severally bottom on and bear against the downwardly and outwardly slanting sill portion 11.

Novel features of the window frame structure are the shoulder 3 to prevent water of condensation on the inside of the undersash from running out into the room over the front of the sill; the groove 6 with its wall 7 for receiving the under, front corner flange of the undersash and form contact between the sill and sash; the shoulder 9 above the drip or drift water cove 10 for contact with an under, rear corner flange of the under sash; the vertical parting strip 47 with its opposed side grooves, each for reception of a projecting sash member whereby, when in operative installation, there will be an air chamber on each side of the sash projection, forming pockets between the sash projection and the outward edges of the grooves of the upper and of the vertical parting strips.

The vertical grooves 49 at the outer side of the parting strips 47 serve in an important way to receive driving water from storms and to prevent it from leaking inwardly past the lower sash in its closed position, because such water is conducted downwardly and discharged on the sill portion 11 by such grooves. The grooves 49, both front and back, discharge downwardly and outwardly on the sill portion 11. Sill portion 8 is preferably formed with weep holes 8^a communicating with drift-water cove 10.

Lower sash construction.—The lower and interior sash for glass 60 comprises a three flanged, chambered bottom frame the upper wall 61 of which has a front, vertically dependent, transversely extending flange 62 the under end of which, as the sash is lowered, contacts with wall 7 of groove 6 and makes a weather tight joint between the cam wall 7 and the sill. Upper wall 61 also has a dependent, vertical, transverse flange 63 which, when the window is closed down, contacts with the shoulder 9 and makes a weather tight joint by such contact, coming into contact with shoulder 9 before flange 62 contacts with wall 7 and drawing flange 62 into hard contact with wall 7. The flanges 62 and 63 are so spaced apart that weather tight joints are formed by the two lines of close contact at shoulder 9 and wall 7. The bottom of chamber 64 is formed by the downwardly and outwardly inclined, sill portion 8. Wall 61 also has an upwardly extending, vertical transverse flange 65 which serves as an abutment for the outer side of glass 60. The glass holding means are old and need not be described.

This under sash comprises at its upper end a top sash member 66 which is formed

at its upper, front corner portion, forwardly of the plane of the rear side of glass 60 with a transversely extending, open top trough 67. The bottom wall of the trough is formed by a horizontal, transversely projecting flange 68 that terminates in an up-standing flange 69 which forms the front wall of the trough. The back wall of the trough is formed by the front side of sash member 66 above the bottom trough wall 68.

A three sided channel bar 70 has its under, open side opposed to bottom wall 68 and is located between the front and back walls of the trough and clamped in the trough by a screw 71 through the upper wall of the channel bar and entrant in the bottom trough wall 68. Sash member 66, outwardly of the trough wall 68, has considerable thickness. Its underside has a lengthwise extending groove 72. The back surface 73 of the sash member 66 is vertical from the under edge 74 of the rear wall of groove 72, the latter being for reception of a transverse flange 75 which extends upwardly and forwardly from the transverse under member 76 of the upper sash along the bottom of the upper and outward sash holding glass 77. In consequence of the contact between the flange 75 and walls of the groove 72, an air pocket is formed between them. Said sash member 76 has a front, flat wall making a tight joint with surface 73 when the upper and under sashes are closed. Member 76 has a rear, dependent flange 78 which is parallel to its forward, downwardly projecting flange 79 from which the upwardly, forwardly extending flange extends.

The upper and outward sash is provided with a three walled, open sided, rectangular air chamber forming member the bottom wall of which is indicated by 80. It has spaced apart, vertical, upwardly extending sides 81 and 82. Side 82, when the sash is up, contacts with the back wall 27 of the upper transverse parting strip. The rear wall 81 then contacts with the forward, free edge of a transverse horizontal joint and pocket forming rib 92 described below.

Each vertical edge (Fig. 3) of the under sash is provided with a vertical, three sided sash member 85 provided with a vertical, rearwardly projecting rib 86 which moves freely in the front slot 49 of a vertical parting strip 47. Each vertical side of the upper, outward sash is provided with a vertical, three walled, sash member 87 having a forwardly extending rib 88 that works freely in the rear groove 49 of vertical parting strip 47. Thus the two chambers referred to are formed on each side of each of the two parting strips 47.

Important features of the sash structure are: The flange 62 that closes down into the groove 6 to make a weather tight joint

thereat, and the flange 63 which is longer than the therewith parallel, front flange 62; the projecting ribs 86 and 88 that slide in the recesses 49 with their exposed edges in contact with the bottom walls of the recesses, thereby forming at the front and back sides of each vertical parting strip, a vertical air pocket and water guideway. Such water guideways are of special importance because when driving rain strikes against the under closed sash, when the upper sash is closed water cannot pass between the sides of the under sash and opposed frame members but being arrested in the inwardly direction by the break joint construction, arising from the rib and groove wall construction, flows downwardly and is discharged from the front and back open sides of the groove 49 on the outwardly and downwardly sloping sill portion 11.

The sash members (Fig. 2) 66 and 76 with the air pocket at 72 form a water-tight and weather-tight joint when the sashes are in closed position. The members 85 and 87 form air pocketed, weather-tight means cooperative with vertically opposed portions of the window frame, at both vertical sides of the sash. The lengthwise extending cove 10 insures the outward discharge of rain driving from the outside against the sashes and the downwardly and rearwardly sloping sill portion 11; and the weather and water tight joints at 7 and 9 prevent the drift of driving rain from passing the closed under sash onto the interior portion of the window sill. Thus the construction insures perfect wind and water-tightness around all four edges of the sashes and also at contact of the members 66 and 76; the transverse, rearwardly facing shoulder 3 also preventing flow into the room of interior, water condensation.

The rib 86 is extruded from the back side of the vertical member 85 or stile of the under sash, rib 88 being similarly extruded from the front side of the vertical member 87 or stile of the upper sash. The free edge of each vertical rib 86 and 88 contacts with the bottom of its receiving groove in the parting strip only when the sashes are drawn together by locking the sash drawing and locking device 89. In Fig. 1, the device 89 is shown in sash drawing and locking position for the upper and lower sash which are shown closed. The sash binders 90, also shown in Fig. 1, are in sash binding position; and one of them is shown in the same position in Fig. 3. When the two sashes are drawn and locked together, with ribs 86 each in contact with a bottom wall of a groove 49 in the parting strip, a vertical air pocket and water way is formed at each side of each rib. Moreover, an air and water-tight joint is formed between the free edge of each rib and the bottom wall of the groove with

which it is then drawn into contact. In this position there are clearances at 91; there being a vertical front clearance 91 between the back wall 44 of molding 13 and the front wall 92 of the member or stile 85; and a rear clearance between the back wall 93 of the upper sash member or stile 87. It is now to be noted that when the sash devices 89 and 90 are in unlocked positions, the sash naturally moves back slightly; the clearances at 91 are partially reduced, the contacts of the ribs 86 and 88 relieved, and slight clearances established between the parting strip and the walls 87 and 94 of the two vertical stiles 85 and 87. In such loose positions, both sashes are freely raisable and lowerable and friction joints, during sash raising and lowering movements, between the parting strips and sash stiles are avoided. This obviates sticking of the sashes in their guideways and renders it easy to raise and lower these heavy, metal sashes without strain on the person lifting or lowering the sashes.

The sash drawing and locking device 89 and the sash binders 90 are described in my Patent No. 1,459,668 of June 19, 1923 in which a double hung window is shown.

This present application relates to an improvement in the construction set forth in my pending application Serial No. 95,251, filed March 17, 1926 for double hung windows. In the present invention, the window casing jamb portion 21, where it merges into the bent portion 22 is formed with an extended joint-forming, forwardly projecting rib 92 the free edge of which is opposed to the back wall 81 of upper sash members 80 forming not only a slight clearance between such free edge and wall, when the upper sash is in fully raised position, but a weather excluding pocket 94 above the rib, between it and jamb portion 20 and the there opposed, spaced apart walls 81 and 21.

Referring now to the sash members or rails 66 and 76, the bottom wall of the inverted groove 72 is shaped as an arc of a circle and forms a tight joint-forming wall 94^a with and against which the lengthwise extending, cross-sectionally rounded, and extruded free edge 95 interiorly contacts with the arced wall 94^a and as such edge and wall are progressively forced together, the contacting surfaces of the edge 95 and wall 94 ride one on the other, until they are in weather excluding contact. Then there is formed at the back side of flange 75, a closed weather excluding air-pocket 96 between the flange and thereto opposed walls of the lower sash member 66 and the downwardly projecting flange 79 sash member, or under rail, 76 of the upper sash.

In the new form, it will be noted that the rounded, free edge 95 of the flange of the under rail of the upper sash, when it contacts in a closing movement with the arced

bottom 94^a of the inverted trough of the upper rail of the lower sash, effects a self-adjusting, weather excluding joint.

It is also to be noted that the upper wall 61, between the transverse sill flanges 62 and 63 has a length which is substantially less than the distance between the front wall 7 of the sill groove 6 and the back, free edge of the shoulder 9, whereby when the back flange 63 partially contacts, on a closing movement of the under sash, with the upper corner portion of shoulder 9, the two flanges 62 and 63 are sprung apart, slightly, by the rocketing of the under portion of flange 62 in sill groove 6, thereby tightly binding the flange 63 against the shoulder 9 and making a transverse, weather-tight joint between the flange 63 and said shoulder; and also forming a tight joint between the under edge portion of flange 62 and the sill wall 7. It is also to be noted that the back flange 63 is longer than the front flange 62.

The weather excluding rib 92 and the thereto adjacent air and water pocket 94 (Fig. 2) are continued vertically downwards of the rearward, window frame stiles 38 to the sill. At the junction of each vertical member or stile 38 with its portion 39, there is extruded a forwardly projecting, vertical rib 97, the free edge of which is closely adjacent the back, vertical side member 93 of the upper sash. Between each member 93 of the upper sash, the vertical wall portion 39 of the window frame stile, a rib 97 and the vertical portion 40 of the stile with which its portion 39 merges, there is formed a vertical air and water pocket 98. The horizontal, joint-forming ribs 92 and the pockets 94 are severally in alignment with a vertical rib 97 and air pocket 98. Thus the horizontal, joint forming rib 92 and adjacent air pocket 94 at each end are extended downwardly, to the sill.

The vertical stile portion 39 (Fig. 3) of the window frame is a bent portion at right angles to the flat frame portion 38 and flat frame portion 40 is at right angles to the bent portion 39. The vertical plate 41 has its inner surface in alignment with the inner surfaces of the rearward portion 40 and the inner surfaces of portions 40 and 41 are continuous and form elongated walls of a guideway for the under and upper sashes which are spaced apart by a vertical parting strip that is detachably secured to the inner side of the vertical frame portion 41, the rearward, wide groove of the parting strip being opposed to and spaced apart from the bent portion 39; a free edge of a wall of the trough in the parting strip being opposed to the free, forwardly extending edge of the joint-forming rib 97. So also in Fig. 2, the top horizontal jamb portion 21 of the window frame is bent at right angles to the flat jamb portion 22 and the elongated

frame portion 20, to which the parting strip is detachably secured, is at right angles to the bent portion 21. The free, forwardly projecting edge of the top, joint-forming rib 92 is opposed to the under, rear corner portion of the top, horizontal parting strip. As shown in Fig. 2, there is only one air chamber and water way 94 and it is horizontal, but it communicates at each end with a vertical air chamber and water-way 98 shown in Fig. 3; and each of these vertical chambers 98 is opposed to and spaced apart from the two water-ways 49 formed on the rear side of the parting strip by the projection of the narrow sash rib 88 into the much wider, rear groove of the parting strip between the side walls thereof, so as to form at each side of each rib 88 a vertical air and water chamber or way 49.

The cross sectional, arcuate, free edge or rib 95 overhangs the rear side of the subjacent wall of flange 75. The front wall of the inverted groove 72 slopes curvingly downwards and rearwardly from its arcuate bottom or under wall 94^a. The result is that when the sashes are closed and drawn together, a weather excluding joint is formed along the upper and thereto rearward, peripheral portions of the free edge or rib 95 and the arcuate wall. The joint thus formed is peculiarly efficient as a weather excluding joint and is a substantial and important feature of the present invention. The horizontal, diametric dimension of the arced, free edge of rib 95, above the subjacent portion of the flange, is greater than the thickness of the flange so that the rear, peripheral portion of the free edge makes an initial sliding contact with said downwardly and backwardly curving wall of the groove. Said structure and mode of operation are believed to be novel in the art. The front edge of the extruded ribs 92 and 97 are smooth and flat for contact with the rear surfaces of the top and side members of the rear sash.

The upwardly and forwardly projecting portion of flange 75 is springable laterally. When the back, upper sash is slid up the arced upper wall of the flange 75 initially strikes against the rear downwardly curving wall of the groove or trough 72, and as the back upper sash is forced upwardly into its final closing position, the arced wall of the flange lodges finally and firmly against the arced bottom or joint forming wall 94^a; and when the sash drawing and locking device 89 is closed the contacting, arced, transversely extending surfaces of the trough and

flange are drawn tightly into weather excluding position.

What I claim is:

1. In a double hung, metallic sash and window frame structure, an outward, metal frame comprising a horizontal, flat top portion having at each end a straight, flat portion extending downwardly to the window sill, and also having an upward vertically and horizontally extending, integral portion, the metal at the junction of said top portion and its upward extension being extruded horizontally forward into a horizontal joint forming rib; each downwardly extending portion having a lateral, vertical integral portion, the metal at the junction of each downwardly extending portion and of each laterally projecting portion being extruded forwardly to form a joint forming rib; the front surfaces of the ribs being in alignment one with another and flat for contact with rear, flat surfaces of the top and side members of the rear window sash.

2. In a double hung, metallic sash and window frame structure, the combination with a front sash having a top, rearwardly projecting, transverse member formed with a lengthwise extending, inverted trough along its under side; and a rear sash, the under member of which is provided with an upwardly and forwardly projecting, transversely extending, springable flange spaced apart from a forward transversely extending portion of the under member of the rear sash; the bottom of said trough being arced and such arced bottom wall curving downwardly and rearwardly; and the upper edge of said springable flange being arced on a circle; the arced end of the springable flange being adapted, during an upward movement of the top sash to impinge on the curved side wall of said trough and, at the final closing movement of the rear sash, to have its arced edge wall sprung into weather tight contact with the arced wall of the trough; the rear wall portion of the trough being entrant into a space between the rear side of said flange and the forward wall of that portion of the under member of the rear sash to which the flange is opposed; in combination with a sash drawing and locking device; the arced edge wall of the flange overhangs the subjacent portion of the flange.

Signed at Brooklyn in the county of Kings and State of New York this 7th day of February, A. D. 1927.

SIDNEY U. BARR.