

(19) **DANMARK**

(10) **DK/EP 3919698 T3**



(12) **Oversættelse af
europæisk patentskrift**

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **E 04 B 5/14 (2006.01)** **E 04 B 1/26 (2006.01)** **E 04 B 5/12 (2006.01)**
E 04 C 3/12 (2006.01) **E 04 C 3/14 (2006.01)** **E 04 C 3/292 (2006.01)**
E 04 C 3/36 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2023-11-06**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2023-08-02**
- (86) Europæisk ansøgning nr.: **20382489.1**
- (86) Europæisk indleveringsdag: **2020-06-05**
- (87) Den europæiske ansøgnings publiceringsdag: **2021-12-08**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **PHYLEM STRUCTURES, SL, C/Espronceda 19, 00 A IZ., 28003 Madrid, Spanien**
- (72) Opfinder: **Perez Romero, Manuel, , 28003 Madrid, Spanien**
Tarazona Lizarraga, Jaime, , 28003 Madrid, Spanien
- (74) Fuldmægtig i Danmark: **Patrade A/S, Ceresbyen 75, 6., 8000 Århus C, Danmark**
- (54) Benævnelse: **KONSTRUKTIONSSYSTEM AF KONSTRUERET TRÆ**
- (56) Fremdragne publikationer:
WO-A1-2015/011300
WO-A1-2015/121886
FR-A1- 2 133 487
FR-A1- 2 613 403
US-A- 3 866 371
US-A1- 2016 348 368

DESCRIPTION

Technical field

[0001] The present invention is directed to an engineered wood structural system for erecting structures made entirely with components made of engineered wood adhered to each other using durable moisture-resistant structural adhesives such as polyurethane or other resins.

State of the Art

[0002] The structural systems made of engineered wood are known in the state of the art.

[0003] For example, document WO2016191510A1 describe an engineered wood structural system comprising beams, slab members and wall panels. Each beam includes an upper horizontal slat, a lower horizontal slat and one central vertical slat placed between and attached to the upper and lower horizontal slats. The slab members are constitutive of structural floors, each slab member being supported on said beams and comprising an upper horizontal sheet and a lower horizontal sheet separated and connected through first ribs and second ribs perpendicular to the first ribs. The wall panels have a construction similar to the slab members but including beam seats on its upper end where the central vertical slat of the beams is engaged and supported, transmitting vertical loads from the beams to the wall panels.

[0004] This solution permits the prefabrication and the subsequent assembly of the different constructive elements of the structural system. The connection between the different constructive elements proposed in this solution allows the transmission of vertical loads, for example from the beams to the wall panels, but in this case different beams converging on the same wall panel are not connected to each other and can either transmit loads between them or compensate said loads between converging beams.

[0005] Furthermore, the proposed connections between the beams and the wall panels are not rigid connections and therefore other loads different from the vertical loads, such shear loads, bending loads or twisting loads cannot be properly transmitted across the different constructive elements, and according to this solution, the vertical loads are transmitted through the wall panels, but the beams are stacked on top of said wall panels interrupting its vertical continuity, preventing the vertical transmission of loads through said wall panels when three or more structural floors are overlapped, supported on said wall panels. If the vertical loads cannot be continuously transmitted through the constructive elements intended to transmit the vertical loads, in this case the wall panels, the vertical loads supported by said constructive elements are reduced and the size, resistance and price of the structural system is negatively affected.

[0006] Document US3866371A discloses all the features of the preamble of claim 1, and also describes an engineered wood structural system including pillars and beams connected to said pillars. Different beams converging on the same pillar are connected to each other through vertical connectors made of vertical slats adhered to lateral sides of the converging beams for transferring loads between the converging beams allowing for the compensation of said loads. In this case the pillars are continuous pillars passing through the node where the beams are connected to said pillars allowing for the continuous transmission of vertical loads between multiple overlapped structural floors.

[0007] In this case the proposed beams only include central vertical slats but not upper and lower horizontal slats, reducing the resistance of said beams and negatively affecting the resistance, size and price of the structural system. Furthermore, the connection between converging beams is produced only through vertical connectors made of vertical slats which suffer bending loads instead of traction or compression loads more easily supportable by an engineered wood slat.

[0008] Furthermore, in this case when beams in a first direction and in a second direction, for example first and second orthogonal directions, converge on the same pillar the vertical connectors of the beams in the first direction interfere with and partially interrupt the vertical connectors of the beams in the second direction, and only half of the total vertical height of each vertical connector is continuous across the node connecting with the opposite beam, negatively affecting the resistance of said vertical connector and reducing the load transmission between the connected beams. This solution only permits the connection between aligned beams, but not the proper load transmission of loads between non-aligned beams converging on the same pillar.

[0009] Document US20100275551 describe a connection between two aligned portions of a beam through a finger joint on the facing end and through a lower connector adhered to a lower surface of said beams. In this case the lower connector is a triangular-shaped board fitted in a complementary recess. In this case the beams are solid squared beams, which are structurally inefficient and therefore expensive compared with other types of beams. This solution is also directed only to the obtention of a long longitudinal beam made of multiple partial beams glued together, but not to connection of said beams with a pillar not to the transmission of loads between converging beams supported on a pillar or the transmission of loads from said converging beams to the pillar.

[0010] Document EP0550803A1 describe a connection system between aligned beams similar to the one described on document US20100275551. In this case the beams are also solid squared beams, and the connectors are integrated in recessed staggered steps of the beams. But in this document, when this solution is applied to the connection between converging beams and a pillar, only vertical connectors made of vertical slats adhered to the lateral vertical surfaces of the beams and of the pillar are suggested, transmitting bending loads through said vertical connectors and only allowing the connection between aligned beams but not the

connection with beams converging from other different directions. As stated above the engineered wood is more efficient when transmitting compression of traction loads than when transmitting bending loads, therefore the vertical connectors suggested on this document are not the most efficient use of the engineered wood, negatively affecting the structural system efficiency. This document does not suggest pillars having continuity of vertical loads transmission when multiple overlapped structural floors are supported on the pillars.

[0011] Document EP0079761A1 describes a structural system including beams comprising an upper horizontal slat and a lower horizontal slat connected through a central vertical slat which ends are connected to pillars including a beam seat where the central vertical slat is supported, but this document does not describe the connection between different beams converging on the same pillar.

[0012] The present invention solves the above described and other problems.

Brief description of the invention

[0013] The present invention is directed to an engineered wood structural system according to claim 1.

[0014] It will be understood that the engineered wood are derivative wood products which are manufactured by binding or fixing strands, particles, fibers, veneers or boards of wood, together with adhesives to form composite material. This type of wood is also known as mass timber, composite wood, man-made wood, or manufactured board.

[0015] The most common types of engineered wood are the plywood, which is manufactured from sheets of laminated veneer switching directions and bonded under heat and pressure with durable moisture-resistant adhesives, the laminated strand lumber, which is similar to plywood but with the veneers all stack in the same direction, the oriented strand board manufactured from wood flakes compressed and glued together, and the medium-density fiberboard manufactured from wood fibers or sawdust compressed and glued together.

[0016] The aim of the present invention is to describe a structural system using engineered wood as a main structural component not only of the structural elements but also of the connections between those structural elements.

[0017] The present structural system comprises the following components, all made of engineered wood as a main material:

- multiple pillars parallel to each other, each pillar including beam seats;
- multiple beams connected to said pillars through the beam seats, each connection defining a node, each beam including an upper horizontal slat, a lower horizontal slat and at least one central vertical slat placed between, and attached to, the upper and

lower horizontal slats;

- slab members supported on said beams defining overlapped structure floors on different floor level.

[0018] In other words, the proposed structural system comprises multiple parallel pillars, each supporting multiple beams on different overlapped levels on which slab members are supported defining a multi-floor structure.

[0019] All the beams at the same level define a matrix of beams coplanar in a horizontal plane. Multiple matrix of beams, supported on the same pillars in different horizontal levels, define said different structural floors.

[0020] As stated above, the proposed structural system comprises slab members supported on said matrix of beams, covering some or all the spaces defined between the beams of the matrix of beams, generating a structure floor supported on said pillars. Multiple structure floors are stacked at overlapped levels, supported on said pillars, which will be continuous pillars covering the entire high of the structure, generating a multi-floor structure, for example a building comprising up to twenty stacked structure floors.

[0021] Each beam comprises an upper horizontal slat and a lower horizontal slat facing each other and separated a distance, the upper horizontal slat and the lower horizontal slat of each beam being attached to each other through at least one central vertical slat, determining an i-shaped beam.

[0022] It will be understood that the word slat is referred to an elongated flat board which determine two main surfaces with the biggest surface area of the slat, two opposed ends on the most separated extremes thereof and two secondary surfaces connecting said two main surfaces.

[0023] The longitude of the slat will be the longest measure of the main surface, the width of the slat will be the measure of the main surface perpendicular to the longitude, and the thickness will be the measure orthogonal to the longitude and the width.

[0024] It will be also understood that the reference to the horizontal or vertical position of said slats is referred to the position of the main surfaces thereof, so a horizontal slat is a slat which main surfaces are in horizontal position.

[0025] The i-shaped beams provide an optimal use of material because the beams having an i-shape are strong and resistant using less volume of material than other types of beams and therefore, being lighter and cheaper.

[0026] Each beam is attached to several pillars, and said attachment is produced through a

beam seat included on each pillar where the beam is directly supported and vertically overlapped, transmitting vertical loads from the beam to the beam seat, and from the beam seat to the pillar.

[0027] The engineered wood slats are typically more resistant in a direction parallel to the main surface of said slat than in a direction perpendicular to said main surface. When the loads transmitted from the beam to the beam seats are under certain threshold, the beam can be supported on the beam seats through the lower horizontal slat, compressing said lower horizontal slat in a direction perpendicular to the main surface thereof. When the loads transmitted from the beam to the beam seat are above said certain threshold, then the beam shall be supported on the beam seat through said at least one central vertical slat, which may for example include a protruding downward projection through the thickness of the lower horizontal plate, said projection being supported on the beam seat.

[0028] Each pillar will receive the vertical loads from all the beams attached thereto, accumulating vertical loads from multiple structure floors.

[0029] Typically, each pillar is connected with a foundation on its lower end which spreads and transmits all the vertical loads of the pillar in a wider area of the terrain where the structure is placed.

[0030] The adhesion between the different elements constitutive of the proposed structural system will be achieved through durable moisture-resistant structural adhesives such as polyurethane or other resins.

[0031] The present invention further proposes the following features, which are not known from the state of the art:

- each of said multiple pillars comprises multiple nodes on different vertical positions, corresponding to different floor levels, and is made up of multiple vertical struts, which are continuous along the entire longitude of the pillar, separated to each other in a horizontal direction and connected to each other through pillar spacers comprised between said vertical struts,
- each of said multiple beams has a portion comprised between at least two facing vertical struts and vertically supported on one of said beam seats comprised between said two facing vertical struts;
- each vertical strut is made up of multiple successive vertical strut segments, made of a vertical sheet of engineered wood, aligned and rigidly connected to each other through a vertical connector, made of a vertical sheet of engineered wood, adhered to a vertical pillar surfaces of adjacent successive vertical strut segments or through complementary recessed staggered steps defined on adjacent end portion of two successive vertical strut segments overlapped and adhered to each other.

[0032] According to that, each pillar is made of several vertical struts facing each other and separated to each other in the horizontal direction, including the beam seats in between. The beams connected to said pillar include a portion, comprised between said facing vertical struts, supported on said beam seat. This solution allows continuous vertical struts along the entire longitude of the pillar, said vertical struts not being interrupted by the beams connected to the nodes of the pillar, increasing the resistance and the vertical load transmission of said pillars.

[0033] The vertical struts constitutive of one pillar are separated to each other, generating hollow space within the pillar. This solution increases the bending resistance of the pillar, reduces its weight and the hollow space created allows the insertion of the end portion of the beams therein without interrupting the continuity of the struts, permitting the transmission of the loads from the beam to the pillar in a central area of said pillar comprised within the footprint of said hollow space comprised between the struts, reducing the generation of bending loads on the pillar.

[0034] For example, one pillar supporting one continuous beam, or two aligned beams can include two parallel and separated struts, the beams being housed between said two struts.

[0035] When the two converging beams supported on said pillar are not aligned, an acute angle and an obtuse angle is defined between them. One vertical strut of the pillar or two vertical struts at an angle will be placed in the corner defined by the acute angle between said two converging beams, and one strut or two angled struts, each one parallel to one beam, will be placed in the side where the obtuse angle is defined, each beam being comprised between two facing surfaces of said vertical struts.

[0036] According to an alternative embodiment, three beams converge on the same pillar which will include at least three separated vertical struts, each strut being placed in a corner defined between two adjacent beams. When said three beams include two aligned beams, the pillar can include two vertical struts on each acute angle defined between the non-aligned beams and one vertical strut on the side of the node with no angle between the beams. Alternatively, each beam of the node can be comprised between two vertical struts of the pillar, the pillar comprising up to six vertical struts.

[0037] According to an additional embodiment, four orthogonal beams converge on the same pillar, which comprises four vertical struts, each strut being placed in a corner area defined between two orthogonal beams or eight vertical struts, one on each side of each beam.

[0038] Each vertical strut is made of several vertical strut segments aligned and rigidly connected to each other, obtaining a continuous vertical strut without structural interruptions.

[0039] The connection between the vertical strut segments is achieved by a lateral connector adhered simultaneously to end portions of two consecutive vertical strut segments of the same vertical strut. Said vertical connector is made of a vertical sheet of engineered wood.

[0040] Alternatively, the connection between the vertical strut segments is achieved by the direct adhesion of two overlapped portions of the successive vertical strut segments connected to each other, said overlapped portions including complementary recessed staggered steps, defining an attachment portion. Each recessed staggered step is defined in a vertical plane parallel to the main surface of the vertical strut.

[0041] Preferably each vertical strut segment is comprised between two nodes, said attachment between the successive vertical strut segments being produced in the portion of the pillar defining the node.

[0042] It is also proposed that at least some of the vertical connectors can include one or more recessed staggered steps complementary and attached to recessed staggered steps included in the successive vertical strut segments connected to each other through said vertical connector. This connection offers a more even distribution of the loads, increases the connection surface, offers not only vertical connection surfaces but also horizontal connection surfaces on each step, and increases the strength of the connection.

[0043] This connection also allows the two successive vertical strut segments and the vertical connector to be flush, when the two successive vertical strut segments have the same cross section area.

[0044] The successive strut segments can have all the same sectional area or preferably can have different sectional area adapted to the vertical loads supported by each strut segment. Closer to the foundation the strut segments support bigger vertical loads in comparison with the strut segments closer to the uppermost structure floor therefore, it is proposed to use always a strut segments with equal or smaller sectional area than the strut segments of the same pillar placed bellow.

[0045] The beams can be connected to the pillars only by said beam seat, providing an articulated connection which does not transfer bending stresses from the beams to the pillars, reducing the structural requirements of said pillars but increasing the structural requirements of said beams.

[0046] It is also proposed to connect beams to each other through the nodes, for example using the upper and lower connectors described above, producing a continuous beam with increased resistance, but without transferring additional loads to the pillars.

[0047] Alternatively, it is proposed to provide a rigid connection between the beams and the pillars, transferring bending loads from the beams to the pillars, providing a more rigid structure, improving the structural behavior of the beams and also increasing the overall resistance of the structure, especially in front of horizontal loads such seismic loads or wind loads.

[0048] These three types of nodes described above can be obtained by the proposed

engineered wood structural system and can be freely combined within the same structure.

[0049] To provide said rigidity, it is proposed that the at least one central vertical slat of one beam comprised between said two facing vertical struts is adhered:

- to said at least two facing vertical struts; and/or
- to the vertical connectors included on said two facing vertical struts; and/or
- to a vertical connector arm projecting horizontally from the vertical connector included on said two facing vertical struts.

[0050] Said adhesion can be produced directly between facing and adjacent surfaces of the adhered elements or through an interposed element made of engineered wood if the adhered elements are facing each other but at a horizontal distance.

[0051] The vertical connector arm of the vertical connectors can include, for example, one or more recessed staggered steps complementary and attached to recessed staggered steps included in the end portion of the at least one central vertical slat, each recessed staggered step forming a plane parallel to the main surface of the central vertical slat of the beam where the vertical connector is adhered.

[0052] At least some of the beams can be continuous beams supported on several pillars aligned to each other defining a structural wall. In this case the beam is supported on said pillars on intermediate positions. Each pillar will include two vertical struts made of aligned vertical strut segments connected to each other through vertical connectors or through complementary recessed staggered steps, as described above.

[0053] Said aligned pillars can be further connected to each other through a vertical plate made of engineered wood which will actuate as finishing panel of the structural wall providing rigidity to said structural wall in front of horizontal loads.

[0054] One beam supported on said structural wall made of aligned pillars can be connected, on one end, to a node of an isolated pillar receiving other beams only supported on pillars on its ends, allowing for a mixed structure of isolated pillars and structural walls. This is possible because all the beams of the system are equal, differing only in their dimensions determined by the loads to be resisted.

[0055] Preferably, all the beams converging on the same node and connected to each other through said upper and lower connectors should have the upper horizontal slat and the lower horizontal slat aligned.

[0056] The vertical height of a beam can be locally supplemented with the inclusion of an additional lower horizontal slat separated from the lower horizontal slat of the beam, increasing the vertical height of the beam. This can be used to connect a beam supported on multiple

aligned pillars, typically having a reduced vertical height, with other beams supported on pillars only on their ends, typically having a bigger vertical height.

[0057] Also, several beams supported on said structural walls made of aligned pillars can be connected to each other through an upper connector adhered to the upper horizontal slat of the beam and through a lower connector adhered to the lower horizontal slat of the beam, producing a longer structural wall or multiple structural walls connected to each other. In this case the connection between beams can be produced between two nodes.

[0058] Typically, all the pillars of the same structural wall are equidistantly separated to each other. When a structural wall needs an opening wider than said separation, the continuous beam can include a reinforced portion. Said reinforced portion can include a thickening of the lower horizontal slat or can include, in addition to the lower horizontal slat, an additional lower horizontal slat more distant from the upper horizontal slat than the lower horizontal slat.

[0059] Said additional lower horizontal slat can be attached to the rest of the beam by an additional at least one central vertical slat of the beam attached to the lower horizontal slat or by a projection of the at least one central vertical slat of the beam passing through the lower horizontal slat.

[0060] According to an embodiment of the present invention, at least some of the beams are vertically overlapped and supported to the beam seats of the pillars through the at least one central vertical slat, preferably through two opposed end portions of said at least one central vertical slat. This is the case when significant loads shall be transferred from the beam to the pillars, for example when the beam has a longitude bigger than 3m and is supported on two pillars only on its ends.

[0061] When a beam is supported only by two ends thereof overlapped on the beam seat, all the vertical loads supported by said beam are concentrated on said beam seats, and the engineered wood can suffer crushing if not properly configured. The slats of engineered wood are more resistant to compressive forces parallel to the main surfaces thereof than to compressive forces perpendicular to the main surfaces thereof. Therefore, it is preferred to vertically support the at least one central vertical slat of the beam on the beam seat, transferring vertical loads from the at least one central vertical slat to the beam seat in a vertical direction parallel to the main surfaces of the at least one central vertical slat.

[0062] It is also preferred to use, as a beam seat, a vertical slat made of engineered wood, which also receives said vertical loads in a direction parallel to the main surfaces of said vertical slat of engineered wood. This configuration allows an increase in the load transmission between the beam and the pillar.

[0063] In other cases where the loads transferred from the beam to the pillars are reduced, for example when one beam is supported on multiple aligned pillars forming a structural wall, then the beam (20) can be vertically overlapped and supported to the beam seats of the pillars

through the lower horizontal slat.

[0064] Several beams can have respective ends connected to each other on the same node through at least one upper connector, made of a horizontal sheet of engineered wood defining several radial horizontal connector arms surrounding a central portion comprised between said at least two facing vertical struts, said radial horizontal connector arms being adhered to an end portion of all the upper horizontal slats of said beams connected to each other; and through at least one lower connector comprised between said at least two facing vertical struts, said lower connector being placed between, and in close contact with or placed between, in close contact with and adhered to an end portion of all the lower horizontal slats of said beams connected to each other.

[0065] The upper and lower connectors provide structural continuity between beams converging on the same pillar for load transmission. The upper connector, when the connected beams are aligned or almost aligned, mainly transmits pulling forces between the upper horizontal slats of the converging beams. The lower connector, when the connected beams are aligned or almost aligned, mainly transmits pushing forces between the lower horizontal slats of the converging beams. Thus, the combination of the upper and lower connectors transmits bending forces between converging beams producing a total or a partial compensation of said bending forces and providing an increase in the resistance of the converging beams.

[0066] The above described hollow space of the pillar is used for housing at least partially the upper connector and the lower connector, connecting all the beams converging on the same pillar without interrupting the vertical struts of the pillar, which will be placed surrounding the end portions of all the converging beams.

[0067] The upper connector described above is a horizontal sheet made of engineered wood including multiple radial horizontal connector arms, each horizontal connector arm being adhered to the end portion of the upper horizontal slat of one beam.

[0068] Said sheet of engineered wood is cut defining the upper connector including multiple radial arms projecting from the central region. The upper connector will be placed in a horizontal position, i.e. with its main surfaces in horizontal position, placing the central region coincident with the center of the pillar and placing each radial horizontal connector arm overlapped with and adhered to one upper horizontal slat of one beam converging on said pillar.

[0069] Preferably the thickness of the upper connector is decreasing towards the ends of the radial arms, the central region being thicker than the ends of the radial arms.

[0070] For example, when a pillar receives two aligned beams the upper connector can be a rectangular slat including said two horizontal connector arms and the central region comprised between two facing vertical struts. When the pillar receives two orthogonal beams the upper

connector can define a L-shaped upper connector.

[0071] When three beams of the same structural floor are connected to the same node then the upper connector will comprise three radial horizontal connector arms with a central region comprised between three vertical struts of the pillar, defining a T-shaped or a V-shaped upper connector. Equally when a pillar receives four beams of the same structural floor then the upper connector will comprise four connector arms defining a X-shaped upper connector with a central region comprised between four vertical struts of the pillar.

[0072] Preferably said horizontal connector arms have a horizontal transverse width equal or smaller than the horizontal transverse width of the horizontal upper connector slat to which are adhered, said radial horizontal connection arm being contained within the footprint of the upper horizontal slat to which it is adhered. It will be understood that the transverse width is the measure of the main surface of one elongated element such the upper horizontal slat or the radial horizontal connection arm perpendicular to the longitude of said elongated element. In rectangular shaped elongated elements, the width is typically coincident with the smallest dimension of the main surface of said elongated element.

[0073] It is also proposed that at least some of the upper connectors and/or at least some of the lower connectors are in close contact with or in close contact with and adhered to the at least two facing vertical struts which surrounds the central portion of said upper connector through vertical surfaces perpendicular to the main direction of the upper horizontal slat and/or lower horizontal slat adhered to said upper connector and/or lower connector.

[0074] For example, when a node receives four converging beams, the pillar will include at least four vertical struts separated to each other surrounding the central region of the upper connector and the lower connector. Said upper and lower connectors will have a cross shaped central region with four inner corners, and one of said vertical struts will be coupled on each of said corners providing said close contact.

[0075] Similar coupling can be obtained even in nodes receiving only three or two beams, for example including lateral protrusions to the upper and lower connectors defining said cross shape, said protrusions being tightly inserted in a complementary hole of the vertical strut or alternatively including two lateral protrusions on the same upper or lower connector on both sides of the same vertical strut, said vertical strut being comprised between said two lateral protrusions.

[0076] The upper and lower connectors will be respectively pulled and pushed in the main direction of the upper horizontal slat and the lower horizontal slat adhered thereto by the bending force transmitted by the beam to the node. The close contact and optionally adhesion of said upper and lower connectors with the vertical struts, preferably with vertical surfaces of said vertical struts perpendicular to said main direction, will provide a transmission of the bending force from the beam to the pillar, providing rigidity to the node.

[0077] This feature can be additional or alternative to the connection of the at least one central vertical slat of the beam with the vertical struts or the vertical connectors of the vertical strut segments described above, which also allows one vertical connector or one vertical strut to be simultaneously connected to two different beams, for example by two vertical connector arms of the same vertical connector.

[0078] When multiple beams are rigidly connected to a pillar in the same node, as suggested above, the bending loads transmitted to the pillar by beams placed on opposed sides of the pillar can be mutually compensated, reducing the bending loads transmitted to the pillar.

[0079] The combination of the upper connector, the lower connector and optionally the vertical connectors provide structural continuity between all the converging beams and the pillar where said beams converge, transferring the loads from said beams to the pillar which transfer said loads to the foundation of the structure. This structural continuity allow the transfer not only of vertical loads from the beams to the pillar but also the transfer of twisting and bending loads between the converging beams, producing a total or partial compensation of said loads, and between the beams and the pillar where said beams are supported.

[0080] An engineered wood structural system such the one described on this patent application including upper connectors and lower connectors but not necessarily including vertical connectors is a possibility which can be basis for a divisional application.

[0081] It is also proposed to include one or more recessed staggered steps on at least some of the upper connectors described above, said recessed staggered steps being complementary and attached to recessed staggered steps included in a main upside horizontal surface of the end portion of the upper horizontal slat where said upper connector is adhered, each step forming a plane parallel to said main upside horizontal surface.

[0082] Optionally the upper connector is flush with the upper horizontal slat where it is adhered, coincident with the main upside horizontal surface of the upper horizontal slat.

[0083] Said recessed staggered steps provides a more distributed transmission of the loads between the elements connected. This solution also permits the upper connector to be flush with the main upside horizontal surface of the upper horizontal slat of the beam, providing a flat upper surface of the beam where the slab members constitutive of the structural floor can be easily attached, and also permits the vertical connector to be flush with the vertical pillar surface where the lateral surface is attached avoiding undesired increases in the pillar sectional area produced by said vertical connectors.

[0084] The recessed staggered steps mentioned on this application can be obtained by drilling operations performed on the engineered wood elements for example by an automated drilling machine, or can be obtained by adhering together multiple slats, thinner than the slat to be obtained, each one protruding from the previous one leaving an exposed portion thereof in the form of a step.

[0085] According to a preferred embodiment, the end portion of the lower horizontal slats connected through the lower connector include a reinforcement made of engineered wood adhered to at least one horizontal upside main surface and/or to at least one horizontal downside main surface of the lower horizontal slat, said reinforcement increasing the vertical thickness of the end portion of the lower horizontal slat. This reinforcement, also made of engineered wood, increase in the volume of said end portion of the lower horizontal slats providing an increase in the load resistance of said end portion, where the loads are concentrated. The lower horizontal slat includes two main surfaces which are horizontal, one horizontal upside main surface facing upside and one downside main surface facing downside, and the reinforcement is adhered to one or both of said main surfaces.

[0086] According to a preferred embodiment, each beam includes two parallel and separated central vertical slats, being the end portion of both central vertical slats supported on the beam seat of the pillar, dividing the loads transmitted through each single central vertical slat.

[0087] The end portion of the lower horizontal slat which is connected with other lower horizontal slats through the lower connector is a portion of the lower horizontal slat placed between said two parallel and separated central vertical slats, so that the end portion of the lower horizontal slat does not interfere with the transmission of vertical loads from the two parallel central vertical slats to the beam seats, said beam seats being placed on both lateral sides of the end portion of the lower horizontal slat.

[0088] The lower connector, which connects all the lower horizontal slats of the same structure floor converging on the same pillar, comprises a tapered shape block tightly inserted in a descendent direction between said end portion of the lower horizontal slats.

[0089] Said tapered shape block is inserted in a descendent direction, i.e, with its smaller end pointing downwards, for example an inverted frusto-pyramidal shape, so that the gravity and additional pressure assures a tight insertion of said tapered shape block in the available space between the end portions of all the lower horizontal slats of the same structural floor converging on the same pillar.

[0090] According to an additional improvement of the proposed structural system, at least one beam is a post-stressed beam including at least one post-stressed cable between the two opposed ends thereof, the opposed ends of said at least one beam retaining the at least one post-stressed cable in an upper position adjacent to the upper horizontal slat and a central region of said at least one beam, placed between said opposed ends, retaining the at least one post-stressed cable in a lower position adjacent to the lower horizontal slat.

[0091] According to this solution said post-stressed cable covers the entire longitude of the beam from one end to the opposed end, said post-stressed cable being retained in tension defining a polygonal or an arched shape, with the central region of the post-stressed cable being adjacent to a central region of the lower horizontal slat of the beam and the two opposed

ends of the post-stressed cable being adjacent to the end portions of the upper horizontal slat of the beam, increasing the overall load resistance of the beam.

[0092] Optionally multiple consecutive beams are post-stressed beams including at least one continuous pre-stressed cable passing along all said consecutive beams, the opposed ends of each beam retaining the at least one post-stressed cable in an upper position adjacent to the upper horizontal slat and a central region of each beam, placed between said opposed ends thereof, retaining the at least one post-stressed cable in a lower position adjacent to the lower horizontal slat, permitting the post-tensioning of multiple successive beams using the same post-stressed cable.

[0093] Alternatively said multiple consecutive beams are post-stressed beams each including at least one cable sleeve, the opposed ends of each beam retaining the at least one cable sleeve in an upper position adjacent to the upper horizontal slat and a central region of each beam, placed between said opposed ends thereof, retaining the at least one cable sleeve in a lower position adjacent to the lower horizontal slat, wherein each cable sleeve of each beam is connected with a cable sleeve of a successive beam of said consecutive beams through a sleeve connector, and wherein said multiple consecutive beams include at least one continuous post-stressed cable passing along all said consecutive beams through the respective cable sleeves which are connected to each other by said sleeve connectors.

[0094] In this manner the cable sleeve can be pre-installed on each beam and once the beams are installed, said cable sleeves can be connected to each other through the sleeve connectors and the post-stressed cable can be then inserted through said cable sleeves and post-tensioned.

[0095] In regard to the slab members constitutive of each structure floor, it is proposed that each slab member comprises an upper horizontal sheet, a lower horizontal sheet and, placed therebetween and adhered thereto:

- a plurality of first ribs parallel to each other; or
- a plurality of first ribs parallel to each other and a plurality of second ribs perpendicular to the first ribs defining a bidirectional slab structure,

and wherein the upper horizontal sheet has a perimetral zone vertically overlapped to, or overlapped and adhered to, the upper horizontal slat of said beams on which the slab member is supported, and the lower horizontal sheet has a perimetral zone adhered to the beams on which the slab member is supported through lower sheet connectors. According to that, each slab member includes an upper horizontal sheet which is slightly bigger than the footprint of the hollow space defined between beams covered by said slab member so that, when the slab member is inserted on said hollow space defined between beams, a perimetral zone of said upper horizontal sheet of the slab member is vertically overlapped to the upper horizontal slat of said beams surrounding the hollow space where the slab member is inserted.

[0096] The slab member further comprises a lower horizontal sheet separated from the upper

horizontal sheet by interposed first ribs parallel to each other or by a matrix of first ribs and second ribs orthogonal to the first ribs, said lower horizontal sheet and the first ribs or the first and second ribs preferably having a footprint equal or slightly smaller than the footprint of the hollow space defined between beams covered by said slab member. The perimetral zone of the lower horizontal sheet, adjacent to the beams surrounding the hollow space where the slab member is inserted, is adhered to said beams through lower sheet connectors.

[0097] Because the footprint of the lower horizontal sheet and the first and second ribs is equal or smaller than the footprint of the hollow space defined between the beams, most of the thickness of the slab member is shared with the thickness of the beam, and only the upper horizontal sheet is at a level above the beams, obtaining a structure floor with a reduced thickness.

[0098] The connection between the upper and lower sheets of the slab member and beam where said slab member is supported transmits not only vertical loads but also bending loads from the slab member to the beam.

[0099] An engineered wood structural system such the one described on this patent application including the slab member described above but not necessarily including upper connectors, lower connectors or vertical connectors is a possibility which can be basis for a divisional application.

[0100] Preferably the upper horizontal sheet of one slab member is adhered to the upper horizontal sheet of another adjacent slab member through complementary recessed staggered steps provided in the perimetral zone of the upper horizontal sheets of both upper horizontal sheets connected to each other. According to that solution both perimetral zones attached to each other are partially overlapped by said complementary recessed staggered steps, allowing the adhesion of one upper horizontal sheet to the adjacent one without producing an increase in the thickness.

[0101] Alternatively, said connection between the adjacent upper horizontal sheets can be produced through upper sheet connectors adhered to the perimetral zone of the upper horizontal sheets of both upper horizontal sheets connected to each other. Preferably said upper sheet connectors are inserted in a recessed area of the perimetral zone and flush with the upper horizontal sheet.

[0102] The lower horizontal sheet of one slab member is connected to the lower horizontal sheet of another adjacent slab member through respective lower sheet connectors in close contact with, or in close contact with and adhered to, compression configurations interposed between said lower horizontal sheets connected to each other.

[0103] Said compression configurations can be the lower horizontal slat of the beam, when coplanar with the lower horizontal sheet of the connected slabs, or can be included on said at least one central vertical slat of the beam, for example as horizontal or vertical ribs, for

transferring compression loads between the lower horizontal sheets across the at least one central vertical slat.

[0104] Said compression configurations can be, for example, multiple transverse ribs interposed between, and perpendicular to, multiple parallel central vertical slats of the same beam.

[0105] Each lower sheet connector is adhered to the perimetral zone of the lower horizontal sheet and directly or indirectly to the central vertical slat, transmitting loads from said lower horizontal sheet to the central vertical slat of the beam to which it is connected. When two slab members are connected on opposed sides of the same beam, the respective lower horizontal sheets of said slab members can be also connected to each other at least for transferring compression loads across or through the central vertical slat interposed between them.

[0106] When the central vertical slat includes multiple parallel central vertical slats, compression configurations are included between them to ensure the transfer of compression loads in a horizontal direction perpendicular to said central vertical slats. Said compression configurations are horizontal and coplanar with the connected lower horizontal sheets of the connected slab members. Said compression configurations can be the lower horizontal slat of the beam, when it is coplanar with the lower horizontal sheet of the slab members, or can include transverse ribs perpendicular to said multiple parallel central vertical slats, and preferably also parallel to the lower horizontal sheet of the connected slab members, connecting each other.

[0107] Each slab member can be divided in three slab segments connected to each other through slab joints. Dividing the slab member makes easier the manipulation of each slab segment. Preferably each slab segment is approximately one third of the size of the slab member, so that each slab joint is coincident with an area of the slab member with reduced bending moment.

[0108] Each slab segment comprises a portion of the upper horizontal sheet, a portion of the lower horizontal sheet, a number of said first ribs, and a portion of all the second ribs. According to that, the first ribs contained on each slab segment are entire, and each second rib is divided on three segments, one being contained on each slab segment.

[0109] Each slab joint comprises an upper sheet joint, a lower sheet joint and a second rib joint for each single second rib of the slab member.

[0110] The upper sheet joint comprises an upper sheet joint connector adhered to two adjacent portions of the upper horizontal sheet in a connection area adjacent to an edge between two adjacent slab segments connected to each other, providing a continuity between the adjacent portions of the upper horizontal sheet for the load transmission.

[0111] The lower sheet joint comprises a lower sheet connector adhered to two adjacent

portions of the lower horizontal sheet in a connection area adjacent to an edge between two adjacent slab segments connected to each other, providing a continuity between the adjacent portions of the lower horizontal sheet for the load transmission.

[0112] Alternatively, the lower sheet joint can comprise complementary recessed staggered steps provided on two adjacent portions of the lower horizontal sheet in a connection area adjacent to an edge between two adjacent slab segments connected to each other. Said complementary recessed staggered steps provided on two adjacent portions of the lower horizontal sheet will be overlapped and adhered to each other providing a continuity between the adjacent portions of the lower horizontal sheet for the load transmission.

[0113] Each second rib joint comprises a second rib connector adhered to two adjacent portions of the second rib in a connection area adjacent to an edge between two adjacent slab segments connected to each other providing a continuity between the adjacent portions of the second ribs for the load transmission.

[0114] Alternatively, each second rib joint comprises complementary recessed staggered steps provided on two adjacent portions of the second rib in a connection area adjacent to an edge between two adjacent slab segments connected to each other providing a continuity between the adjacent portions of the second ribs for the load transmission.

[0115] It is also proposed that each slab member can be a post-stressed slab member including multiple slab post-stressed cables parallel to the first ribs and/or parallel to the second ribs between two opposed ends of said slab member. The two opposed ends are adjacent to or coincident with the perimetral zone of the slab member.

[0116] The opposed ends of said at least one slab member will retain the at least one slab post-stressed cable in an upper position adjacent to the upper horizontal sheet and a central region of said at least one slab member, placed between said opposed ends, will retain the at least one slab post-stressed cable in a lower position adjacent to the lower horizontal sheet, increasing the overall resistance of the slab member.

[0117] Alternatively, multiple consecutive slab members can be post-stressed slab members including multiple continuous slab post-stressed cables parallel to the first ribs and/or parallel to the second ribs, at least some of said slab post-stressed cables passing along all said consecutive slab members. Two opposed ends of each slab member, which are adjacent to or coincident with the perimetral zone of said slab member, will retain the slab post-stressed cables in an upper position adjacent to the upper horizontal sheet of the slab member, and a central region of each slab member, placed between said opposed ends, will retain the slab post-stressed cables in a lower position adjacent to the lower horizontal sheet of said slab member. At least some of said slab post-stressed cables will be continuous with continuity along multiple consecutive slab members and will pass, for example, over the beams interposed between said adjacent slab members, for example embedded in a recess provided in perimetral zone of the upper horizontal sheet.

[0118] According to an additional alternative embodiment, multiple consecutive slab members are post-stressed beams each including multiple slab cable sleeves parallel to the first ribs and/or parallel to the second ribs.

[0119] Two opposed ends of each slab member, which are adjacent to or coincident with the perimetral zone of the slab member, will retain the at least one slab cable sleeve in an upper position adjacent to the upper horizontal sheet and a central region of each slab member, placed between said opposed ends, will retain the at least one slab cable sleeve in a lower position adjacent to the lower horizontal sheet. At least some of the slab cable sleeves of each slab member are connected with slab cable sleeves of a successive slab members of said consecutive slab members through a slab sleeve connector. Said multiple consecutive slab members will further include continuous slab post-stressed cables inserted in said slab cable sleeves, at least some of said slab post-stressed cables passing along all said consecutive slab members through the respective slab cable sleeves which are connected to each other by said slab sleeve connectors.

[0120] Typically, the engineered wood slats or boards have a different load resistance depending on the direction of said loads in regard to the position of the slat or the board. Usually the biggest load resistance is obtained when the loads are parallel to most of the wood fibers contained in said engineered wood, which typically are parallel to the main surfaces of the slat or board. Therefore, each slat or board is placed, within the structural system, orienting the veneers fibers, usually parallel to the main surface of the board, parallel to the main load on each position of the structure. When the main loads present on one element of the structure are traction or compression loads in one single direction, the slats or boards used in that element will have all or most of the veneer fibers oriented in said direction. When the main loads present on one element of the structure are bending, twisting or shearing loads, or a mix of different loads with different orientations, the slats or boards used in that element will have veneer fibers oriented in multiple directions, for example orthogonal directions. Using on each structural element slats or boards with the optimal veneer fiber orientation provide an optimal resistance of the structure and a reduction in costs and weights of said structure.

[0121] For example, the laminated strand lumber includes fibers oriented all in a single direction parallel to the main surface of the slat or board, and therefore the laminated strand lumber has its biggest resistance on said direction. This material will be preferably used on those areas of the structural system where the loads are mostly oriented in a single direction, for example in the pillars, in the upper and lower horizontal slats of the beams or in the upper connectors when connecting two aligned beams.

[0122] The plywood includes fibers oriented in two orthogonal directions, both parallel to the main surfaces of the slat or board and therefore the plywood has its biggest resistance on those two orthogonal directions but its resistance will be slightly lower than a slat or board made of laminated strand lumber of an identical size. This material will be therefore mostly used on areas of the structural system where loads on different directions, or diagonal loads or

shear force is expected, for example on the end portion of the at least one central vertical slat of the beams, in the upper connectors when connecting non-aligned beams or in the vertical connector.

[0123] Other materials, such the oriented strand board or the medium-density fiberboard have a lower resistance than the materials cited above but are also cheaper. Therefore, those materials will be mainly used on those areas of the structural system where low loads are expected.

[0124] Other engineered wood materials are contemplated including not only wood fibers, but also other natural or artificial fibers embedded therein or adhered thereto, such as glass fibers or carbon fibers.

[0125] It will be understood that references to geometric position, such as parallel, perpendicular, tangent, etc. allow deviations up to $\pm 5^\circ$ from the theoretical position defined by this nomenclature.

[0126] Other features of the invention appear from the following detailed description of an embodiment.

Brief description of the Figures

[0127] The foregoing and other advantages and features will be more fully understood from the following detailed description of an embodiment with reference to the accompanying drawings, to be taken in an illustrative and non-limitative manner, in which:

Fig. 1a shows a perspective view of a building under construction using the present engineered wood structural system, this figure showing a squared matrix of sixteen pillars connected supporting one first structural floor completely covered by slab members and supporting a matrix of beams for a second structural floor overlapped to the first structural floor, the pillars projecting upwards from said second structural floor ready for supporting a matrix of beams of a third structural floor;

Fig. 1b shows a perspective view of a building under construction using the present engineered wood structural system, according to an embodiment in which half of the building has isolated pillars and the other half of the building has structural walls made of aligned pillars;

Fig. 2a shows a beam according to one embodiment including two parallel central vertical slats;

Fig. 2b shows an exploded view of the beam of Fig. 2a;

Fig. 3a shows an alternative embodiment of the beam shown on Fig. 2a including a post-

stressed cable comprised between the two parallel central vertical slats;

Fig. 3b is an exploded view of Fig. 3a;

Fig. 4 is an exploded view and a perspective view of a pillar segment including four vertical strut segments, pillar spacer and four beam seats intended for receiving and supporting four converging beams;

Fig. 5a shows a perspective view of an assembly step of a node of the structural system where two aligned beams are connected to a pillar segment, the pillar segment including two vertical strut segments and two beam seats, one of the beams being connected to one of said beam seats and one beam being separated for clarity;

Fig. 5b shows a further assembly step of the same node shown on Fig. 5a, where both converging beams are supported on the beam seats and where the upper connector, the lower connector and the subsequent pillar segment are shown in an exploded view;

Fig. 5c shows the node shown on Figs. 5a and 5b completely assembled where the two consecutive pillar segments have respective vertical strut segments adhered to each other producing a continuous pillar;

Fig. 6a shows a view equivalent to Fig. 5b but for a node where four converging beams are supported on four beam seats of the same pillar segment;

Fig. 6b shows the node shown on Fig. 6a completely assembled where the two consecutive pillar segments have respective vertical strut segments adhered to each other producing a continuous pillar;

Fig. 6c shows a view equivalent to Fig. 6a but for a node where the successive aligned vertical strut segments are connected to each other through vertical connectors surrounding the node;

Fig. 7a shows an alternative embodiment of the node shown on Figs. 5a to 5c wherein the node further comprises vertical connectors shown in exploded view in this figure;

Fig. 7b shows the node shown on Fig. 7a completely assembled where the two consecutive pillar segments have respective vertical strut segments rigidly connected to each other through the vertical connectors, producing a continuous pillar;

Fig. 8a shows an embodiment equivalent to that shown on Fig. 5b but for a node where three beams converge on the same pillar segment which include three beam seats, two aligned beams and one beam perpendicular to the other two beams, and where the upper connector include three horizontal connector arms;

Fig. 8b shows the node shown on Fig. 8a further including vertical connectors, which are shown in exploded position, to be adhered to the vertical pillar surfaces of two successive vertical strut segments of the pillar, one vertical connector including a vertical connector arm to be adhered to one side of the at least one central vertical slat of the two aligned beams, and four additional vertical connectors each including one vertical connector arm to be adhered to

one side of the at least one central vertical slat of only one beam;

Fig. 9a shows a perspective view of a matrix of beams with one slab member, made of three slab segments, installed therein, the central slab segment being shown in an exploded view;

Fig. 9b shows the same than Fig. 9a but with the three slab segments being installed on the matrix of beams, showing the second rib joints and the upper sheet joints in an exploded view;

Fig. 9c is an exploded section view of one beam and two adjacent slab members supported on said beams;

Fig. 9d is the same view than the Fig. 9c but in an assembled position, where the upper horizontal sheet and the lower horizontal sheet of both adjacent slab members are connected to each other;

Fig. 10 shows a perspective view of a matrix of beams of one structural floor including a schematic view of the disposition of the slab post-tensioning cables within the structural floor, showing, of each slab member, only two first and second ribs for clarity reasons;

Fig. 11 shows a perspective view of a structural wall comprising a beam supported on multiple aligned pillars each including two vertical struts and two vertical connectors, the beam including a reinforced portion with an additional lower horizontal slat for a door opening, and one end of the beam being connected with other two beams by an upper connector and a lower connector.

[0128] On the drawings a shading has been added on the surfaces where adhesive is applied.

Detailed description of an embodiment

[0129] The foregoing and other advantages and features will be more fully understood from the following detailed description of an embodiment with reference to the accompanying drawings, to be taken in an illustrative and not limitative.

[0130] According to one embodiment, the engineered wood structural system of the present invention is used to erect a multi-floor building with multiple stacked structural floors, for example between five and twenty structural floors, wherein each pillar 10 is an isolated pillar connected with two, three or four beams 20 converging on a node of said pillar 10 for each structural floor. In those buildings the nodes shall be rigid nodes connecting the beams and the pillars, or the building shall include rigid elements covering the entire height of the building, such a rigid core (typically the staircase or the elevator enclosure) or diagonal elements connecting some nodes of different levels.

[0131] The proposed engineered wood structural system can also be used to erect a multi-

floor building with structural walls, for example a balloon or platform frame building, where said structural walls are made of a succession of parallel aligned pillars supporting one continuous beam.

[0132] The proposed engineered wood structural system also allows for a mixed structure combining structural walls, made of aligned pillars supporting one beam, and isolated pillars, as shown in Fig. 1b, in which case the structural walls can actuate as a rigid core for the isolated pillars, in which case the rigidity of the nodes is optional.

[0133] In Fig. 1 an example of a building partially erected is shown where all the beams 20 are horizontal beams 20 orthogonal to each other defining a squared matrix of beams for each structural floor.

[0134] As shown on Figs. 2a and 2b, each beam 20 comprises one upper horizontal slat 21 and one lower horizontal slat 22 parallel to each other separated a distance and connected to each other through two parallel central vertical slats 23 perpendicular to said upper and lower horizontal slats 21 and 22 and adhered thereto, providing an i-shaped beam 20 with double central vertical slat 23. This shape has an optimal relation between resistance, cost and weight.

[0135] In this embodiment the upper horizontal slat 21 and the lower horizontal slat 22, both mainly resisting loads parallel to their main longitude, are made of laminated strand lumber.

[0136] Each of the two parallel central vertical slats 23 have two end portions 23a which in this example are made of plywood, each end portion 23a being adjacent to one pillar 10 where the beam 20 is supported. The rest of said two parallel central vertical slats 23, between the two end portions 23a, is made in this example of a cheaper engineered wood such as oriented strand board because on that central portion the loads are much less than in the end portions 23a.

[0137] Typically, said end portion 23a made of a more resistant engineered wood have a longitude comprised between 50cm and 100cm, and is adhered to the rest of the engineered wood constitutive of the same central vertical slat 23 for example through complementary recessed staggered steps.

[0138] As shown for example on Figs. 4 and 5a, each pillar 10 include a beam seat 11 for each beam 20 supported on said pillar 10.

[0139] When reduced loads are transferred from the beam 20 to the pillar 10, for example when a beam 20 is supported on multiple aligned pillars 10, as shown for example on Fig. 11, the beam 20 can be supported on the beam seat 11 of each pillar 10 through the lower horizontal slat 22, compressing said lower horizontal slat 22 in a vertical direction which is sub-optimal but resistant enough for such reduced loads.

[0140] When the loads transferred from the beam 20 to the pillars 10 is significant, for example when a long beam comprised between 3m and 8m is supported on the pillars 10 only on its ends, the end portion 23a of said two central vertical slats 23 of each beam 20 will be vertically supported on said beam seat 11, transferring vertical loads from the beam 20 to the pillar 10 in a direction parallel to the main surface of the central vertical slats 23 which is optimal for load transfer.

[0141] Because this load transfer generates compression loads and shear loads on said end portion 23a of the central vertical slats 23, said end portions 23a are preferably made of engineered wood including veneer fibers in different directions, such as plywood.

[0142] In the example shown in the figures, each beam seat 11 comprises two vertical and parallel boards perpendiculars to the central vertical boards to be supported, each board including one central notch between two horizontal support areas. Each of the support areas is intended to be in contact with one of the two central vertical slats 23 of the beam 20 to be supported and the central notch is intended to house the end portion 22a of the lower horizontal slat 22 of the beam 20 supported on said beam seat 11, preventing the contact between said end portion 22a and the beam seat 11.

[0143] According to the embodiment shown in the figures, each pillar 10 include multiple vertical struts 12 continuous along the entire longitude of the building, said vertical struts 12 being separated in the horizontal direction by pillar spacers 14 placed between and adhered to said struts 12, generating a hollow pillar 10. The separation between the struts 12 of the pillar 10 allow the insertion of the end portion of all the beams converging on said pillar 10, including the end portions 23a of the correspondent central vertical slats 23, in said space between the struts 12 of the pillar 10, allowing the vertical continuity of the struts 12, which surround the end portion of the beams 20.

[0144] The beam seats 11 are also included between and adhered to the struts 12, said beam seats 11 being interposed between, and connected to, the struts 12 within the hollow pillar, permitting the transfer of loads from the beams 20 to the pillar 10 in an area close to the geometric center of the pillar 10, reducing the bending loads generated on the pillar 10.

[0145] The loads transferred from the beams 20 to the pillars 10 through said beam seats 11 are concentrated on said struts 12, accumulated from the multiple structural floors and conducted to the foundation where said pillars 10 are supported.

[0146] The multiple beams 20 of the same structural floor converging on the same pillar 10 are connected to each other at least through an upper connector 40 and through a lower connector 50, as shown in Figs. 5b to 8b.

[0147] The upper connector 40 is a flat horizontal sheet including as many horizontal connector arms 41 as beams 20 of the same structural floor converge on said pillar 10, being the angular distribution of said horizontal connector arms 41 coincident with the angular

distribution of the beams 20 converging on said pillar 10.

[0148] Each horizontal connector arm 41 is adhered to the end portion 21a of one upper horizontal slat 21 of one beam 20 supported on said pillar 10. Said upper connector 40 transmits loads between the upper horizontal slats 21 of all the beams 20 converging on said pillar 10.

[0149] According to a preferred embodiment shown in the figures, the end portion 21a of each upper horizontal slat 21 and the horizontal connector arm 41 adhered thereto include complementary recessed staggered steps coupled and adhered to each other, each step being a flat surface parallel to the upside main surface of the upper horizontal slat 21. Said connection through recessed staggered steps produces a distributed transfer of the loads and also allows the upper connector 41 to be flush with said upside main surface of the upper horizontal slat 21 of the beam 20. Said upper connector 40 is preferably made of engineered wood including veneer fibers in different directions, such as plywood.

[0150] The lower connector 50 comprises a tapered shape block, for example an inverted frusto-pyramidal shape, tightly inserted in a descendent direction between the end portion 22a of the lower horizontal slats 22 of the beams 20 of the same structural floor converging on the same pillar 20. Said lower connector 50 transmits loads between the lower horizontal slats 22 of the converging beams 20 of the same structural floor.

[0151] In the examples shown in the attached Fig. 2b and others, each lower horizontal slat 22 include a reinforcement 24 adhered to its end portion 22a, between the two central vertical slats 23 of the beam 20, producing an increase in the thickness and in the resistance of said end portion 22a of the lower horizontal slat 22 which contacts with the lower connector 50.

[0152] As shown in Figs. 5b, 6a and 8a, said lower connector 50 is a tapered shape block inserted in the center of the hollow pillar 10 defined between the vertical struts 12 constitutive of said pillar 10, between the end portion of the converging beams 20, said lower connector 50 being compressed between the end portion 22a of the lower horizontal slats 22 of the converging beams 20 of the same structural floor.

[0153] Optionally, each beam 20 can be also connected to the pillar 10 through at least one vertical connector 60 made of a vertical sheet of engineered wood, as shown on Figs. 7a to 8b.

[0154] Each vertical connector 60 is adhered to one vertical pillar surface 10a of one vertical strut 12 of the pillar 10, below and above the node, and include a vertical connector arm 61 adhered to the end portion 23a of one central vertical slat 23.

[0155] It is also contemplated that, when one pillar 10 supports two aligned converging beams 20, the vertical connector arm 61 of the vertical connector 60 is simultaneously adhered to the end portion 23a of the central vertical slats 23 of both converging beams 20.

[0156] Said vertical connector 60 transmits shear, bending and twisting loads from the beams 20 to the struts 12 of the pillar 10, and is preferably made of engineered wood including veneer fibers in different directions, such as plywood.

[0157] Each strut 12 of one single continuous pillar 10 is typically made of multiple successive vertical strut segments 13 rigidly connected to each other, each vertical strut segment 13 having the same high as the distance between successive structural floors.

[0158] According to the embodiment shown in Figs. 5b to 6b two successive vertical strut segments 13 constitutive of the same strut 12 include complementary recessed staggered steps on its ends which are coupled and adhered to each other providing a vertical continuity and a vertical transmission of loads.

[0159] According to an alternative embodiment, shown in Fig. 7a to 8b, two successive vertical strut segments 13 constitutive of the same strut 12 are connected to each other through the vertical connector 60 adhered to the vertical pillar surface 10a of the vertical strut segments 13 placed below the beam 20 and to the vertical pillar surface 10a of the vertical strut segments 13 placed above the beam 20.

[0160] Preferably each of said vertical strut segments 13 is connected to the vertical connector 60 through complementary recessed staggered steps parallel to the vertical pillar surface 10a included in the vertical strut segments 13 and in the vertical connector 60, to provide a distributed load transmission. Said complementary recessed staggered steps provide a vertical continuity and a vertical transmission of loads.

[0161] In some cases, it is preferred to connect vertical strut segments 13 having different cross sectional area, typically having the lower vertical strut segments 13 bigger cross sectional area to withstand bigger accumulated loads, producing a pillar 10 with an increasing section and an increasing resistance.

[0162] Between the frame defined between four orthogonal beams 20 of the same structural floor is covered by a slab member 30 supported on said beams 20.

[0163] Each slab member 30 include an upper horizontal sheet 33, a lower horizontal sheet 34 parallel to each other and connected to each other through first ribs 31 parallel to each other and second ribs 32 perpendicular to the first ribs 31 interposed between said upper and lower horizontal sheets 33 and 34.

[0164] The upper horizontal sheet 33 is bigger than the foot-print of the hollow space defined between said beams 20 where the slab member 30 is supported. The upper horizontal sheet 33 include a perimetral zone supported on and adhered to the upper horizontal slats 21 of said beams 20.

[0165] The upper horizontal sheet 33 is connected to the upper horizontal sheet 33 of adjacent

slab members 30, for example through complementary recessed staggered steps provided in the perimetral zone of the upper horizontal sheets 33 of both upper horizontal sheets 33 of adjacent slab members 30 connected to each other or through upper sheet connectors 36 adhered to the perimetral zone of the upper horizontal sheets 33 of both upper horizontal sheets 33 of adjacent slab members 30 connected to each other. In this case the upper sheet connectors 36 are elongated slats connecting the perimetral zone of both upper horizontal sheets 33, preferably said elongated slats being inserted in recessed areas of said perimetral zone and being flush with the upper horizontal sheets 33, as shown in Fig. 1.

[0166] The lower horizontal sheet 34 is equal or smaller than the foot-print of the hollow space defined between said beams 20 on which the slab member 30 is supported. Said lower horizontal sheet 34 include a perimetral zone adhered to the surrounding beams 20, preferably to the surrounding central vertical slats 23 of said beams 20, through a lower sheet connector 35, which in this example is a slat adhered to the perimetral zone of the lower horizontal sheet 34, for example through complementary recessed staggered steps adhered to each other, and to the central vertical slat 23.

[0167] In this embodiment the at least one central vertical slat 23 of the beam 20 are two parallel central vertical slats 23 including a compression configuration in between to transmit loads from between the lower sheet connectors 35 of two different slab members adhered on both sides of the same beam 20. In this example, the compression configuration is a transversal rib interposed between the two parallel central vertical slats 23, perpendicular to said two central vertical slats 23 and parallel to, and preferably coplanar with, the lower horizontal sheets 34 both adjacent slab members 30.

[0168] The proposed slab member 30 can be divided in three adjacent and coplanar slab segments 30a, 30b and 30c, each having approximately one third of the total surface of the slab member 30, each slab segment 30a, 30b and 30c including a portion of the upper horizontal sheet 33, a portion of the lower horizontal sheet 34, a number of first ribs 31 and a portion of all the second ribs 32, said three slab segments 30a, 30b and 30c being connected to each other through slab joints.

[0169] Each slab joint includes an upper sheet joint, a lower sheet joint and a second rib joint for each single second rib 32.

[0170] The upper sheet joint comprises an upper sheet joint connector 37 adhered to two adjacent portions of the upper horizontal sheet 33 in a connection area adjacent to an edge between two adjacent slab segments 30a, 30b, 30c connected to each other, for example through complementary recessed staggered steps provided in the upper sheet joint connector 37 and in the connection area of the adjacent upper horizontal sheet, said complementary recessed staggered steps being coupled and adhered to each other.

[0171] The lower sheet joint comprises complementary recessed staggered steps provided on two adjacent portions of the lower horizontal sheet 34 in a connection area adjacent to an edge

between two adjacent slab segments 30a, 30b, 30c connected to each other, said complementary recessed staggered steps being coupled and adhered to each other.

[0172] Alternatively, said lower sheet joint comprises a lower sheet connector adhered to two adjacent portions of the lower horizontal sheet 34 in a connection area adjacent to an edge between two adjacent slab segments 30a, 30b, 30c connected to each other.

[0173] Each second rib joint comprises complementary recessed staggered steps provided on two adjacent portions of the second rib 32 in a connection area adjacent to an edge between two adjacent slab segments 30a, 30b, 30c connected to each other, said complementary recessed staggered steps being coupled and adhered to each other.

[0174] Alternatively, each second rib joint comprises a second rib connector 39, in this case a small flat piece made of engineered wood adhered to two adjacent portions of the second rib 32 in a connection area adjacent to an edge between two adjacent slab segments 30a, 30b, 30c connected to each other, providing structural continuity between the portions of the second rib 32 connected through it.

[0175] Typically, the three slab segments 30a, 30b and 30c are installed adjacent to each other, supporting said slab segments 30a, 30b and 30c on the surrounding beams 20 through the perimetral zone of the upper horizontal sheet 33 and respective lower horizontal sheet portions are connected to each other through the lower sheet joints. Then the portions of the second ribs 32 of the different slab segments 30a, 30b and 30c are connected to each other by the second rib joints. Finally, the upper horizontal sheet portions are connected to each other by the upper sheet joint connectors 37 adhered thereto.

[0176] According to an additional embodiment, each slab member 30 is a post-stressed slab member includes several slab post-stressed cables 73 parallel to the first ribs 31, each slab post-stressed cable 73 extending across the slab member 30 in tension and having opposed ends adjacent to the perimetral zone of the upper horizontal sheet 33 and having a central region adjacent to the lower horizontal sheet 34 of the slab member 30, providing an increase in the overall structural resistance of the slab member 30.

[0177] Optionally the slab member further comprises several slab post-stressed cables 73 parallel to the second ribs 32, providing a bidirectional post-tensioning of the slab member 30.

[0178] When multiple consecutive slab members 30 are post-stressed slab members, at least some of the slab post-stressed cables 73 can be continuous along all said consecutive slab members 30. In that case the slab post-stressed cables 73 pass from one slab member 30 to the adjacent one above the beam 20 interposed where said adjacent slab members 30.

[0179] It is also contemplated that said slab post-stressed cables 73 are inserted in slab cable sleeves, each slab member 30 including one slab cable sleeve for each slab post-stressed cable 73 reproducing its path, the slab cable sleeves of the adjacent slab members 30 being

connected to each other through sleeve connectors placed above the beams 20 interposed between the adjacent slab members 30. In that manner the slab cable sleeves can be installed in the slab members before the installation of said slab members 30 within the structural system, and later connected to each other through the sleeve connectors once in place.

[0180] In a similar manner, each beam 20 can be a post-stressed beam including at least one post-stressed cable 70 between the two opposed ends thereof, the opposed ends of said at least one beam 20 retaining the at least one post-stressed cable 70 in an upper position adjacent to the upper horizontal slat 21 and a central region of said at least one beam 20, placed between said opposed ends, retaining the at least one post-stressed cable 70 in a lower position adjacent to the lower horizontal slat 22. In the example shown on Figs. 3a and 3b the post-stressed cable 70 is placed between two parallel central vertical slats 23, and the beam 20 includes three cable retainers interposed to, and perpendicular to, said two parallel central vertical slats 23. One cable retainer is in the center of the beam, retaining the post-stressed cable 70 on its lower end, and two cable retainers are in the opposed ends of the beam each retaining the post-stressed cable 70 on their respective upper ends, defining an V-shaped post-stressed cable 70.

[0181] Also, multiple consecutive beams 20 can including at least one continuous post-stressed cable 70 passing along all said consecutive beams 20. Optionally said continuous pre-stressed cable 70 can be inserted in one cable sleeve pre-installed on each beam 20, the cable sleeves of all said consecutive beams 20 being connected to each other through sleeve connectors.

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [WO2016191510A1 \[0003\]](#)
- [US3866371A \[0006\]](#)
- [US20100275551A \[0009\] \[0010\]](#)

- EP0550803A1 [0010]
- EP0079761A1 [0011]

Patentkrav

1. Et strukturelt system af konstrueret træ fremstillet af komponenter af konstrueret træ, nævnte komponenter af konstrueret træ omfatter:

5

- flere søjler (10) parallelt med hinanden, hver søjle (10) inkluderer bjælkelejer (11);

10

- flere bjælker (20) forbundet til de nævnte søjler (10) gennem bjælkelejerne (11), hver forbindelse definerer et knudepunkt, hvor hver bjælke (20) omfatter en øvre vandret lamel (21), en nedre vandret lamel (22) og mindst en central lodret lamel (23) placeret mellem og fastgjort til de øvre og nedre vandrette lameller (21 og 22);

- pladebyggeelementer (30) understøttet af de nævnte bjælker (20), der definerer overlappende strukturgulve (1) på forskellige gulvniveauer;

15

kendetegnet ved, at

20

- hver af de flere søjler (10) omfatter flere knudepunkter på forskellige lodrette positioner, svarende til forskellige gulvniveauer, og består af flere lodrette afstivere (12), som er fortløbende langs hele søjlens (10) længde, adskilt fra hinanden i vandret retning og forbundet med hinanden gennem søjleleafstandsstykker (14) mellem de lodrette afstivere (12),

25

- hver af de flere bjælker (20) har en del mellem mindst to modstående lodrette afstivere (12) og understøttes lodret på et af bjælkelejerne (11) mellem de to modstående lodrette afstivere (12);

30

- hver lodret afstive (12) består af flere efterfølgende lodrette stiversegmenter (13), fremstillet af en lodret plade af konstrueret træ, justeret og stift forbundet med hinanden gennem en lodret forbindelsesdel (60), fremstillet af en lodret plade af konstrueret træ, klæbet til en lodret søjleoverflade (10a) af tilstødende efterfølgende lodrette stiversegmenter (13) eller gennem supplerende forsænkede forskudte trin defineret på tilstødende endedel af to efterfølgende lodrette trykstangsdele (13) der er overlappet og klæbet til hinanden.

35

2. Konstruktionssystemet af konstrueret træ ifølge krav 1, hvori:

- mindst nogle af de lodrette forbindelsesdele (60) omfatter et eller flere forsænkede forskudte trin, der er supplerende og fastgjort til forsænkede

- forskudte trin, der indgår i de efterfølgende lodrette trykstangsdele (13), der er forbundet med hinanden gennem den lodrette forbindelsesdel (60), eller
- mindst nogle af de lodrette forbindelsesdele (60) omfatter et eller flere forsænkede forskudte trin, der er supplerende og fastgjort til forsænkede forskudte trin, der indgår i de efterfølgende lodrette trykstangsdele (13), der er forbundet med hinanden gennem den lodrette forbindelsesdel (60), idet den lodrette forbindelsesdel (60) og de to efterfølgende lodrette trykstangsdele (13) flugter.
- 5
- 10 **3.** Konstruktionssystemet af konstrueret træ ifølge krav 1 eller 2, hvori den mindst ene centrale lodrette lamel (23) på bjælken, der er placeret mellem de to modstående lodrette afstivere (12), er klæbet:
- til de mindst to modstående lodrette afstivere (12); og/eller
 - til de lodrette forbindelsesdele (60), der er inkluderet på de to modstående lodrette afstivere (12); og/eller
 - til en lodret forbindelsesarm (61), der rager vandret ud fra den lodrette forbindelsesdel (60), der er inkluderet på de to modstående lodrette afstivere (12);
- 15 tilvejebringer stivhed mellem bjælken (20) og søjlen (10).
- 20
- 4.** Konstruktionssystemet af konstrueret træ ifølge krav 1, 2 eller 3, hvori mindst nogle af bjælkerne (20) er fortløbende bjælker (20) understøttet af flere søjler (10), der er justeret i forhold til hinanden og definerer en konstruktionsvæg.
- 25
- 5.** Konstruktionssystemet af konstrueret træ ifølge et hvilket som helst af de foregående krav, hvori
- mindst nogle af bjælkerne (20) er lodret overlappede og understøttet til bjælkelejerne (11) på søjlerne (10) gennem den mindst ene centrale lodrette lamel (23); og/eller
- 30 mindst nogle af bjælkerne (20) er lodret overlappede og understøttet til bjælkelejerne (11) på søjlerne (10) gennem to modsatte endedele (23a) af den mindst ene centrale lodrette lamel (23); og/eller
- mindst nogle af bjælkerne (20) er lodret overlappede og understøttet til bjælkelejerne (11) på søjlerne (10) gennem den nedre horisontale lamel (22).
- 35
- 6.** Konstruktionssystemet af konstrueret træ ifølge et hvilket som helst af de foregående krav, hvori flere bjælker (20) har respektive ender forbundet med hinanden på det samme knudepunkt:

5 • gennem mindst en øvre forbindelsesdel (40), fremstillet af en vandret plade af konstrueret træ, der definerer flere radiale vandrette forbindelsesarme (41), der omgiver en central del mellem de mindst to modstående lodrette afstivere (12), idet de radiale vandrette forbindelsesarme (41) er klæbet til en endedel (21a) af alle de øvre vandrette lameller (21) af bjælkerne (20), der er forbundet med hinanden; og

10 • gennem mindst en nedre forbindelsesdel (50), der er omfattet mellem de mindst to modstående lodrette afstivere (12), idet den nedre forbindelsesdel (50) er anbragt mellem og i tæt kontakt med eller anbragt mellem, i tæt kontakt med og klæbet til en endedel (22a) af alle de nedre vandrette lameller (22) af bjælkerne (20), der er forbundet med hinanden.

15 **7.** Konstruktionssystemet af konstrueret træ ifølge krav 6, hvori mindst nogle af de øvre forbindelsesdele (40) og/eller mindst nogle af de nedre forbindelsesdele (50) er i tæt kontakt med, eller i tæt kontakt med og klæbet til, de mindst to modstående lodrette afstivere (12) og/eller til den lodrette forbindelsesdel (60), som omgiver den centrale del af den øvre forbindelsesdel (40).

20 **8.** Konstruktionssystemet af konstrueret træ ifølge krav 6 eller 7, hvori

25 • mindst nogle af de øvre forbindelsesdele (40) omfatter et eller flere forsænkede forskudte trin, der er supplerende og fastgjort til forsænkede forskudte trin, der er inkluderet i en vandret hovedoverflade på oversiden af endedelen (21a) af den øvre vandrette lamel (21), hvor den øvre forbindelsesdel (40) er klæbet fast, idet hvert forsænket forskudt trin danner et plan parallelt med den vandrette hovedoverflade på oversiden, eller

30 • mindst nogle af de øvre forbindelsesdele (40) inkluderer et eller flere forsænkede, forskudte trin, der er supplerende og fastgjort til forsænkede, forskudte trin, der er inkluderet i en vandret hovedoverflade af endedelen (21a) af den øvre vandrette lamel (21), hvor den øvre forbindelsesdel (40) er fastgjort, idet hvert forsænket, forskudt trin danner et plan parallelt med den vandrette hovedoverflade, idet den øvre forbindelsesdel (40) og de øvre vandrette lameller (21), der er forbundet med hinanden, flugter.

35

9. Konstruktionssystemet af konstrueret træ ifølge et hvilket som helst af de foregående krav 6 til 8, hvori hver bjælke (20) omfatter to parallelle og adskilte centrale lodrette lameller (23), og hvori endedelen (22a) af de nedre vandrette lameller

(22), der samles mod den samme søjle (10), er en centralt endedel placeret mellem de to parallelle og adskilte centrale lodrette lameller (22).

5 **10.** Konstruktionssystemet af konstrueret træ ifølge krav 9, hvori den nedre forbindelsesdel (50) omfatter en konisk formet blok, der er tæt indsat i en nedadgående retning mellem nævnte endedel (22a) af de nedre vandrette lameller (22).

11. Konstruktionssystemet af konstrueret træ ifølge et hvilket som helst af de foregående krav, hvori

10

- mindst én bjælke (20) er en efterspændt bjælke, der inkluderer mindst ét efterspændt kabel (70) mellem de to modstående ender heraf, idet de modstående ender af den mindst ene bjælke (20) fastholder det mindst ene efterspændte kabel (70) i en øvre position, der støder op til den øvre vandrette lamel (21), og et centralt område af den mindst ene bjælke (20), der er placeret mellem de modstående ender, fastholder det mindst ene efterspændte kabel (70) i en nedre position, der støder op til den nedre vandrette lamel (22); eller

15

20

- flere fortløbende bjælker (20) er efterspændte bjælker, der inkluderer mindst et fortløbende forspændt kabel (70), der passerer langs alle de fortløbende bjælker (20), de modsatte ender af hver bjælke (20) holder det mindst ene efterspændte kabel (70) i en øvre position, der støder op til den øvre vandrette lamel (21), og et centralt område af hver bjælke (20), der er placeret mellem de modsatte ender deraf, der holder det mindst ene efterspændte kabel (70) i en nedre position, der støder op til den nedre vandrette lamel (22);

25

30

- flere fortløbende bjælker (20) er efterspændte bjælker, der hver inkluderer mindst én kabelbøsning, idet de modstående ender af hver bjælke (20) fastholder den mindst ene kabelbøsning i en øvre position, der støder op til den øvre vandrette lamel (21), og et centralt område af hver bjælke (20), der er placeret mellem de modstående ender heraf, fastholder den mindst ene kabelbøsning i en nedre position, der støder op til den nedre vandrette lamel (22), hvori hver kabelbøsning på hver bjælke (20) er forbundet med en kabelbøsning på en efterfølgende bjælke (20) af de fortløbende bjælker gennem en kabelbøsningsforbindelse, og hvori de flere fortløbende bjælker (20) inkluderer mindst et fortløbende efterspændt kabel (70), der passerer langs alle de fortløbende bjælker (20) gennem de respektive kabelbøsninger, som er forbundet med hinanden ved hjælp af bøsningsforbindelserne.

35

12. Konstruktionssystemet af konstrueret træ ifølge et hvilket som helst af de foregående krav, hvori

5 hvert pladeelement (30) omfatter en øvre vandret plade (33), en nedre vandret plade (34) og, placeret derimellem og klæbet til disse:

- en flerhed af første skinner (31) parallelle med hinanden; eller
- en flerhed af første skinner (31) parallelt med hinanden og en flerhed af andre skinner (32) vinkelret på de første skinner (31), der definerer en

10 tovejs pladekonstruktion,

og hvori den øvre vandrette plade (33) har en omkredszone, der er lodret overlappet til, eller overlappet og klæbet til, den øvre vandrette lamel (21) på de bjælker (20), som pladeelementet (30) er understøttet af, og den nedre vandrette plade (34) har omkredszone, der er klæbet til de bjælker (20), som

15 pladeelementet (30) er forbundet med gennem nedre pladeforbindelsesdele (35).

13. Konstruktionssystemet af konstrueret træ ifølge krav 12, hvori den øvre vandrette plade (33) er klæbet til den øvre vandrette plade (33) af et andet tilstødende

20 pladeelement (30) gennem supplerende forsænkede forskudte trin tilvejebragt i omkredszonen af de øvre vandrette plader (33) af begge øvre vandrette plader (33) forbundet til hinanden eller gennem øvre pladeforbindelsesdele (36) klæbet til omkredszonen af de øvre vandrette plader (33) af begge øvre vandrette plader (33) forbundet til hinanden, og/eller hvori

25 den nedre vandrette plade (34) er forbundet med den nedre vandrette plade (34) på et andet tilstødende pladebyggelement (30) gennem respektive nedre pladeforbindelsesdele (35) i tæt kontakt med, eller i tæt kontakt med og klæbet til, kompressionskonfigurationer, der er indskudt eller indskudt og koplanære med de nedre vandrette plader (34) på begge tilstødende pladebyggelementer (30), der

30 er forbundet dertil, nævnte kompressionskonfigurationer er bjælkens (20) nedre vandrette lamel (22) eller er inkluderet på bjælkens (20) mindst ene centrale lodrette lamel (23) til overførsel af kompressionsbelastninger mellem de nedre vandrette plader (34) på tværs af den centrale lodrette lamel (23).

35 **14.** Konstruktionssystemet af konstrueret træ ifølge krav 12 eller 13, hvori hvert pladeelement (30) er opdelt i flere pladeafsnit (30a, 30b, 30c) forbundet med hinanden gennem pladesamlinger, hvor hvert pladesegment (30a, 30b, 30c) omfatter en del af den øvre vandrette plade (33), en del af den nedre vandrette plade (34),

et antal af de første skinner (31) og en del af alle de andre skinner (32), hvor hver pladesamling omfatter

- 5 • en øvre pladesamling, der omfatter en øvre pladesamlingsforbindelsesdel (37), der er klæbet til to tilstødende dele af den øvre vandrette plade (33) i et forbindelsesområde, der støder op til en kant mellem to tilstødende pladeafsnit (30a, 30b, 30c), der er forbundet til hinanden,
- 10 • en nedre pladesamling, der omfatter supplerende forsænkede forskudte trin, der er tilvejebragt på to tilstødende dele af den nedre vandrette plade (34) i et forbindelsesområde, der støder op til en kant mellem to tilstødende pladeafsnit (30a, 30b, 30c), der er forbundet med hinanden, eller omfatter en nedre pladesamling, der er klæbet til to tilstødende dele af den nedre vandrette plade (34) i et forbindelsesområde, der støder op til en kant mellem to tilstødende pladeafsnit (30a, 30b, 30c), der er forbundet med hinanden, og
- 15 • en anden ribbesamling for hver enkelt anden ribbe (32) i pladeelementet (30), hvor hver anden ribbesamling omfatter supplerende forsænkede forskudte trin, der er tilvejebragt på to tilstødende dele af den anden ribbe (32) i et forbindelsesområde, der støder op til en kant mellem to tilstødende pladeafsnit (30a, 30b, 30c), der er forbundet med hinanden, eller omfatter en
- 20 anden skinneforbindelsesdel (39), der er klæbet til to tilstødende dele af den anden ribbe (32) i et forbindelsesområde, der støder op til en kant mellem to tilstødende pladeafsnit (30a, 30b, 30c), der er forbundet med hinanden.

15. Konstruktionssystemet af konstrueret træ ifølge krav 12, 13 eller 14, hvori

- 25 • hvert pladeelement (30) er et efterspændt pladeelement, der inkluderer flere efterspændte pladekabler (73) parallelt med de første skinner (31) og/eller parallelt med de andre skinner (32) mellem to modstående ender af det nævnte pladeelement (30), der er tilstødende til eller falder sammen med den
- 30 omkredszonen, de modsatte ender af det mindst ene pladeelement (30) fastholder de flere efterspændte pladekabler (73) i en øvre position tilstødende den øvre vandrette plade (33), og et centralt område af pladeelementet (30), placeret mellem de modsatte ender, fastholder det mindst ene efterspændte pladekabel (73) i en nedre position ved siden af den nedre vandrette plade
- 35 (34); eller
- flere fortløbende pladebyggelementer (30) er efterspændte pladeelementer, der inkluderer flere fortløbende efterspændte pladekabler (73) parallelt med de første skinner (31) og/eller parallelt med de andre skinner (32), idet

mindst nogle af de efterspændte pladekabler (73) passerer langs alle de fortløbende pladebyggelementer (30), to modstående ender af hvert pladebyggelement (30), der støder op til eller falder sammen med omkredszonen, og som fastholder det mindst ene efterspændte kabel (73) i en øvre position, der

5 støder op til den øvre vandrette plade (33), og et centralt område af hvert pladeelement, der er placeret mellem de modsatte ender, og som fastholder de efterspændte kabler (73) i en nedre position, der støder op til den nedre vandrette plade (34);

- flere fortløbende pladebyggelementer (30) er efterspændte pladeelementer, der hver især inkluderer flere pladekabelbøsninger parallelt med de første

10 skinner (31) og/eller parallelt med de andre skinner (32), to modstående ender af hvert pladebyggelement (30), der støder op til eller falder sammen med omkredszonen, der holder pladekabelbøsningerne i en øvre position, der støder op til den øvre vandrette plade (33), og et centralt område af hvert

15 pladebyggelement (30), der er placeret mellem de modstående ender, holder pladekabelbøsningerne i en nedre position, der støder op til den nedre vandrette plade (34), hvori mindst nogle af pladekabelbøsningerne på mindst nogle af pladebyggelementerne (30) er forbundet med pladekabelbøsninger på efterfølgende pladebyggelementer (30) på de fortløbende pladebyggele-

20 menter (30) gennem en pladekabelbøsningsforbindelse, og hvori de flere fortløbende pladebyggelementer (30) inkluderer fortløbende efterspændte pladekabler (73) indsat i pladekabelbøsningerne, hvor mindst nogle af de efterspændte pladekabler (73) passerer langs alle de fortløbende pladebyggele-

25 menter (30) gennem de respektive pladekabelbøsninger, som er forbundet til hinanden af bøsningsforbindelsesdelene.

DRAWINGS

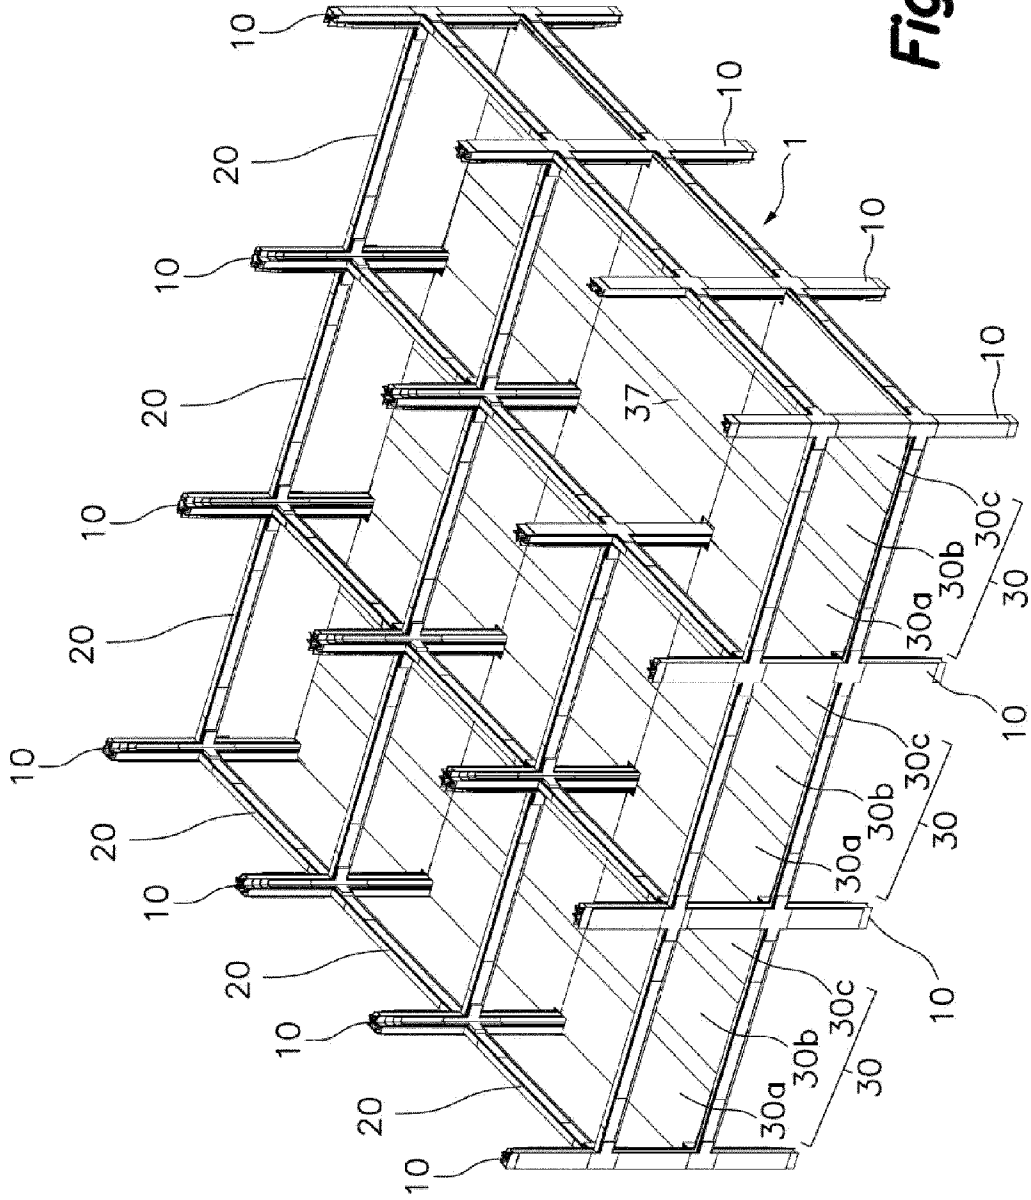


Fig. 1A

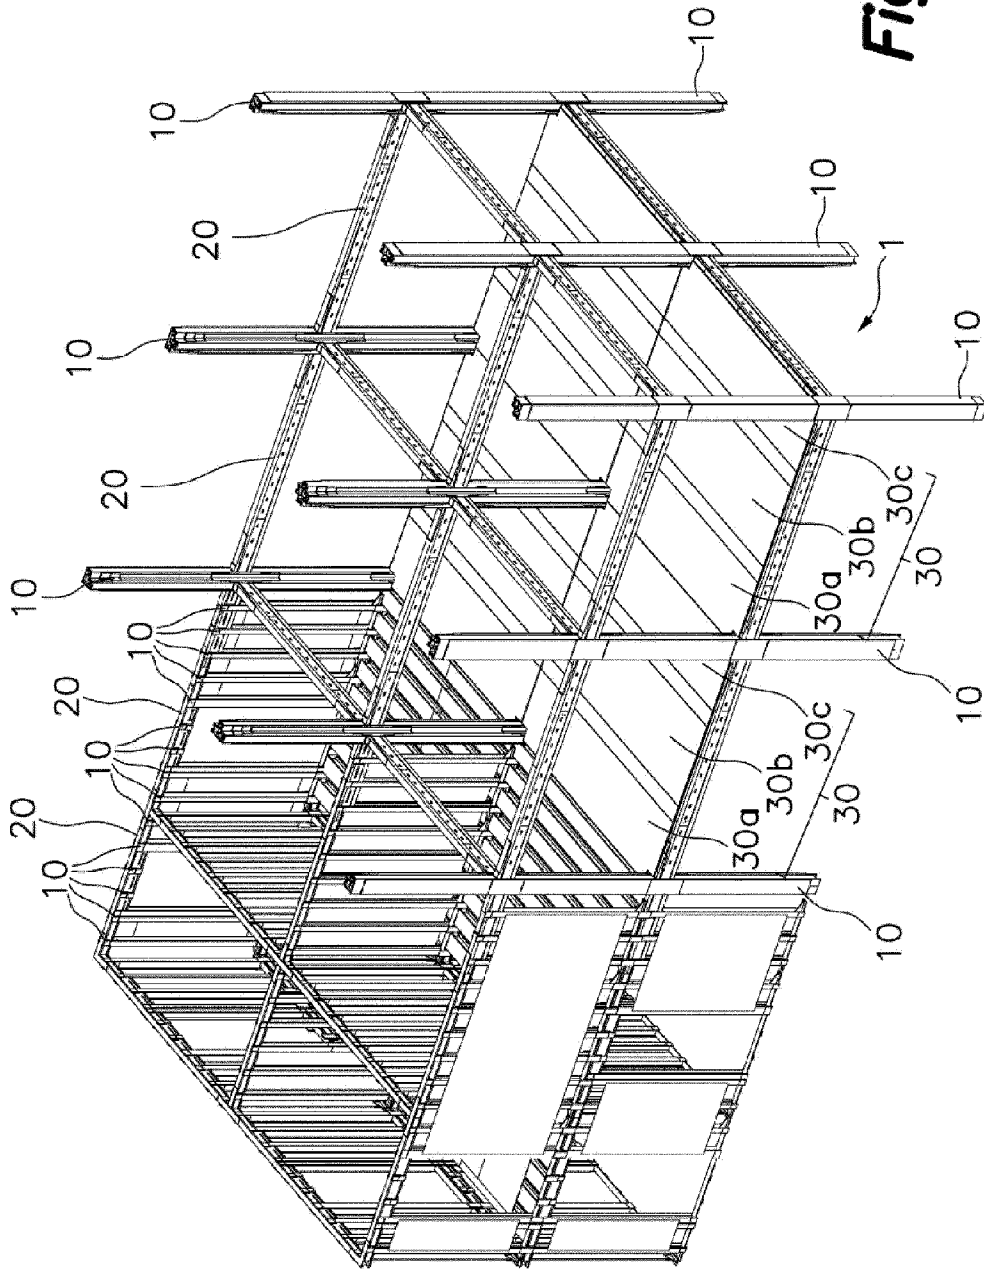


Fig. 1B

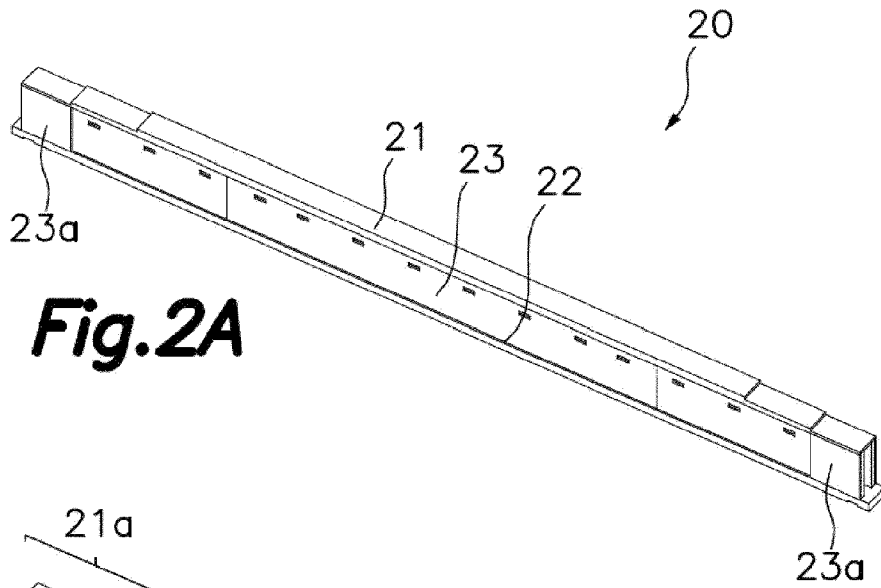


Fig. 2A

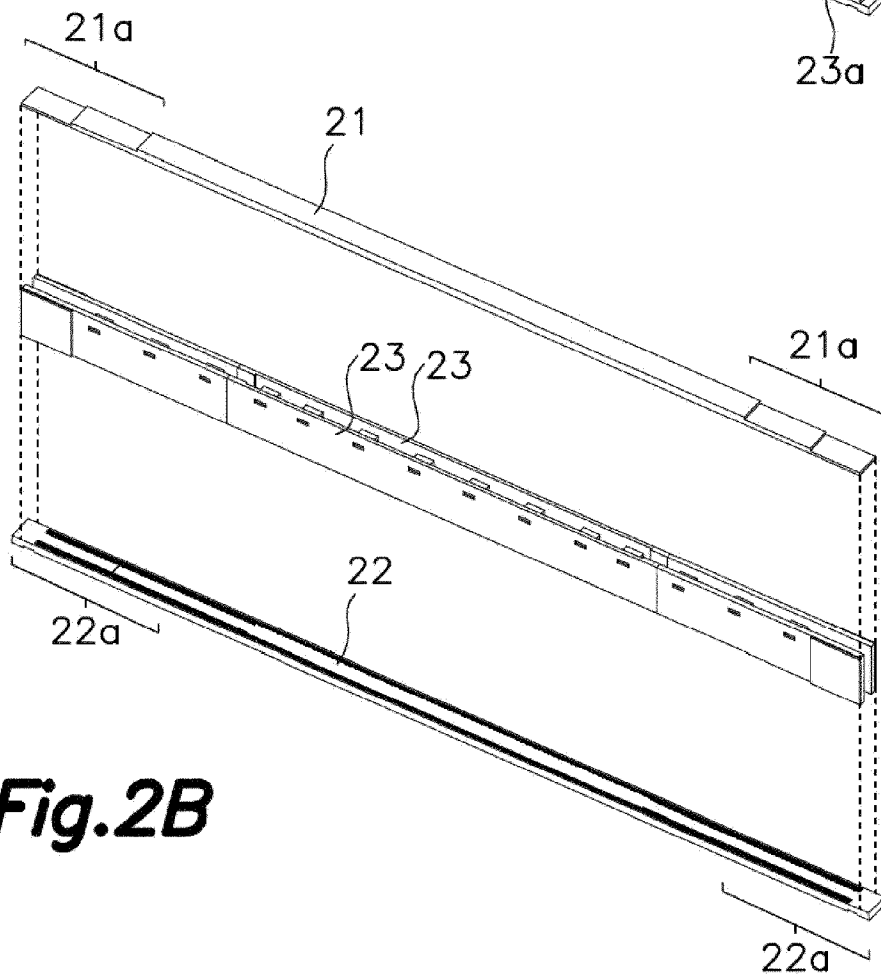


Fig. 2B

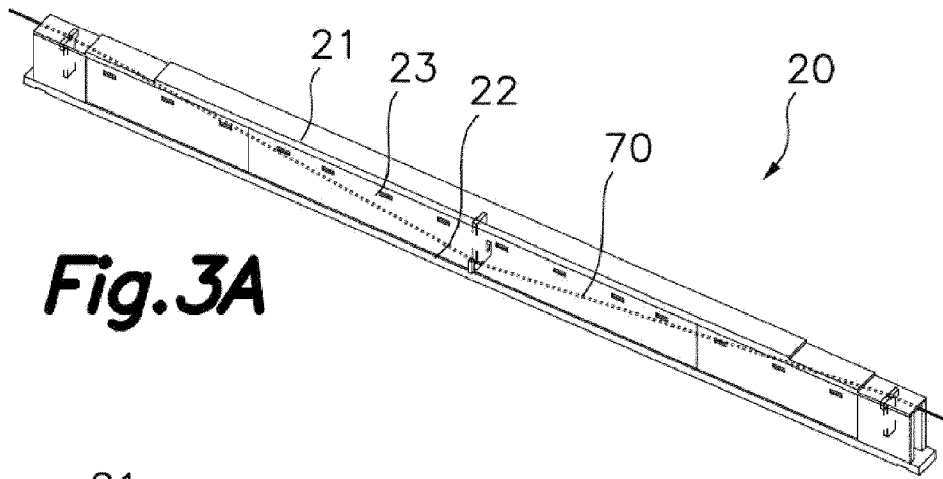


Fig.3A

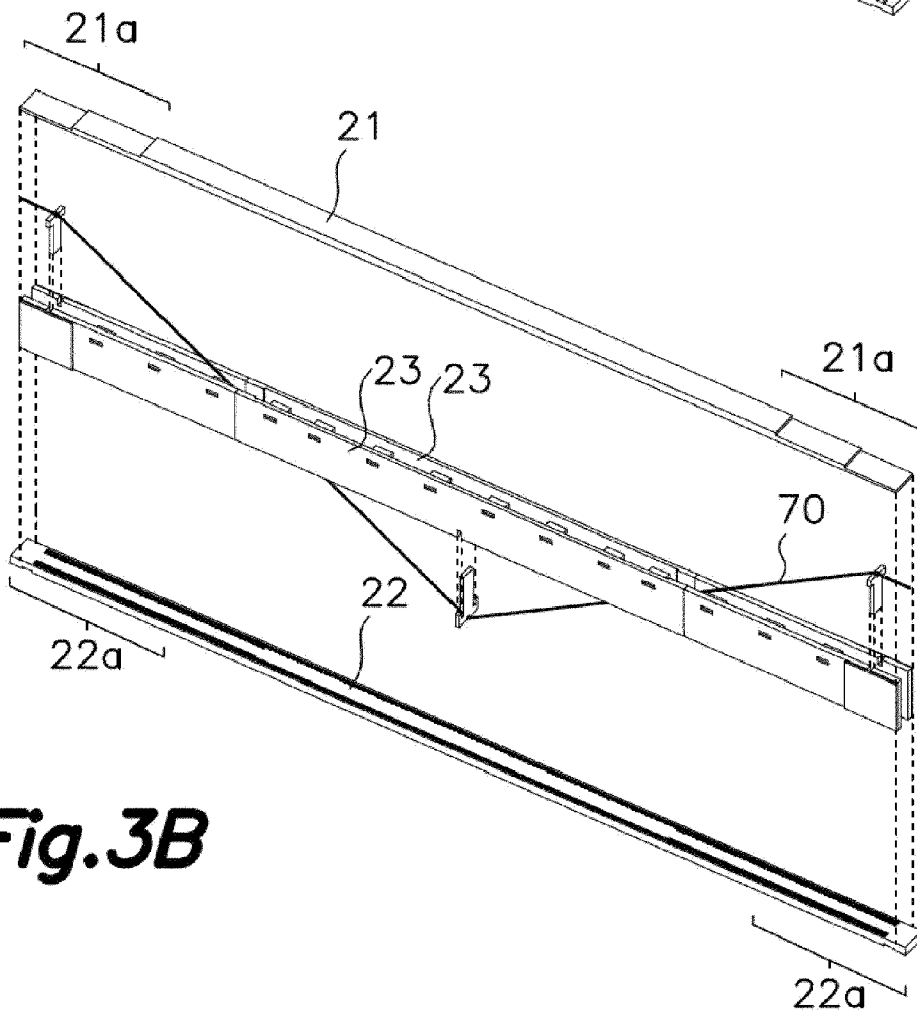


Fig.3B

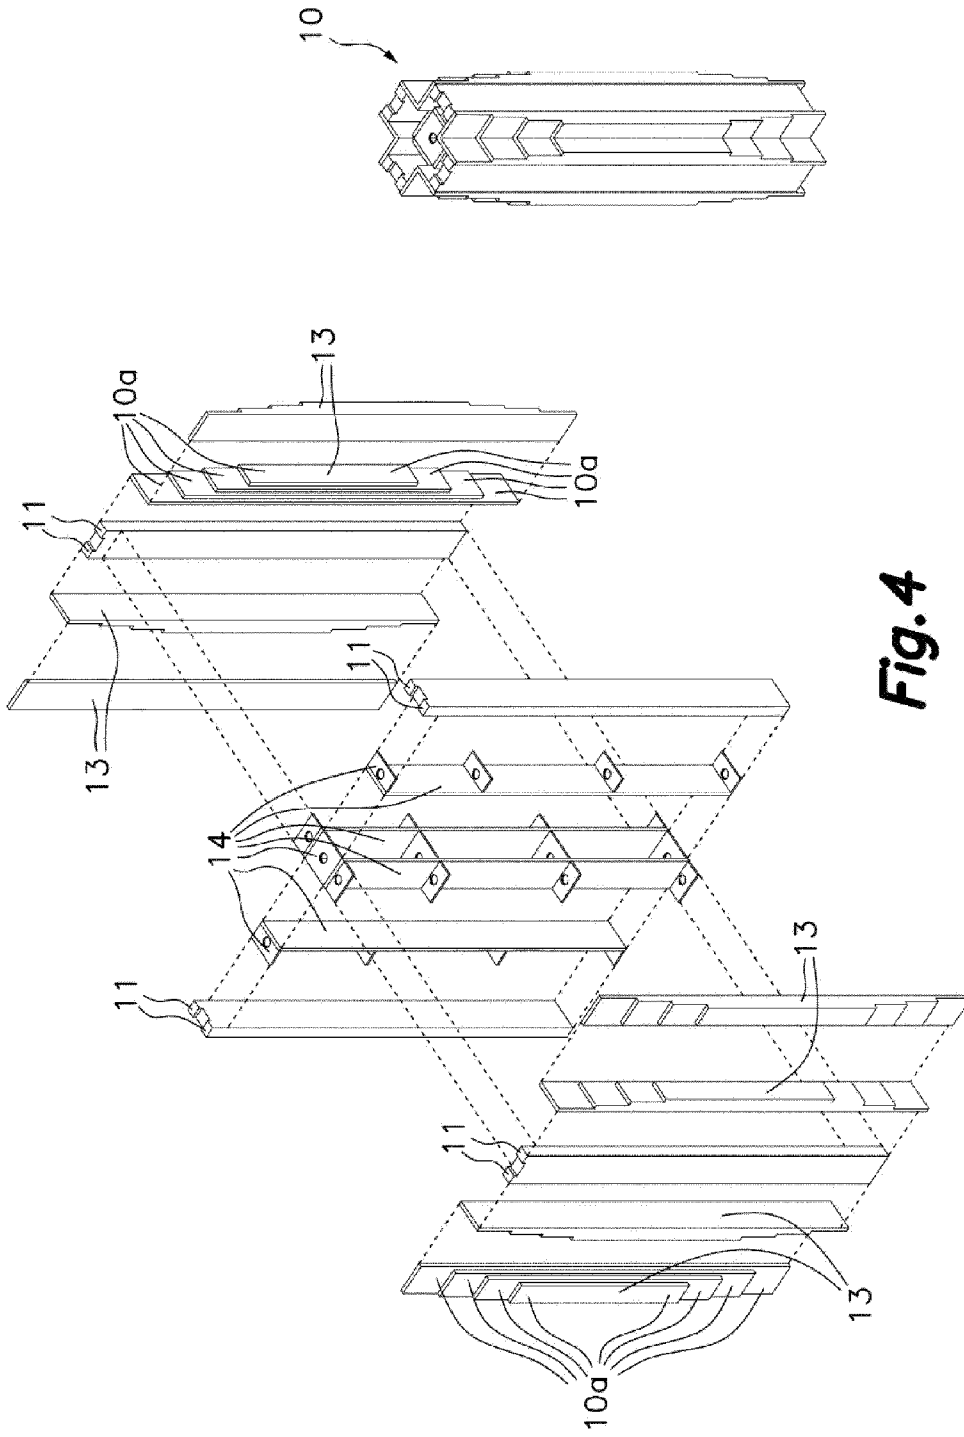


Fig. 4

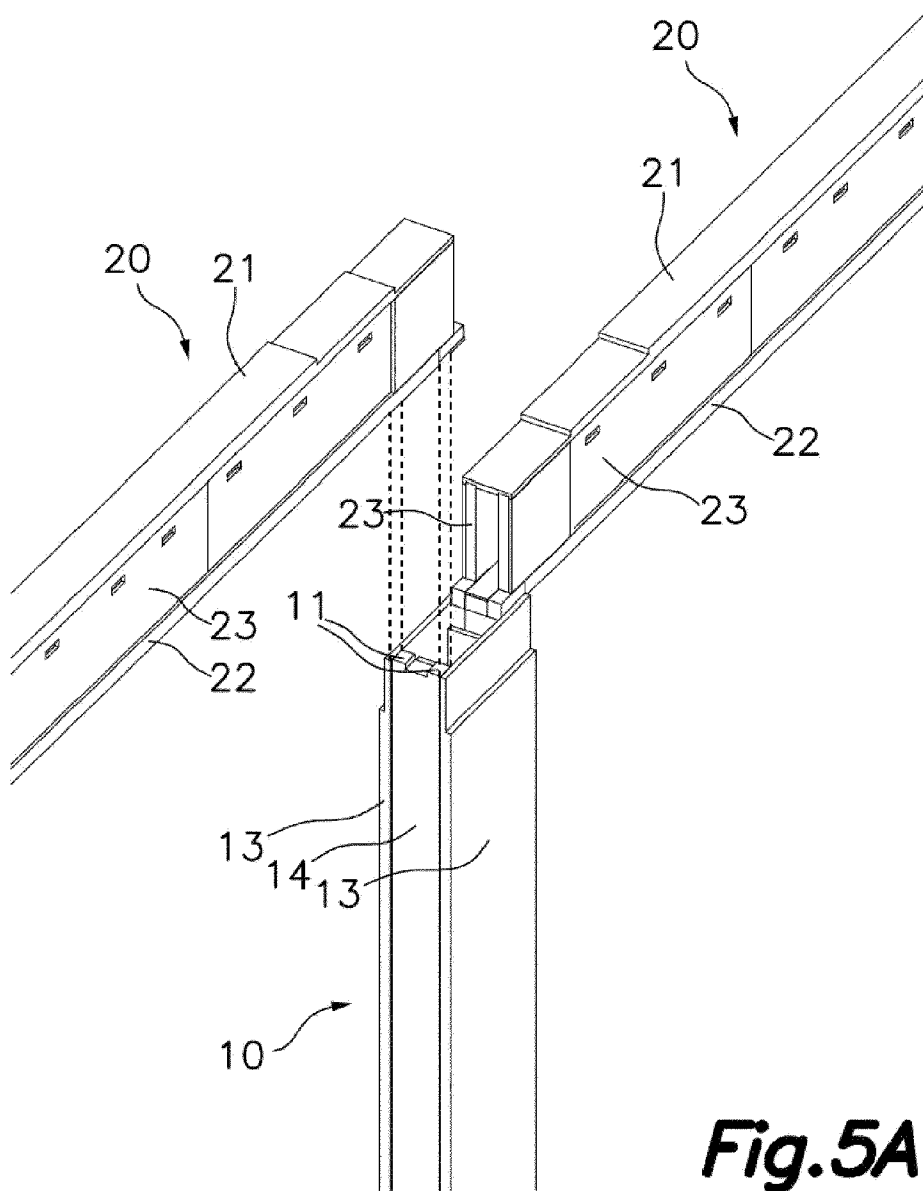


Fig.5A

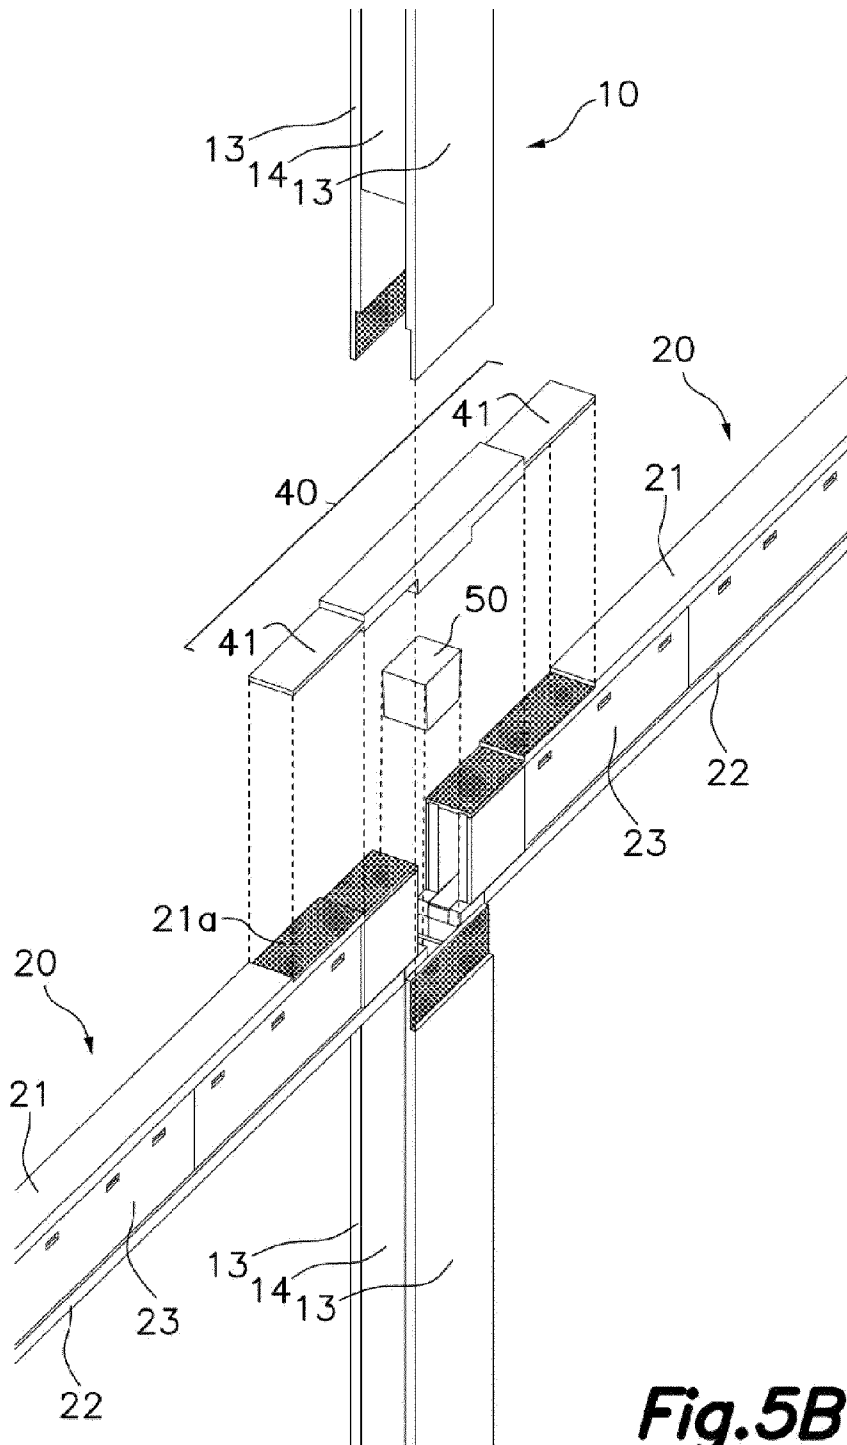


Fig.5B

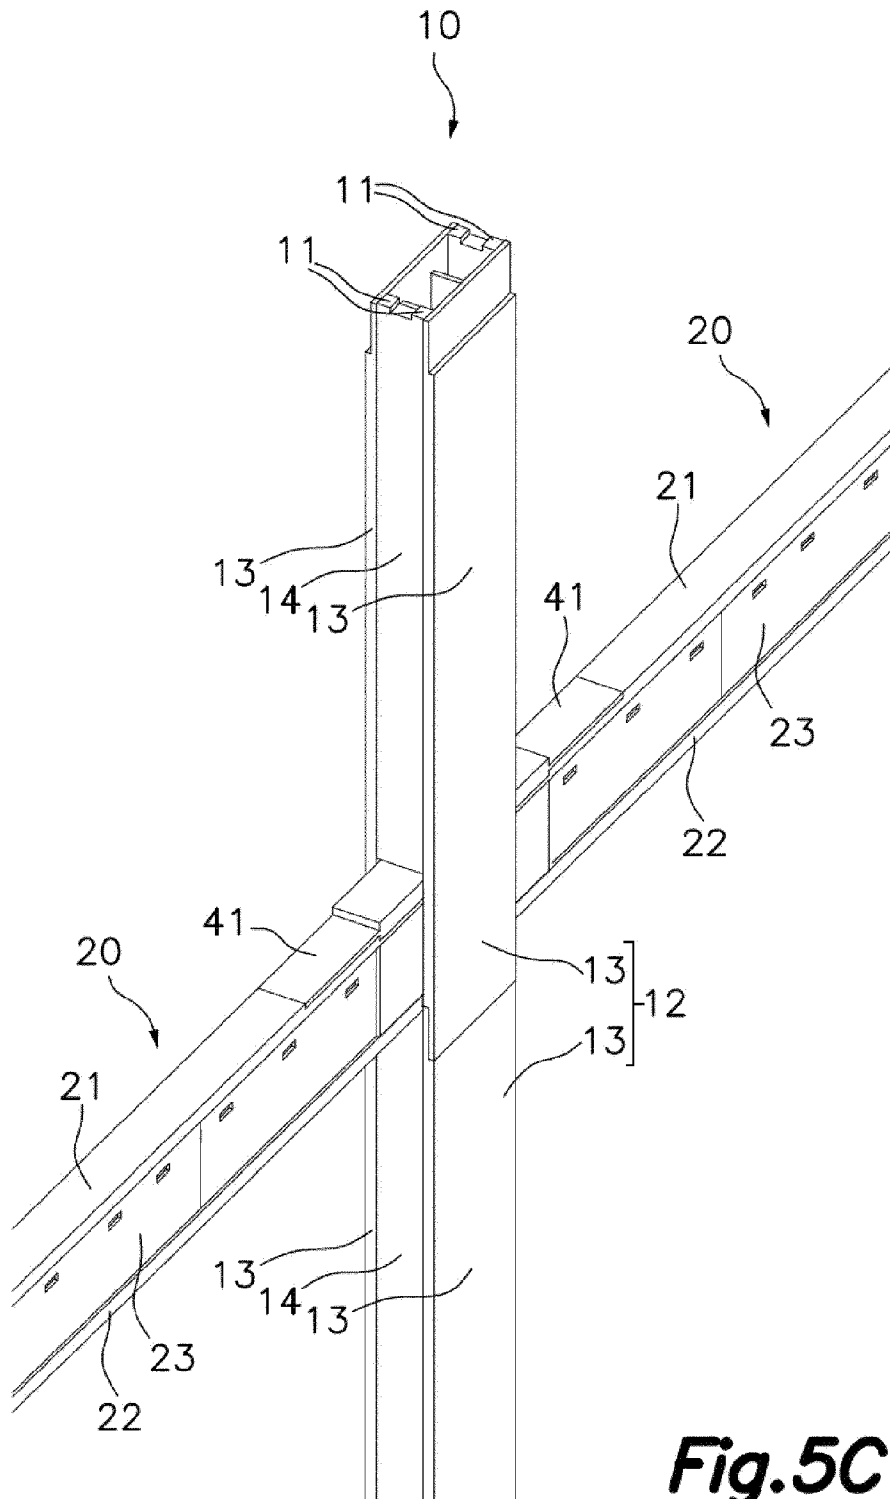
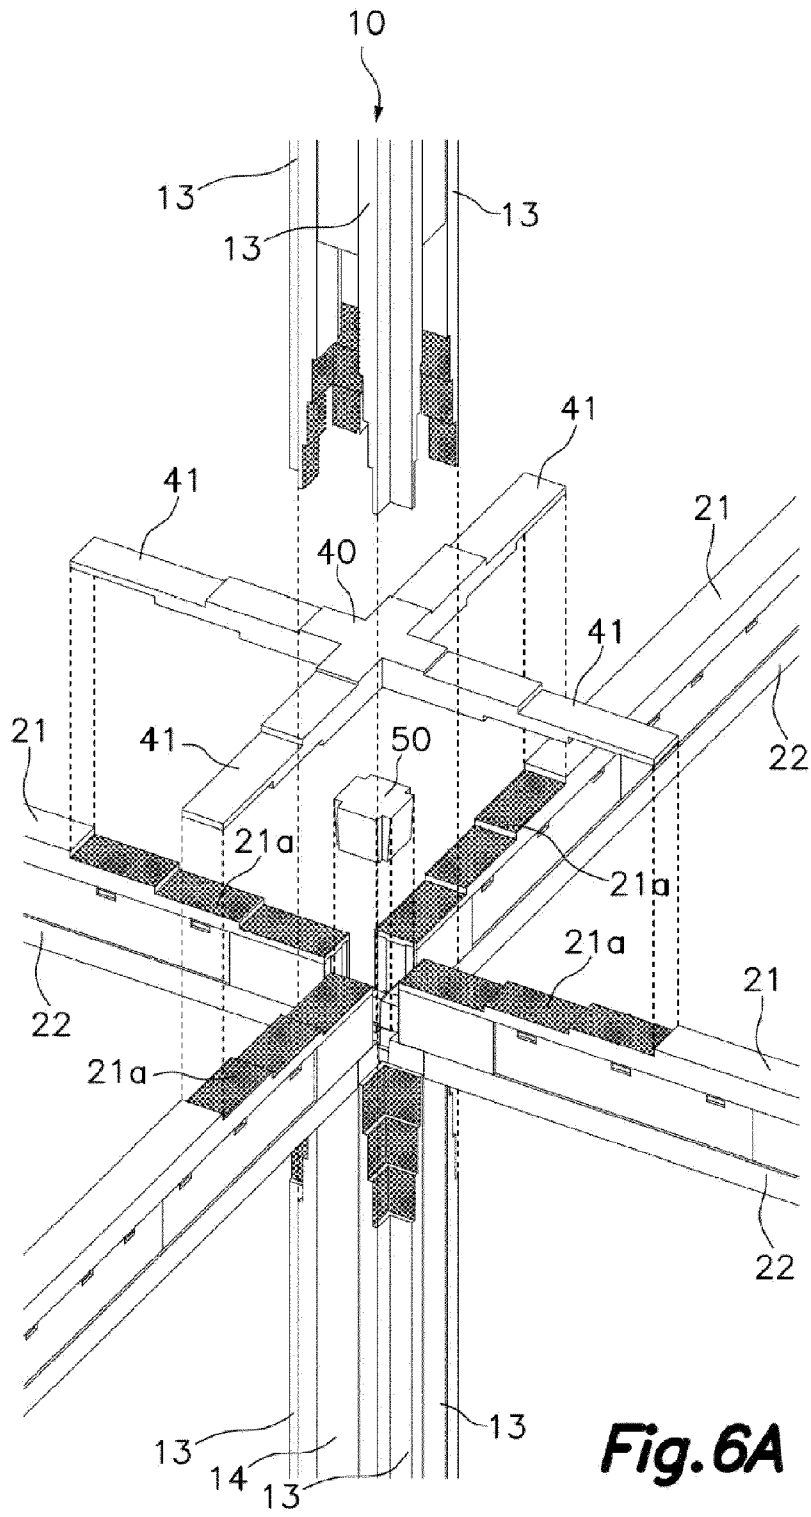


Fig.5C



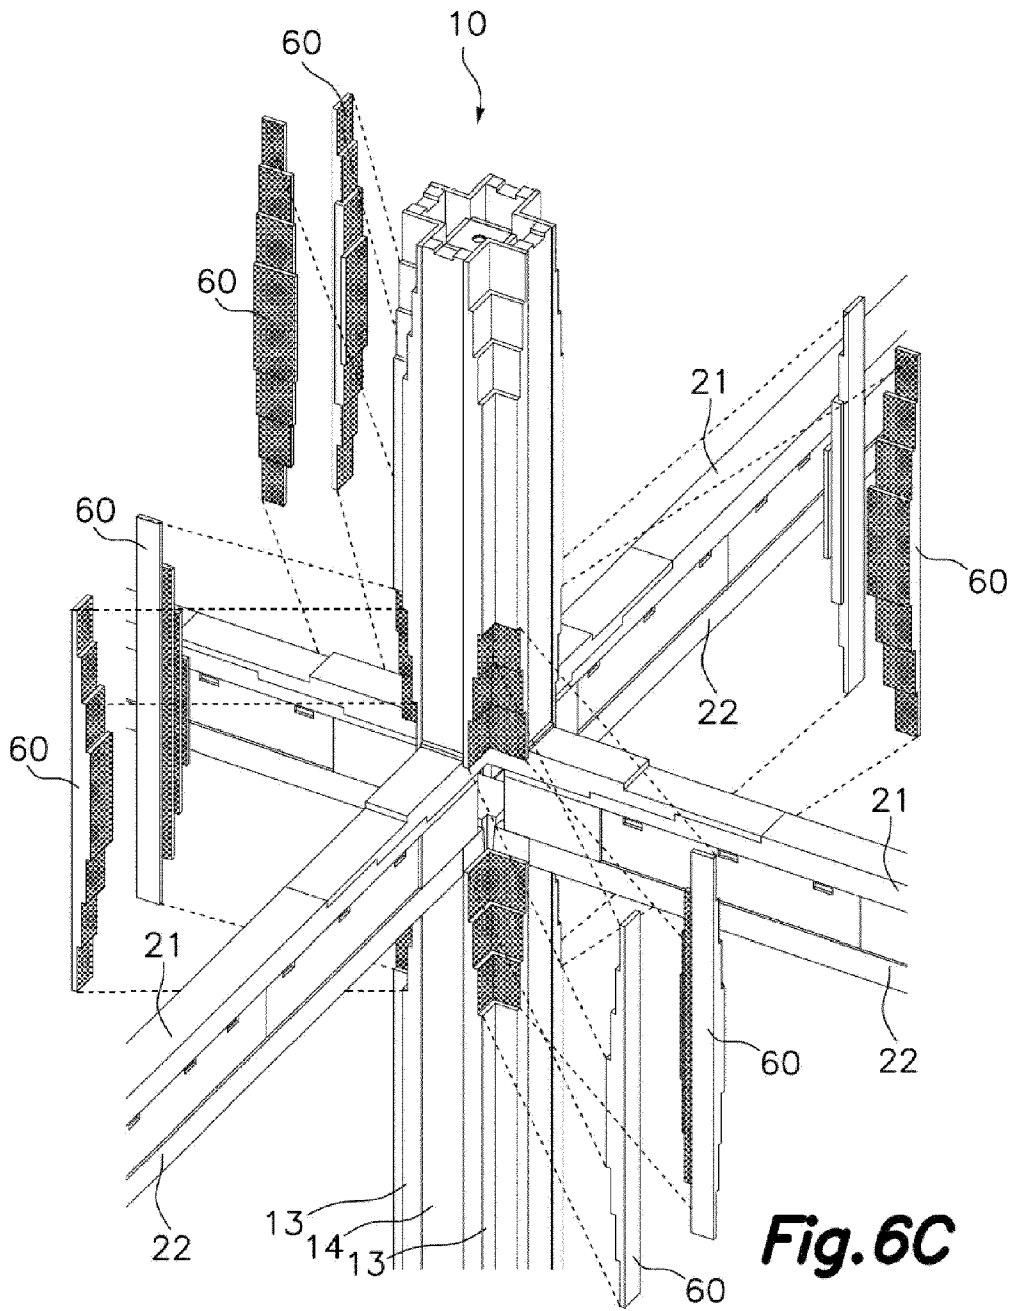
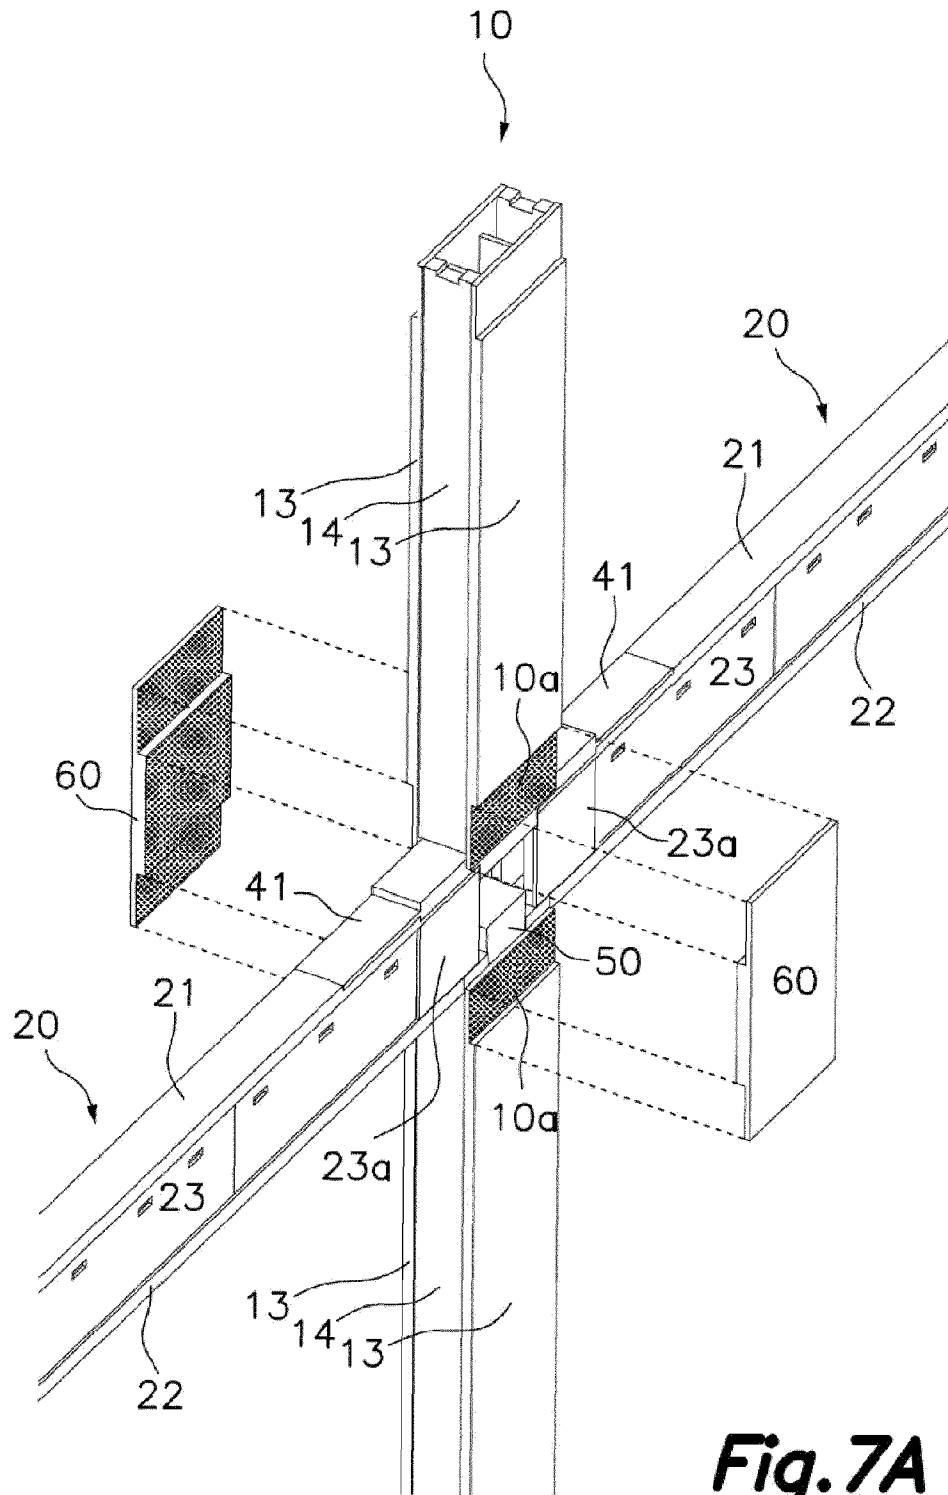


Fig. 6C



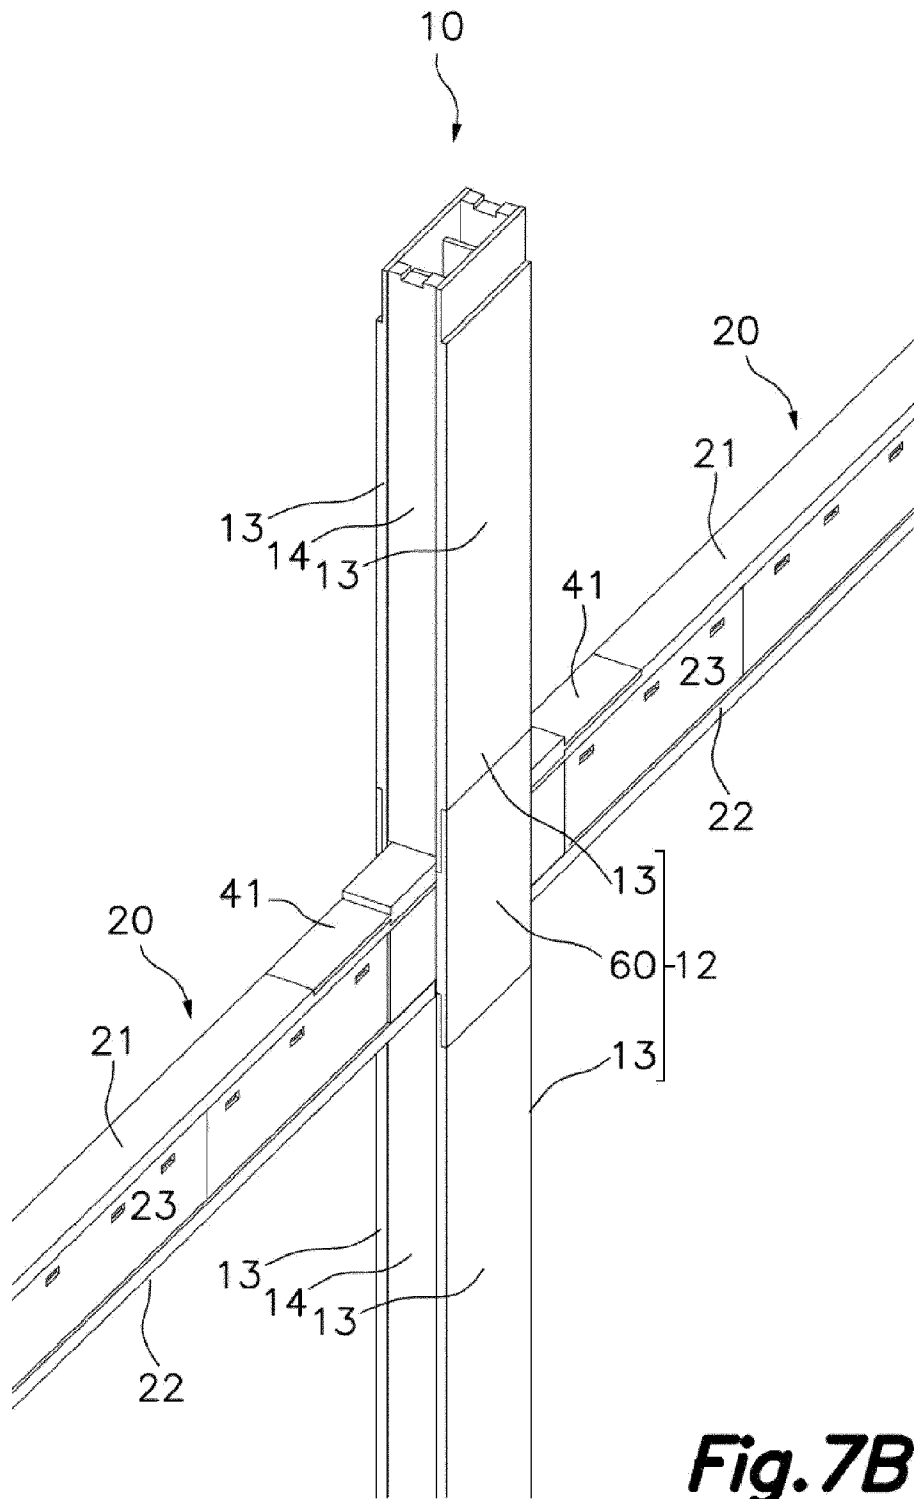


Fig. 7B

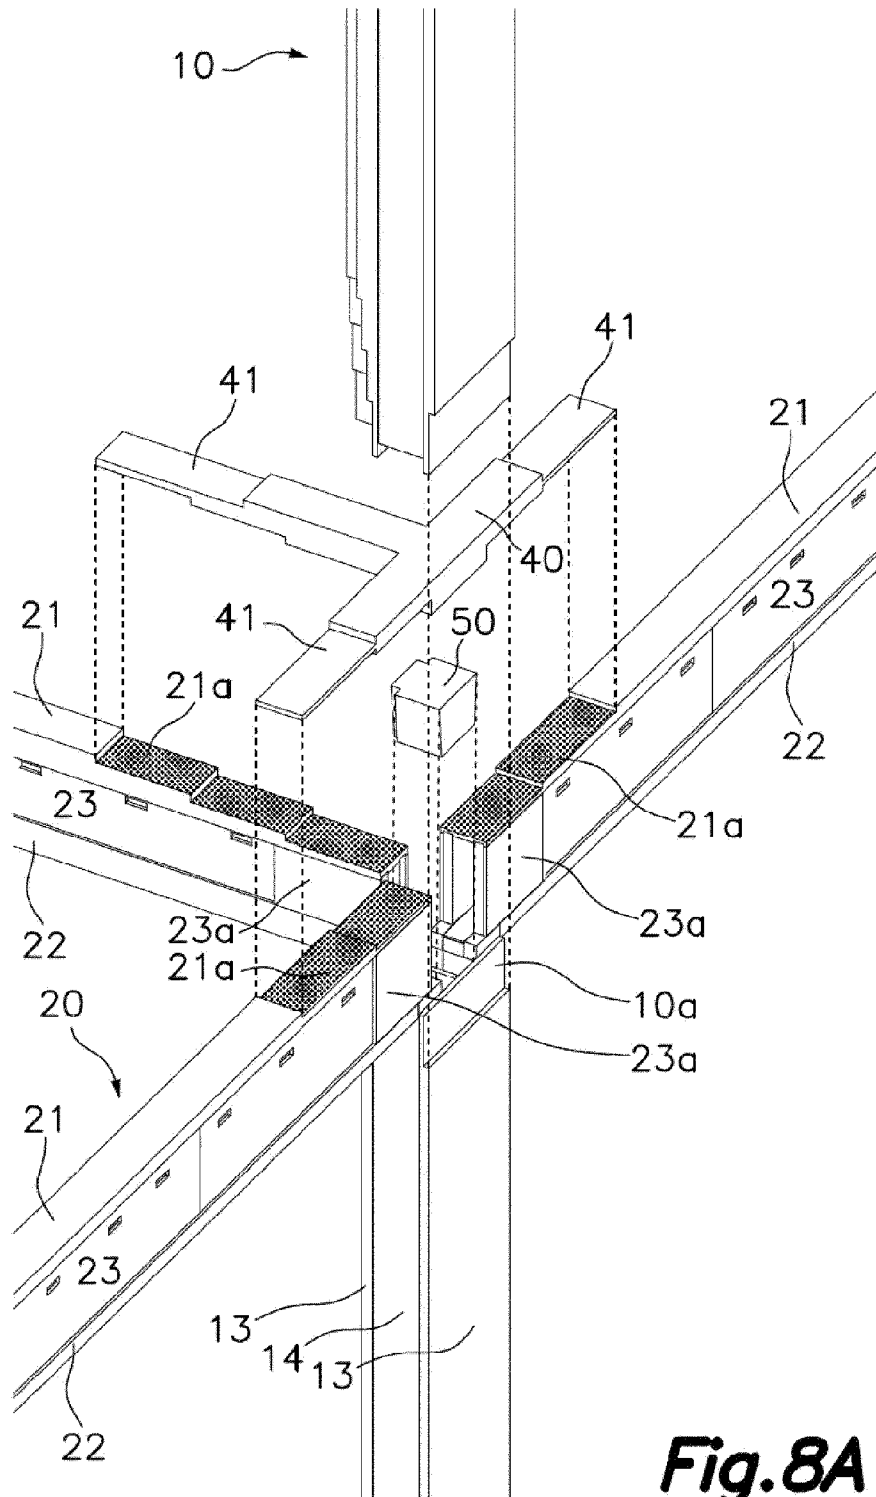


Fig. 8A

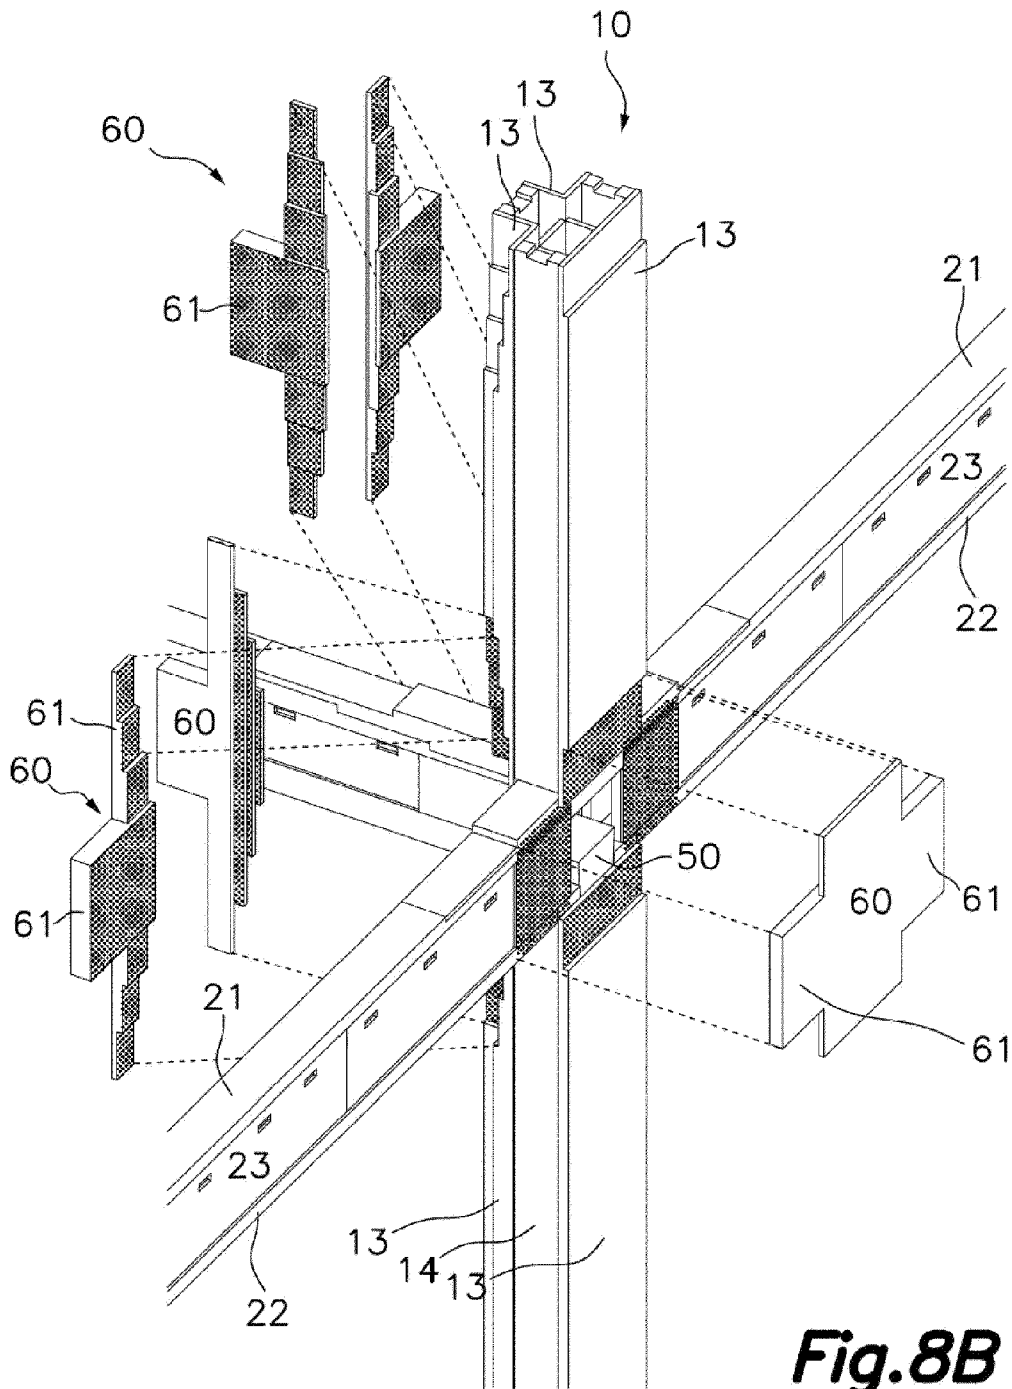


Fig. 8B

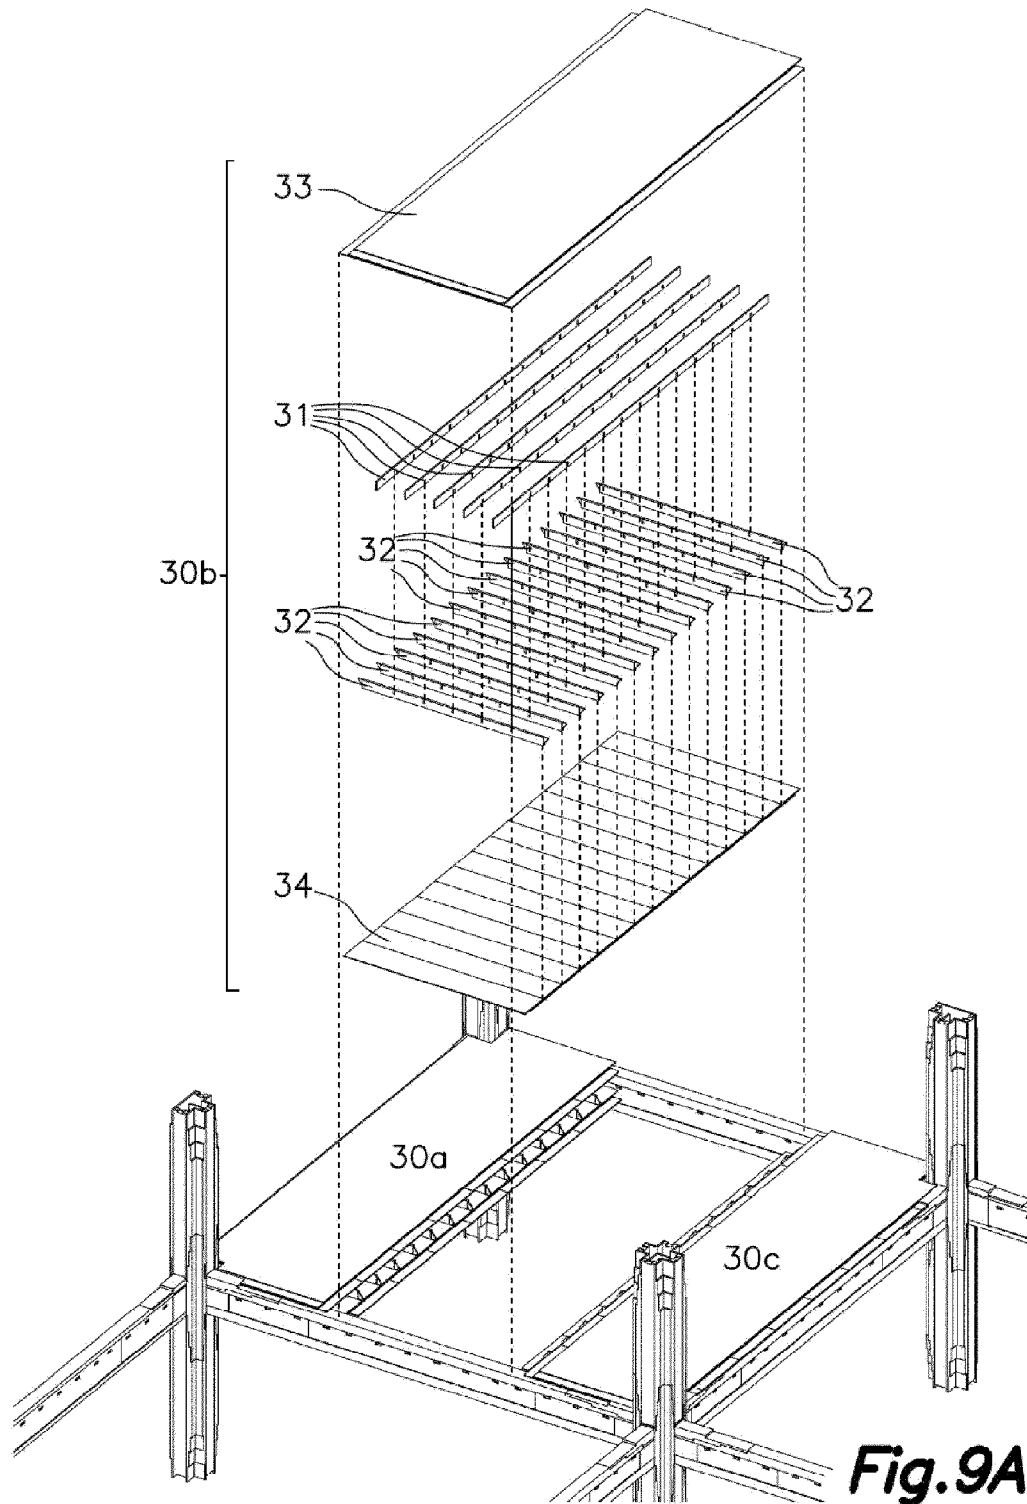


Fig.9A

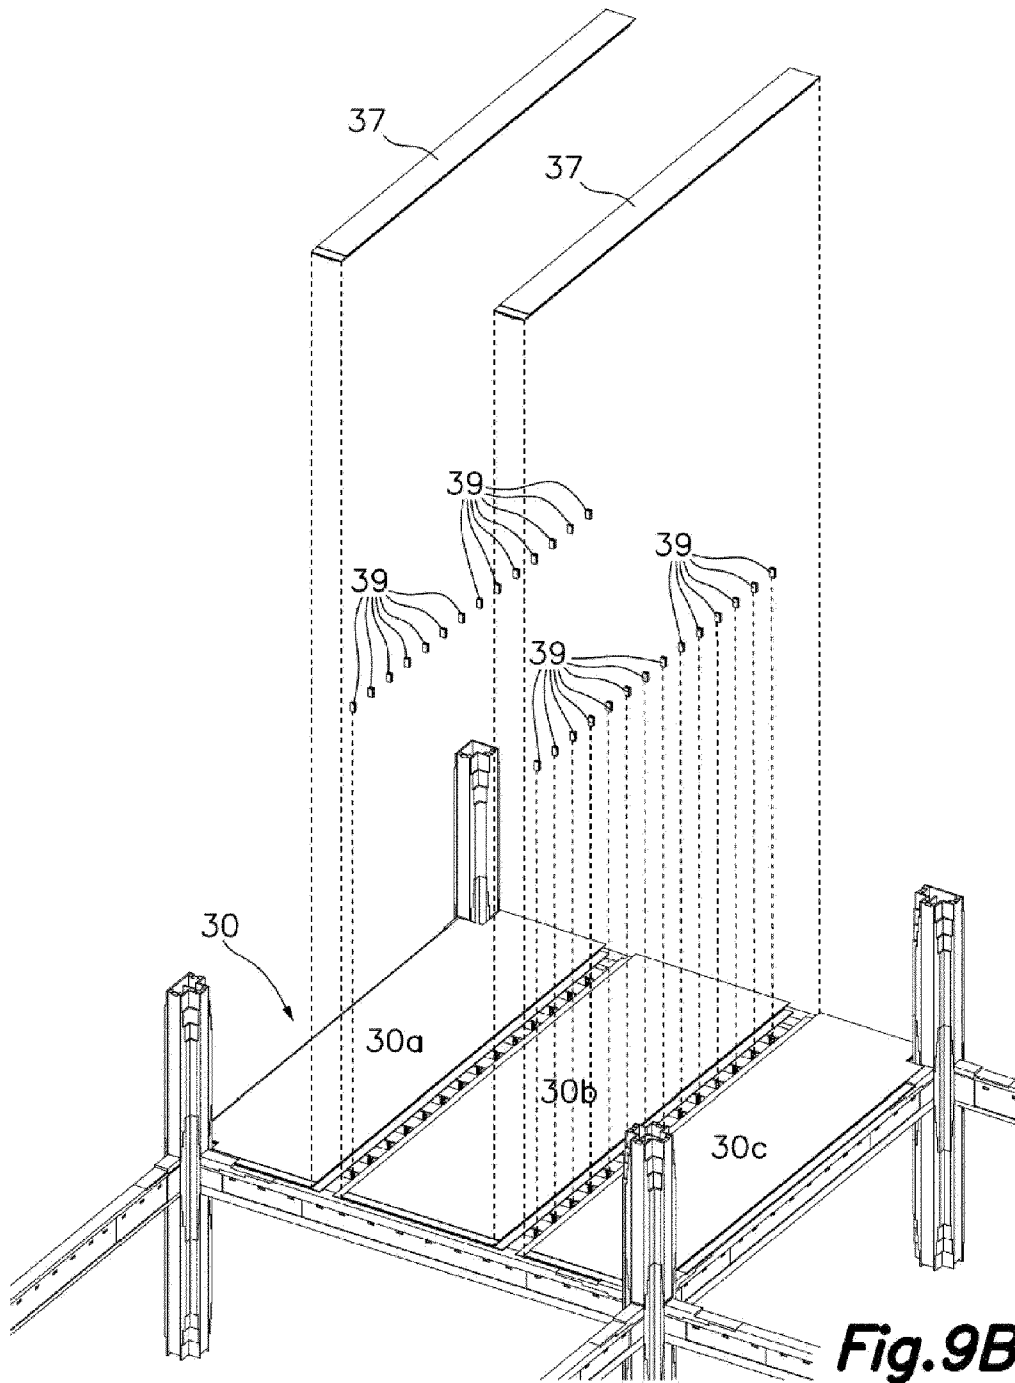
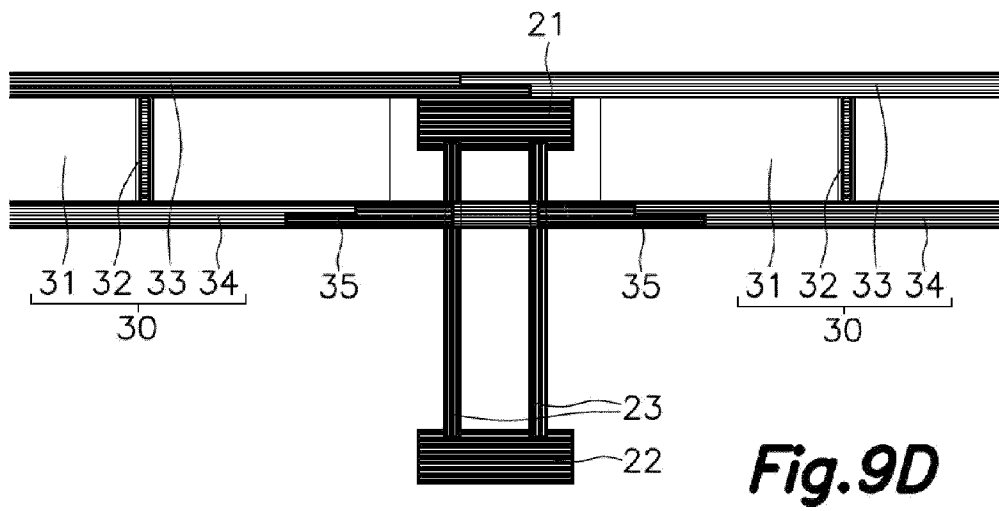
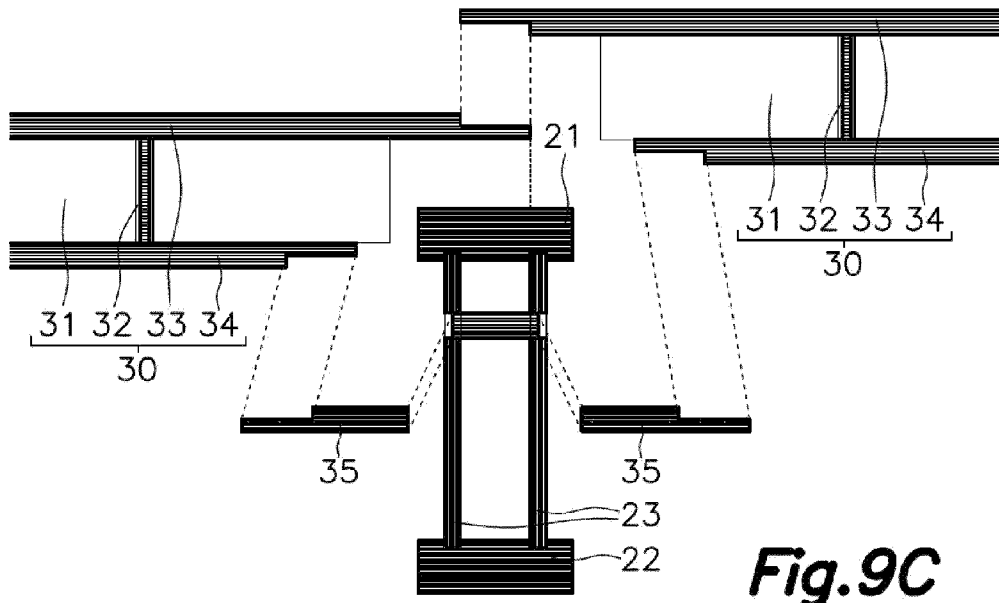


Fig.9B



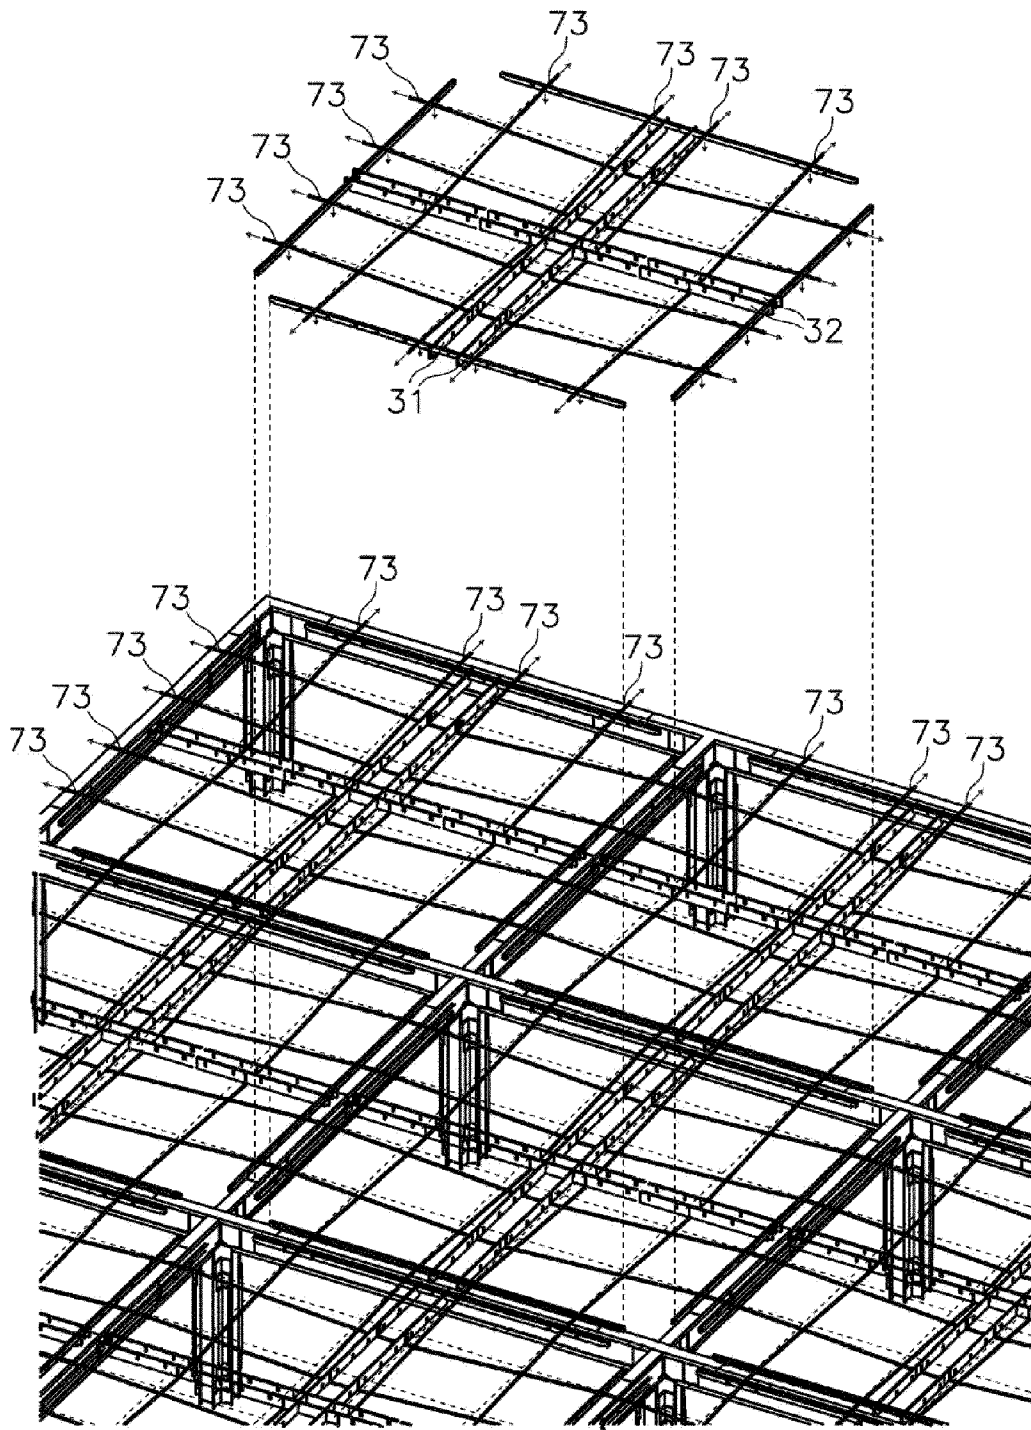


Fig. 10

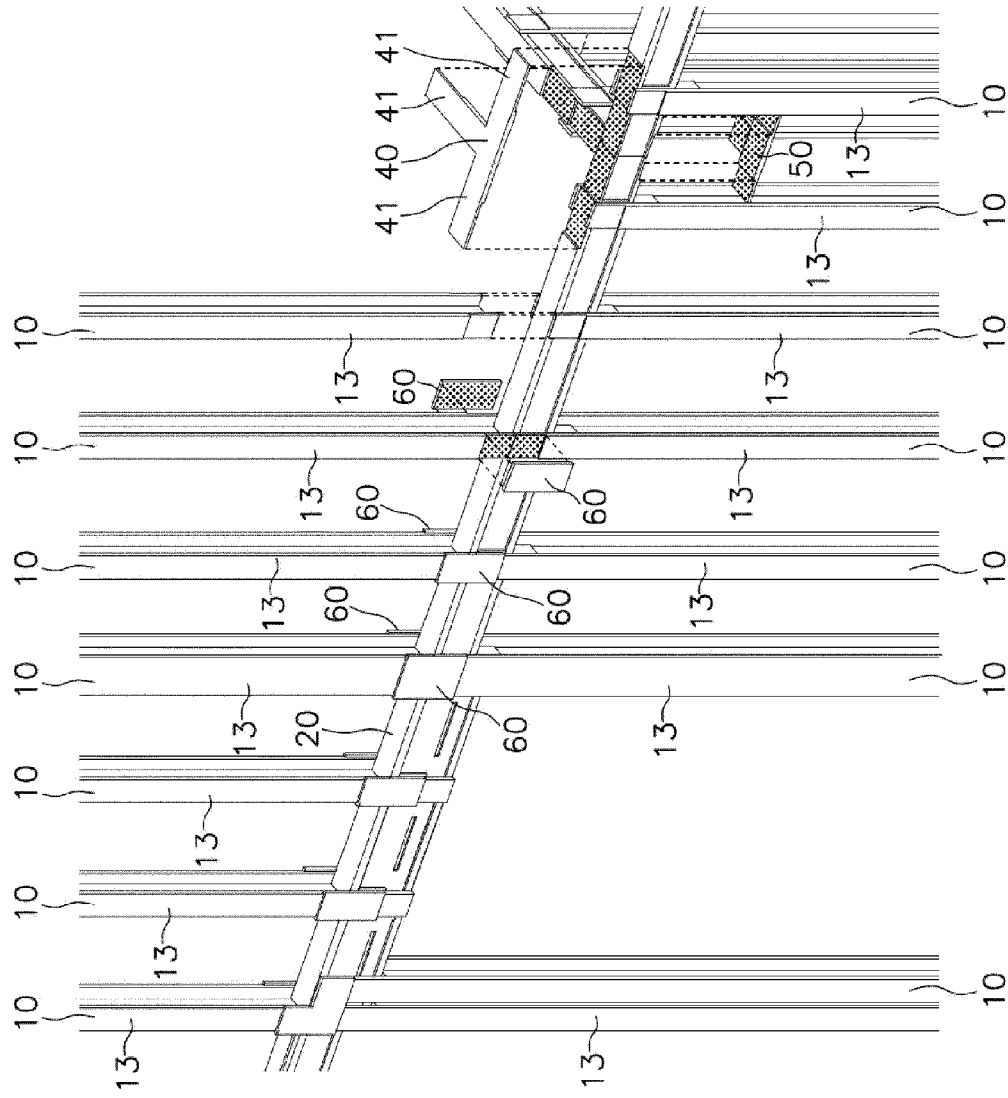


Fig. 11