

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 April 2008 (10.04.2008)

PCT

(10) International Publication Number
WO 2008/042009 A1

(51) International Patent Classification:
G01B 5/28 (2006.01)

(21) International Application Number:

PCT/US2007/006379

(22) International Filing Date: 13 March 2007 (13.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/782,072 13 March 2006 (13.03.2006) US

(71) Applicant (for all designated States except US): **ASYLUM RESEARCH CORPORATION** [US/US]; 6310 Hollister Avenue, Goleta, CA 93117 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BONILLA, Flavio, Alejandro** [US/US]; Asylum Research Corporation, 6310 Hollister Avenue, Goleta, CA 93117 (US). **PROKSCH, Roger** [US/US]; 2020 Foothill Lane, Santa Barbara, CA 93105 (US). **CLEVELAND, Jason** [US/US]; 2424 Pierport Blvd., Ventura, CA 93001 (US). **SAUTER, Tim** [US/US]; 640-A Coronel Place, Santa Barbara, CA 93101 (US).

(74) Agents: **WILLIAMS, Gary, S.** et al.; Morgan Lewis & Bockius LLP, 2 Palo Alto Square, 3000 El Camino Real, Suite 700, Palo Alto, California 94306 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: NANOINDENTER

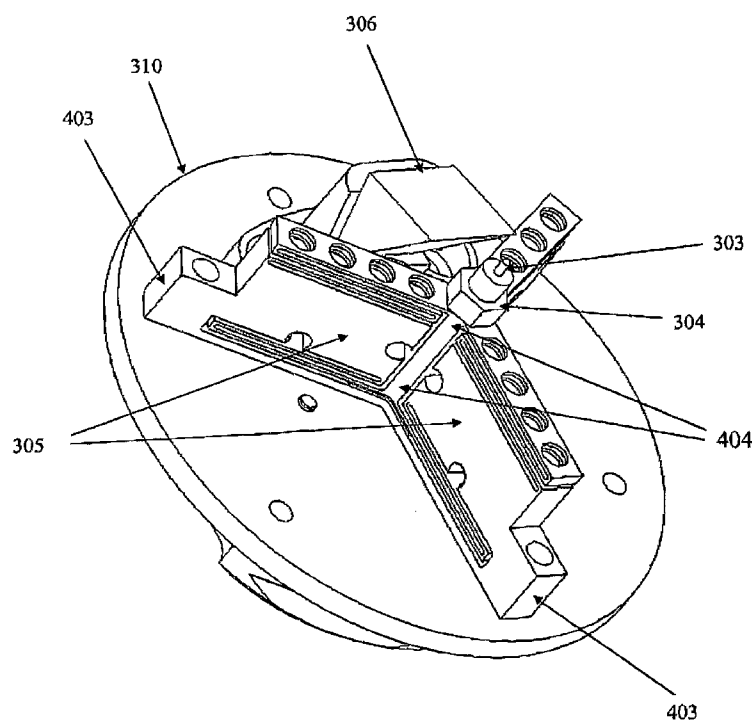

(57) Abstract: A new type of indenter is described. This device combines certain sensing and structural elements of atomic force microscopy with a module designed for the use of indentation probes, conventional diamond and otherwise, as well as unconventional designs, to produce high resolution and otherwise superior indentation measurements.

WO 2008/042009 A1

NANOINDENTER

Tip Surface Interactions in STM and AFM, J.B. Pethica and W.C. Oliver, *Physica Scripta*, vol. T19, 61-66, 1987. Month not given. Atomic Force Microscope,

G. Binnig and C.F. Quate, *Physical Review Letters*, vol. 56, No. 9., Mar. 3, 1986. pp. 930-933.

Friction Effects on Force Measurements with an Atomic Force Microscope, Jan H. Hoh and Andreas Engel, Aug. 3, 1993.

Scanning Tunneling Microscopy and Atomic Force Microscopy: Application to Biology and Technology, P.K. Hansma, V.B. Elings, O. Marti, C.E. Bracker, *Science*, vol. 242, pp. 209-216, Oct. 14, 1988.

Energy Dissipation During Nanoscale Indentation of Polymers with an Atomic Force Microscope, E. Boschung, M. Heuberger, and G. Dietler, *Appl. Phys. Lett.* 64 (14), Apr. 1994. pp. 1794-1796.

Nanotribology: Friction, Wear and Lubrication at the Atomic Scale, B. Bhushan, J. Israelachvili and U. Landman, *Nature*, vol. 374, pp. 607-616, Apr. 1995.

Micromachining with a Force Microscope Tip Assisted by Electrostatic Force, K. Goto and K. Hane, *Rev. Sci. Instrum.* 67 (2), Feb. 1996, pp. 397-400.

Imaging Metal Atoms in Air and Water Using the Atomic Force Microscope, S. Manne, H.J. Butt, A.C. Gould, and P.K. Hansma, *Appl. Phys. Lett.* 56 (18), Apr. 1990, pp. 1758-1759.

Atomic Force Microscopy, Daniel Rugar and Paul Hansma, *Physics Today*, Oct. 1990, pp. 23-30.

Nanoindentation Hardness Tests Using a Point Contact Microscope, C.J. Lu, D. Bogy and R. Kaneko, *Journal of Tribology*, vol. 116, Jan. 1994, pp. 175-180.

Wickramasinghe, "Scanned-Probe Microscopes", *Scientific American*, Oct., 1989, pp. 98-105.

Grigg et al., "Tip-sample forces in scanning probe microscopy in air and vacuum", *J. Vac. Sci. Technol. A*, vol. 10, No. 4, Jul./Aug., 1992, pp. 680-683.

Heerens, "Application of capacitance techniques in sensor design", *J. Phys. E. Sci. Instrum.*, vol. 19, 1986, pp. 897-906.

Nishibori et al., "Ultra-Microhardness of Vacuum-Deposited Films in Ultra-Microhardness Tester", *Thin Solid Films*, vol. 48, 1978, pp. 325-331.

- Tsukamoto et al., "Mechanical Properties of Thin Films measurements of Ultramicroindentation Hardness Young's Modulus and Internal Stress".
- Yanagisawa et al., "An Ultramicro Indentation Hardness Tester and Its Application to Thin Films", *Lubrication Engineering*, vol. 45, Jan., 1987, pp. 52-56.
- Newey et al., "An ultra-low-load penetration hardness tester", *J. Phys. E. Sci. Instrum.*, vol. 15, 1982, pp. 119-122.
- Wierenga et al., "Ultramicroindentation apparatus for the mechanical characterization of thin films", *J. Appl. Phys.*, vol. 55, No. 12, Jun. 15, 1984, pp. 42244-42247.
- Wierenga et al., "Ultramicrohardness Experiments on Vapour-Deposited Films of Pure Metals and Alloys", *Thin Solid Films*, vol. 119, 1984, pp. 375-382.
- Oliver et al., "Thin Film Characterization Using a Mechanical Properties Microprobe", *Thin Solid Films*, vol. 153, 1987, pp. 185-196.
- Wu, "Microscratch and load relaxation tests for ultra-thin films", *J. Mater. Res.*, vol. C, No. 2, Feb., 1991, pp. 407-426.
- Holman et al., "Using capacitive sensors for in situ calibration of displacements in a piezo-driven translation stage of an STM", *Sensors and Actuators A*, vol. 36, 1993, pp. 37-42.
- Weihs et al., "Mechanical deflection of cantilever microbeams: A new technique for testing the mechanical properties of thin films", *J. Mater. Res.*, vol. 3, No. 5, Sep./Oct. 1988, pp. 931-942.
- M. R. VanLandingham, Review of Instrumented Indentation, *J. Res. Natl. Inst. Stand. Technol.* 108, 249-265 (2003)
- Maugis, D., Ed.; *Contact, adhesion and rupture of elastic solids*; Springer: 1st edition ed.
- G. M. Pharr, Measurement of mechanical properties by ultralow load indentation, *Mater. Sci. Eng. A* 253 (1-2), 151-159 (1998).
- N. Huber, W. D. Nix, and H. Gao, Identification of elasticplastic material parameters from pyramidal indentation of thin films, *Proc. Roy. Soc. London A* 458 (2023), 1593-1620 (2002).

J. G. Swadener, B. Taljat, and G. M. Pharr, Measurement of residual stress by load and depth sensing indentation with spherical indenters, *J. Mater. Res.* 16 (7), 2091-2102 (2001).

B. J. Briscoe, L. Fiori, and E. Pelillo, Nano-indentation of polymeric surfaces, *J. Phys. D—Appl. Phys.* 31 (19), 2395- 2405 (1998).

M. R. VanLandingham, J. S. Villarrubia, W. F. Guthrie, and G. F. Meyers, Nanoindentation of polymers—An overview, in *Macromolecular Symposia*, Vol. 167, *Advances in Scanning Probe Microscopy of Polymers*, V. V. Tsukruk and N. D. Spencer, eds., Wiley-VCH Verlag GmbH, Weinheim, Germany (2001) 15-43.

N. X. Randall and R. Consiglio, Nanoscratch tester for thin film mechanical properties characterization, *Rev. Sci. Instrum.* 71 (7), 2796-2799 (2000).

V. Jardret, B. N. Lucas, W. C. Oliver, and A. C. Ramamurthy, Scratch durability of automotive clear coatings: A quantitative, reliable and robust methodology, *J. Coating Technol.* 72 (907), 79-88 (2000).

X. D. Li and B. Bhushan, Micro/nanomechanical and tribological studies of bulk and thin-film materials used in magnetic recording heads, *Thin Solid Films* 398, 313-319 (2001)

M. Dao, N. Chollacoop, K. J. Van Vliet, T. A. Venkatesh, and S. Suresh, Computational modeling of the forward and reverse problems in instrumented sharp indentation, *Acta Mater.* 49 (19), 3899-3918 (2001).

Y. T. Cheng, Z. Y. Li, and C. M. Cheng, Scaling relationships for indentation measurements, *Philos. Mag. A* 82 (10), 1821- 1829 (2002).

W. C. Oliver and G. M. Pharr, An improved technique for determining hardness and elastic modulus using load and displacement sensing indentation measurements, *J. Mater. Res.* 7 (6), 1564-1583 (1992).

M. F. Doerner and W. D. Nix, A method for interpreting the data from depth-sensing indentation instruments, *J. Mater. Res.* 1 (4), 601-609 (1986).

B. Bhushan, A. V. Kulkarni, W. Bonin, and J. T. Wyrobek, Nanoindentation and picoindentation measurements using a capacitive transducer system in atomic force microscopy, *Phil. Mag. A* 74 (5), 1117-1128 (1996).

D. Newey, M. A. Wilkins, and H. M. Pollock, An ultra-low-load penetration hardness tester, *J. Phys. E-Sci. Instrum.* 15 (1), 119-122 (1982).

W. C. Oliver, R. Hutchings, and J. B. Pethica, Measurement of hardness at indentation depths as low as 20 nanometers, in ASTM STP 889, *Microindentation Techniques in Materials Science and Engineering*, P. J. Blau and B. R. Lawn, eds., ASTM International, West Conshohocken, PA (1986) pp. 90-108.

S. A. Joyce and J. E. Houston, A new force sensor incorporating force-feedback control for interfacial force microscopy, *Rev. Sci. Instrum.* 62 (3), 710-715 (1991).

S. A. S. Asif, K. J. Wahl, and R. J. Colton, Nanoindentation and contact stiffness measurement using force modulation with a capacitive load-displacement transducer, *Rev. Sci. Instrum.* 70 (5), 2408-2413 (1999).

J. C. Hay, A. Bolshakov, and G. M. Pharr, A critical examination of the fundamental relations used in the analysis of nanoindentation data, *J. Mater. Res.* 14 (6), 2296-2305 (1999).

K. J. Van Vliet, L. Prchlik, and J. F. Smith, Direct measurement of indentation frame compliance, *J. Mater. Res.*, 19: 325-331 (2004)

M. R. VanLandingham, J. S. Villarrubia, and G. F. Meyers, Recent Progress in Nanoscale Indentation of Polymers Using the AFM, in *Proceedings of the SEM IX International Congress on Experimental Mechanics*, Society for Engineering Mechanics, Inc., Bethel, CT (2000) 912-915.

M. R. VanLandingham, J. S. Villarrubia, and R. Camara, Measuring tip shape for instrumented indentation using the atomic force microscope, *Meas. Sci. Technol.* 16 2173-2185 (2005)

K. W. McElhaney, J. J. Vlassak, and W. D. Nix, Determination of indenter tip geometry and indentation contact area for depthsensing indentation experiments, *J. Mater. Res.* 13 (5), 1300-1306 (1998).

Y. Sun, S. Zheng, T. Bell, and J. Smith, Indenter tip radius and load frame compliance calibration using nanoindentation loading curves, *Phil. Mag. Lett.* 79 (9), 649-658 (1999).

R. Dison, R. Köning, J. Fu, T. Vorbürger, and B. Renegar, Accurate dimensional metrology with atomic force microscopy, *SPIE Proc.* 3998, 362-368 (2000).

Schwarzer, N. *Transactions of the ASME* 2000, 122, 672.

Sheiko, S.; Moller, M.; Rauvekamp, E.; Zandbergen, H. *Phys. Rev. B* **1993**, *48*, 5675.

Cleveland, J.; Manne, S. *Rev. Sci. Instrum.* **1993**, *64*, 403.

Oliver, W. J. *Mater. Res.* **2001**, *16*, 3202.

Stone, D. J. *Mater. Res.* **1998**, *11*, 3207.

T.; Schwarzer, N.; Richter, F.; Beck, U. *Thin Solid Films* **2000**, 377-3778, 366.

Laboratory, N. P. Indicoat Final Report: Determination of Hardness and Modulus of Thin Films and Coatings by Nanoindentation. In *Indicoat Final Report*; Laboratory, N. P., Ed.; National Physical Laboratory: Teddington, Middlesex, **2001**.

Chudoba, T.; Schwarzer, N. *ELASTICA, Software Demonstration Package Available at <http://www.asmec.de>* **2001**, v2.0, t.chudoba@asmec.de.

Saha, R.; Nix, W. *Acta Materialia* **2002**, *50*, 23.

BACKGROUND OF THE INVENTION

An AFM is a device used to produce images of surface topography (and other sample characteristics) based on information obtained from rastering a sharp probe on the end of a cantilever relative to the surface of the sample. Deflections of the cantilever, or changes in its oscillation, which are detected while rastering correspond to topographical (or other) features of the sample. Deflections or changes in oscillation are typically detected by an optical lever arrangement whereby a light beam is directed onto a cantilever in the same reference frame as the optical lever. The beam reflected from the cantilever is made to illuminate a position sensitive detector (PSD). As the deflection or oscillation of the cantilever changes, the position of the reflected spot on the PSD changes, causing a change in the output from the PSD. Changes in the deflection or oscillation of the cantilever are typically made to trigger a change in

the vertical position of the cantilever base relative to the sample, in order to maintain the deflection or oscillation at a constant pre-set value. It is this feedback that generates an AFM image. AFMs can be operated in a number of different imaging modes, including contact mode where the tip of the cantilever is in constant contact with the sample surface, and oscillatory modes where the tip makes no contact or only intermittent contact with the surface.

Actuators are commonly used in AFMs, for example to raster the probe relative to the sample surface or to change the position of the cantilever base relative to the sample surface. The purpose of actuators is to provide relative movement between the probe and the sample. For different purposes and different results, it may be useful to actuate the sample, or the tip or some combination of both. Sensors are also commonly used in AFMs. They are used to detect movement of various components of the AFM, including movement created by actuators. For the purposes of the specification, unless otherwise specified, the term "actuator" refers to a broad array of devices that convert input signals into physical motion, including piezo activated flexures, piezo tubes, piezo stacks, blocks, bimorphs, unimorphs, linear motors, electrostrictive actuators, electrostatic motors, capacitive motors, voice coil actuators and magnetostrictive actuators, and the term "position sensor" or "sensor" refers to a device that converts a displacement, velocity or acceleration into an electrical signal, including capacitive sensors, inductive sensors (including eddy current sensors), differential transformers (such as described in co-pending applications US20020175677A1 and US20040075428A1, Linear Variable Differential Transformers for High Precision Position Measurements, and US20040056653A1, Linear Variable Differential Transformer with Digital Electronics, which are hereby incorporated by reference in their entirety), variable inductance, optical interferometry, optical deflection detectors (including those referred to above as a PSD and those described in co-pending applications US20030209060A1 and US20040079142A1, Apparatus and Method for Isolating and Measuring Movement in Metrology Apparatus, which are hereby

incorporated by reference in their entirety), strain gages, piezo sensors, magnetostrictive and electrostrictive sensors.

SUMMARY OF THE INVENTION

We have developed a nanoindenter that produces very accurate, quantitative characterization for a wide spectrum of materials. The new nanoindenter may be implemented on an atomic force microscope (AFM) platform, but unlike indentation that might be effected with an AFM cantilever, the invention drives the indenting tip perpendicularly into the sample. Displacement and force are measured with optimized LVDT sensors and an Optical Lever, respectively, the same devices that eliminate inaccuracies (e.g. non linearity) present in measurements made with AFMs, and this greatly increases sensitivity and resolution in comparison to commercial indenters. This highly quantitative tool, incorporating high end AFM capabilities breaks new ground in characterization of a great diversity of materials including thin films, coatings, polymers, etc. As noted, the nanoindenter may be implemented on an AFM platform and when integrated with the native metrology abilities of the Molecular Force Probe-3D AFM of Asylum Research Corporation, it enables the user to perform quantitative indentation measurements and to make quantitative statements regarding the indenter tip shape and indentation volumes and profiles, all with the same instrument set-up.

In addition to an AFM platform, the new nanoindenter may be implemented on other cantilever-based instruments. Cantilever-based instruments include such instruments as AFMs, molecular force probe instruments (1D or 3D), high-resolution profilometers and chemical or biological sensing probes. For the sake of convenience, the specification focuses on AFMs. However, it should be understood that problems addressed and solutions

presented by the present invention are also applicable to other instruments with nanoscale motion and metrology applications.

The systems and techniques described herein provide a novel device for nanoscale metrology that permits quantitative measurements of indentation and related parameters better than is presently possible with commercially available tools.

Specifics of the invention will be described in greater detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is the new indenter module attached to an existing AFM.

FIG. 2 is the new indenter module placed in the MFP-3D AFM of Asylum Research Corporation.

FIG. 3 is the new indenter module prior to assembly.

FIG. 4 is the flexure mounted on the circular plate/retaining ring of the new indenter module.

FIG. 5 is the flexure of the new indenter module.

FIG. 6 is a cross sectional view of the mechanical converter system of the new indenter module.

FIG. 7 is a perspective view from the top of the mechanical converter system of the new indenter module.

FIG. 8 is another new indenter module prior to assembly.

FIG. 9 is a bottom-side plan view of the indenter module of **FIG. 8** after assembly.

FIG. 10 is a plan view of the planar leaf springs of the assembled flexure of indenter module of **FIG. 8**.

FIG. 10 through **FIG. 15** are plan views of planar leaf springs of other assembled flexures for other indenter modules.

FIG. 16 is another new indenter module prior to assembly.

FIG. 17 is a bottom-side plan view of the indenter module of **FIG. 16** after assembly.

FIG. 18 is a plan view of the planar leaf springs of the assembled flexure of indenter module of **FIG. 16**.

FIG. 19 is a perspective view of the an optical lever detection system designed to substitute for the mechanical converter system depicted in **FIG. 6**.

DETAILED DESCRIPTION

One preferred embodiment of the current invention is depicted in **FIG. 1**, showing a cross-sectional view of a module embodying the invention which is installed in an AFM in place of the cantilever holder. Panels **(A)** and **(B)** of **FIG. 1** each show the module rotated 90 degrees about the vertical central shaft of the module which culminates in the indenter probe **303** positioned over a stage **307** on which a sample could be attached. This embodiment of the invention allows it to take direct advantage of some or all of the existing sensors and structures of an AFM.

FIG. 2 shows the module embodying the invention **12** installed in a Molecular Force Probe-3D AFM from Asylum Research Corporation (only the head **13** of the MFP-3D is shown). In the configuration depicted in **FIG. 2**, the indenter module **12** is removable and makes use of the actuators, sensors and optics of the head **13**. In particular, the z-piezo **14** of the MFP-3D is used to actuate the indenter probe **303** and the z-LVDT sensor **17** of the MFP-3D may be used to measure the displacement of the indenter probe **303**. The position sensitive detector **16** of the MFP-3D is used to measure the motion of the flexure controlling the displacement of the indenter probe **303**. Using data from these sensors, it is possible to quantify the displacement and force acting between the indenter probe **303** and a sample (not shown).

Another useful feature of the indenter module 12 being installed in the MFP-3D head 13 is that the module can use certain optical features of the head for providing an optical view of the indenter probe 303 and the sample. The top-view objective 18 and steering mirror 19 of the MFP-3D head 13 work with the prism 6 of the indenter module 12 to provide an optical view of both the indenter probe 303 and the sample (not shown), as well as to illuminate both. This is of great utility for aligning the indenter probe 303 with particular structures on the sample.

The indenter can similarly be installed in AFMs manufactured by other companies and, with modifications, in yet other AFMs. The MFP-3D of Asylum Research Corporation is particularly amenable to conversion to an indenter because the actuators, sensors and optics located in its head are appropriate and convenient for indenter purposes. The same is true of other AFMs, or could be made to be true with modifications.

Except where clearly stated otherwise, the remainder of this Detailed Discussion of the current invention is directed at an indenter module that might be installed in any AFM, not just the MFP-3D of Asylum Research Corporation, as well as to a stand-alone indenter that is not a component of an AFM.

FIG. 3 shows a perspective view of the module embodying the invention prior to assembly. The indenter probe 303 is mounted on a removable chuck 304. The chuck 304 allows the user to employ a variety of standard and custom indenter probes and to change easily from one probe to another. As is well-known to those versed in the art, these probes are formed of different materials, including diamond, tungsten, silicon nitride and others. The chuck 304 is attached to a monolithic three-dimensional leaf spring flexure 305 which is designed to constrain the motion of the indenter probe 303 to the z-axis only, that is, perpendicular to the sample. Precluding motion in the other axes is a major contributor to the results available with the invention. The flexure 305 is rigidly

attached to the bottom of a circular plate with a retaining ring on its top 310 which is designed to mount into an AFM in place of the cantilever holder. This permits the actuator (not shown), which in an AFM would be used to change the position of the cantilever base in response to changes in the deflection or oscillation of the cantilever, to be used to actuate the circular plate/retaining ring 310 and through it to actuate the flexure 305, the chuck 304 and the indenter probe 303. Measurement of this actuation may be improved through the use of a sensor (not shown) to measure the displacement.

As shown in FIG. 3, the module embodying the invention may also include a prism 306 to permit an oblique view of the sample (not shown) on the sample holder 307, the indenter probe 303 and their interface where the AFM in which the module is mounted includes an optical view system. The module may also include a dust cover 308 to protect the flexure 305, the circular plate/retaining ring 310 and the prism 306 from external contamination and prevent damage from handling. The dust cover 308 may also provide mechanical hard stops (not shown) to prevent the flexure 305 from being overextended. A shake piezo (not shown) to oscillate the flexure 305, and thus the chuck 304 and the indenter probe 303, when the measurement is to be made in an AC mode could be added at the point where collar 320 screws into the flexure 305 or alternatively could be attached to the circular plate/retaining ring 310.

FIG. 4 is a perspective view of the flexure 305 mounted on the circular plate/retaining ring 310, with the chuck 304, the indenter probe 303 and the prism 306 shown assembled. The flexure 305 is a monolithic, three-dimensional leaf spring with three supporting ends 403 and a flexing portion, the central shaft 404, which is free to move in response to the application of force. The supporting ends 403 are each rigidly attached to the circular plate/retaining ring 310. The chuck 304 is rigidly attached to one end of the flexing portion, the central shaft 404, and the indenter probe 303 is attached to the chuck 304, facing the sample to be indented.

FIG. 5 is a second perspective view of the flexure 305, absent the other items shown in FIG. 4. Such flexures are fabricated using metals and machining methods, including electronic discharge machining, well-known to those versed in the art.

FIG. 6 shows a cross-sectional view of the central shaft 404 of the flexure 305, with the chuck 304 attached to one end (and the indenter probe 303 attached to the chuck 304) and a collar 320 attached to the other end which is inserted through a hole in the center of the circular plate/retaining ring 310 and gives access to the central shaft 404 from within the AFM to enable a mechanical converter assembly. The purpose of the mechanical converter assembly is to convert the z-axis linear motion of the central shaft 404, chuck 304, and indenter probe 303 into an angular change that an optical lever detector system, which in an AFM would be used to detect changes in the deflection or oscillation of the cantilever, can measure. When the indenter module is mounted into an AFM in place of the cantilever holder and the circular plate/retaining ring 310 is actuated, thereby displacing flexure 305, chuck 304 and indenter probe 303 toward the sample, one end of a second flexure, planar flexure 314, which is rigidly attached to the circular plate/retaining ring 310 is also displaced. At the same time, the other end of planar flexure 314, which on one side is linked through a ball bearing mechanism 318 to the central shaft 404 and on the other side is attached to a wedge-shaped mirror mount 315, and is free to flex is also displaced, with the displacement following that of the central shaft 404. This displacement of the flexing end of the planar flexure 314 tilts the mirror mount 315, and mirror 309 attached to the mount, and thereby steers the light beam of an optical lever detection system (not shown) from one place on the position sensitive detector of the system to another thereby providing a measure of the displacement of the indenter probe 303. A small permanent magnet 324 keeps the mirror mount 315 and planar flexure 314 in contact with the ball bearing surface 318.

The design of the mechanical converter assembly allows the motion of the indenter tip 303 to be measured in much the same manner as cantilever tip deflection or oscillation are measured in a conventional AFM. Together with the use of the z-axis actuator previously discussed, this allows the indenter module to be easily swapped with the cantilever holder of an AFM, resulting in a unique, useful and versatile instrument that allows the user to bring the functionality of an AFM to bear on indenting.

FIG. 7 shows a perspective view from above of the mechanical converter assembly discussed in the preceding paragraph. The two ends of the planar flexure 314, the support end 316 rigidly attached to the circular plate/retaining ring 310, and therefore displaced in tandem with actuation of the circular plate/retaining ring, 310 and the flexing end 317 linked through a ball bearing mechanism 318 to the central shaft 404 and also attached to the mirror mount 315, and therefore displaced in tandem with the central shaft, are displayed with greater clarity. FIG. 7 also shows the hard stops 311 built into the mechanical converter assembly to prevent the flexure 305 from being overextended or damaged by normal handling.

The planar flexure 314 has a very high compliance when compared to the indenting flexure 305, that is, the spring constant of the planar flexure 314 is very low compared to the spring constant of the indenting flexure 305.

It will be observed that the indenting flexure 305 plays a major role in the performance of the preferred embodiment of the current invention which has just been discussed. A second preferred embodiment, employing a different indenting flexure but, like the first preferred embodiment, designed to be installed in an AFM in place of the cantilever holder in order to make use of the actuators, sensors and optics of the AFM is depicted in FIG. 8, a perspective view of the module embodying the invention prior to assembly.

Unlike the monolithic three-dimensional leaf spring flexure 305 of the first preferred embodiment, the flexure of FIG. 8 is an assembled flexure. Like that flexure, however, the assembled flexure of FIG. 8 is designed to constrain the motion of the indenter probe 303 to the z-axis only, that is, perpendicular to the sample. The flexing portion of the assembled flexure of FIG. 8 is provided by the central shaft of two circular, planar leaf springs 506 and 507, which are firmly constrained at the support end, that is the perimeter, by interleaved clamps, 503, 504 and 505. The assembly of planar leaf springs 506 and 507 and interleaved clamps, 503, 504 and 505 is rigidly attached to the circular plate/retaining ring 310. The central shaft of the planar leaf springs 506 and 507 is composed of spindles 508 and 509. The upper end of spindle 508 screws into the lower end of spindle 509, clamping planar leaf spring 506 against the stop at the lower end of spindle 509. The stop at the upper end of spindle 509 is fastened to planar leaf spring 507 and the portion of the spindle above the stop extends through a hole in the center of the circular plate/retaining ring 310 and gives access to the central shaft from within the AFM to enable the mechanical converter assembly discussed above in connection with the first preferred embodiment to function.

As with the first preferred embodiment, the central shaft of the assembled flexure of FIG. 8 ends with the chuck 304, rigidly attached to the lower end of spindle 508, and the indenter probe 303 attached to the chuck 304, facing the sample to be indented. The assembled flexure, the chuck 304 and the indenter probe 303 are actuated by actuating the circular plate/retaining ring 310 with the actuator (not shown) which in the AFM would be used to change the position of the cantilever base in response to changes in the deflection or oscillation of the cantilever.

FIG. 9 is a bottom-side plan view of the flexure of FIG. 8 after assembly. FIG. 10 is a plan view of the planar leaf springs 506 and 507 of the flexure of FIG. 8. Such springs are fabricated using metals, including beryllium copper, and machining methods well-known to those versed in the art.

Other preferred embodiments of the current invention, also designed to be installed in an AFM in place of the cantilever holder in order to make use of the actuators, sensors and optics of the AFM, but employing a different indenting flexures than indenting flexure 305 of the first preferred embodiment or the assembled flexure of FIG. 8, form part of the invention. FIG. 11 through FIG. 15 are plan views of the planar leaf springs of such other preferred embodiments. Each of them consists of a flexing portion in the center of the spring, support ends at the perimeter and connections from the flexing portions to the support ends of variously shaped beams. In addition to the circles and other depicted shapes of these planar leaf springs, any polygon would in general produce similar results when paired with appropriate connections.

An additional preferred embodiment, again employing a different indenting flexure but, like the other preferred embodiments disclosed above, designed to be installed in an AFM in place of the cantilever holder in order to make use of the actuators, sensors and optics of the AFM is depicted in FIG. 16, a perspective view of the module embodying the invention prior to assembly. Like the flexure of FIG. 8, the flexure of FIG. 16 is an assembled flexure and is designed to constrain the motion of the corresponding probe 703 (which is also an optical element) to the z-axis only, that is perpendicular to the sample.

The components of the assembled flexure of FIG. 16 are similar to those of the assembled flexure of FIG. 8: two planar leaf springs 707 and 708 separated by clamps 705 and 706. However, the assembled flexure of FIG. 16 does not have a third clamp separating the upper planar leaf spring 708 from the plate 709 which facilitates installation of the assembly in an AFM in place of the cantilever holder. Instead, planar leaf springs 708 is rigidly attached directly to the plate 709.

The central shaft of the planar leaf springs 707 and 708 of the assembled flexure of FIG. 16 also differs from the central shaft of the assembled flexure of FIG. 8. The central shaft of the planar leaf springs 707 and 708 consists of just a chuck 704, and the probe 703 attached to the chuck 704, facing the sample to be indented. The upper end of the chuck 704 extends through a hole in the center of the plate 709 and gives access to the central shaft from within the AFM to enable the mechanical converter assembly discussed above in connection with the first preferred embodiment to function.

The probe 703 of the assembled flexure of FIG. 16 is a new device not currently known in the art and as such is significantly different from the indenter probe 303 of the assembled flexure of FIG. 8. Probe 703 has both a different function than indenter probe 303 and a different construction. Probe 703 has a dual function: it is both an optical element and an indenting probe. As an optical element, probe 703 acts as a lens allowing the optical viewer system of the AFM head in which assembled flexure of FIG. 16 is installed direct optical view of the sample to be indented. As an indenting probe, probe 703 is a rigid element that applies force and indents the sample as with traditional indenter probes, such as 303. With this dual function comes a requirement for a different construction. A probe like probe 703 must be fabricated from a material which is both very hard and transparent to light. Suitable materials include diamond and sapphire.

Probe 703 has many advantages over other indenter transducers or indenting probes. These include making available true top optical view of the sample to be indented, allowing for accurate positioning of indentations and having a combination of low mass and high resonant frequency, which allows unprecedented resolution in the measurement of mechanical behavior of materials through both static and dynamic material testing methods.

FIG. 17 is a bottom-side plan view of the flexure of FIG. 16 after assembly. FIG. 18 is a plan view of the planar leaf springs 707 and 708 of the flexure of

FIG. 16. Such springs are fabricated using metals, including beryllium copper, and machining methods well-known to those versed in the art.

FIG. 19 shows an optical lever detection system designed to free the modules embodying the current invention from the use of the mechanical converter assembly described above in order to access the optical lever detection system of an AFM. A mirror **1901** is attached to the collar **320** which is rigidly attached to central shaft **404**, chuck **304** and indenter probe **303** of the flexure of the first preferred embodiment of the invention. Mirror **1901** deflects incident light beam coming from an optical lever detection system and as this mirror moves relative to the indenter probe **303**, PSD of the optical lever detection system measures the displacement. An additional lens **1902** may be placed above mirror **1901** to increase sensitivity and facilitate calibration of the optical lever detection system.

The described embodiments of the invention are only considered to be preferred and illustrative of the inventive concept. The scope of the invention is not to be restricted to such embodiments. Various and numerous other arrangements may be devised by one skilled in the art without departing from the spirit and scope of the invention.

NANOINDENTER**References Cited****U.S. PATENT DOCUMENTS**

6252557	1999-09-30	Plugge et al
6349591	2000-01-13	Fretigny et al
6520004	2000-08-03	Lin
6642129	2001-12-07	Liu et al
6823723	2002-02-28	Vandervorst et al
6867443	2003-08-25	Liu et al
6884999	2000-12-04	Yedur et al
6945097	2003-04-08	Jardret et al
6993959	2003-10-17	Shoelson
4848141	1988-04-06	Oliver et al
5193383	1990-07-11	Burnham et al
5229606	1989-06-05	Elings et al
5329808	1993-07-02	Elings et al
5383354	1993-12-27	Doris et al
5400647	1992-11-12	Elings
5406832	1993-07-02	Gamble et al
5412980	1992-08-07	Elings et al
5415027	1993-11-05	Elings et al
5461907	1993-03-23	Tench et al
5463897	1993-08-17	Prater et al
5481908	1993-04-28	Gamble
5497656	1995-02-23	Kado et al
5504338	1993-06-30	Marrian et al
5519212	1995-01-31	Elings et al
5553486	1994-10-24	Bonin
5557156	1994-12-02	Elings
5574278	1995-05-23	Poirier
5866807	1999-02	Elings et al.
RE033387	1988-11-16	Binnig
RE034331	1991-08-30	Elings et al
RE034489	1992-06-04	Hansma et al.
3418546	1966-11-25	Bobby R et al
4040118	1975-06-18	Johnston
4237989	1979-05-11	Lewis
4479392	1983-01-03	Froeb et al
4523474	1983-08-12	Browne et al

4550617	1984-05-04	Fraignier et al
4685678	1985-03-19	Frederiksen
4694687	1986-04-17	Bonin et al
4699000	1986-04-17	Lashmore et al
4820051	1986-08-21	Yanagisawa et al
4922444	1987-12-14	Baba
4970374	1989-08-02	Ueda et al
5065103	1990-03-27	Slinkman et al
5092174	1989-10-19	Reidemeister et al
5115291	1991-07-12	Stokes
5128671	1990-04-12	Thomas
5134886	1991-04-16	Ball
5174159	1991-06-21	Jacobsen et al
5255562	1992-10-07	Yamamoto et al
5305633	1990-12-07	Weissenbacher et al
5359879	1992-11-04	Oliver et al.
5866807	1997-02-04	Elings et al
6026677	1997-11-06	Bonin
6694829	2002-01-30	Chimura et al
6904806	2002-07-18	Pryor

OTHER PUBLICATIONS

In situ Imaging of pN Load Indents into GaAs, E.T. Lille- W. Bonin, J. Nelson, J.T. Wyrobek, W.W. Gerberich, Barbara, Calif. J. Mater. Res., vol. 10, No. 9, Sep. 1995. pp. 2162-2165.

Nanoindentation Hardness Measurements Using Atomic Force Microscopy, Bharat Bhushan and Vilas N. Koinkar, Applied Phys. Lett. 64 (13), Mar. 28, 1994. pp. 1653-1655.

An Improved Technique for Determining Hardness and Elastic Modulus Using Load and Displacement Sensing Indentation Experiments, W.C. Oliver & G.M. Pharr, J. Mater. Res., vol. 7, No.6, Jun 1992. pp. 1564-1583.

TappingMode™ Imaging Applications and Technology, C.B. Prater, P.G. Maivald, K.J. Kjoller and M.G. Heaton; Digital Instruments Apr. 1997.

Nanoindentation and Hardness Testing with NanoScopeB SPMs, J.R. Elings, Digital Instruments, Jan. 1996.

What is claimed is:

1. A nanoindenter, comprising

a module installed in an atomic force microscope which includes an actuator that may be used to actuate the indenter probe and an optical lever detection system that may be used to measure the motion of the flexure controlling the indenter probe;

an indenter probe attached to the central shaft of a monolithic three-dimensional leaf spring flexure which constrains the motion of such probe to the axis perpendicular to the sample; and

a mechanical converter assembly which converts the z-axis motion of such central shaft to an angular change which may be measured by such optical lever detection system.

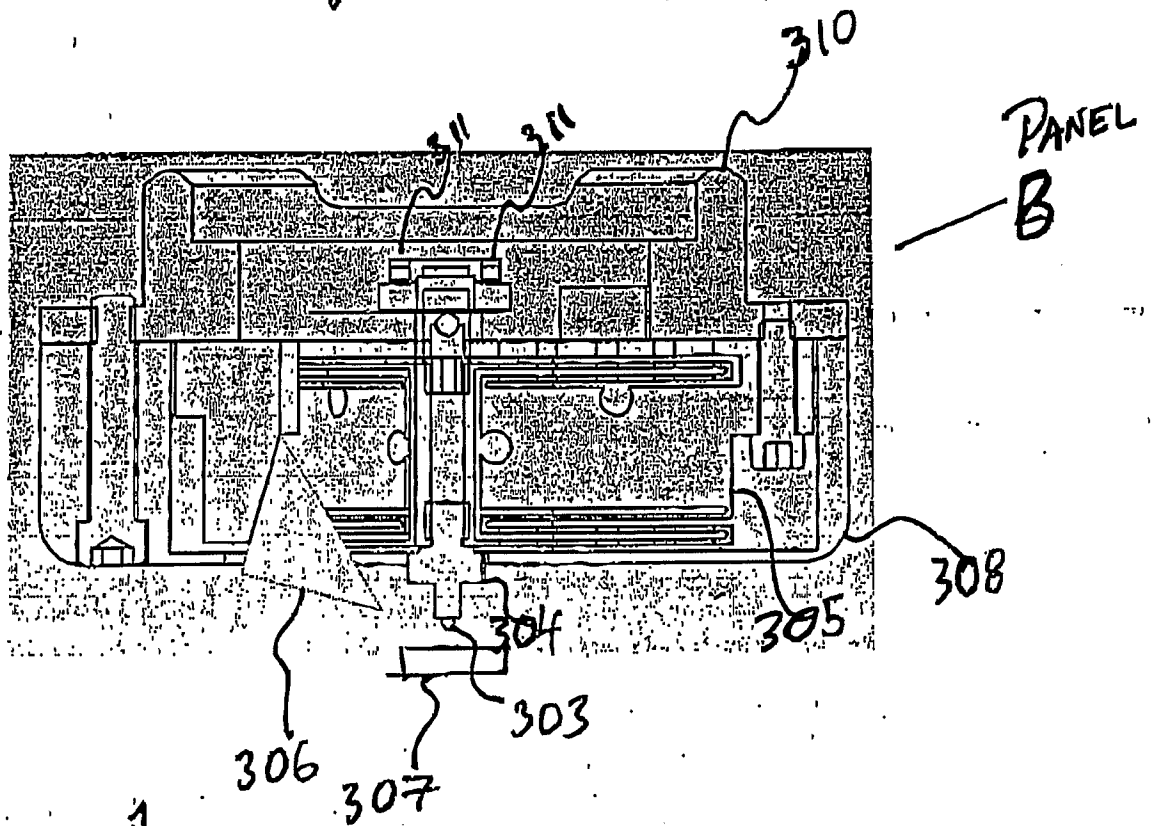
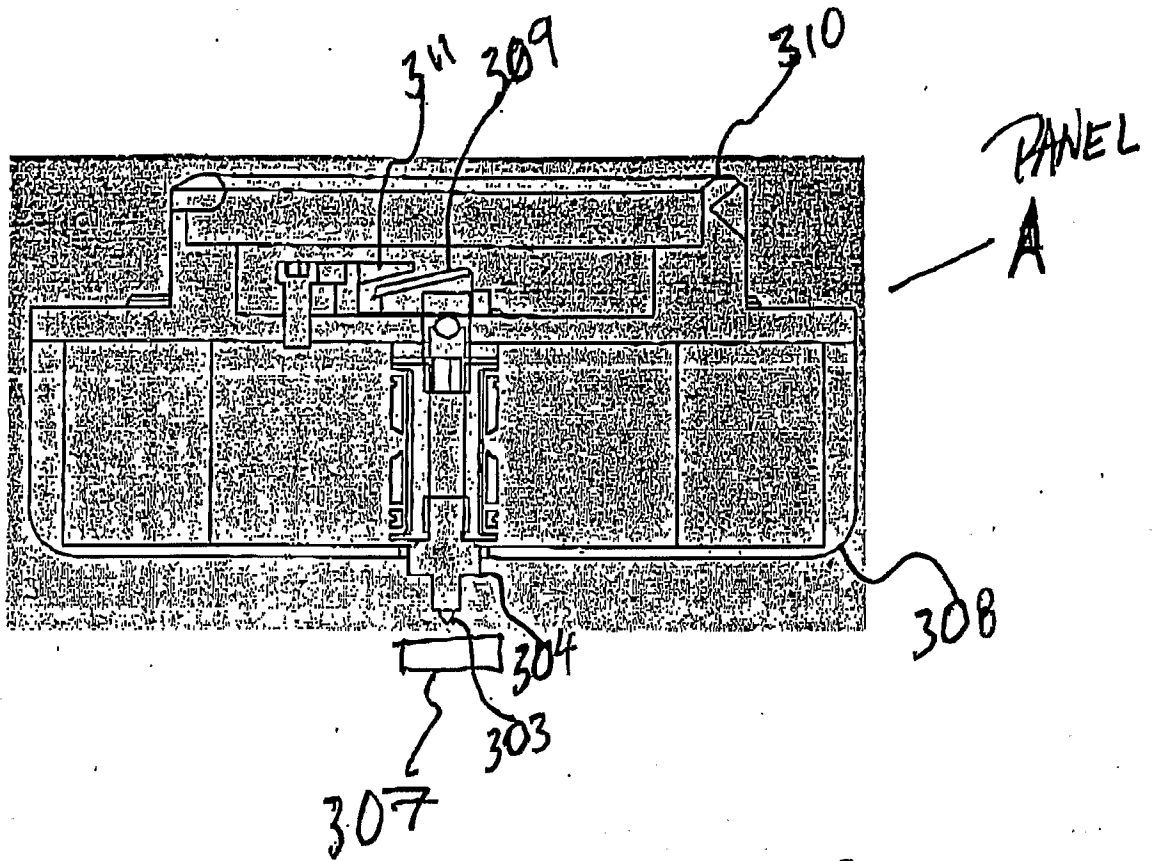
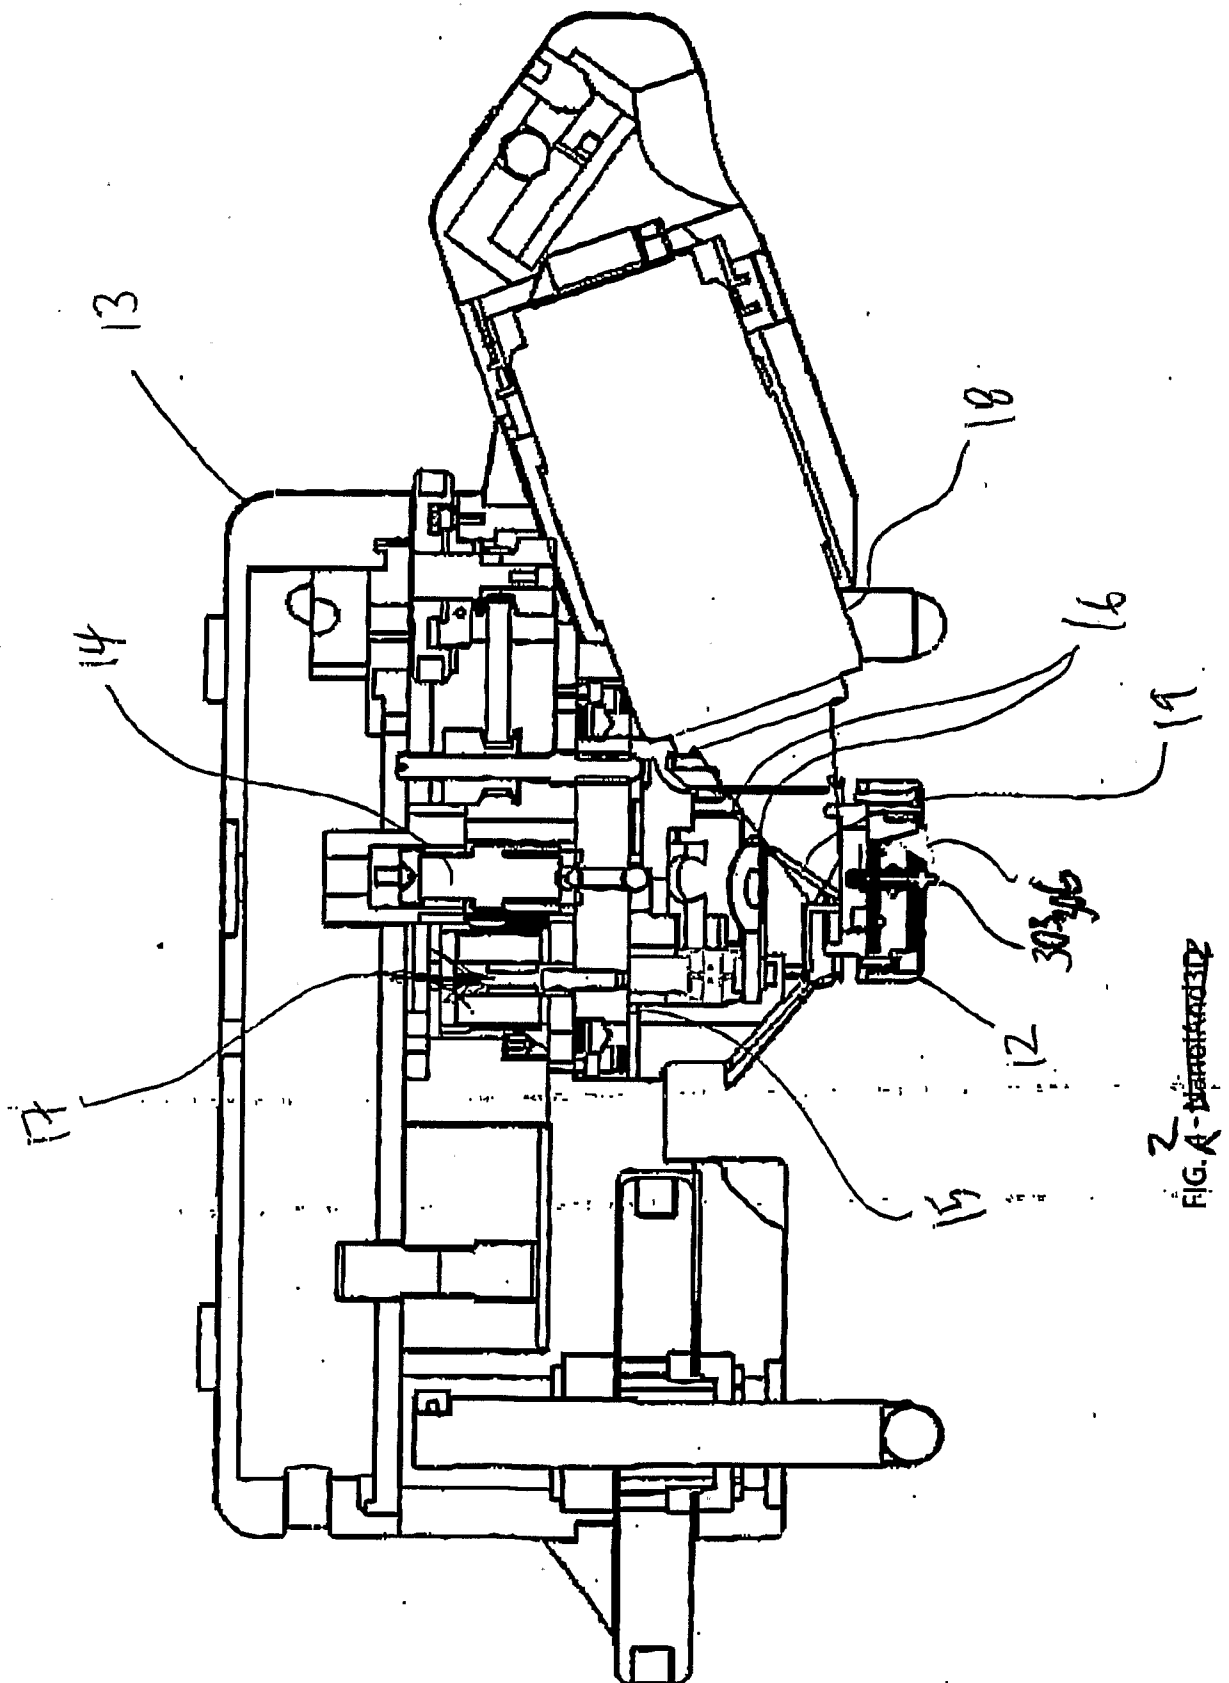


FIG. 1
~~Panel A~~ ~~Panel B~~



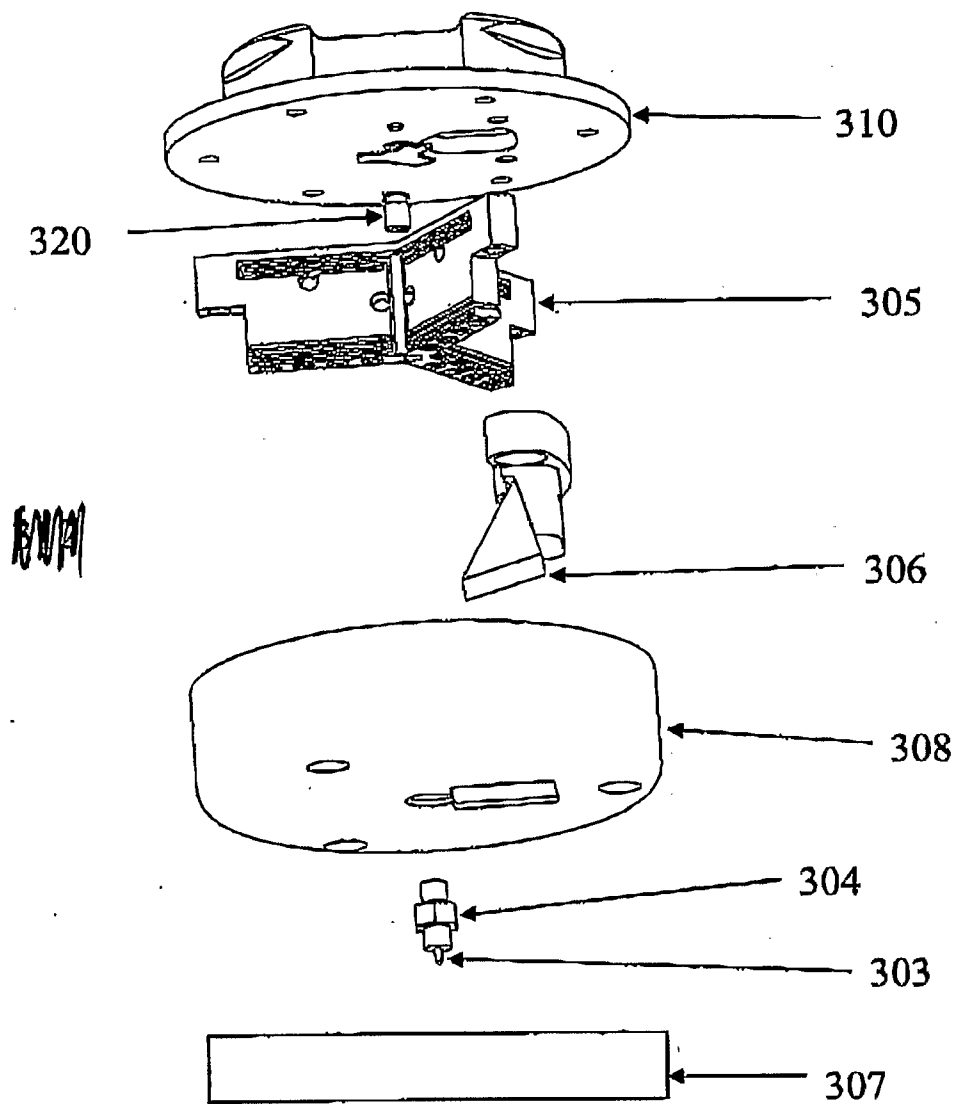


FIG. 3 ~~Nanoindenter before assembly~~

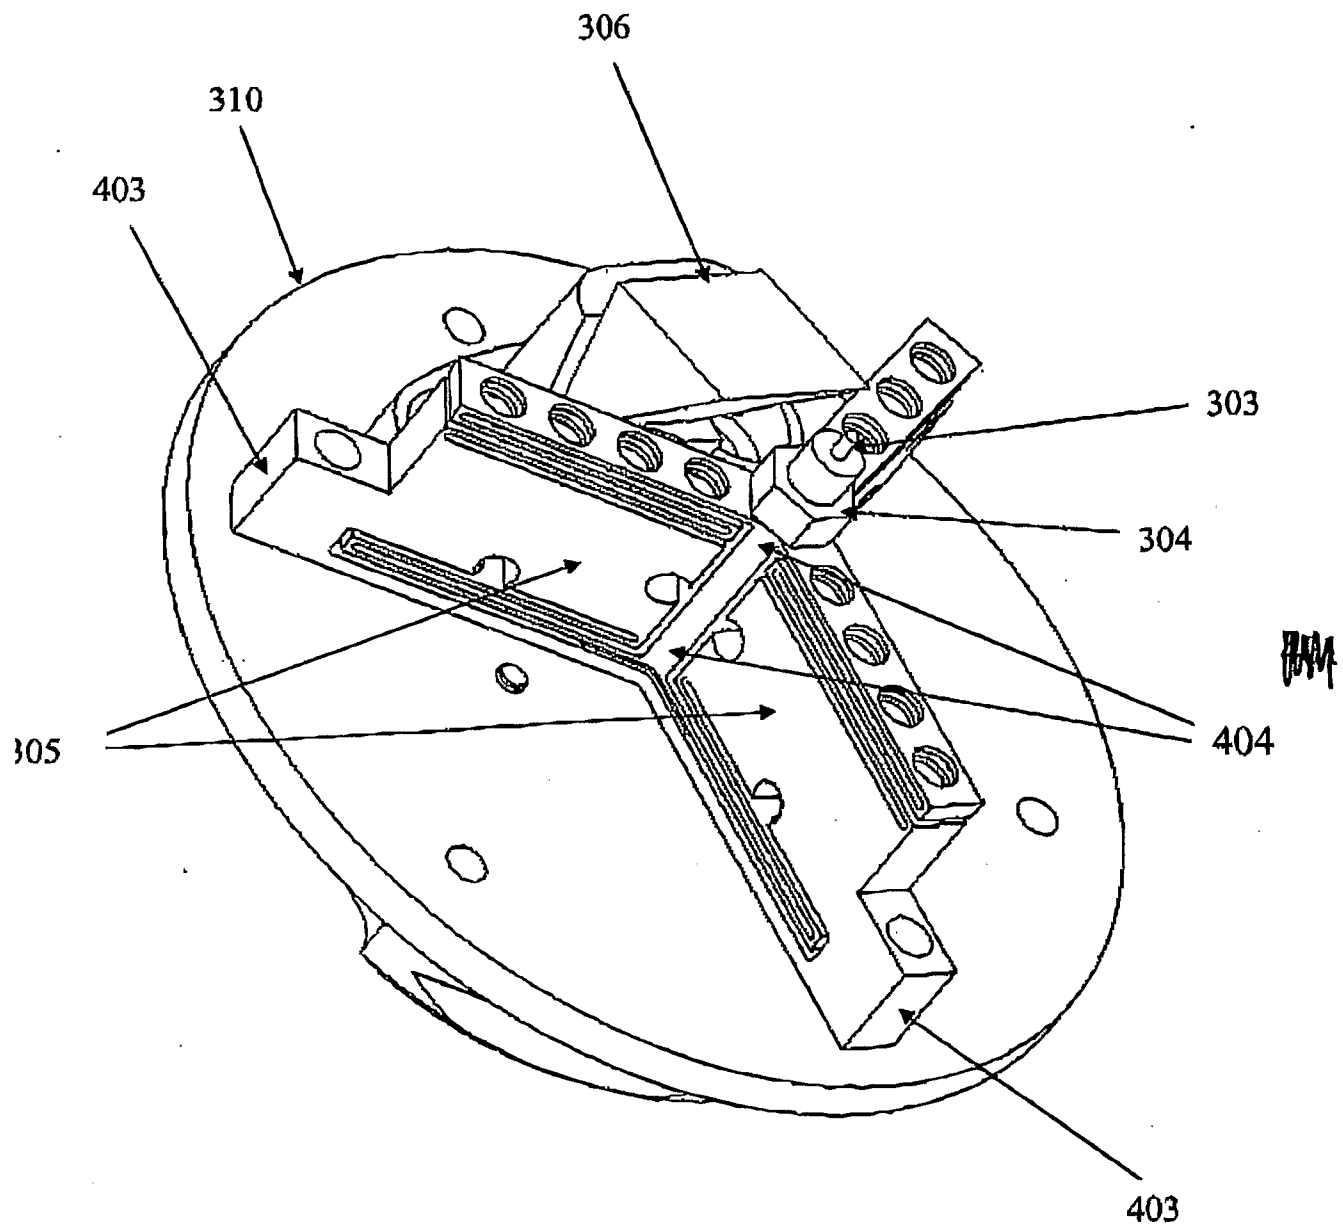


FIG. 4 ~~Nanoindenter fixture~~

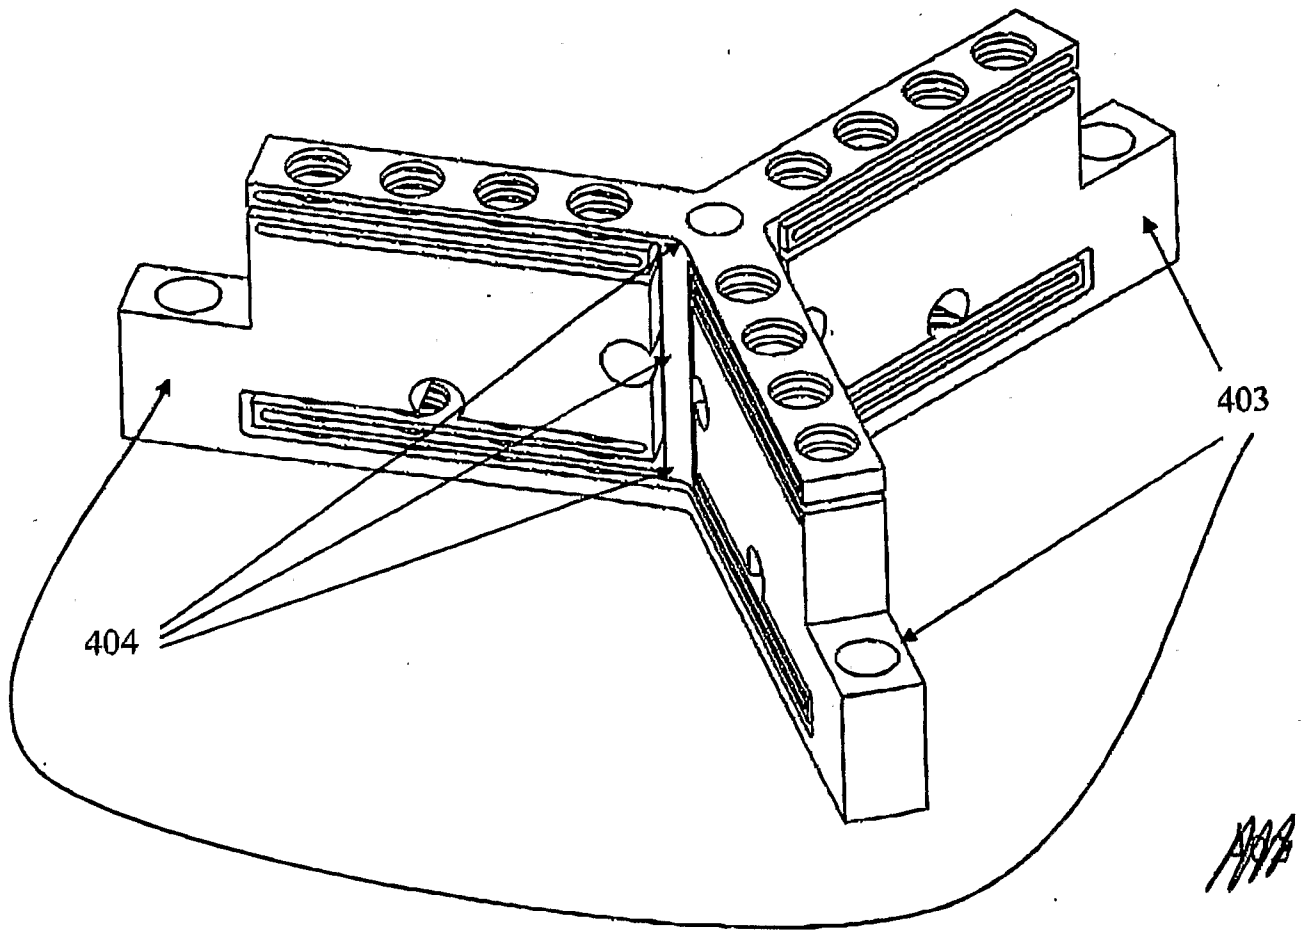


FIG. 5 ~~Nanoindenter flexure~~

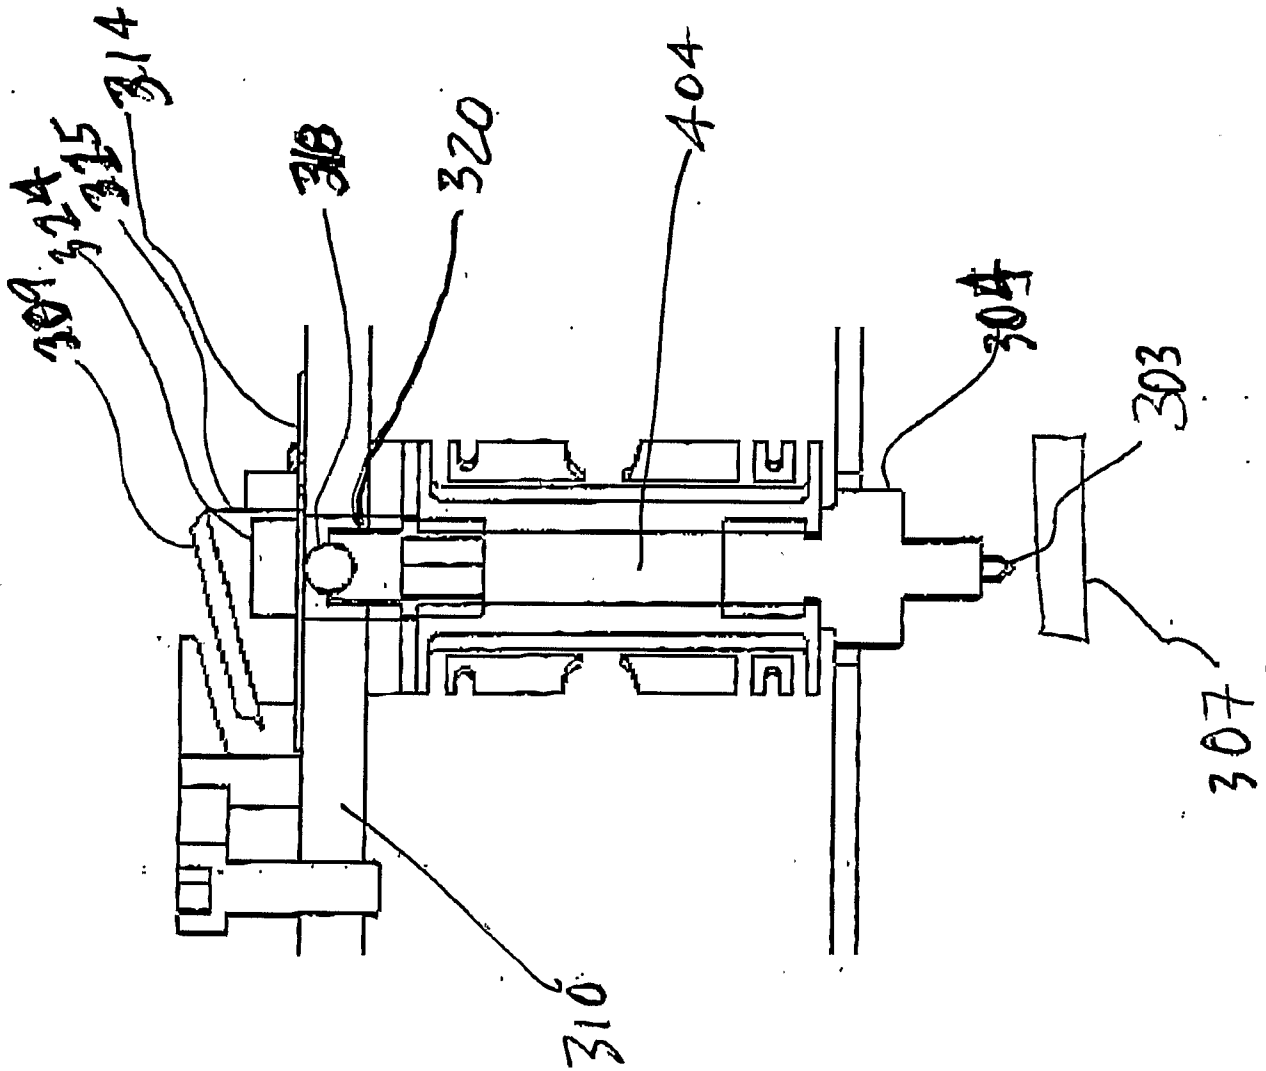


FIG. 6 - Optical Detector

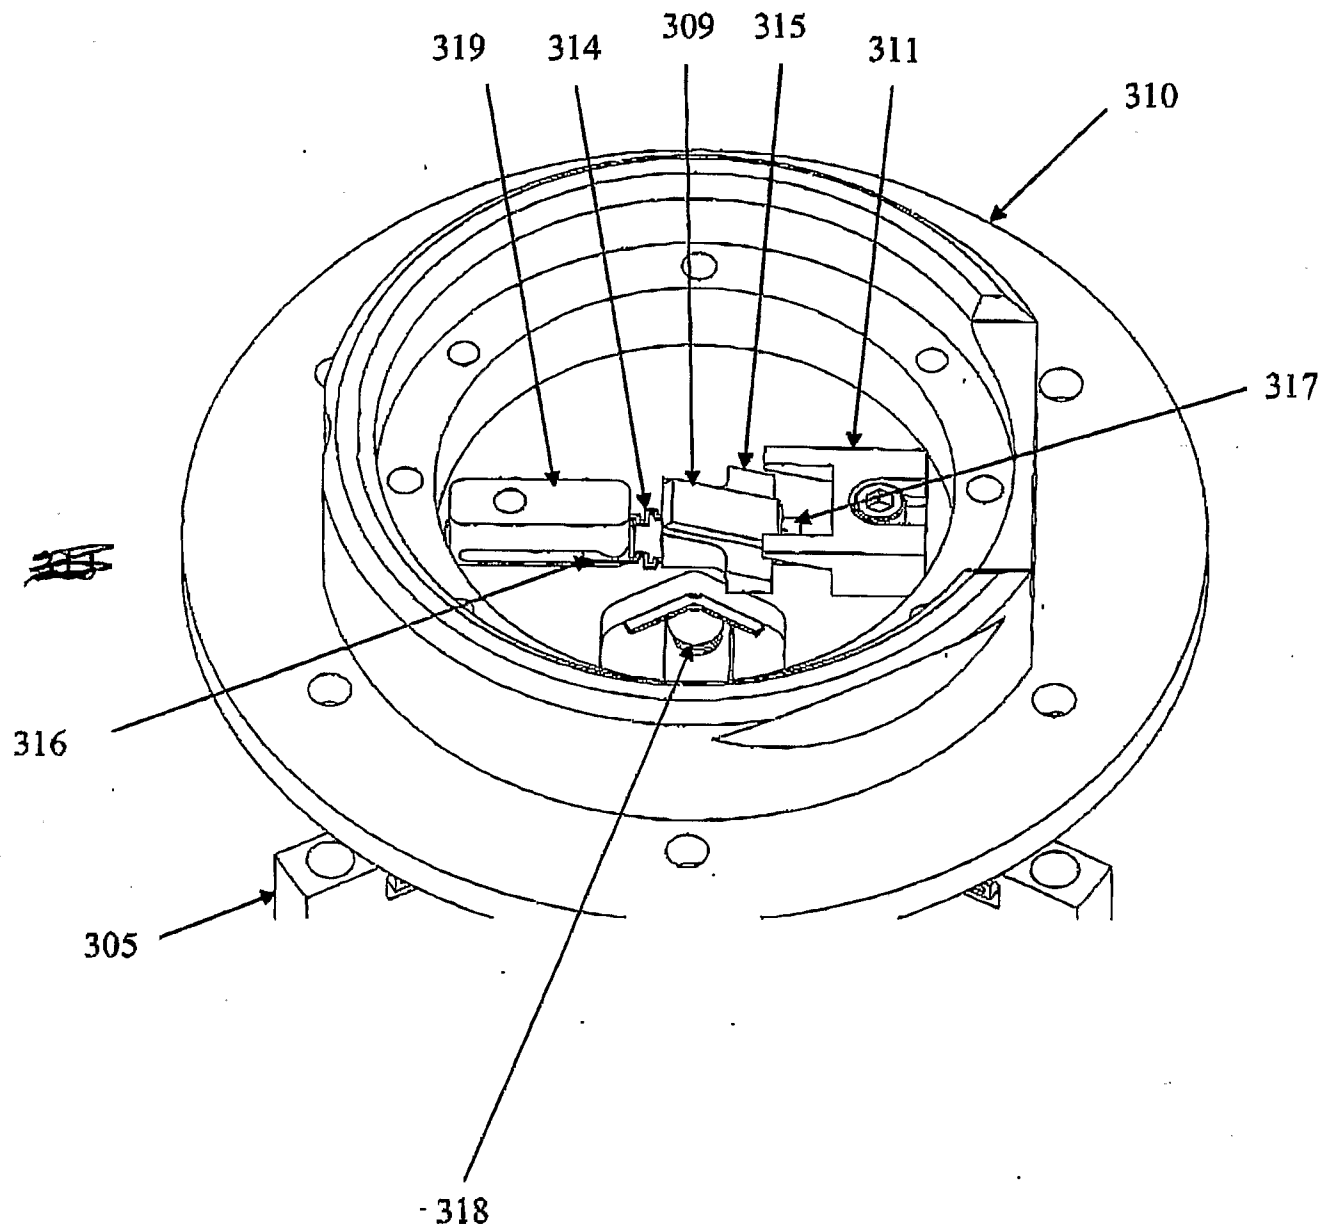


FIG. 7 ~~Nanoindenter, optical lever detection detailed.~~

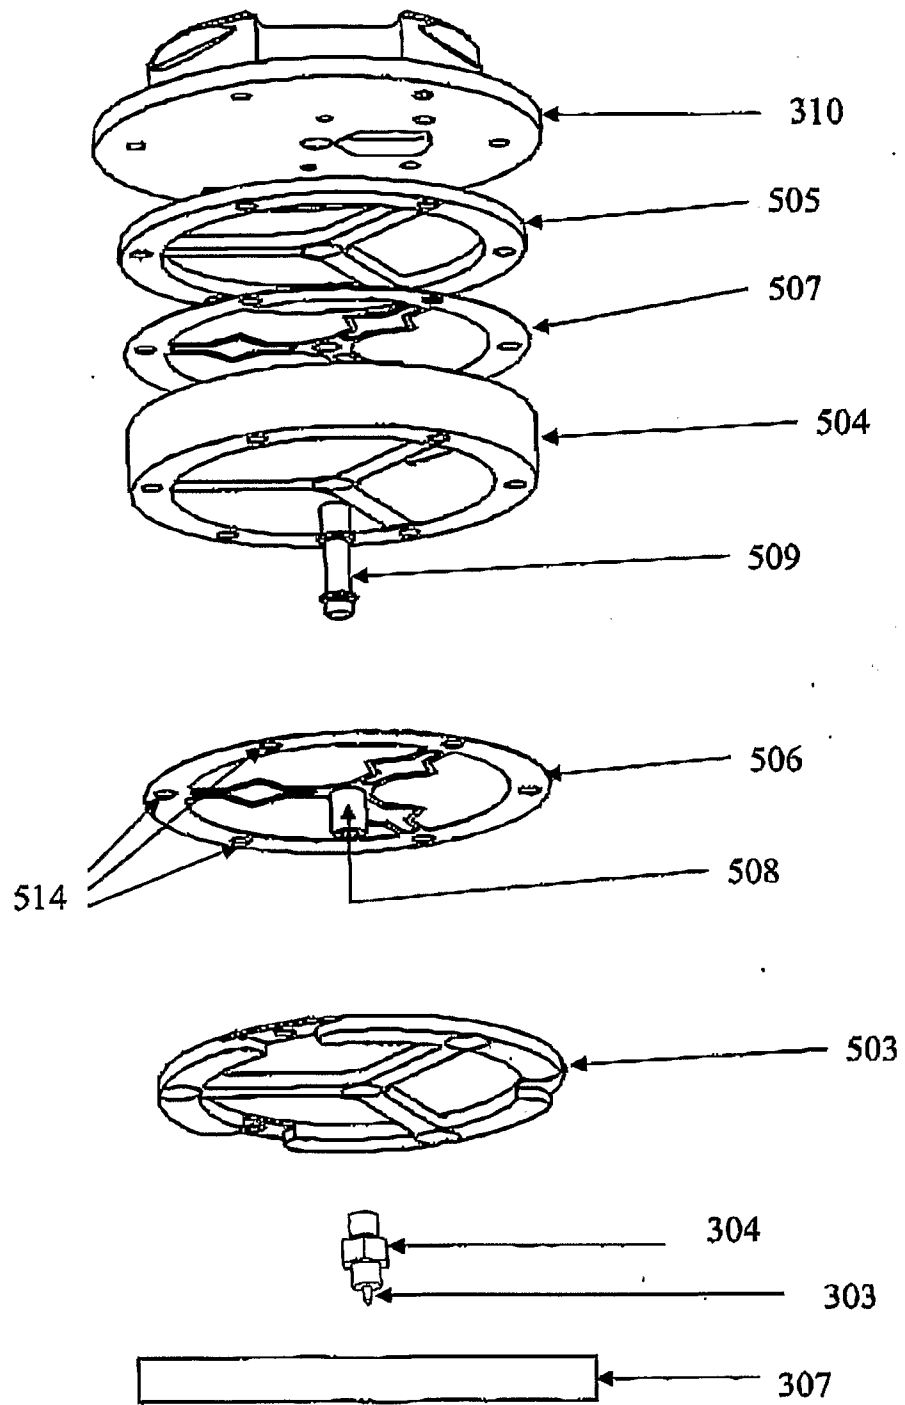


FIG. 8 Nanoindenter schema 2 before assembly

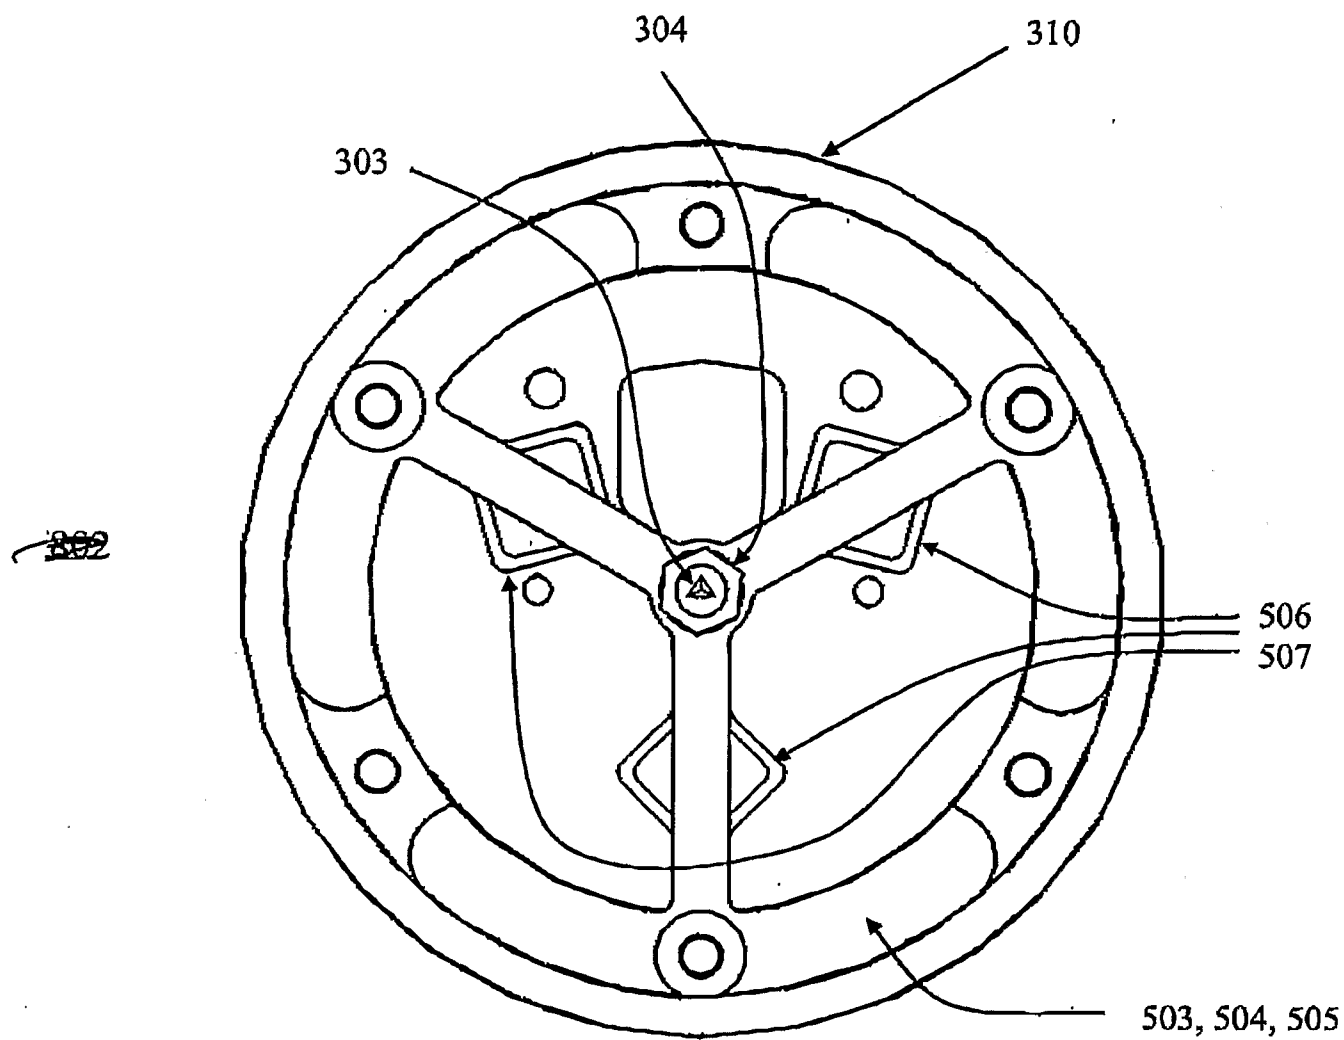


FIG. 9 Nanoindenter scheme 2, front view

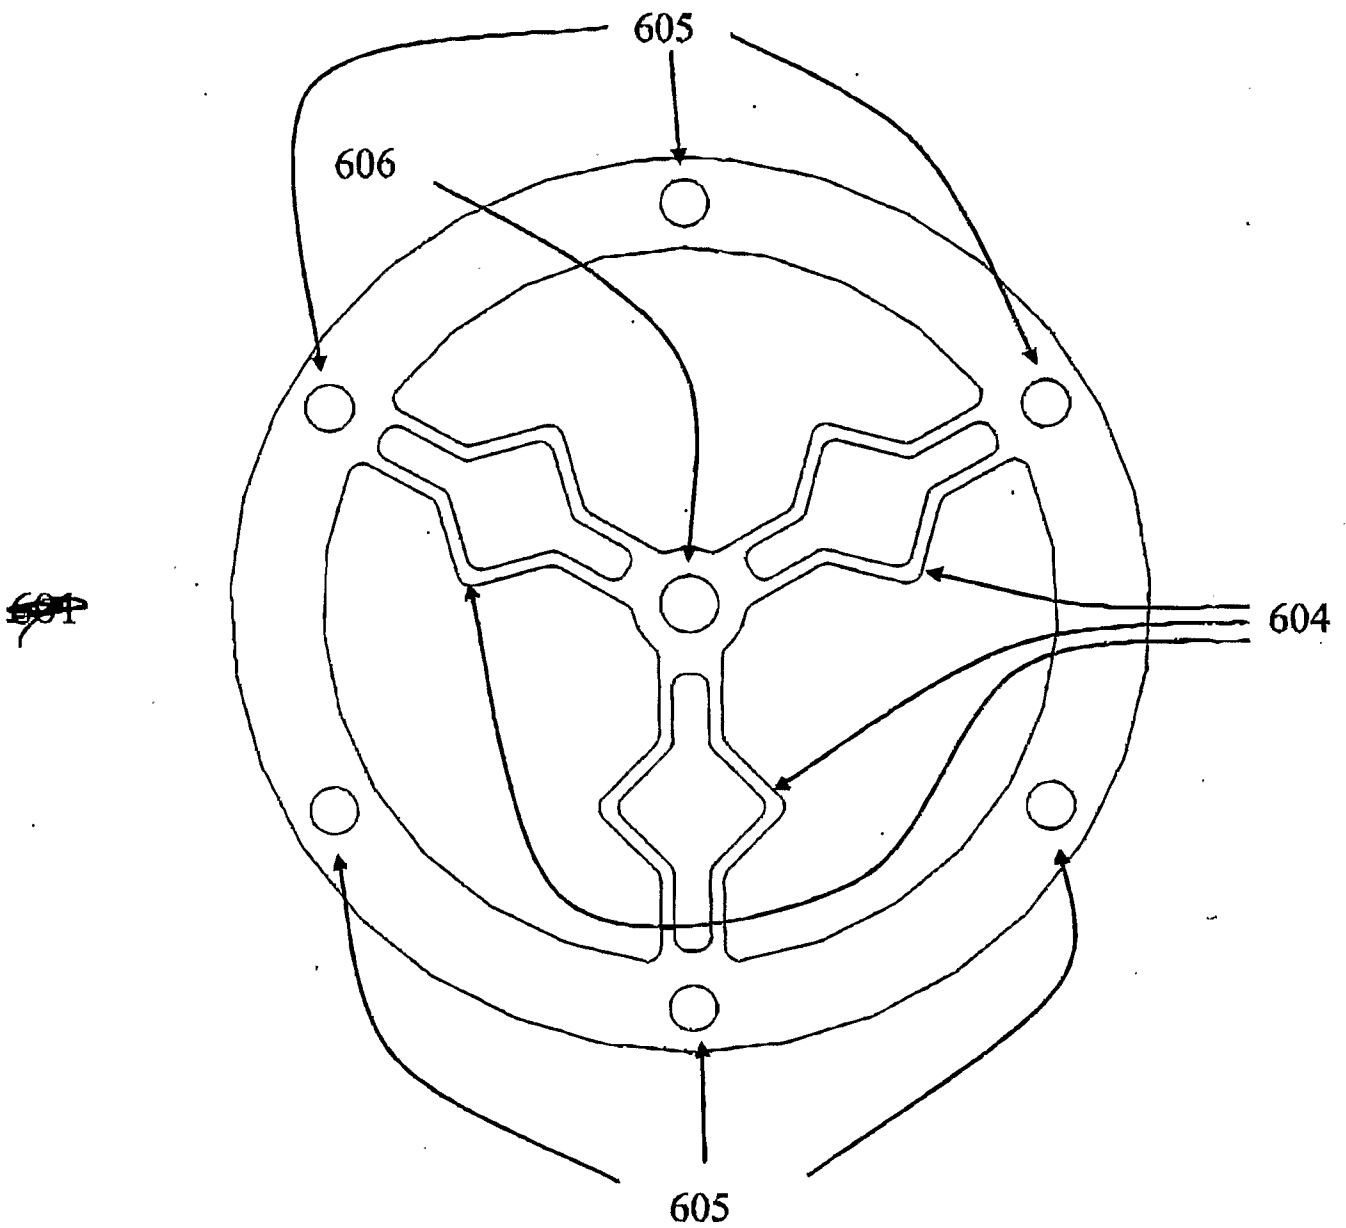


FIG. 10 ~~Planar flexures schemes for assembled flexure scheme.~~



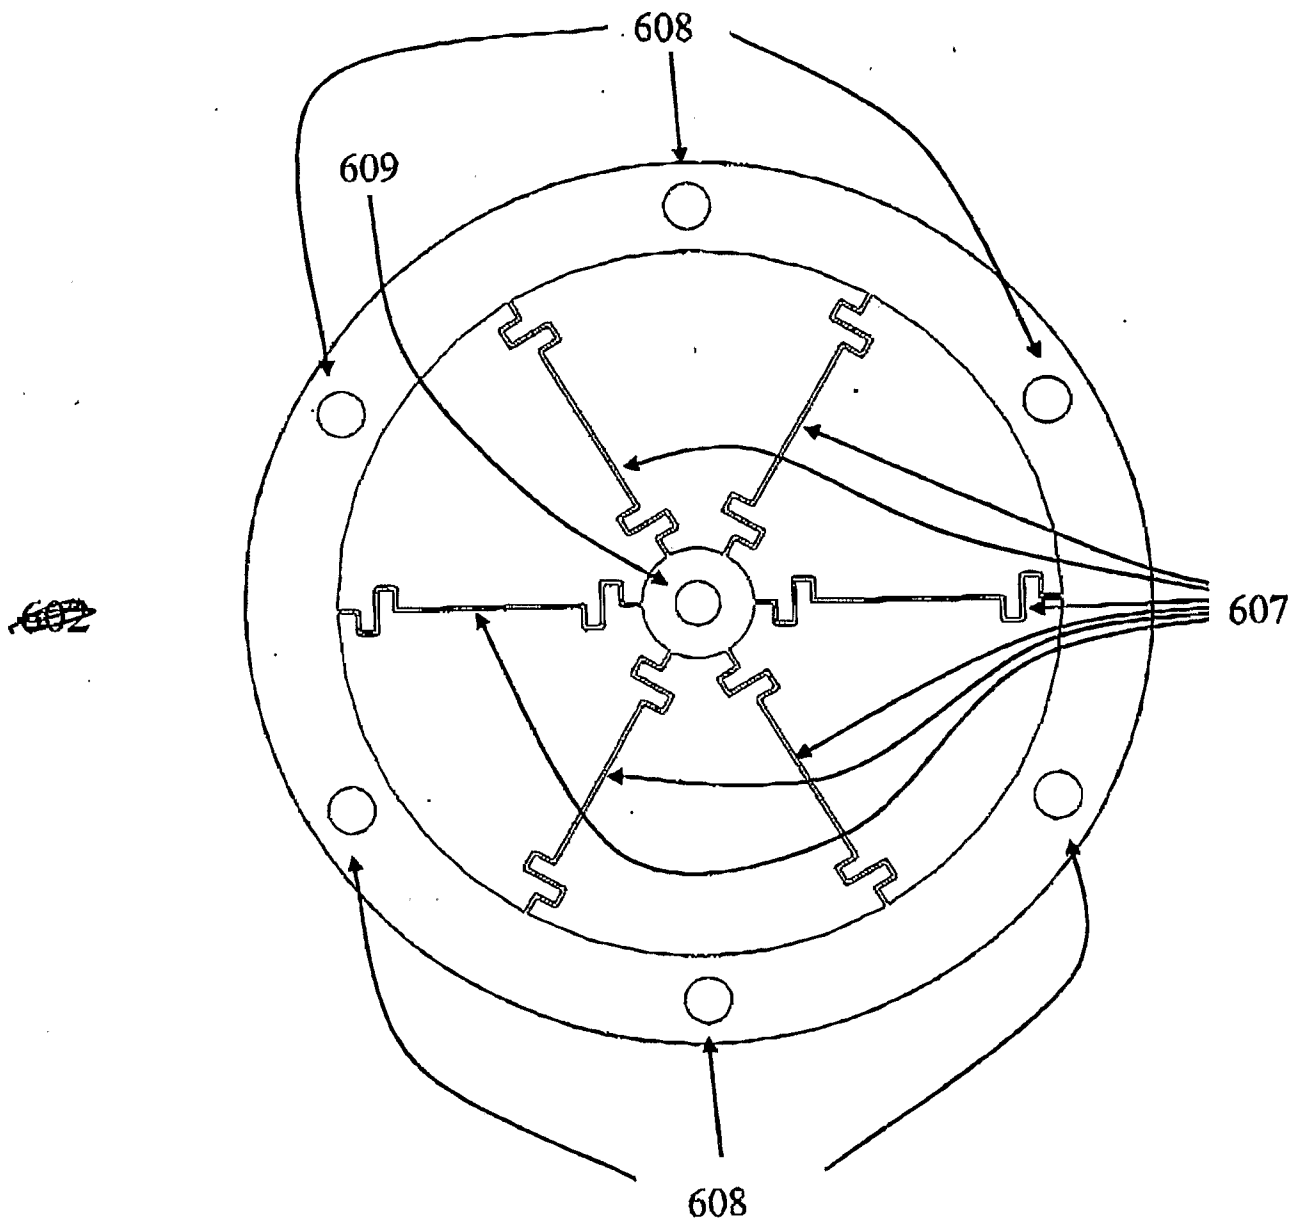



FIG. 11 Planar flexures schemes for assembled flexure scheme.

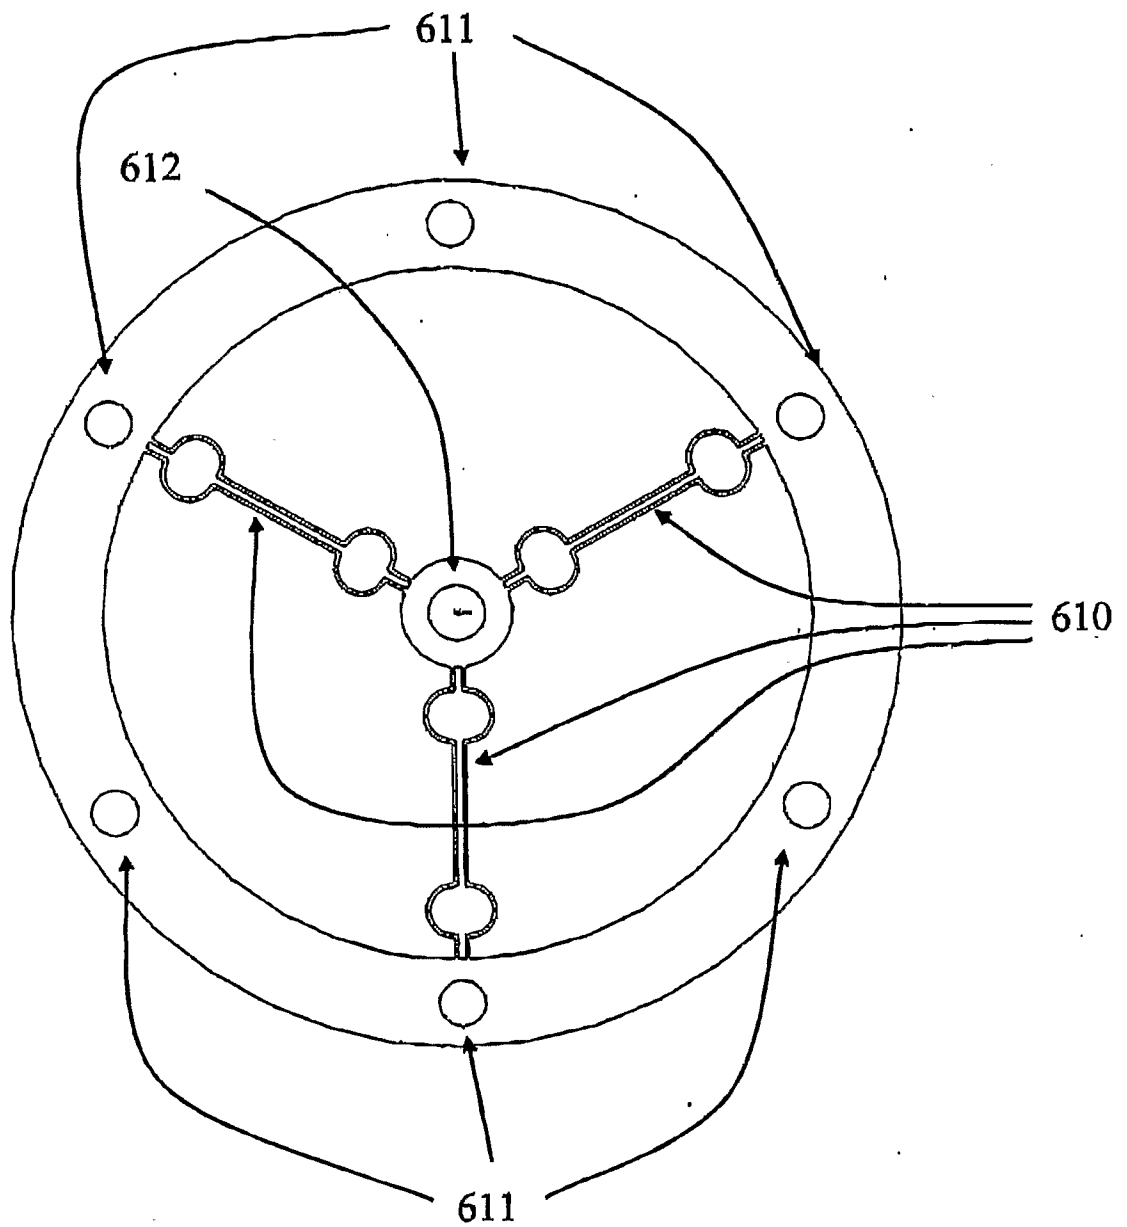


12
FIG. 12 Planar flexures schemes for assembled flexure scheme.

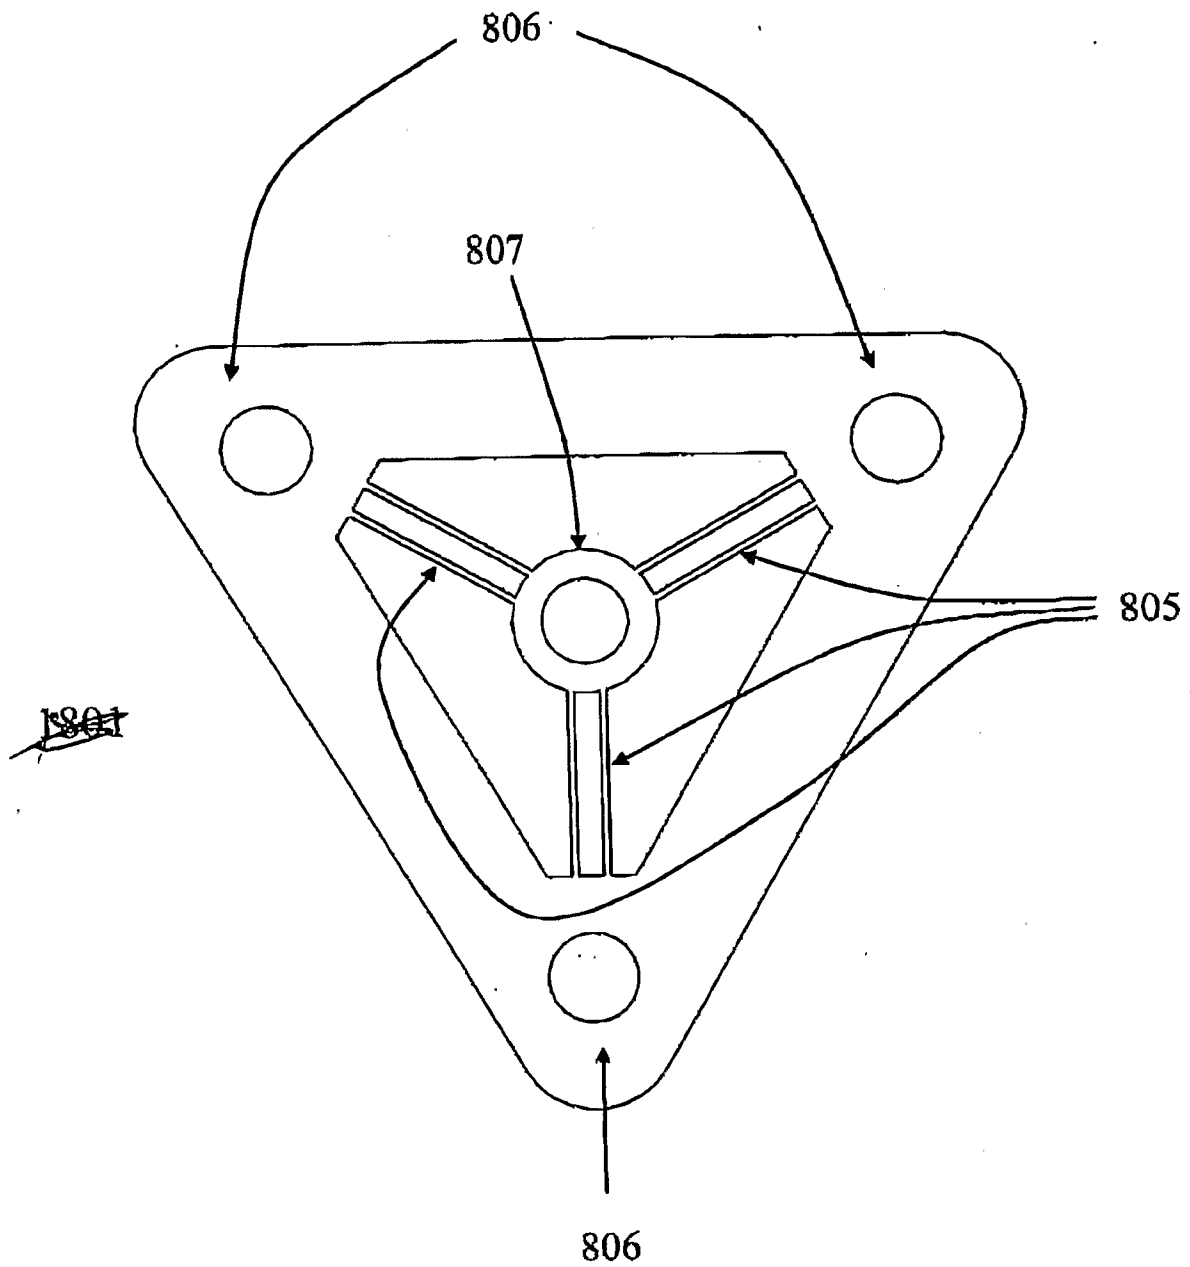

13
FIG. 13 Planar flexures schemes for assembled flexure scheme 3.

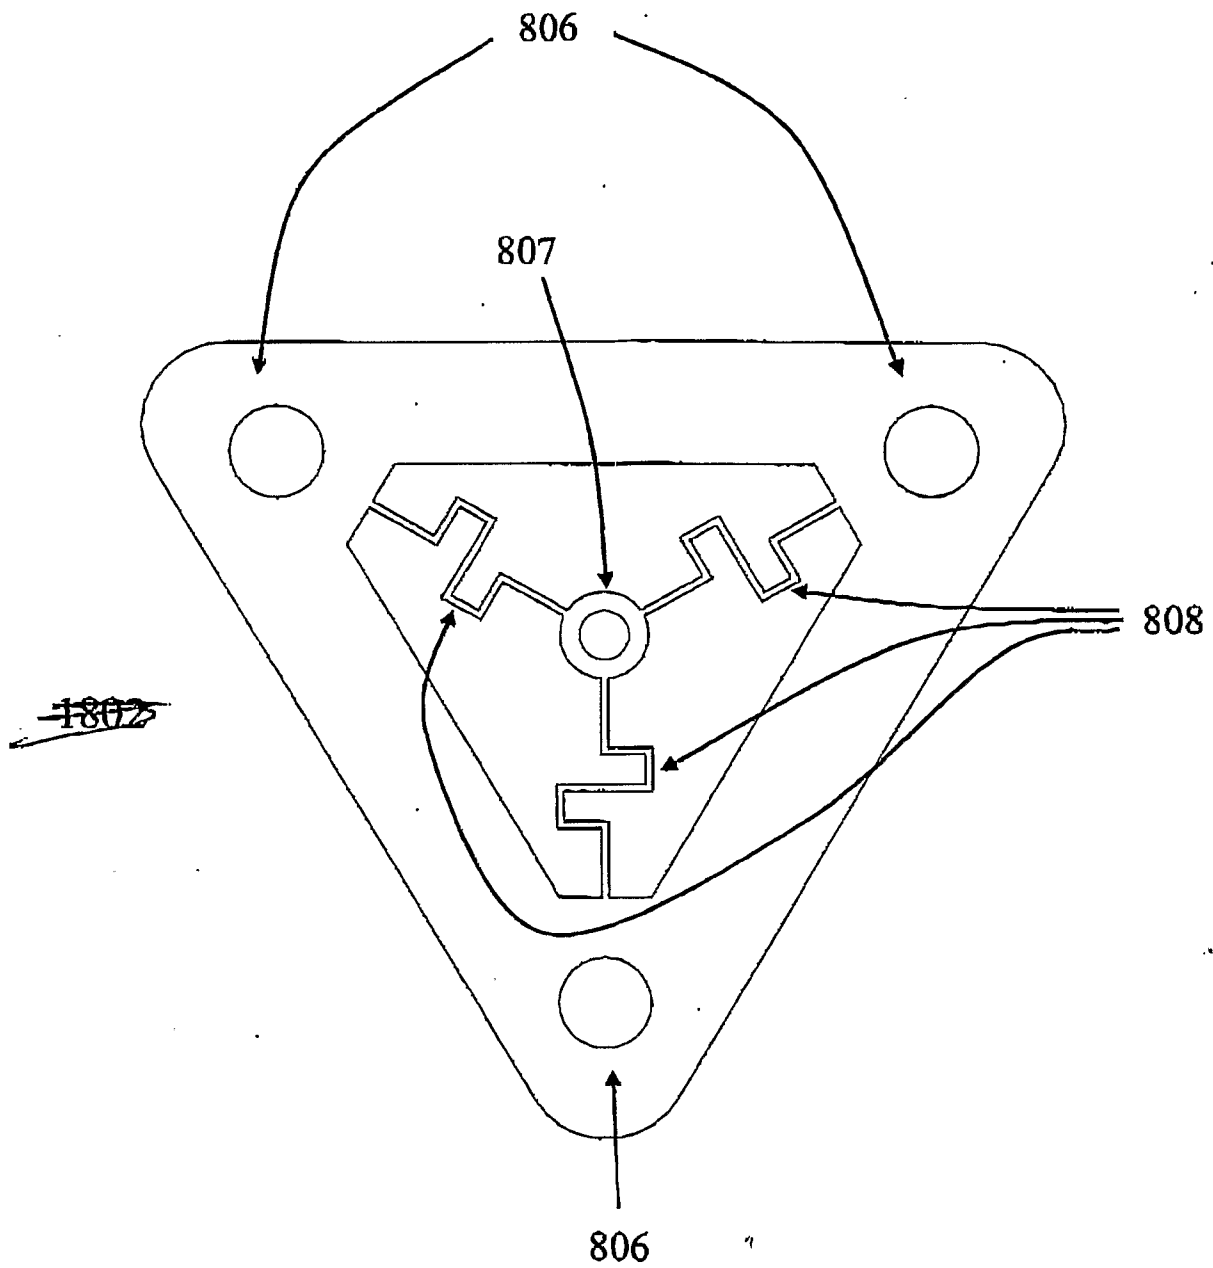

~~14-~~
 FIG. ~~13~~ Planar flexures schemes for assembled flexure scheme ~~3~~.

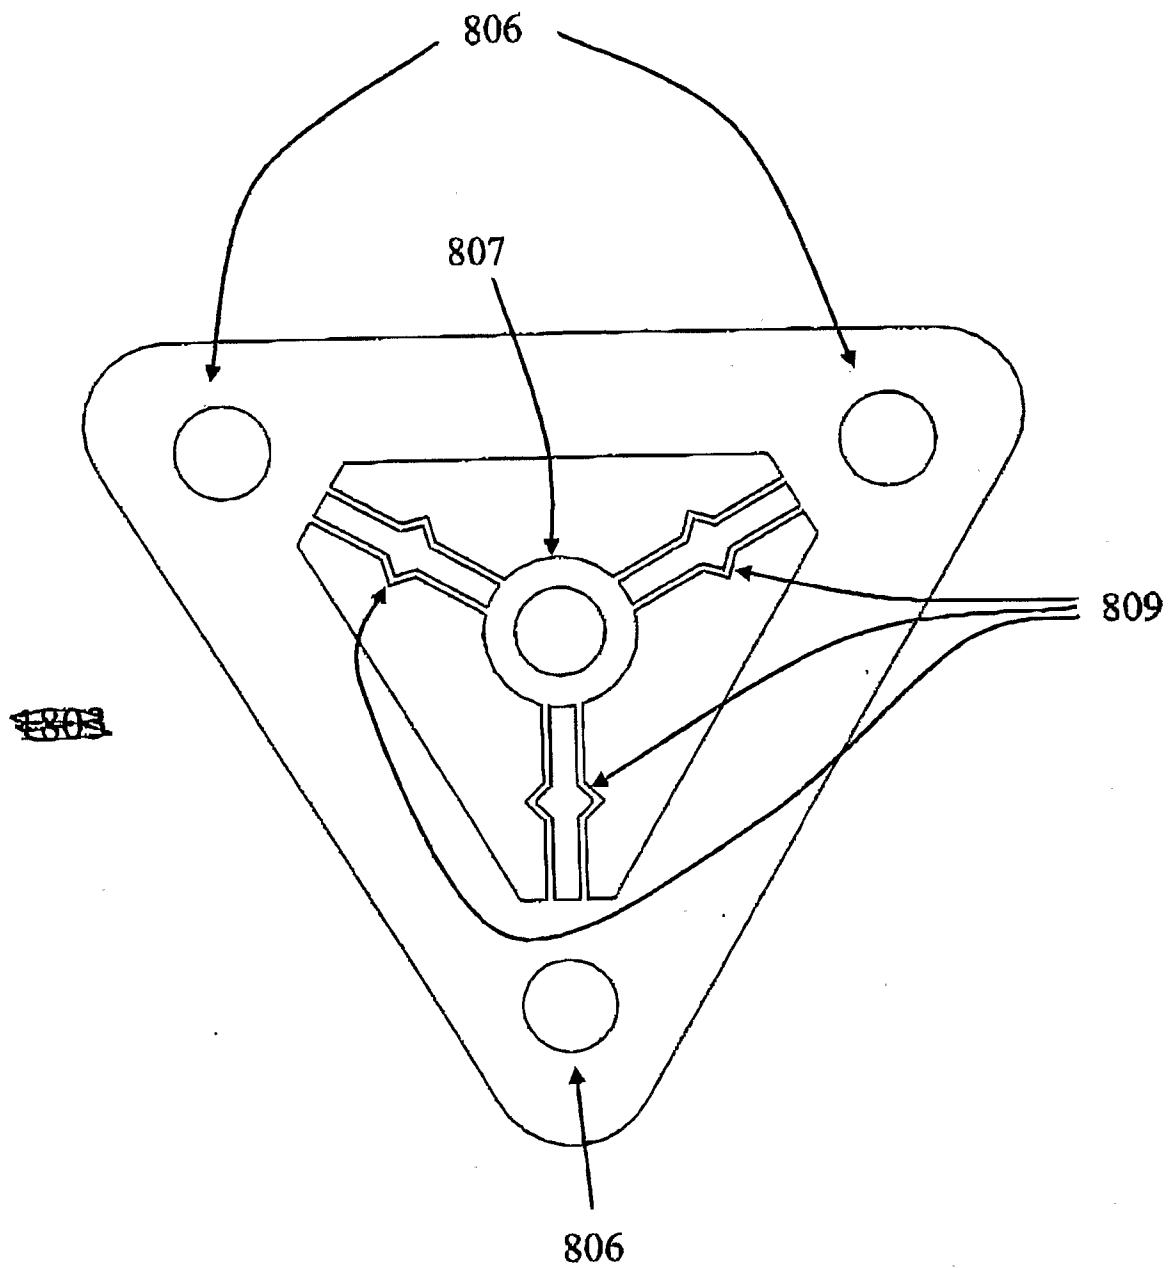

15
FIG. 15 Planar flexures schemes for assembled flexure scheme 3.

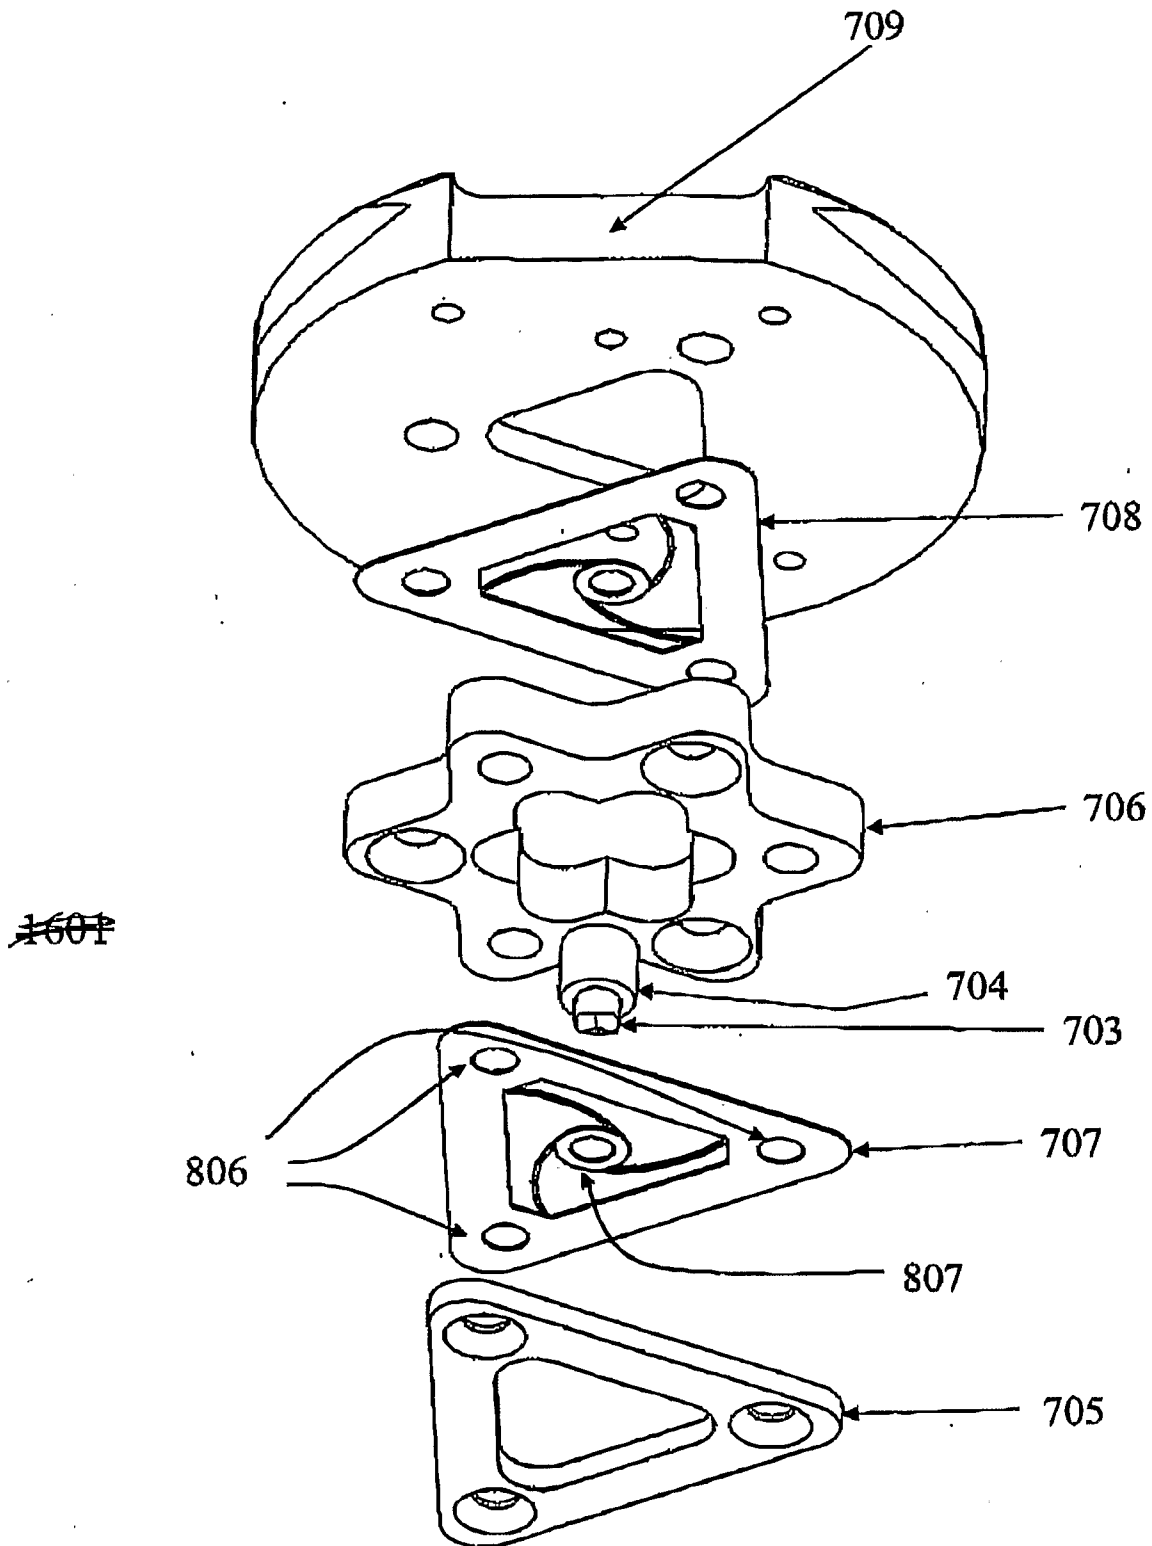


FIG. 16 Nanoindenter scheme 3 before assembly

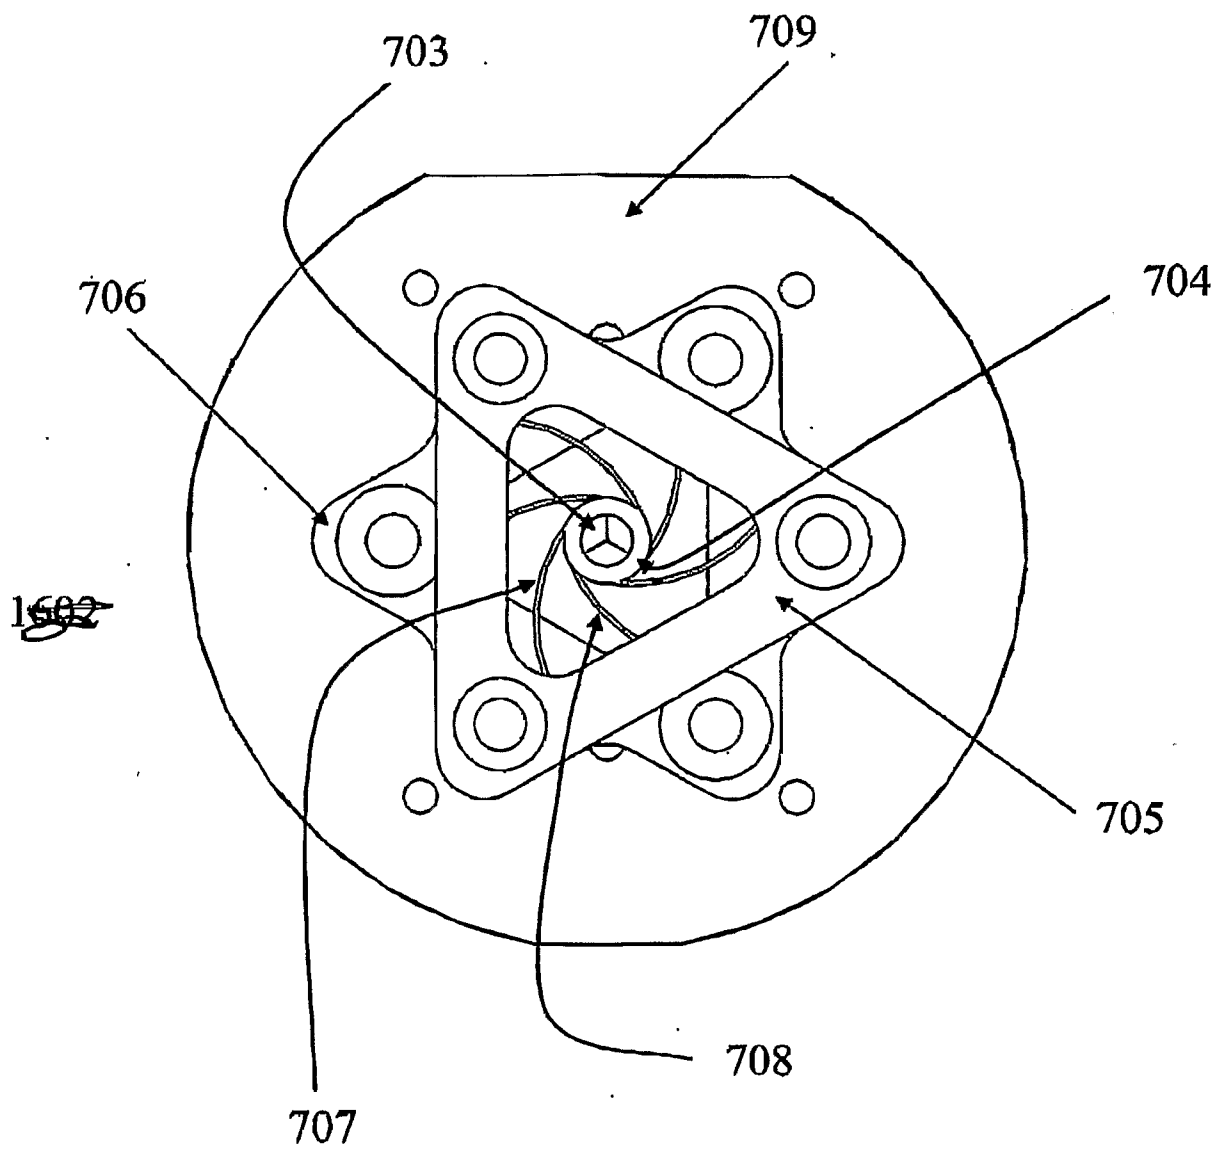


FIG. 17 Nanoindenter scheme 3 before assembly


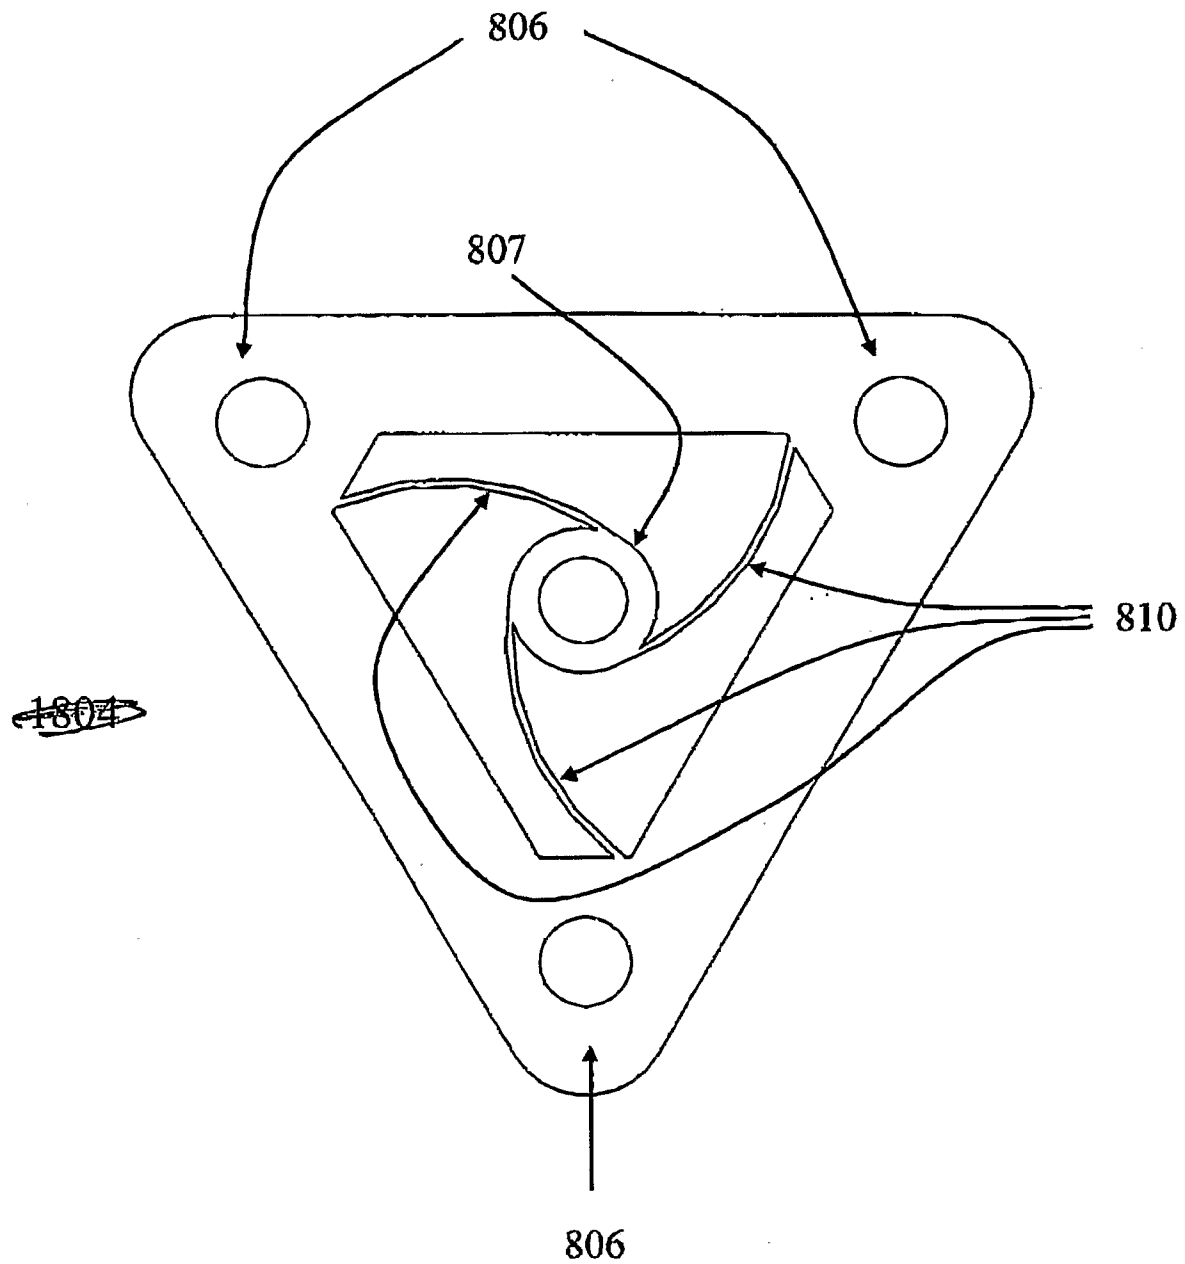


FIG. 18 Planar flexures schemes for assembled flexure scheme 2.

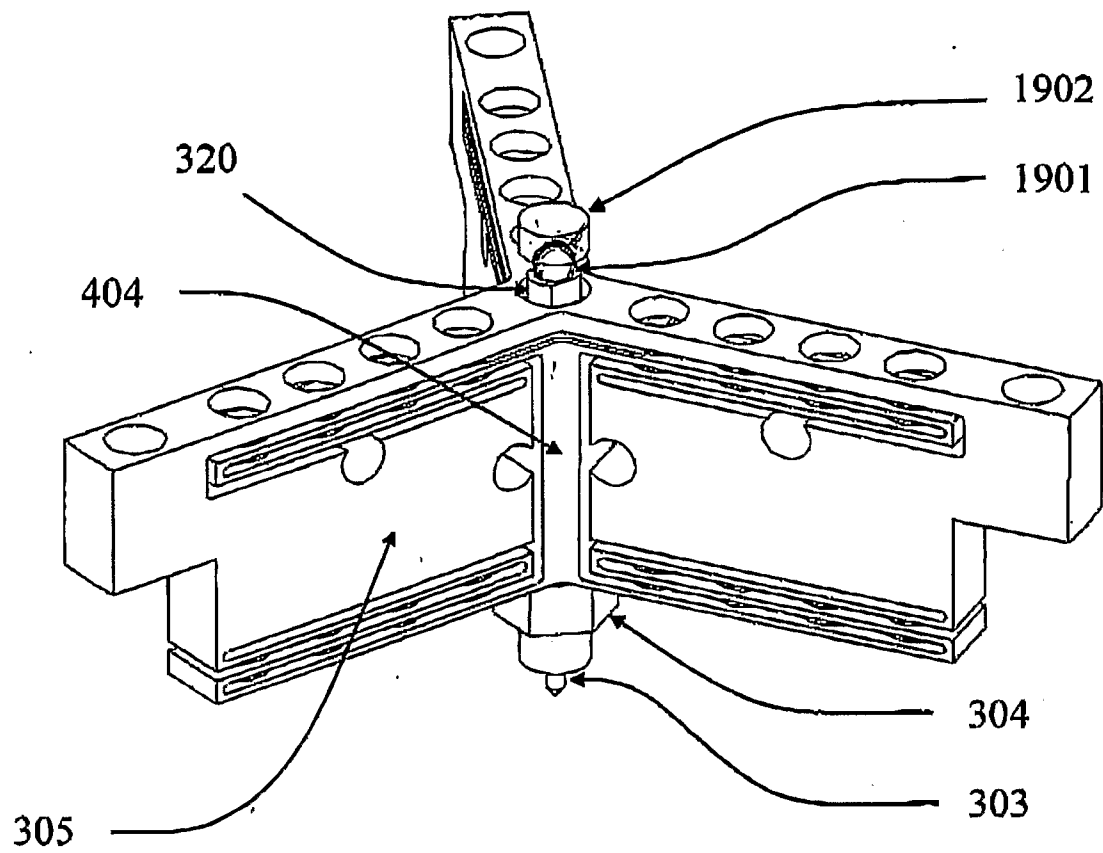

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 07/06379

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G01B 5/28 (2007.10)

USPC - 73/105

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 73/105

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC: 73/104; 977/863, 880 (text search ? see terms below)Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PubWEST (PGPB,USPT,USOC,EPAB,JPAB); DialogPro (Engineering); Google Scholar; Google Patents; FreePatentsOnline
Search Terms: actuator, atomic force microscopy, Bonilla, Cleveland, Flavio, indentation, indenter, leaf spring, nanoindenter, optical, Proksch, Roger, Sauter

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,193,383 A (BURNHAM et al.) 16 March 1993 (16.03.1993), entire document especially FIG. 1, col. 4, ln. 3-7 and 26-32	1
Y	US 5,067,346 A (FIELD) 26 November 1991 (26.11.1991), entire document especially FIG. 2, col. 4, ln. 13 ? col. 5, ln. 16	1

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 November 2007 (25.11.2007)

Date of mailing of the international search report

21 DEC 2007

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774