

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 603 936 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

19.03.1997 Bulletin 1997/12

(51) Int Cl.6: **H05B 37/02**

(21) Application number: **93203499.4**

(22) Date of filing: **14.12.1993**

(54) **Lighting system**

Beleuchtungsanlage

Système d'éclairage

(84) Designated Contracting States:
BE DE ES FR GB IT NL

(30) Priority: **21.12.1992 EP 92204036**

(43) Date of publication of application:
29.06.1994 Bulletin 1994/26

(73) Proprietor: **Philips Electronics N.V.**
5621 BA Eindhoven (NL)

(72) Inventors:
• **Buij, Arnold Willem, c/o Int. Octrooibureau B.V.**
NL-5656 AA Eindhoven (NL)

• **Beij, Marcel, c/o Inter. Octrooibureau B.V.**
NL-5656 AA Eindhoven (NL)

(74) Representative:
Evers, Johannes Hubertus Maria et al
INTERNATIONAAL OCTROOIBUREAU B.V.,
Prof. Holstlaan 6
5656 AA Eindhoven (NL)

(56) References cited:
EP-A- 0 482 680

EP 0 603 936 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The invention relates to a lighting system comprising

- lighting units, each provided with
 - connection terminals for holding at least one lamp,
 - an operating circuit for operating the lamp,
 - a control circuit coupled to the operating circuit for controlling the luminous flux of the lamp,
- control means for influencing the luminous fluxes of the lamps *via* the respective control circuits, comprising
 - first adjustment means for selecting a lighting mode of the lighting system,
 - further adjustment means for changing a desired luminous flux value within a lighting mode at at least one chosen location which is illuminated by at least one lighting unit belonging to a first group of the lighting units.

Such a lighting system is known from European Patent Application EP 482680 A1. A lighting mode of the known lighting system is associated with a certain spatial distribution of the light in the room in which the lighting system is installed. A user of the known lighting system can adapt the illumination of the room in which the lighting system is installed to his activities such as, for example, reading, watching TV, *etc.*, through the choice of a suitable lighting mode. When a certain lighting mode has been set, the first group of the lighting units often supplies a comparatively high luminous flux intended for task lighting at the chosen location, while the luminous fluxes of the other lighting units belonging to a second group supply surround lighting. Often, lighting modes can also be selected attuned to situations in which more than one person uses the room. The different persons will in general perform different task in different locations. In such situations, two or more chosen locations are present in the room, a task lighting being realised in each chosen location which suits the task to be performed in this location. It is desirable for the surround lighting to be harmonized with the task lighting so that the overall illumination of the room makes a pleasant impression on the human eye. This harmonization means that the luminous flux of the surround lighting must be chosen within a certain range, which range depends on the luminous flux value(s) in the chosen location(s). The lighting modes, moreover, are programmable in the known lighting system. This renders it possible to program lighting modes for widely differing rooms and for widely differing tasks, the surround lighting being harmonized with the task lighting. This harmonization, however, is lost when a user changes the desired lumi-

nous flux value in one or several locations by means of the further adjustment means within a given lighting mode without adapting the luminous flux of the second group of lighting units. This means that one of the main advantages of a lighting system with preprogrammed lighting modes may easily be lost when the system offers the user also the possibility of adjusting the luminous flux for task lighting in accordance with his own preference and/or needs.

The invention has for its object *inter alia* to provide a lighting system in which the user has the possibility of adjusting the desired luminous flux value in a chosen location over a wide range according to his preference and/or needs within a given lighting mode, while within this range a good harmonization of the surround lighting with the task lighting is maintained.

According to the invention, a lighting system of the kind mentioned in the opening paragraph is for this purpose characterized in that the control means are further provided with correction means for automatically changing the luminous fluxes of the lighting units belonging to the second group of lighting units in dependence on a change in the desired luminous flux value in the chosen location.

The surround lighting is adapted to the task lighting over a substantial portion of the adjustment range of the task lighting owing to the automatic adaptation of the luminous fluxes of the second group of lighting units upon a change in the desired luminous flux value in the chosen location.

When the lighting system according to the invention is installed in a room where there is no light other than the light generated by the lighting units, a luminous flux substantially equal to the desired luminous flux value is generated in the chosen location substantially exclusively by the relevant lighting unit(s) belonging to the first group. When the luminous flux in the chosen location is not substantially exclusively determined by the luminous flux(es) from lighting units belonging to the first group, however, but also by daylight, it is advantageous to provide the lighting system with a control system for rendering the total luminous flux built up from the luminous flux of daylight and the luminous flux(es) of the lighting units of the first group substantially equal to the desired luminous flux value in the chosen location, independently of the luminous flux of daylight. It is achieved by this that the luminous flux in the chosen location remains substantially constant in spite of fluctuations in the luminous flux of daylight in the chosen location. When all lighting units which can belong to the second group, depending on the selected lighting mode, are also provided with such a control system, the surround lighting is also to a high degree independent of the luminous flux of daylight in every lighting mode. Such a lighting system, however, is comparatively expensive. A less expensive possibility is to provide exclusively those lighting units which can belong to the first group, depending on the selected lighting mode, with a

control system, and at the same time to set the luminous flux of each lighting unit forming part of the second group for the lowest value in the range over which the luminous flux of this lighting unit in a given task lighting provides a surround lighting adapted to this task lighting. When the luminous flux of a lighting unit forming part of the second group is supplemented with daylight, a good harmonization between task lighting and surround lighting will only be lost if the total luminous flux is greater than the upper limit of the range referred to above. This means in practice that the harmonization between task lighting and surround lighting is not disturbed even with a comparatively large contribution of the daylight to the surround lighting.

An advantageous embodiment of a lighting system according to the invention is characterized in that the correction means comprise a memory for storing a chosen relation between the desired luminous flux in the chosen location and the luminous fluxes of the lighting units of the second group for each lighting mode of the lighting system. The correction means can be constructed in a reliable and comparatively simple manner through the use of such a memory. Preferably, the memory comprises, for each lighting unit of the second group and for each desired luminous flux value in each chosen location, information about a luminous flux range of the lighting unit of the second group, and the correction means are provided with means for adjusting the luminous flux of each lighting unit of the second group to a value which belongs to each of the luminous flux ranges of the lighting unit in the case of a change in the desired luminous flux value in a chosen location. When these luminous flux ranges of each of the lighting units of the second group are so chosen that a user experiences the luminous flux of the relevant lighting unit of the second group in the relevant chosen location as pleasant within each range, the adjustment of the luminous flux of the relevant lighting unit of the second group to a value belonging to each range will guarantee that each user of the room experiences this luminous flux as pleasant. When the correction means are also provided with means for determining the lowest luminous flux value of each lighting unit of the second group which forms part of all luminous flux ranges of the lighting unit, the luminous flux of the lighting unit may be set for this lowest value, so that a surround lighting is realised which is well harmonized with the task lighting at a comparatively low power consumption. The advantage described above is also achieved, *i.e.* the harmonization between task lighting and surround lighting is not disturbed even in the case of a comparatively large contribution of daylight to the surround lighting.

A further advantageous embodiment of a lighting system according to the invention is characterized in that the luminous flux of each lighting unit can be set for a number of discrete values. Since the desired luminous flux in the chosen location can be set for a finite number of discrete levels only in this further advantageous em-

bodiment of a lighting system according to the invention, the correction means have to know the desired relation between task lighting and surround lighting only for this finite number of discrete levels, so that the correction means can be of a comparatively simple construction. When the correction means comprise a memory, the desired relation between task lighting and surround lighting may be laid down in this memory in a comparatively simple manner in the form of a table. When the number of discrete levels is chosen to be sufficiently great, the adjustment possibility of the task lighting in practical terms is scarcely more limited than in a lighting system in which the task lighting can be varied continuously. It can also be achieved through a logarithmic increase of the luminous flux with the discrete levels that the change in luminous flux between two consecutive levels is experienced as constant by a user.

Another advantageous embodiment of a lighting system according to the invention is characterized in that the control means comprise first programming means for programming a desired relation between the desired luminous flux in the chosen location and the luminous fluxes of the second group of lighting units for each lighting mode of the lighting system. The chosen relation between task lighting and surround lighting may be adapted to the room in which the lighting system is installed and to the use of this room as a result of this programming possibility. This renders the lighting system highly suitable for use in rooms of differing dimensions and widely differing purposes.

Another embodiment of a lighting system according to the invention, which has very wide application possibilities, is characterized in that the control means comprise further programming means for allocating a lighting unit to one of the groups of lighting units for each lighting mode. These further programming means render it possible to select the lighting units belonging to the first group or to the second group over a wide range at will, for a given total number of lighting units forming part of the lighting system, whereby widely differing lighting modes can be programmed. In addition, these further programming means offer a possibility of adapting the total number of lighting units which form part of the lighting system. The possibilities of adjusting the lighting system optimally to the dimensions and intended use of the space in which it is used, during installation or at a later stage, are additionally widened by these further programming means.

When the control means comprise means for infrared communication between a user and the first and further adjustment means, a user of the lighting system can adjust a lighting mode in a comparatively simple manner and change the luminous flux(es) of one or several lighting units of the first group within a lighting mode. When communication between the user and the first and/or further programming means is also possible through the infrared communication means, a (re)installation of the lighting system by a user can be carried out in a com-

paratively simple manner as well. To ensure that the infrared signals satisfactorily penetrate the entire room in which the lighting system is accommodated, it may be desirable that the infrared communication means include repetition means for receiving infrared signals and for subsequently transmitting said signals in a unchanged form.

It is also advantageous when the control means include means for communication with further control means for controlling the illumination of a group of rooms. This group of rooms may be formed, for example, by the building in which the room containing the lighting system according to the invention is present. Since the control means communicate with the further control means, the lighting mode of the room in which the lighting system according to the invention is present is partly determined by the further control means which control the illumination of the building. The application possibility of the lighting system according to the invention is thus expanded to rooms in buildings in which the lighting is controlled by a "building management system", which name is often given to these further control means.

It is also possible in a comparatively simple manner to couple the control means to a presence detection system for changing the lighting mode of the lighting system through the control means in the case in which nobody has been present in the room for an adjustable time interval. The change in the lighting mode may consist, for example, in switching-off of the lighting system or in switching-on of a lighting mode in which the luminous fluxes of a number of lighting units are substantially zero or comparatively low. It is achieved by this that the lighting system consumes comparatively little electric power when the room is not in use.

Embodiments of the invention will be explained in more detail with reference to a drawing, in which:

Fig. 1 is a diagram of an embodiment of a lighting system according to the invention;

Fig. 2 shows an embodiment of a lighting unit and part of the control means suitable for use in the lighting system shown in Fig. 1; and

Fig. 3 is a diagrammatic picture of a room in which a lighting system according to the invention is present.

In Fig. 1, reference numerals 1, 2, 3 ... n denote lighting units forming part of the lighting system. Each lighting unit is provided with at least one lamp, an operating circuit for operating the lamp, and a control circuit for controlling the luminous flux of the lamp. The lighting units are coupled to control means I for influencing the luminous fluxes of the lamps through the respective control circuits. Control means I comprise first adjustment means II for selecting a lighting mode of the lighting system, further adjustment means III for changing a desired luminous flux value in at least one chosen location illu-

minated by at least one lighting unit belonging to a first group of lighting units within a lighting mode. The control means I also comprise correction means IV for automatic correction of the luminous fluxes of lighting units belonging to a second group of lighting units in dependence on a change in the desired luminous flux value in the chosen location.

The operation of the lighting system shown in Fig. 1 is as follows. When one or several users use a room in which the lighting system is installed, a user will set a lighting mode for the room with the first adjustment means. It is laid down by this selection of the lighting mode which lighting units belong to the first group of lighting units and which to the second group of lighting units. The luminous fluxes of all lighting units of the lighting system are also set for initial values belonging to the selected lighting mode. The lighting units of the first group produce luminous fluxes which are suitable, for example, for performing certain tasks in various chosen locations in the room, while the lighting units belonging to the second group produce luminous fluxes which realise a surround lighting which harmonizes with the task lighting referred to above. When one of the users of the room changes the desired luminous flux value in a chosen location, for example, to a higher value, the luminous fluxes of the lighting units of the second group are automatically changed by the correction means in such a manner that a good harmony between task lighting and surround lighting is maintained.

The portion of a lighting system shown in Fig. 2 is suitable for use in lighting systems according to the invention in which the control means comprise infrared communication means. In Fig. 2, La is a lamp and B is an operating circuit coupled to the lamp La for operating the lamp La. G are terminals for connecting the lighting unit to a supply voltage source. C is a control circuit coupled to the operating circuit B for controlling the luminous flux of the lamp. E is an infrared receiver, D is a circuit for generating electrical signals which the circuit C is capable of interpreting and converting into control signals which are sent to the operating circuit B for changing the luminous flux of the lamp La, if so desired, through a change in the lamp operation. The circuit D comprises a memory M in which the chosen relation between the luminous fluxes of the lighting units of the first group and the luminous fluxes of the lighting units of the second group are laid down for each lighting mode. An initial luminous flux value for each lighting unit is also laid down in the memory M for each lighting mode. The circuit D also comprises a circuit CPU coupled to the memory M for generating the electrical signals mentioned above for influencing the luminous flux of the lamp in dependence on both the information present in the memory and the infrared signals received by the infrared receiver. The circuit CPU, using information contained in the infrared signal, also lays down in the memory which lighting mode was selected by the user(s) of the room and whether the relevant lighting unit belongs

to the first or to the second group of lighting units in this lighting mode. If the lighting unit in question belongs to the first group, the circuit CPU also lays down in the memory which chosen location is illuminated by the lighting unit. The circuit D and the infrared receiver E form part of the first adjustment means in all lighting units; the circuit D and the infrared receiver E form part of the further adjustment means in lighting units which form the first group in the given lighting mode; the circuit D and the infrared receiver E form part of the correction means in lighting units which belong to the second group in the given lighting mode.

A lighting system comprising lighting units and control means as shown in Fig. 2 as well as further means for infrared communication operates as follows. When a user enters the room in which such a lighting system according to the invention is installed, the user can select a lighting mode for the room with the further means for infrared communication, which may comprise, for example, an IR remote control. The signals transmitted by the IR remote control during this are received by the infrared receivers E of the control means and, as explained above, it is laid down by each circuit CPU in the memory coupled to the circuit CPU on the basis of the IR signals which chosen location is illuminated by the relevant lighting unit in the given lighting mode, and whether the relevant lighting unit belongs to the first or to the second group. The circuit CPU also sets the luminous flux of the relevant lighting unit for the initial value belonging to the lighting mode. After selecting a lighting mode with the first adjustment means, the user may change the desired luminous flux in a chosen location by means of the further adjustment means, which are also incorporated in the IR remote control. The IR signals corresponding to this change are received by all infrared receivers E. The circuits CPU coupled to lighting units of the first group which do not illuminate the relevant chosen location can learn from the memory M that the information contained in the IR signals is not aimed at these lighting units, and they keep the luminous fluxes of these lighting units unchanged. The circuits CPU coupled to lighting units of the first group which do illuminate the relevant chosen location learn from the coupled memory M that the information contained in the IR signals is aimed at these lighting units, and increase or reduce the luminous fluxes of the lighting units in accordance with the user's wishes. The circuits CPU coupled to lighting units belonging to the second group learn from the memory that a change (if any) in the luminous fluxes of these latter lighting units is to be derived both from the desired luminous flux value in the chosen location changed by means of the infrared signals and from the relation between the luminous fluxes in the chosen locations on the one hand and the luminous fluxes of lighting units belonging to the second group on the other hand as laid down in the memory M.

A number of tables are stored in each memory M. The tables are arranged in series, the number of series

being equal to the number of lighting modes in which the lighting unit coupled to the memory belongs to the second group. The number of tables in each series is equal to the number of chosen locations present in the room in the relevant lighting mode. In the first table of the first series of tables, each desired luminous flux value in a first chosen location is related to a first luminous flux range of the relevant lighting unit forming part of the second group of lighting units. Within this first range, the luminous flux of the relevant lighting unit is felt to be a pleasant surround lighting by a user present in the first chosen location for the given task lighting which is realised by the luminous flux in the first chosen location. The second table of the first series comprises a second luminous flux range of the relevant lighting unit within which this luminous flux is felt to be pleasant by a user present in a second chosen location for the same lighting mode for each desired luminous flux value in this second chosen location. There are a number of luminous flux values of the relevant lighting unit which lie both within the first range and within the second range for given luminous flux values at the first chosen location and at the second chosen location. If there are no more than two chosen locations in the room for the given lighting mode, the luminous flux of the relevant lighting unit belonging to the second group is set for one of these values by the circuit CPU *via* the control circuit C. If the lowest luminous flux value still forming part of both ranges is set by the circuit CPU, the contribution to the surround lighting formed by the luminous flux of the relevant lighting unit belonging to the second group is felt to be pleasant both by a user present in the first chosen location and by a user present in the second chosen location, while at the same time the power consumed by the lighting unit is comparatively low. If there are K chosen locations in the room in a selected lighting mode, the first series of tables comprises K tables which each contain a range for each desired luminous flux value at one of the K chosen locations within which the luminous flux of the relevant lighting unit is felt to be pleasant by a user present in the chosen location. The luminous flux of the relevant lighting unit of the second group is set for a value lying within all K ranges by the circuit CPU for given luminous fluxes at the chosen locations.

Another possibility is that each table in each series contains a value of the luminous flux of the relevant lighting unit only for one value of the desired luminous flux in the relevant chosen location. This luminous flux value of the relevant lighting unit is the lowest value for the luminous flux of the relevant lighting unit which lies within the range within which a user in the chosen location experiences the luminous flux of the relevant lighting unit as pleasant in the chosen location for a given luminous flux in the chosen location. All other values of the luminous flux of the relevant lighting unit for other luminous flux values in the chosen location are determined by the circuit CPU in that both the value of the desired luminous flux in the relevant chosen location and the ac-

comparing luminous flux value of the relevant lighting unit are multiplied by the same factor. For a given setting of the desired luminous flux values in the chosen locations in a certain lighting mode, the luminous flux of each lighting unit of the second group is set by the circuit CPU for the highest value among the values which the circuit CPU calculates by means of the tables in the series. Since the values calculated by the circuit CPU by means of the tables in the series form the bottom limits of ranges within which the luminous flux of the relevant lighting unit of the second group is felt to be pleasant by the various users, it is practically always found in practice that the highest bottom limit falls within all ranges. When a lighting mode is selected with only one chosen location in such a lighting system, the luminous fluxes of the lighting units of the second group are changed by the same factor as the one by which a user changes the desired luminous flux value in the chosen location. When a lighting mode with more than one chosen location is selected, a change in the desired luminous flux in a chosen location will not always lead to a change in the luminous flux of each and every lighting unit of the second group because it is possible that the highest value selected by the circuit CPU remains unchanged. It is found in practice that the luminous fluxes of the lighting units of the second group are felt to be well attuned to the task lighting by every user of the room, also in lighting modes with more than one chosen location.

In Fig. 3, IL1 to IL7 denote lighting units. These lighting units are constructed as indicated in Fig. 2. Each lighting unit is coupled to an infrared receiver E and a circuit D, as shown in Fig. 2. The luminous flux of each of these lighting units can be set for a number of discrete values. In the lighting mode set, IL3 and IL4 are lighting units associated with task lighting, and thus form the first group of lighting units. IL1, IL2, IL5, IL6 and IL7 form the second group of lighting units associated with surround lighting. RC1, RC2 and RC3 are means for generating infrared signals, forming part of control means for influencing the luminous fluxes of the lamps through the respective control circuits. RC1 together with the infrared receivers E and the circuit D forms first adjustment means for selecting a lighting mode in the room. RC1 also comprises programming means P1 for programming the desired relation between the desired luminous fluxes in the chosen locations and the luminous fluxes of the lighting units forming part of the second group for each lighting mode of the lighting system, via the infrared receivers E and the circuits CPU, and comprises programming means P2 for assigning a lighting unit to one of the groups of lighting units. RC2 and RC3 together with the circuits D and the infrared receivers E, which are coupled to the lighting units of the first group, form the further adjustment means for changing the desired luminous flux value of one or several lighting units of the first group within a lighting mode. RC2 and RC3 together with the circuits D and infrared receivers E, which are coupled to the lighting units of the second group, in this

embodiment form the correction means. The surfaces of the two tables present in the room and shown in Fig. 3 in this embodiment form the two chosen locations for the adjusted lighting mode. LMC1 and LMC2 are photometric cells which form part of a control system for keeping the total luminous flux at the desired level, which luminous flux is built up from the luminous flux of daylight and the luminous flux thrown by the lighting units associated with the task lighting onto the surfaces of the two tables present in the room and shown in Fig. 2, independently of the luminous flux of daylight. PD is a presence detector which forms part of a presence detection system coupled to the control means for changing the lighting mode of the lighting system through the control means in the case in which nobody has been in the room for an adjustable time interval. LCN is a component of the system which is provided with repetition means for receiving infrared signals and subsequently transmitting them in an unchanged form. In addition, LCN comprises means for communicating with further control means for controlling the lighting of a group of rooms. This communication is depicted in Fig. 3 by a double-sided arrow touching the component LCN.

The operation of the lighting system shown in Fig. 3 is as follows. When a certain lighting mode has been selected with the first adjustment means, the lighting units IL1 to IL7 provide a spatial distribution of light associated with the relevant lighting mode. Luminous fluxes associated with task lighting are thrown onto the two table surfaces by the respective lighting units IL3 and IL4. As long as there are users in the room, the presence detector maintains the lighting mode of the lighting system. In addition to that, the control system comprising the photometric cells LMC1 and LMC2 controls the total luminous flux on each table surface at the desired value by increasing the luminous flux of lighting unit IL3 and of lighting unit IL4 when the luminous flux of daylight decreases, and by decreasing the luminous flux of lighting unit IL3 and of lighting unit IL4 when the luminous flux of daylight increases. The luminous fluxes of the lighting units IL1, IL2, IL5, IL6, and IL7, which form the second group of lighting units, are so set that a surround lighting felt to be pleasant by both users is realised. If the desired value for the total luminous flux on a table surface is changed by a user with the further adjustment means RC2 or RC3, the luminous flux of lighting unit IL3 or IL4 is changed. The circuits RCU then also adjust the luminous fluxes of the lighting units IL1, IL2 and IL5 to IL7 to a value fitting the changed task lighting through reference to the tables stored in the memories M. A relation between the task lighting and the surround lighting can be set upon (re)installation with the programming means P1 so as to fit the relevant task and the dimensions and arrangement of the room. It can be laid down with the programming means P2 which lighting units serve for task lighting and thus form part of the first group of lighting units, and which lighting units serve for surround lighting and thus form part of the second group.

The number of lighting units of the first or the second group can also be increased or reduced with the programming means P2.

Claims

1. A lighting system comprising

- lighting units (1-N), each provided with
 - connection terminals (G) for holding at least one lamp (LA),
 - an operating circuit (B) for operating the at least one lamp (LA),
 - a control circuit (C) coupled to the operating circuit (B) for controlling a luminous flux of the at least one lamp (LA),
- control means (I) for influencing the luminous flux of the at least one the lamp *via* the respective control circuit (C), comprising
 - first adjustment means (II) for selecting a lighting mode of the lighting system,
 - further adjustment means (III) for changing a desired luminous flux value within said lighting mode at at least one chosen location which is illuminated by at least one lighting unit belonging to a first group of the lighting units (1-N), characterized in that the control means (I) are further provided with correction means (IV) for automatically changing the luminous fluxes of the lighting units belonging to a second group of lighting units in dependence on a change in the desired luminous flux value in the chosen location.

2. A lighting system as claimed in Claim 1, characterized in that the lighting system is also provided with a control system for rendering the total luminous flux built up from the luminous flux of daylight and from the luminous fluxes of the lighting units of the first group equal to the desired luminous flux value in a chosen location in a room, independently of the luminous flux of daylight.

3. A lighting system as claimed in any one of the preceding Claims, characterized in that the correction means (IV) comprise a memory (M) for storing a chosen relation between the desired luminous flux in the chosen location and the luminous fluxes of the lighting units of the second group for each lighting mode of the lighting system.

4. A lighting system as claimed in Claim 3, characterized in that the memory (M) comprises, for each

lighting unit of the second group and for each desired luminous flux value in each chosen location, information about a luminous flux range of the lighting unit of the second group, and in that the correction means (IV) are provided with means for adjusting the luminous flux of each lighting unit of the second group to a value which belongs to each of the luminous flux ranges of the lighting unit in the case of a change in the desired luminous flux value in a chosen location.

5. A lighting system as claimed in Claim 4, characterized in that the correction means (IV) are provided with means for determining the lowest luminous flux value of each lighting unit of the second group which falls within all luminous flux ranges of the lighting unit.

6. A lighting system as claimed in any one of the preceding Claims, characterized in that the luminous flux of each lighting unit can be set for a number of discrete values.

7. A lighting system as claimed in any one of the preceding Claims, characterized in that the control means (I) comprise first programming means for programming the desired relation between the desired luminous flux in the chosen location and the luminous fluxes of the second group of lighting units for each lighting mode of the lighting system.

8. A lighting system as claimed in any one of the preceding Claims, characterized in that the control means (I) comprise further programming means for allocating a lighting unit to one of the groups of lighting units.

9. A lighting system as claimed in any one of the preceding Claims, characterized in that the control means (I) comprise infrared communication means (E).

10. A lighting system as claimed in Claim 9, characterized in that the infrared communication means (E) include repetition means for receiving infrared signals and for subsequently transmitting said signals in an unchanged form.

11. A lighting system as claimed in any one of the preceding Claims, characterized in that the control means (I) include means for communication with further control means for controlling the illumination of a group of rooms.

12. A lighting system as claimed in any one of the preceding Claims, characterized in that the lighting system further comprising a presence detection system coupled to the control means (I) for chang-

ing the lighting mode of the lighting system through the control means in the case in which nobody has been present in the room for an adjustable time interval.

Patentansprüche

1. Beleuchtungsanlage mit

- Beleuchtungseinheiten (1-N), mit je
- Verbindungsklemmen (G) zum Halten wenigstens einer Lampe (La),
- einer Bedienungsschaltung (B) zum Betreiben wenigstens einer Lampe (La),
- einer Regelschaltung (C), gekoppelt mit der Bedienungsschaltung (B) zum Regeln eines Lichtstroms der wenigstens einen Lampe (La),
- Regel mitteln (I) zum Beeinflussen des Lichtstroms der wenigstens einer Lampe über die betreffende Regelschaltung (C), mit
- ersten Einstellmitteln (II) zum Wählen einer Beleuchtungsart der Beleuchtungsanlage,
- weiteren Einstellmitteln (III) zum Ändern eines gewünschten Lichtstromwertes in der Beleuchtungsart an wenigstens einer gewählten Stelle, die von wenigstens einer Beleuchtungseinheit einer ersten Gruppe von Beleuchtungseinheiten (1-N) beleuchtet wird,

dadurch gekennzeichnet, daß die Regelmittel (I) außerdem mit Korrekturmitteln (IV) zum automatischen Ändern der Lichtströme der Beleuchtungseinheiten aus einer zweiten Gruppe von Beleuchtungseinheiten abhängig von einer Änderung im gewünschten Lichtstromwert an der gewählten Stelle vorgesehen werden.

2. Beleuchtungsanlage nach Anspruch 1, dadurch gekennzeichnet, daß die Beleuchtungsanlage ebenfalls mit einer Regelanlage zum Ermöglichen des Aufbaus des Gesamtlichtstroms aus dem Lichtstrom des Tageslichts und aus den Lichtströmen der Beleuchtungseinheiten der ersten Gruppe gleich dem gewünschten Lichtstromwert an der gewählten Stelle in einem Raum unabhängig vom Lichtstrom des Tageslichts vorgesehen ist.

3. Beleuchtungsanlage nach einem der vorangehenden Ansprüche, dadurch gekennzeichnet, daß die Korrekturmittel (IV) einen Speicher (M) zum Speichern eines gewählten Verhältnisses zwischen dem gewünschten Lichtstrom an der gewählten Stelle und den Lichtströmen der Beleuchtungseinheiten der zweiten Gruppe für jede Beleuchtungsart der Beleuchtungsanlage enthalten.

4. Beleuchtungsanlage nach Anspruch 3, dadurch ge-

kennzeichnet, daß der Speicher (M) für jede Beleuchtungseinheit der zweiten Gruppe und für jeden gewünschten Lichtstromwert an jeder gewählten Stelle Information über einen Lichtstrombereich der Beleuchtungseinheit der zweiten Gruppe enthält, und daß die Korrekturmittel (IV) mit Mitteln zum Einstellen des Lichtstroms jeder Beleuchtungseinheit der zweiten Gruppe auf einen Wert vorgesehen sind, der zu jedem der Lichtstrombereiche der Beleuchtungseinheit bei einer Änderung im gewünschten Lichtstromwert an einer gewählten Stelle gehört.

5. Beleuchtungsanlage nach Anspruch 4, dadurch gekennzeichnet, daß die Korrekturmittel (IV) mit Mitteln zum Bestimmen des niedrigsten Lichtstromwertes jeder Beleuchtungseinheit der zweiten Gruppe vorgesehen sind, der in allen Lichtstrombereichen der Beleuchtungseinheit fällt.

6. Beleuchtungsanlage nach einem oder mehreren der vorangehenden Ansprüche, dadurch gekennzeichnet, daß der Lichtstrom jeder Beleuchtungseinheit auf eine Anzahl diskreter Werte einstellbar ist.

7. Beleuchtungsanlage nach einem oder mehreren der vorangehenden Ansprüche, dadurch gekennzeichnet, daß die Regelmittel (I) erste Programmiermittel zum Programmieren des gewünschten Verhältnisses zwischen dem gewünschten Lichtstrom an der gewählten Stelle und den Lichtströmen der zweiten Gruppe der Beleuchtungseinheiten für jede Beleuchtungsart der Beleuchtungsanlage enthalten.

8. Beleuchtungsanlage nach einem oder mehreren der vorangehenden Ansprüche, dadurch gekennzeichnet, daß die Regelmittel (I) weitere Programmiermittel zum Zuordnen einer Beleuchtungseinheit zu einer der Gruppen von Beleuchtungseinheiten enthalten.

9. Beleuchtungsanlage nach einem oder mehreren der vorangehenden Ansprüche, dadurch gekennzeichnet, daß die Regelmittel (I) Infrarotkommunikationsmittel (E) enthalten.

10. Beleuchtungsanlage nach Anspruch 9, dadurch gekennzeichnet, daß die Infrarotkommunikationsmittel (E) Wiederholungsmittel zum Empfangen infraroter Signale und zum anschließenden Übertragen der Signale in einer ungeänderten Form enthalten.

11. Beleuchtungsanlage nach einem oder mehreren der vorangehenden Ansprüche, dadurch gekennzeichnet, daß die Regelmittel (I) Mittel zum Kommunizieren mit weiteren Regelmitteln zum Regeln

der Beleuchtung einer Gruppe von Räumlichkeiten enthalten.

12. Beleuchtungsanlage nach einem oder mehreren der vorangehenden Ansprüche, dadurch gekennzeichnet, daß die Beleuchtungsanlage außerdem eine Anwesenheitsdetektoranlage enthält, die mit den Regelmitteln (I) zum Ändern der Beleuchtungsart der Beleuchtungsanlage über die Regelmittel gekoppelt ist, wenn ein einstellbares Zeitintervall lang im Raum keiner anwesend war.

Revendications

1. Système d'éclairage comprenant

- des unités d'éclairage (1-N) munies chacunes
 - de bornes de connexion (G) pour maintenir au moins une lampe (LA),
 - d'un circuit de fonctionnement (B) pour le fonctionnement d'au moins une lampe (LA),
 - d'un circuit de commande (C) couplé aux circuits de fonctionnement (B) pour commander un flux lumineux d'au moins une lampe (LA), - de moyens de réglage (I) pour influencer le flux lumineux d'au moins une lampe par l'intermédiaire du circuit de réglage respectif (C), comprenant
 - des premiers moyens d'ajustement (II) pour sélectionner un mode d'éclairage du système d'éclairage
 - d'autres moyens d'ajustement (III) pour changer une valeur de flux lumineux désirée dans ledit mode d'éclairage à au moins un endroit choisi qui est éclairé par au moins une unité d'éclairage appartenant à un premier groupe des unités d'éclairage (1-N), caractérisé en ce que les moyens de réglage (I) sont en outre munis de moyens de correction (IV) pour changer automatiquement le flux lumineux des unités d'éclairage appartenant à un deuxième groupe d'unités d'éclairage en dépendance d'un changement se produisant dans la valeur du flux lumineux désirée à l'endroit choisi.

2. Système d'éclairage selon la revendication 1, caractérisé en ce que le système d'éclairage est également muni d'un système de réglage pour rendre le flux lumineux total composé à partir du flux lumineux de la lumière du jour et à partir des flux lumineux des unités d'éclairage du premier groupe égal à la valeur de flux lumineux désirée à l'endroit choisi dans une chambre, indépendamment du flux lumi-

neux de la lumière du jour.

3. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que les moyens de correction (IV) comportent une mémoire (M) pour le stockage d'une relation choisie entre le flux lumineux désiré à l'endroit choisi et les flux lumineux des unités d'éclairage du deuxième groupe pour chaque mode d'éclairage du système d'éclairage.

4. Système d'éclairage selon la revendication 3, caractérisé en ce que la mémoire comporte pour chaque unité d'éclairage du deuxième groupe et pour chaque valeur de flux lumineux désirée à chaque endroit choisi de l'information concernant une gamme de flux lumineux de l'unité d'éclairage du deuxième groupe et en ce que les moyens de correction (IV) sont munis de moyens pour l'ajustement du flux lumineux de chaque unité d'éclairage du deuxième groupe à une valeur qui appartient à chacune des gammes de flux lumineux de l'unité d'éclairage dans le cas d'un changement de la valeur de flux lumineux désirée à un endroit choisi.

5. Système d'éclairage selon la revendication 4, caractérisé en ce que les moyens de correction (IV) sont munis de moyens pour déterminer la valeur de flux lumineux la plus basse de chaque unité d'éclairage du deuxième groupe qui fait partie de toutes les gammes de flux lumineux de l'unité d'éclairage.

6. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que le flux lumineux de chaque unité d'éclairage peut être établi à plusieurs valeurs discrètes.

7. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que les moyens de réglage (I) comprennent des premiers moyens de programmation pour programmer la relation désirée entre le flux lumineux désiré à l'endroit choisi et les flux lumineux du deuxième groupe d'unités d'éclairage pour chaque mode d'éclairage du système d'éclairage.

8. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que les moyens de réglage (I) comprennent d'autres moyens de programmation pour incorporer une unité d'éclairage dans l'un des groupes d'unités d'éclairage.

9. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que les moyens d'éclairage (I) comportent des moyens pour la communication infrarouge (E).

10. Système d'éclairage selon la revendication 9, caractérisé en ce que les moyens de communication

infrarouge (E) comprennent des moyens de répétition pour la réception de signaux infrarouge et pour émettre ensuite lesdits signaux sous une forme inchangée.

5

11. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que les moyens de réglage (E) comprennent des moyens pour la communication avec d'autres moyens de réglage pour régler l'éclairage d'un groupe de chambres.

10

12. Système d'éclairage selon l'une des revendications précédentes, caractérisé en ce que le système d'éclairage comporte en outre un système de détection de présence couplé aux moyens de réglage (I) pour changer le mode d'éclairage d'un système d'éclairage par l'intermédiaire des moyens de réglage dans le cas où personne n'est présente dans la chambre pendant un intervalle de temps réglable.

15

20

25

30



35

40

45

50

55

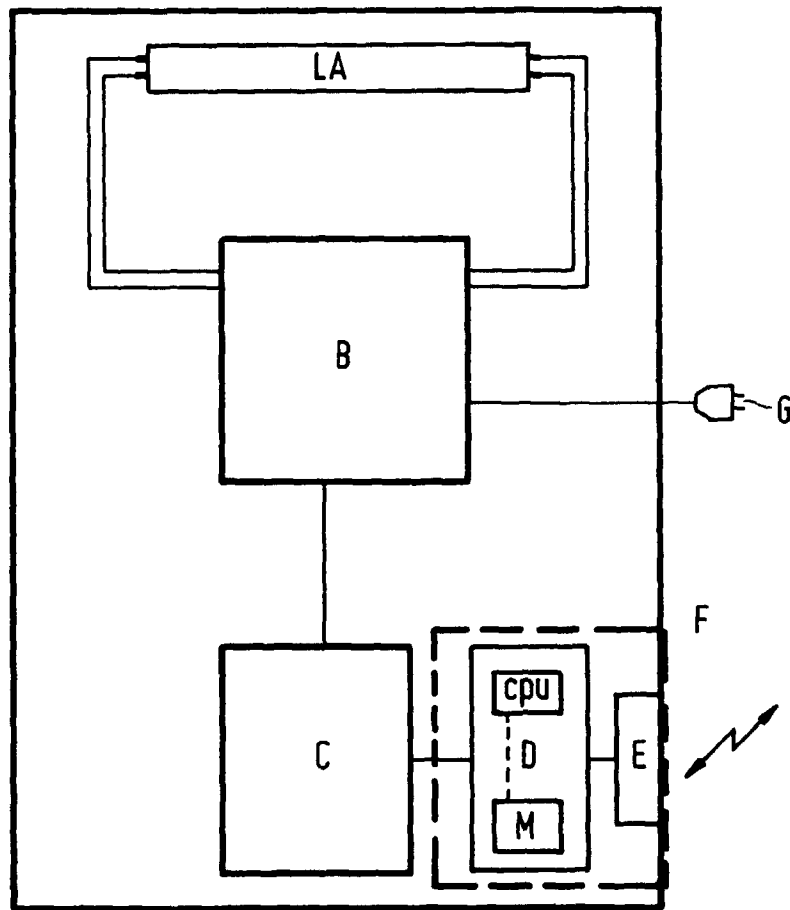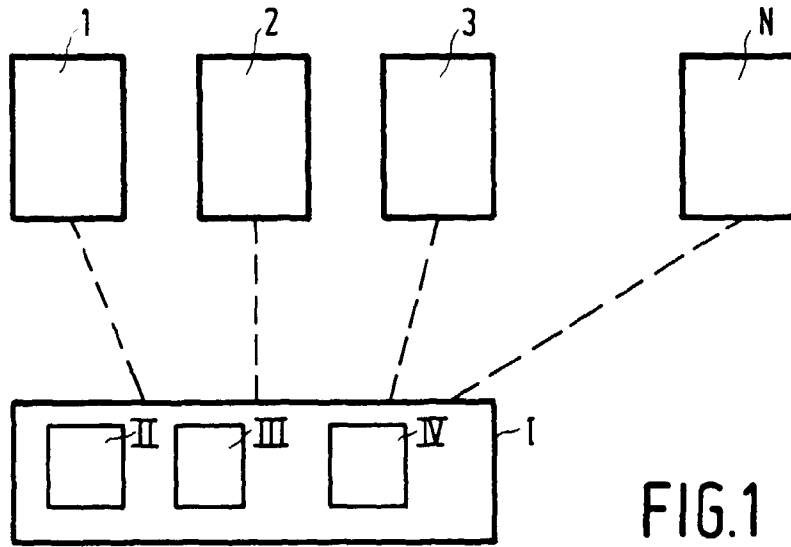

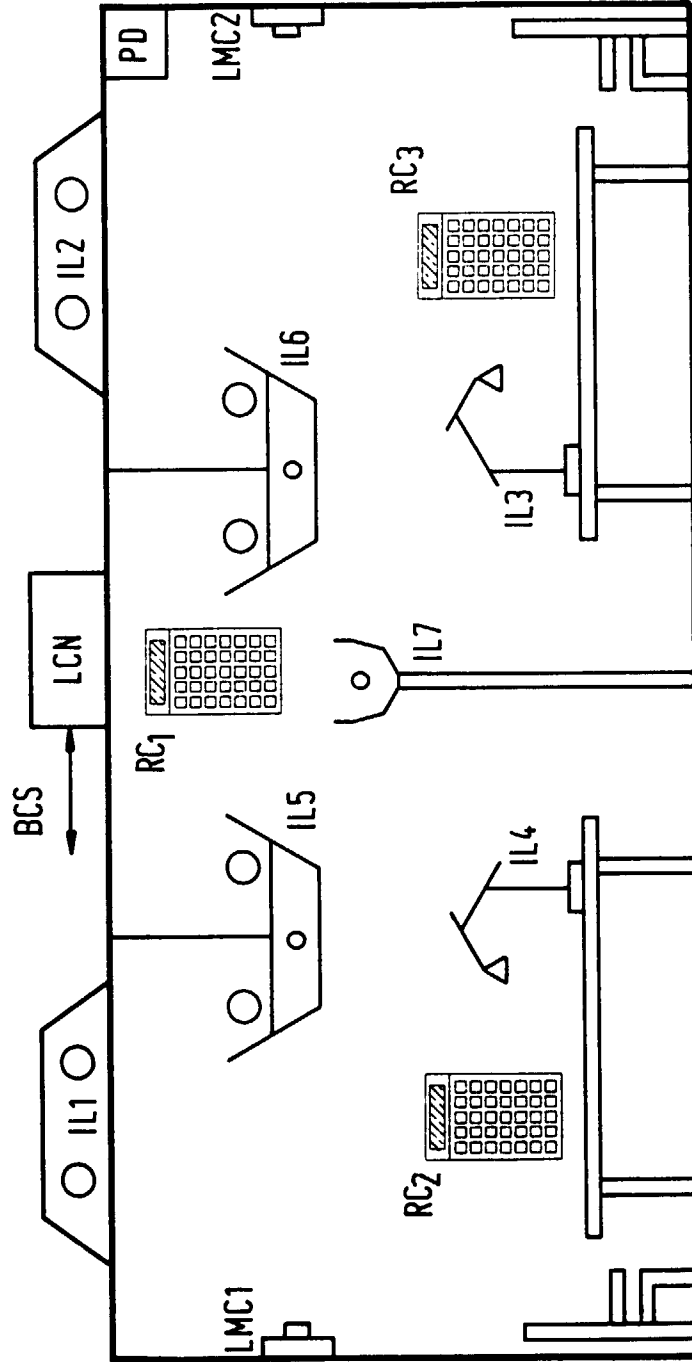


FIG. 3