



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.03.2014 Bulletin 2014/10

(51) Int Cl.:
B24B 23/03 (2006.01)

(21) Application number: **13176389.8**

(22) Date of filing: **12.07.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **Moerbeek, Ruben Jan**
4812 GR BREDA (NL)
• **Schoutens, Bas**
2623 PC Delft (NL)

(30) Priority: **13.07.2012 NL 1039725**

(74) Representative: **Haan, Raimond et al**
Arnold & Siedsma
Sweelinckplein 1
2517 GK Den Haag (NL)

(71) Applicant: **ROBERT BOSCH GMBH**
70469 Stuttgart-Feuerbach (DE)

(54) **Device for processing a workpiece**

(57) The present invention relates to a device(1) for processing a workpiece, comprising a housing (2), a drive arranged in the housing for driving a drive shaft (4) relative to the housing, a first coupling part (6) connected directly or indirectly to the drive shaft and provided with a toothing (8), and a first workpiece processing part (10) which is provided with a second coupling part (12) connectable in engaging manner to the first coupling part (6), and wherein the second coupling part (12) is provided for this purpose with a toothing (14) co-acting with the toothing (8) of the first coupling part (6), wherein the toothing (8) of the first coupling part (6) and the toothing (14) of the second coupling part (12) are mutually engageable crown gears, and wherein the device further comprises first clamping means (16) which are configured to clamp the crown gears (8, 14) of the first and the second coupling part (6, 12) in engaging contact against each other and to thus form a self-centering clearance-free coupling.


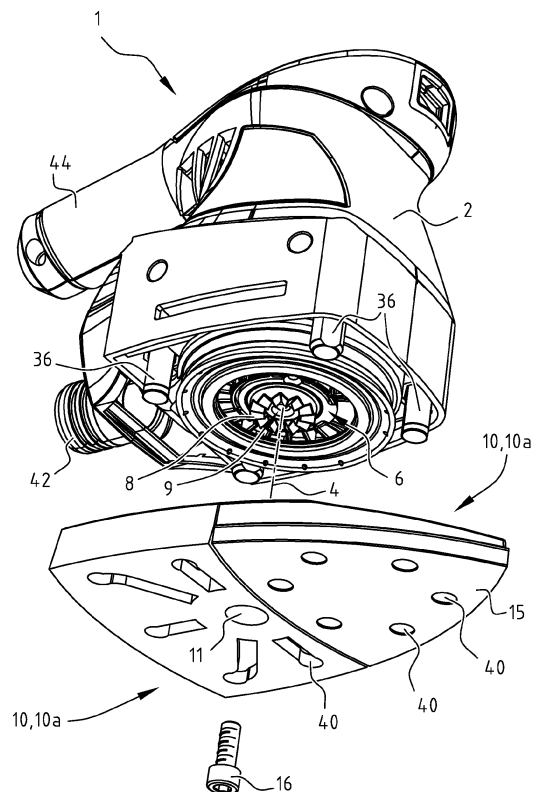


FIG. 1

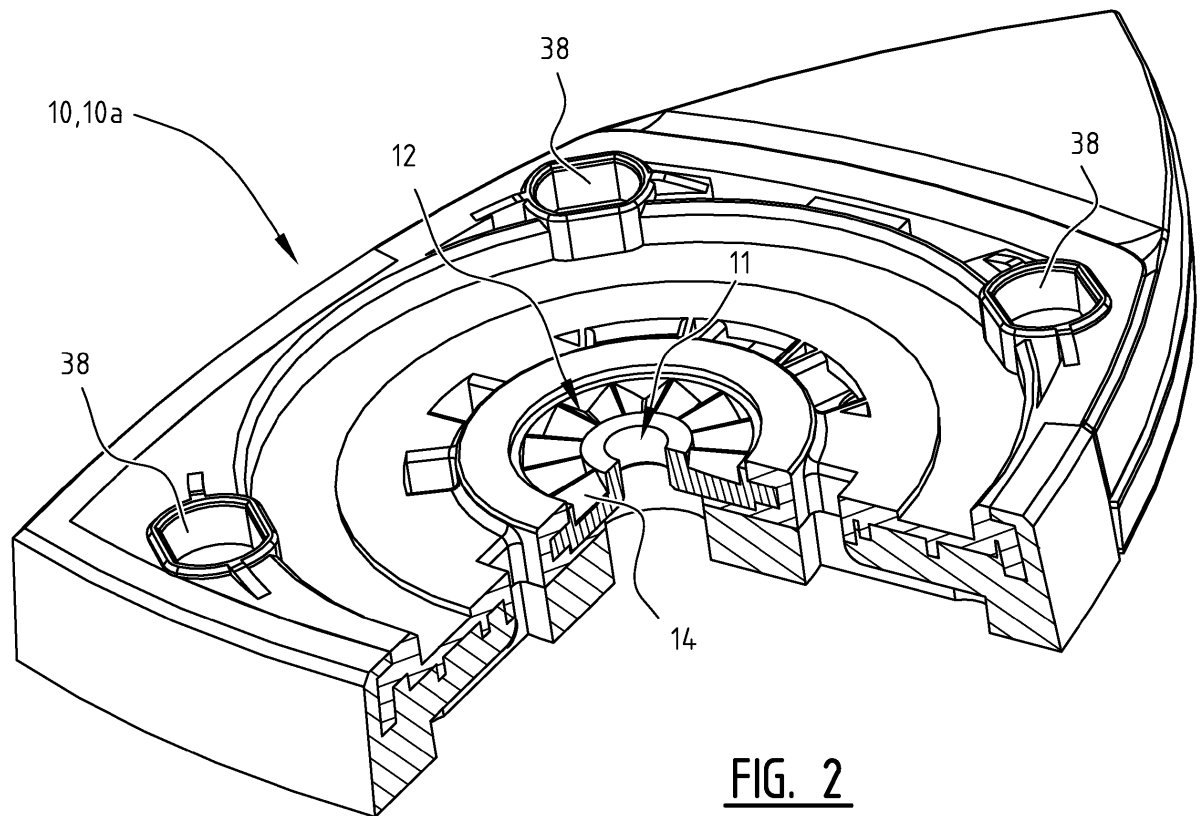

Description

[0001] The invention relates to a device for processing a workpiece.

[0002] Known devices for processing a workpiece to which the invention relates are for instance sanding machines and so-called multi-tools.

[0003] In processing devices the coupling between a drive shaft driven by a drive and a workpiece processing part can be embodied as a pin-hole connection.

[0004] A technically obvious solution is to then arrange the pins on the machine side, which can however result in hazardous situations if the machine is driven without a workpiece processing part being coupled thereto. The rotating pins can then cause serious injury.

[0005] In addition, some clearance between the pins and the holes of the pin-hole connection will be required for the purpose of making the coupling wherein the holes are inserted into the pins. Certainly in the case of oscillating movements such as made by a multi-tool, use will be made of this clearance in each movement cycle. Use of the processing device will therefore result in an increase in the clearance.

[0006] Even with sufficient clearance between the pins and the holes it requires some effort on the part of a user to connect all pins and holes. Positioning with an exact alignment is usually awkward and an undesirable use of time. This positioning process is made even more difficult when a sanding machine has flexible connecting legs which pre-align, and thereby bias to some extent, the connection between the processing machine and the workpiece processing part. Such flexible connecting legs ensure that the workpiece processing part makes small circular movements within a limited range.

[0007] An object of the present invention is to provide a device for processing a workpiece wherein the stated drawbacks do not occur, or at least do so to lesser extent.

[0008] Said object is achieved with the device for processing a workpiece according to the invention, the device comprising:

- a housing;
- a drive arranged in the housing for driving a drive shaft relative to the housing;
- a first coupling part connected directly or indirectly to the drive shaft and provided with a toothing;
- a first workpiece processing part which is provided with a second coupling part connectable in engaging manner to the first coupling part, and wherein the second coupling part is provided for this purpose with a toothing co-acting with the toothing of the first coupling part;
- wherein the toothing of the first coupling part and the toothing of the second coupling part are mutually engageable crown gears; and
- wherein the device further comprises first clamping means which are configured to clamp the crown gears of the first and the second coupling part in

engaging contact against each other and to thus form a self-centering clearance-free coupling.

[0009] In contrast with a pin-hole connection, the first coupling part and the second coupling part are both provided with a toothing. These toothings of the two coupling parts co-act with each other in order to realize a coupling between the two coupling parts.

[0010] It is noted that a direct connection to the drive also comprises embodiments with an intermediate connection mounted between the drive motor and drive shaft, for instance via an eccentric.

[0011] The first coupling part can be connected directly as well as indirectly to the drive shaft. In the case of a direct connection the coupling part is connected directly to the drive shaft. A connection is indirect when a conventional connection is for instance applied between the drive shaft and a base plate, wherein a first coupling part provided with a toothing is arranged on the base plate. In the indirect embodiment with a toothing according to the invention the workpiece processing part is coupled to a part driven by the drive, and not directly to the drive itself.

[0012] A crown gear, also referred to as crown gear wheel, or simply crown wheel, has a disc-like surface provided with a toothing. The tooth shape is preferably helical, whereby the toothing is narrower on the inner side than on the outer side. Although crown gears are generally used to generate a pulsating movement, for instance in a hammer drill, according to the invention crown gears are clamped against each other and applied to transmit a rotating movement between parallel shafts. A self-centering and clearance-free coupling is in this way provided.

[0013] Such a self-centering, clearance-free coupling can also be obtained with a crown gear consisting of a surface provided with a toothing, wherein the toothing is not helical but wherein teeth lie at an angle. Self-centering is provided by the angle between the teeth.

[0014] If desired, the angles between the teeth can vary in order to impose a specific coupling position. If on the other hand the teeth are distributed at equal angles, multiple coupling positions are then possible.

[0015] The clamping means ensure that the crown gears of both coupling parts are clamped against each other, whereby an engaging contact is brought about between the co-acting crown gears.

[0016] In clamped state two crown gears connectable in clamping manner in such a way have a large contact surface over which forces can be transmitted.

[0017] When two co-acting crown gears are placed in contact with each other, there moreover occurs a self-positioning alignment. The positioning process is hereby considerably simplified, particularly when the connection between processing machine (sanding machine) and workpiece processing part (for instance a sanding plate or sanding foot) is provided with flexible connecting legs which bias the coupling between the two parts to some

extent.

[0018] A crown gear - in contrast with the pin side of a pin-hole connection - further has a gradually upward and downward sloping form. The risk of a user being injured by an unguarded rotating crown gear is hereby many times smaller than the risk of a pin connection resulting in injury.

[0019] According to a further preferred embodiment, the first workpiece processing part is provided with a third coupling part with a toothing, and an attachment workpiece processing part is connectable in engaging manner to the first workpiece processing part, wherein the workpiece processing part is provided for this purpose with a fourth coupling part with a toothing which co-acts with the toothing of the third coupling part.

[0020] The first workpiece processing part, which is itself provided with a second coupling part with which it is connectable in engaging manner to a first coupling part connected directly and/or indirectly to the drive shaft, is provided according to this further embodiment with a third coupling part to which an attachment workpiece processing part is connectable. Because different types of attachment workpiece processing parts are connectable to the workpiece processing part, such as a finger-like accessory or a contour-following accessory, the applicability of a workpiece processing device is considerably increased. Using a (crown) gear according to the invention such an attachment workpiece processing part can moreover be positioned in different positions, this further increasing flexibility.

[0021] According to yet another preferred embodiment, the toothing of the third coupling part and the toothing of the fourth coupling part are mutually engageable crown gears, and the device further comprises second clamping means configured to clamp the crown gears of the third and the fourth coupling part in engaging contact against each other.

[0022] The coupling according to the invention, wherein co-acting toothings are applied between two coupling parts, can thus be applied on the one hand for connection between a first coupling part, which is connected directly or indirectly to a drive shaft, and a workpiece processing part. Such a coupling can on the other hand be applied between a workpiece processing part and a further attachment workpiece processing part.

[0023] Although it is recommended to apply a connection according to the invention for the coupling between the drive shaft and the first workpiece processing part, it is also possible to envisage a conventional connection being applied for this purpose. It is noted for the sake of completeness that the third and fourth coupling part described in the application in that case function as first and second coupling part. The second clamping means then function as first clamping means.

[0024] According to yet another preferred embodiment, the clamping means configured to clamp the crown gears in engaging manner against each other are a bayonet connection, screw connection, snap connection or

swivel connection.

[0025] According to yet another preferred embodiment, the number of teeth of the toothing of the first coupling part connected directly and/or indirectly to the drive shaft and the number of teeth of the toothing of the third coupling part of the first workpiece processing part differ such that they have one or more common whole numbers as divisor and one or more common differing whole numbers as divisor.

[0026] A partial incompatibility is intentionally created in that there are one or more common whole numbers (or integers) as divisor and one or more common differing whole numbers (or integers) as divisor.

[0027] When according to a first example the first coupling part has 16 teeth and the third coupling part arranged on the workpiece processing part is provided with 12 teeth, the following situation results:

- (attachment) workpiece processing parts with a coupling part having 16 or 8 teeth can only be coupled to the first coupling part;
- (attachment) workpiece processing parts with a coupling part having 12, 6 or 3 teeth can only be coupled to the third coupling part; and
- (attachment) workpiece processing parts with 4 or 2 teeth can be coupled to both the first coupling part and the third coupling part.

[0028] When according to a second example the first coupling part has 20 teeth and the third coupling part arranged on the workpiece processing part is provided with 15 teeth, the following situation results:

- (attachment) workpiece processing parts with a coupling part having 20, 10, 4 or 2 teeth can only be coupled to the first coupling part;
- (attachment) workpiece processing parts with a coupling part having 15 or 3 teeth can only be coupled to the third coupling part; and
- (attachment) workpiece processing parts with 5 teeth can be coupled to both the first coupling part and the third coupling part.

[0029] According to yet another preferred embodiment, the device further comprises an adapter part which is arrangeable between two coupling parts and provided on both sides with a crown gear. Such an adapter part can for instance function as spacer.

[0030] According to yet another preferred embodiment, the teeth of the crown gear on both sides of the adapter part are offset relative to each other. In addition to the function as spacer, the adapter part in this embodiment also provides the option of coupling (attachment) workpiece processing parts in a greater number of orientations.

[0031] According to yet another preferred embodiment, the crown gears on both sides of the adapter part comprise a differing number of teeth. A whole or partial

incompatibility can hereby be brought about or eliminated.

[0032] According to yet another preferred embodiment, the device comprises at least two exchangeable attachment workpiece processing parts, wherein at least one is embodied in a first embodiment and at least one is embodied in a second embodiment, wherein the orientation in which the crown gear of the fourth coupling part is arranged on the attachment workpiece processing part in the first embodiment differs from the orientation in which the crown gear of the fourth coupling part is arranged on the attachment workpiece processing part in the second embodiment. Because the orientation of the crown gears differs, the different embodiments of the attachment workpiece processing parts are each suitable for their own selection of orientations.

[0033] According to yet another preferred embodiment, the toothings of the first coupling part and the toothings of the second coupling part together form a toothed shaft connection. A toothed shaft connection is suitable for applications in which an at least partial axial displacement of the coupling is desired. Because clearance is required in order to bring about the connection of a toothed shaft connection, such connections are less suitable for use on a processing device with oscillating movements.

[0034] According to yet another preferred embodiment, the toothed shaft connection comprises a tapering form such that there is an end position wherein the toothings fit substantially close together. The toothed shaft connection in this way has a form-fitting end position which makes this connection suitable for oscillating applications.

[0035] According to yet another preferred embodiment, the processing device is a sanding machine, and the drive shaft is rotatable relative to the housing by the drive.

[0036] According to yet another preferred embodiment, the processing device is a multi-tool, and the drive shaft is rotatable reciprocally through an angular displacement relative to the housing by the drive.

[0037] The invention further relates to an adapter part configured to be arranged between two coupling parts of a device as described in the foregoing.

[0038] The invention further relates to a workpiece processing part or attachment workpiece processing part with a coupling part provided with a toothings and configured for coupling to a device for processing a workpiece as described in the foregoing.

[0039] Preferred embodiments of the present invention are further elucidated in the following description with reference to the drawing, in which:

Figure 1 is a perspective bottom view of a workpiece processing device according to the invention with a workpiece processing part of a first type;

Figure 2 is a perspective top view of the workpiece processing part of the first type shown in figure 1;

Figure 3 is a perspective bottom view of a workpiece processing device with a workpiece processing part of a second type;

Figure 4 is a perspective top view of the workpiece processing part of the second type shown in figure 3; Figure 5 is a perspective bottom view of a workpiece processing device with an attachment workpiece processing part of a first type;

Figure 6 is a perspective top view of the workpiece processing part shown in figure 5 with two variants of an attachment workpiece processing part of the first type;

Figure 7 is a perspective top view of an operative mode of the workpiece processing device shown in figure 5;

Figure 8 is a perspective bottom view of a workpiece processing device with a workpiece processing part of a fourth type and an attachment workpiece processing part of a second type;

Figure 9 is a perspective top view of the workpiece processing part and the attachment workpiece processing part of the second type as shown in figure 8;

Figure 10 is a perspective view of an adapter part of a first type;

Figure 11 is a perspective view of an adapter part of a second type;

Figure 12 is a perspective view of a compatible coupling between a crown gear with 16 teeth (above) and a crown gear with 8 teeth (below);

Figure 13 is a perspective view of an incompatible coupling between a crown gear with 12 teeth (above) and a crown gear with 8 teeth (below);

Figure 14 is a perspective view of a compatible coupling between a crown gear with 16 teeth (above) and a crown gear with 4 teeth (below); and

Figure 15 is a perspective view of a compatible coupling between a crown gear with 12 teeth (above) and a crown gear with 4 teeth (below).

[0040] The workpiece processing device 1 shown in figure 1 comprises a housing 2 and a drive (not shown) therein for driving a drive shaft 4 relative to this housing 2. In the embodiment shown in figure 1 a first coupling part 6 provided with a toothings 8 is connected directly to drive shaft 4.

[0041] Housing 2 of device 1 further comprises a hand-grip 44 and a suction conduit 42.

[0042] Further shown is a first workpiece processing part 10 of a first type 10a which is a so-called multi-foot provided with suction openings 40 through which abraded material can be suctioned away and extracted from device 1 via suction conduit 42.

[0043] The first workpiece processing part 10 of the first type 10a further comprises an opening 11 through which this workpiece processing part 10a is can be engaged with a bolt 16 in a recess 9 provided with screw thread in the first coupling part 6.

[0044] Arranged on housing 2 of device 1 are connecting legs 36 which can be received in receiving spaces 38 of the first workpiece processing part 10, 10a of the first type shown in figure 1. These receiving spaces 38 for connecting legs 36 are shown in the partly cut-away perspective top view of figure 2.

[0045] A second coupling part 12 with a toothing 14 is arranged in first workpiece processing part 10. This second coupling part 12 is provided with the opening 11 through which bolt 16 can connect to the recess 9 provided with screw thread in the first coupling part 6 mounted on drive shaft 4 of device 1.

[0046] Figures 3 and 4 show device 1 according to the invention with a first workpiece processing part 10 of a second type 10b, which is a rotating sanding plate. Such a rotating sanding plate is also referred to as a random orbit sander (ROS). So that the first workpiece processing part 10 of the second type 10b can rotate freely, it is provided with a channel-like recess 13 arranged in peripheral direction in which the connecting legs 36 can hang freely without being engaged by a rotating ROS workpiece processing part.

[0047] A second coupling part 12 with a toothing 14 is also arranged in this first workpiece processing part 10 of the second type 10b.

[0048] By inserting a bolt 16 through the opening 11 arranged in second coupling part 12 the second coupling part 12 can be clamped against the first coupling part 6 connected to drive shaft 4 of device 1.

[0049] Device 1 shown in figures 5-7 comprises a first workpiece processing part 10 of a third type 10c which resembles the multi-foot shown in figure 1. At the position of the sanding foot tip part 15 shown in figure 1 the first workpiece processing part 10 of the third type 10c comprises a third coupling part 18 with a crown gear 20. Using second clamping means 28 in the form of a shaft provided with screw thread and with a rotary knob, an attachment workpiece processing part 22 can be coupled to the first workpiece processing part 10 of the third type 10c.

[0050] In the top view shown in figure 6 the attachment workpiece processing part 22 of the first type 22a is shown in two variants 22a-1 and 22a-2. Both these variants 22a-1 and 22a-2 differ from each other in that the crown gear 26 of the fourth coupling part 24 arranged thereon has a slightly different orientation. Both variants 22a-1 and 22a-2 of the attachment workpiece processing part 22 of the first type 22a can hereby both be coupled in different orientations to the third coupling part 18. A possible orientation is shown in figure 7, wherein it is also noted that the first workpiece processing part 10 of the third type 10c is arranged at an angle of 90° on housing 1. In the shown embodiment the connecting legs 36 are arranged rotation-symmetrically such that they once again fall into a receiving space 38 for the connecting legs.

[0051] A further embodiment of device 1 is shown in figures 8 and 9, wherein a first workpiece processing part 10 of a fourth type 10d is applied. This first workpiece

processing part 10 of the fourth type 10d is likewise provided with a third coupling part 18 with a crown gear 20.

[0052] Applied in the shown embodiment is the attachment workpiece processing part 22 of a second type 22b which is once again provided with a fourth coupling part 24 with a crown gear 26.

[0053] An adapter part 30 can be provided in order to create some distance between two coupling parts, for instance third coupling part 18 and fourth coupling part 24. By embodying this adapter part 30 as a first type 30a with offset crown gears the adapter part provides the option of coupling the attachment workpiece processing part in a greater number of orientations than the initial number of teeth already makes possible (figure 10).

[0054] According to an alternative embodiment thereof, adapter part 30 is embodied as a second type 30b with a different number of teeth (figure 11).

[0055] It is noted that, in order to obtain compatibility between different numbers of teeth, the tooth shape is preferably adapted in order to retain the greatest possible contact surface between the tooth flanks.

[0056] When the largest number of teeth present in the applied coupling parts 6, 12, 18, 24 is for instance sixteen, the tooth shape of a tooth of any of these sixteen teeth can then be taken as basis.

[0057] In order to obtain a crown gear with a small number of teeth, for instance twelve teeth, which still guarantees the greatest possible contact surface, the same angle of inclination for the tooth flanks is chosen as for the tooth shape of the crown gear with the sixteen teeth which serves as basis.

[0058] The twelve teeth are distributed proportionally over the 360° periphery, wherein the tooth top is formed proportionally as a flattened tooth shape. As shown in figures 11, 13 and 15, the crown gear with twelve teeth hereby has a tooth shape which is flattened to some extent.

[0059] Referring to figures 12-15, further elucidation will be made as to how partial compatibility and partial incompatibility between different coupling parts are obtained according to the invention.

[0060] The basis for the partial compatibility and partial incompatibility between different coupling parts is that the number of teeth of these different coupling parts differs such that they have one or more common whole numbers as divisor and one or more common differing whole numbers as divisor.

[0061] When the first coupling part 6 connected to the drive shaft has for instance sixteen teeth and the third coupling part 18 arranged on workpiece processing part 10 is provided with twelve teeth, the following situation results:

- (attachment) workpiece processing parts 10, 22 with a coupling part having sixteen or eight teeth can only be coupled to first coupling part 6. See figure 12 for a compatible coupling between first coupling part 6 having a crown gear with sixteen teeth (above) and

- a second coupling part 12 with a crown gear with eight teeth (below);
- (attachment) workpiece processing parts 10, 22 with a coupling part having twelve, six or three teeth can only be coupled to third coupling part 18. See figure 13 for an incompatible coupling between a third coupling part 18 having a crown gear with twelve teeth (above) and a second coupling part 12 having a crown gear with eight teeth (below); and
 - (attachment) workpiece processing parts 10, 22 with four or two teeth can be coupled to both first coupling part 6 and third coupling part 18. See figures 14 and 15 where a coupling between a crown gear of respectively sixteen teeth (first coupling part 6 in figure 14, above) and twelve teeth (third coupling part 18 in figure 15, above) can be coupled in compatible manner to a second coupling part 12 or fourth coupling part 24 with a crown gear having four teeth (figures 14 and 15, below).

[0062] The incompatible coupling shown in figure 13 prevents the possibility of an undesired coupling being made. It is thus impossible for instance to couple a finger-like attachment workpiece processing part of the first type 22a to first coupling part 6 of workpiece processing device 1. This coupling would cause the attachment workpiece processing part 22a to rotate in hazardous manner relative to housing 2 of workpiece processing device 1.

[0063] As elucidated above, a desired compatibility and incompatibility can be intentionally realized according to the invention between on the one hand the first coupling part 6 connected to the drive shaft and the third coupling part 18 arranged on a first workpiece processing part 10 and on the other hand, optionally connectable to coupling parts 6, 18, a second coupling part 12 of a first workpiece processing part 10 and fourth coupling part 24 of an attachment workpiece processing part 22.

[0064] Although they show preferred embodiments of the invention, the above described embodiments are intended solely to illustrate the present invention and not to limit the scope of the invention in any way. It is particularly noted that the skilled person can combine technical measures of the different embodiments.

[0065] Although the workpiece processing device shown in the figures is a sanding device, the invention is not limited thereto. The invention can also be applied to other workpiece processing devices such as so-called multi-tools or right-angle grinders.

[0066] The described rights are defined by the following claims, within the scope of which many modifications can be envisaged.

Claims

1. Device (1) for processing a workpiece, comprising:

- a housing (2);

- a drive arranged in the housing for driving a drive shaft (4) relative to the housing;
- a first coupling part (6) connected directly or indirectly to the drive shaft and provided with a toothing (8);
- a first workpiece processing part (10) which is provided with a second coupling part (12) connectable in engaging manner to the first coupling part (6), and wherein the second coupling part (12) is provided for this purpose with a toothing (14) co-acting with the toothing (8) of the first coupling part (6);
- wherein the toothing (8) of the first coupling part (6) and the toothing (14) of the second coupling part are mutually engageable crown gears; and
- wherein the device further comprises first clamping means (16) which are configured to clamp the crown gears (8, 14) of the first and the second coupling part (6, 12) in engaging contact against each other and to thus form a self-centering clearance-free coupling.

2. Device as claimed in claim 1, wherein

- the first workpiece processing part (10) is provided with a third coupling part (18) with a toothing (20); and
- wherein an attachment workpiece processing part (22) is connectable in engaging manner to the first workpiece processing part (10), and is provided for this purpose with a fourth coupling part (24) with a toothing (26) which co-acts with the toothing (20) of the third coupling part (18).

3. Device as claimed in claim 2, wherein the toothing (20) of the third coupling part (18) and the toothing (26) of the fourth coupling part (24) are mutually engageable crown gears; and

- wherein the device further comprises second clamping means (28) configured to clamp the crown gears (20, 26) of the third and the fourth coupling part (18, 24) in engaging contact against each other.

4. Device as claimed in any of the foregoing claims, wherein the clamping means (16, 28) configured to clamp the crown gears (8, 14, 20, 26) in engaging manner against each other comprise a bayonet connection, screw connection, snap connection or swivel connection.

5. Device as claimed in any of the foregoing claims, wherein the number of teeth of the toothing (8) of the first coupling part (6) connected directly and/or indirectly to the drive shaft and the number of teeth of the toothing of the third coupling part (18) of the first

workpiece processing part (10) differ such that they have one or more common whole numbers as divisor and one or more common differing whole numbers as divisor.

toothings and configured for coupling to a device (1) for processing a workpiece as claimed in any of the claims 1-13.

- 5
6. Device as claimed in any of the foregoing claims, further comprising an adapter part (30, 30a, 30b) which is arrangeable between two coupling parts and provided on both sides with a crown gear. 10
7. Device as claimed in claim 6, wherein the teeth of the crown gear on both sides of the adapter part (30a) are offset relative to each other.
8. Device as claimed in claim 6 or 7, wherein the crown gears on both sides of the adapter part (30b) comprise a differing number of teeth. 15
9. Device as claimed in any of the claims 2-8, comprising at least two exchangeable attachment workpiece processing parts (22) in a first embodiment (22a-1) and in a second embodiment (22a-2), wherein the orientation in which the crown gear (20) of the fourth coupling part (24) is arranged on the attachment workpiece processing part in the first embodiment (22a-1) differs from the orientation in which the crown gear (20) of the fourth coupling part (24) is arranged on the attachment workpiece processing part in the second embodiment (22a-2). 20 25
- 30
10. Device as claimed in claim 1, wherein the toothing (8) of the first coupling part (6) and the toothing (14) of the second coupling part together form a toothed shaft connection. 35
11. Device as claimed in claim 10, wherein the toothed shaft connection comprises a tapering form such that there is an end position wherein the toothings (8, 14) fit substantially close together. 40
12. Device as claimed in any of the claims 1-11, wherein the processing device (1) is a sanding machine (32), and the drive shaft is rotatable relative to the housing (2) by the drive. 45
13. Device as claimed in any of the claims 1-11, wherein the processing device is a multi-tool (34), and the drive shaft is rotatable reciprocally through an angular displacement relative to the housing (2) by the drive. 50
14. Adapter part configured to be arranged between two coupling parts of a device (1) as claimed in any of the claims 1-13, comprising the measures according to any of the claims 6-8. 55
15. Workpiece processing part or attachment workpiece processing part with a coupling part provided with a

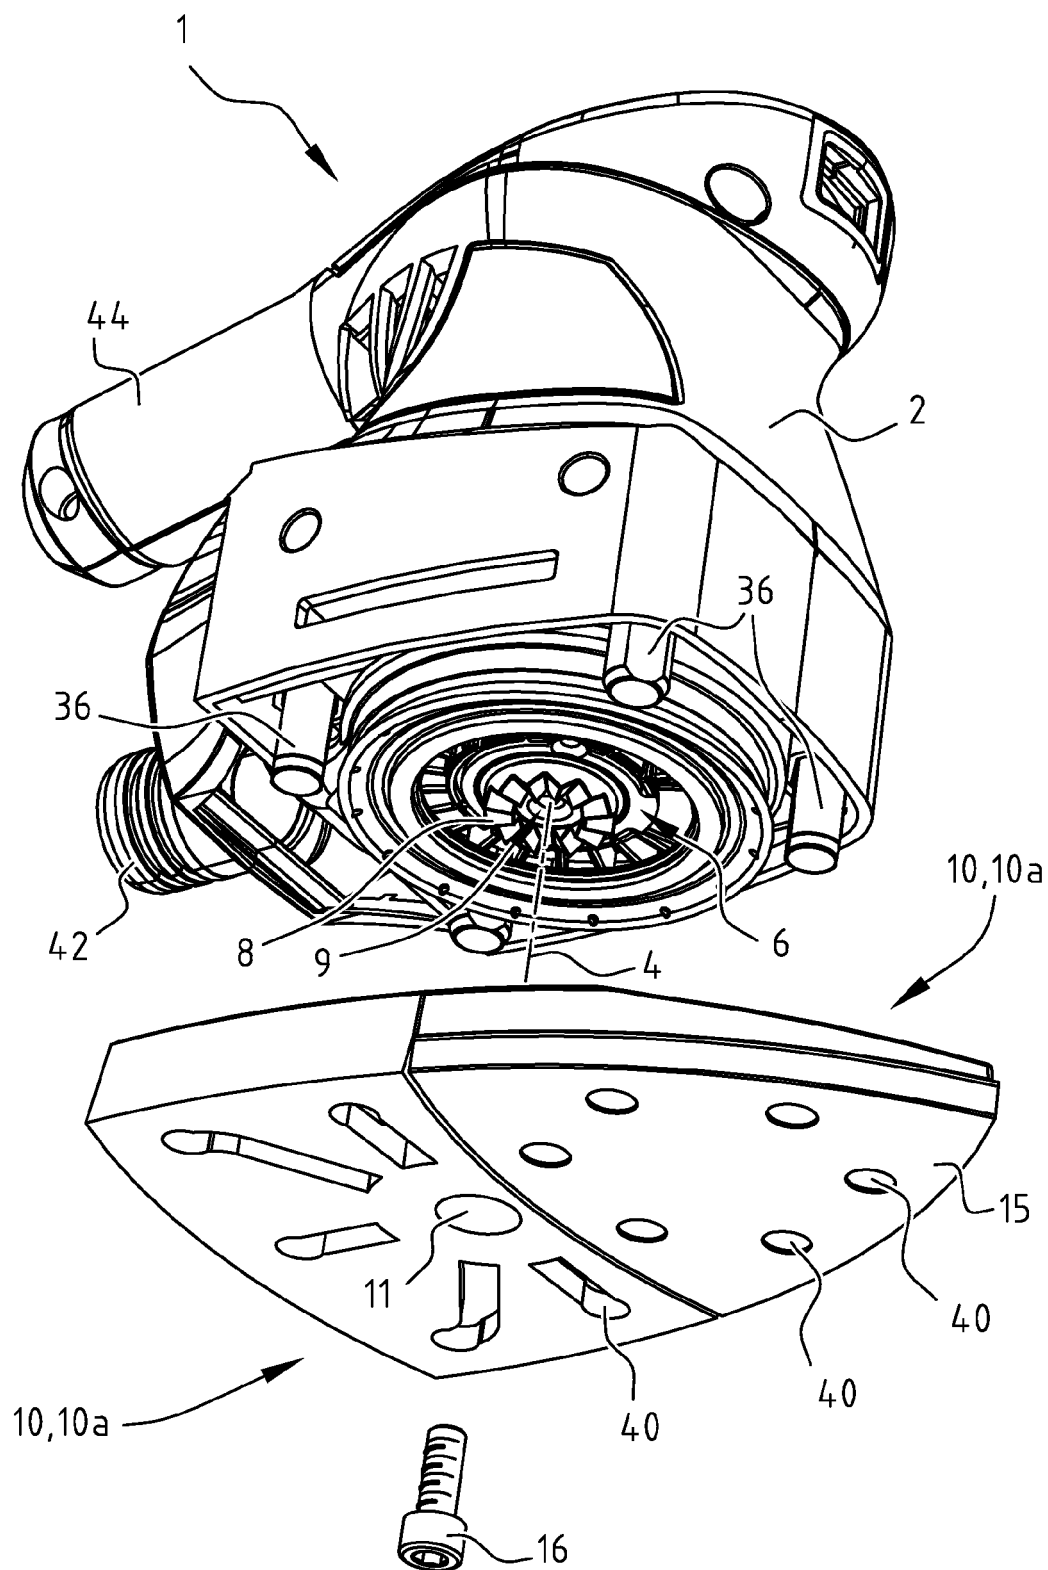


FIG. 1

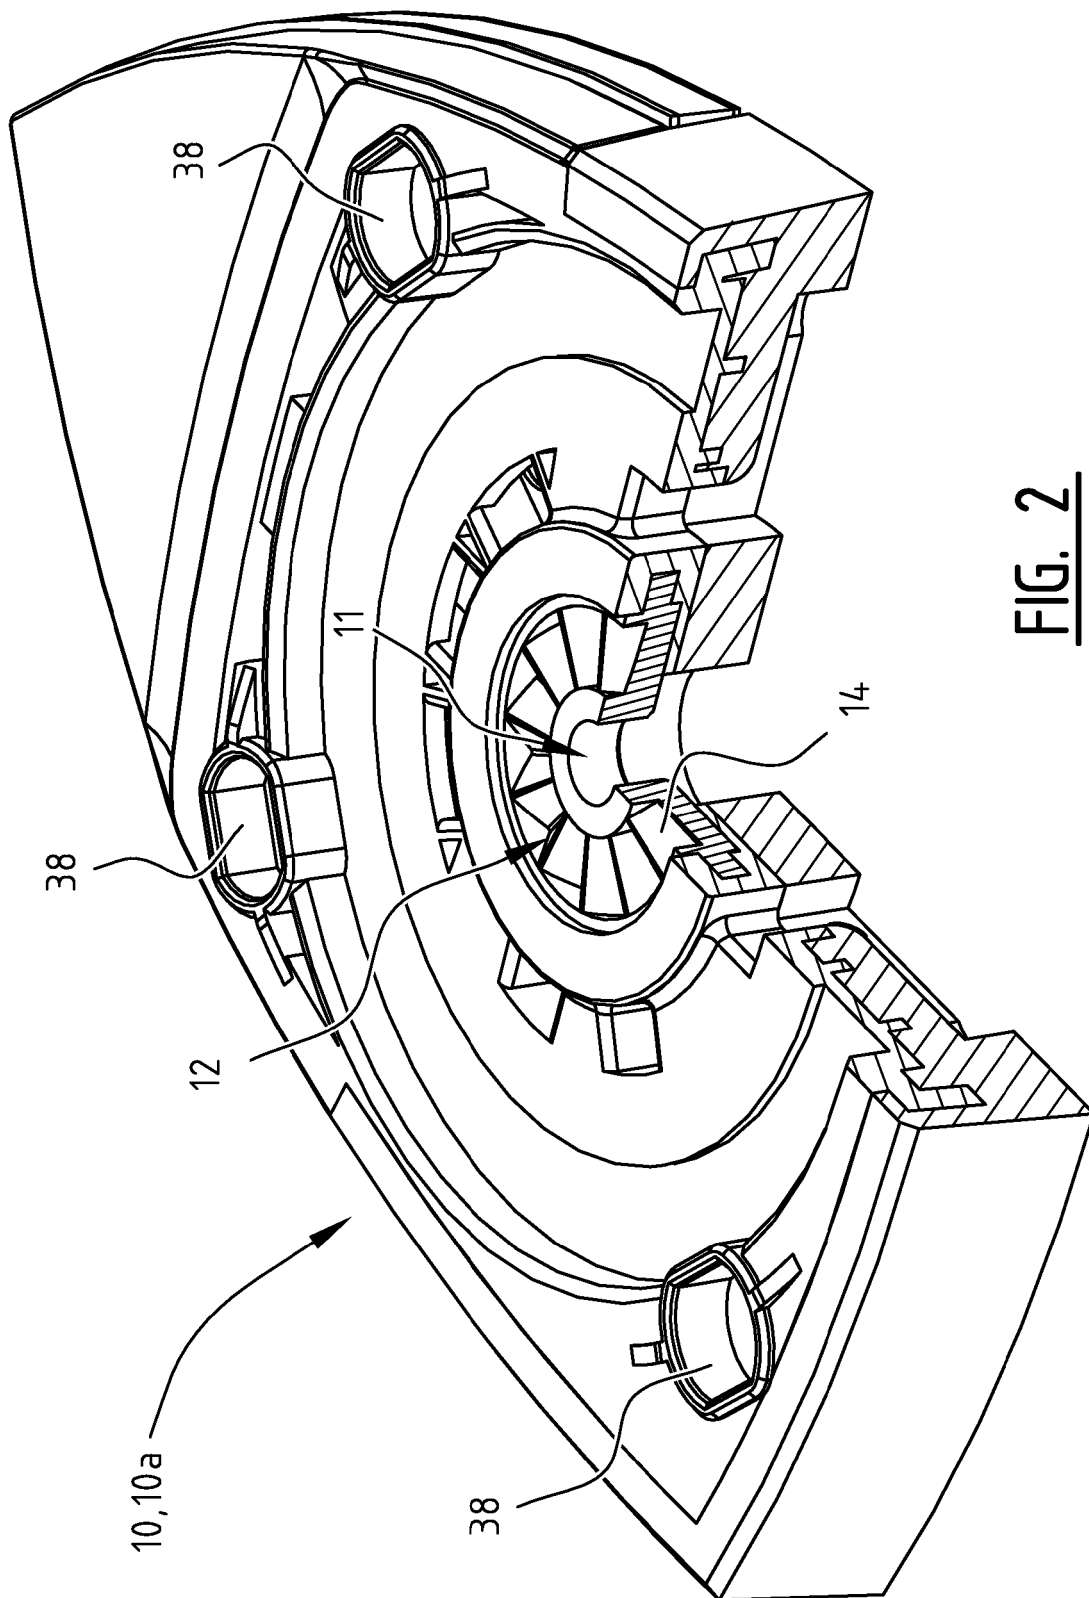
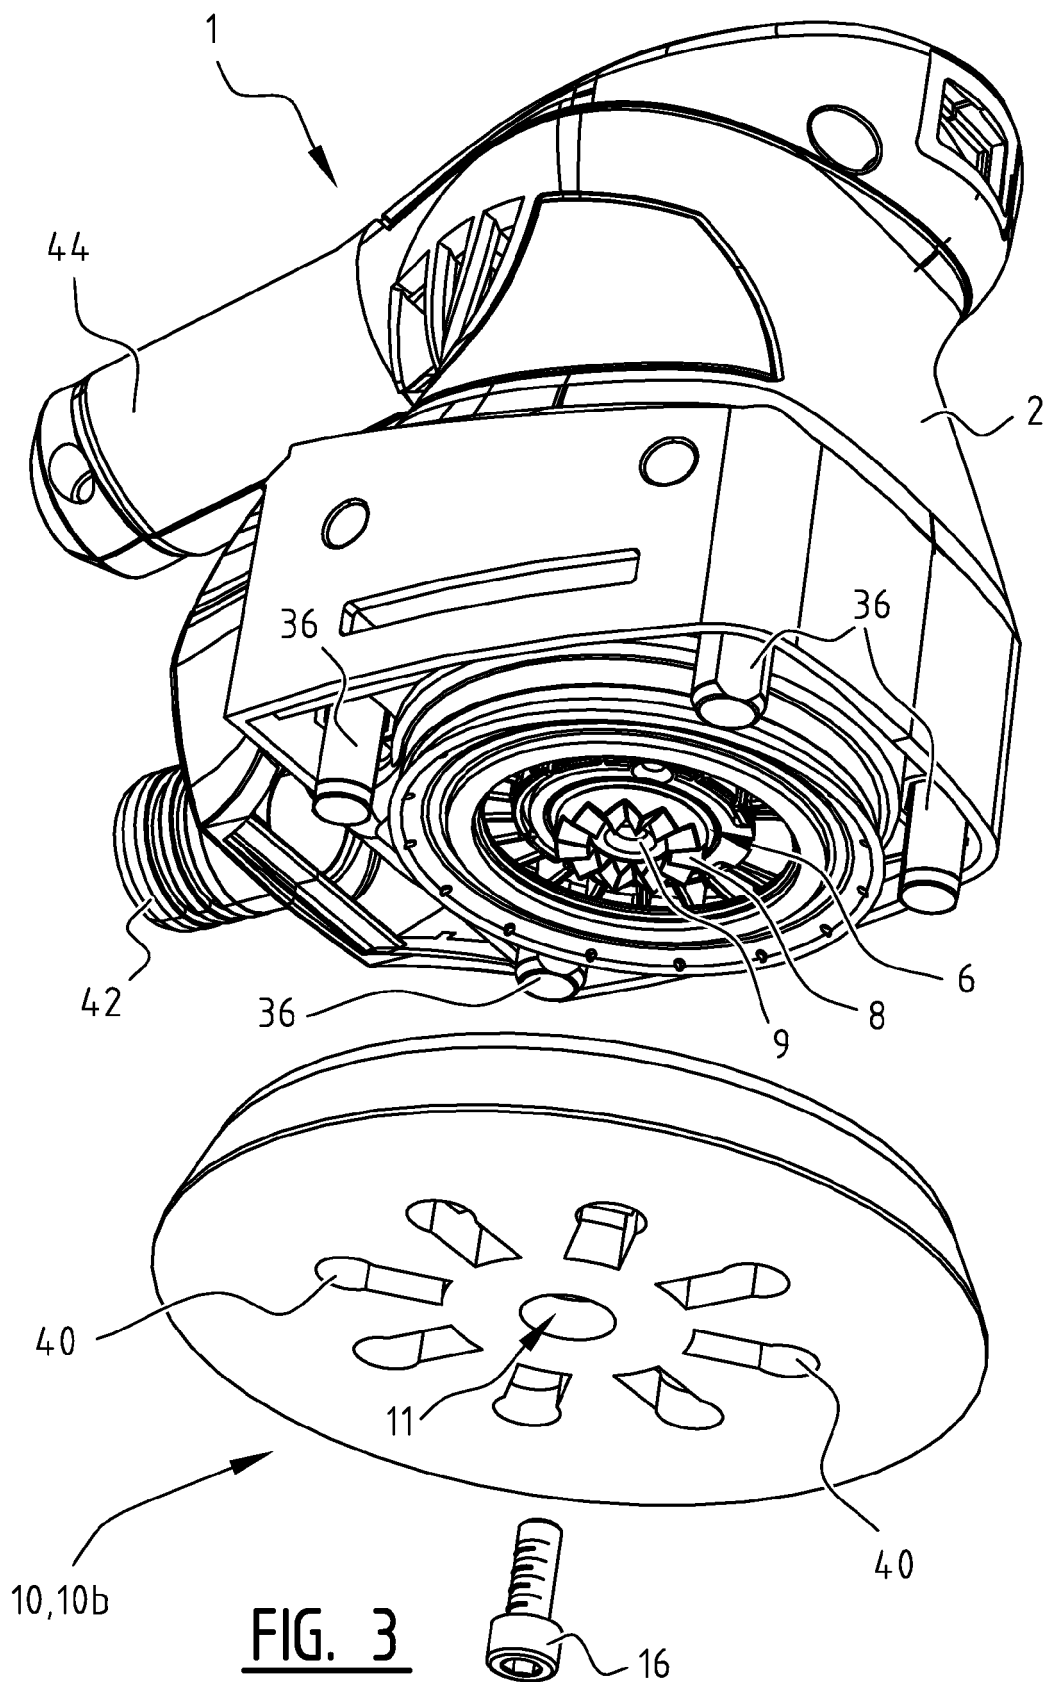


FIG. 2



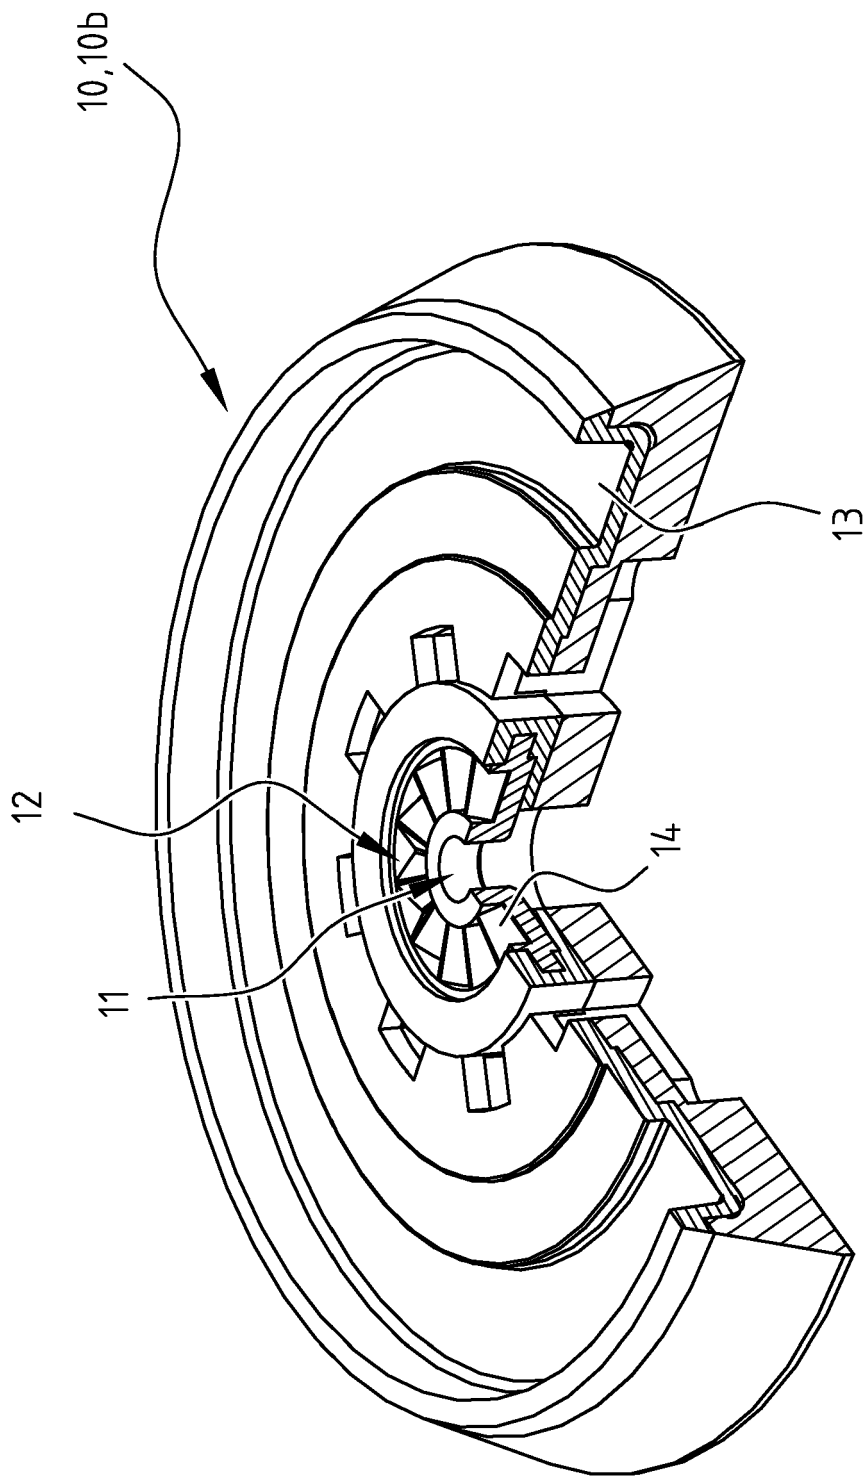


FIG. 4

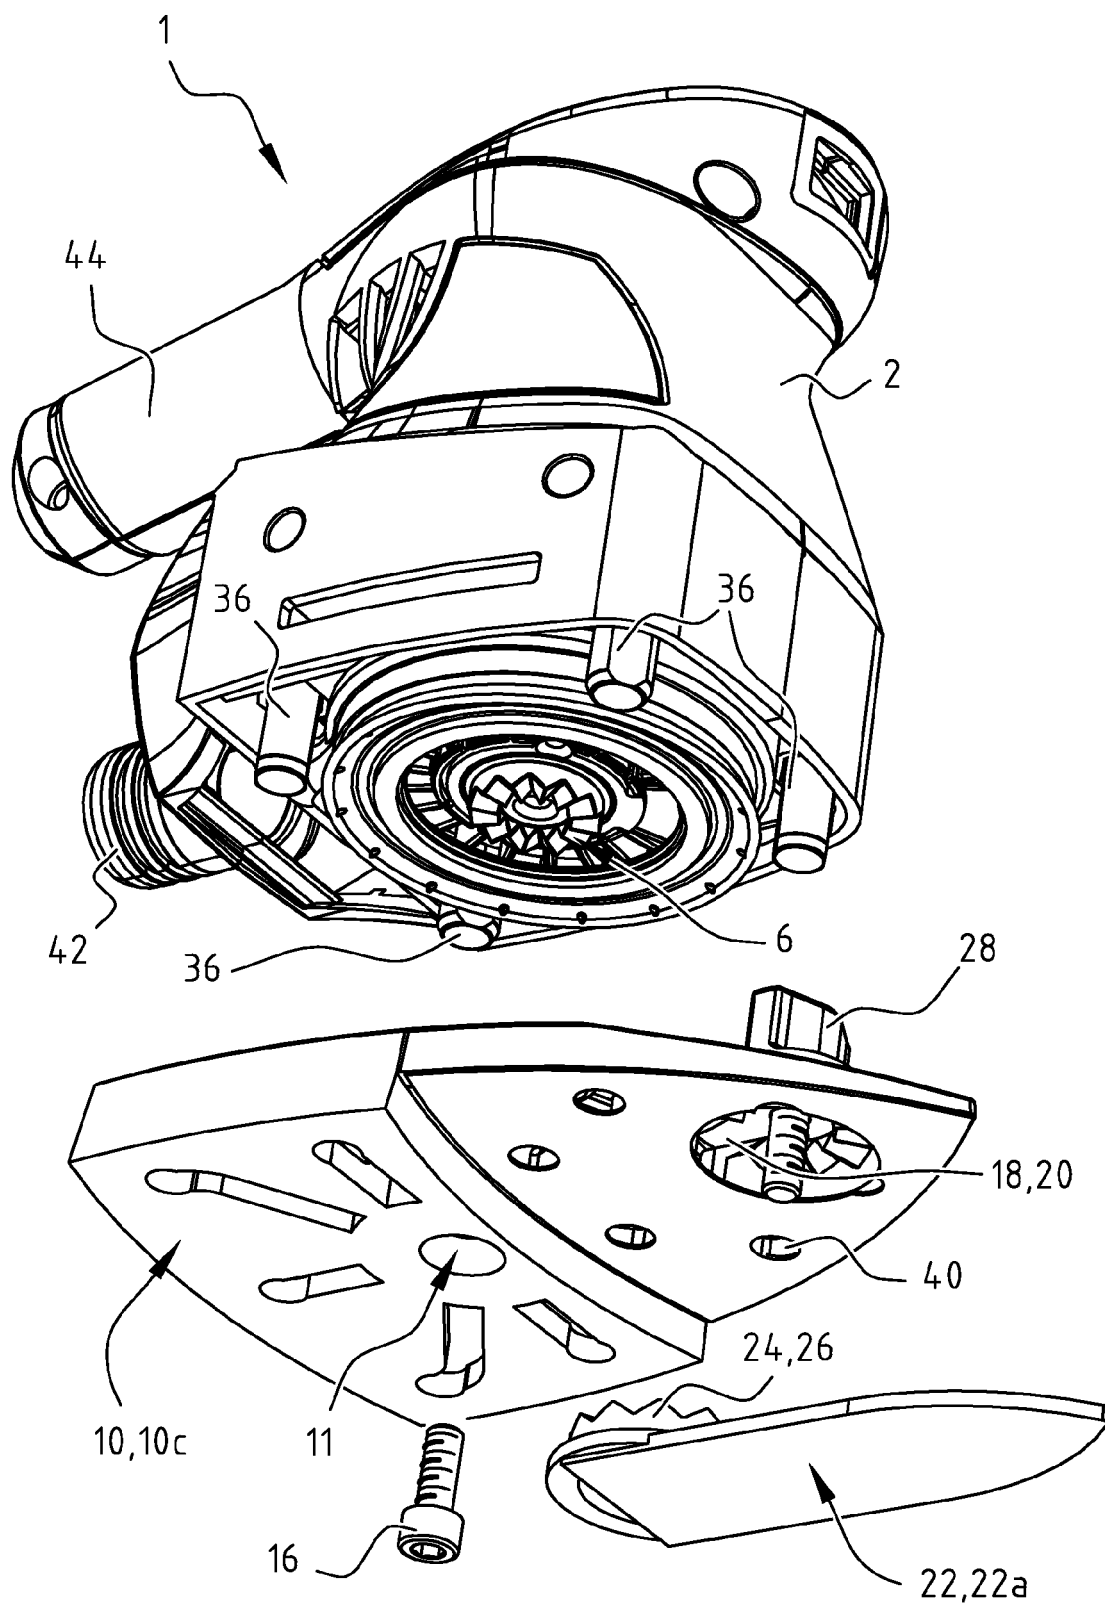


FIG. 5

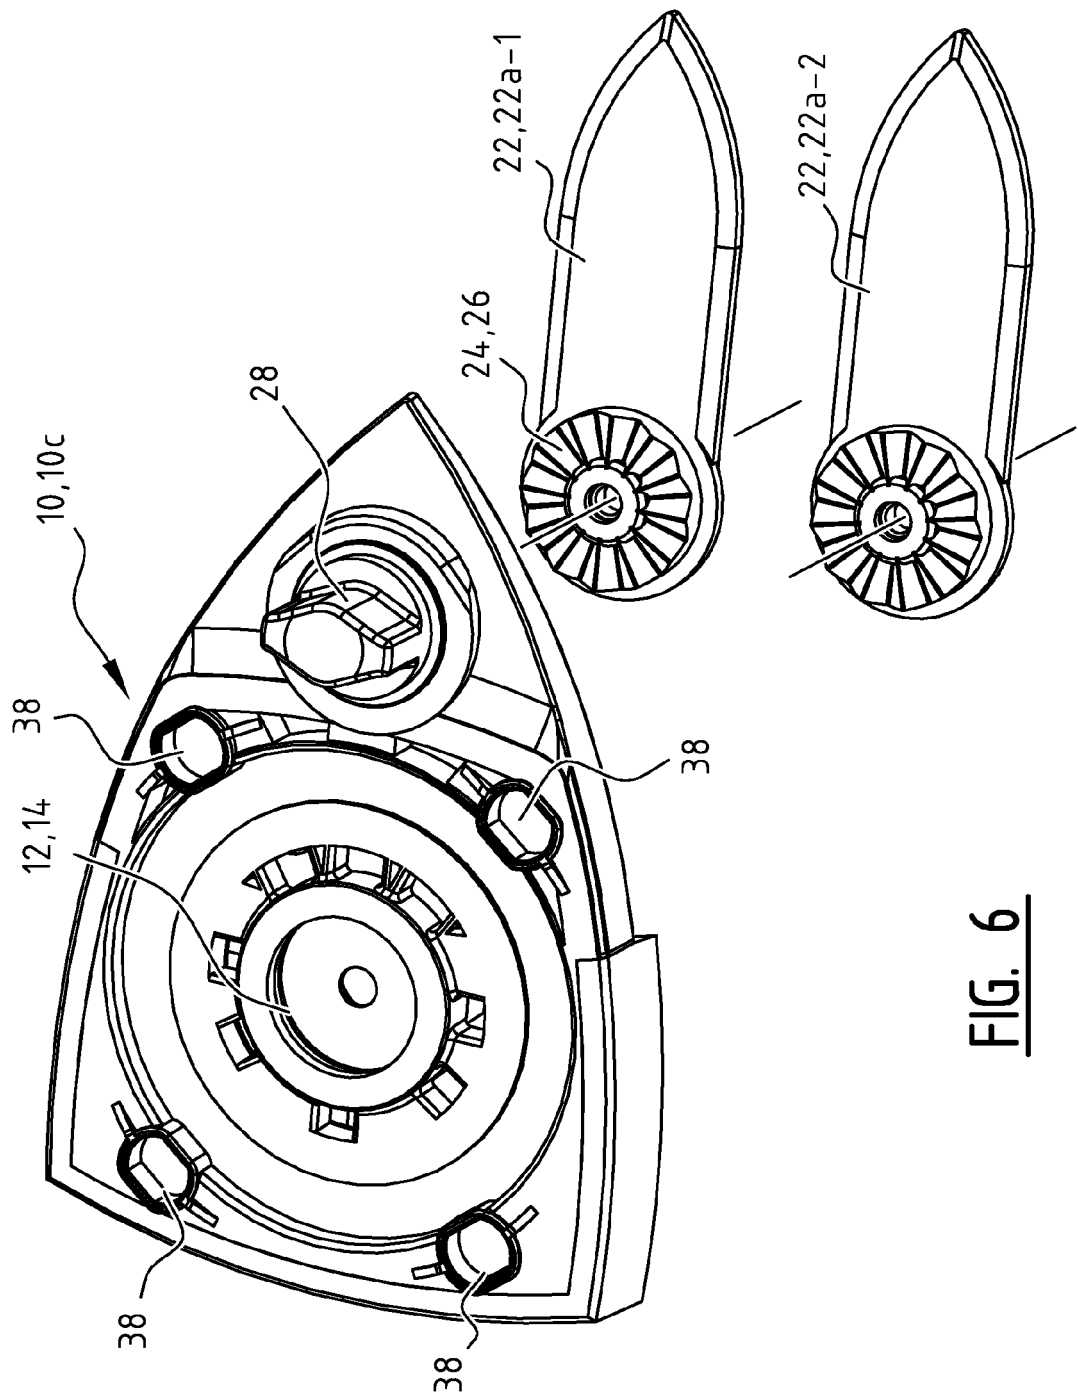


FIG. 6

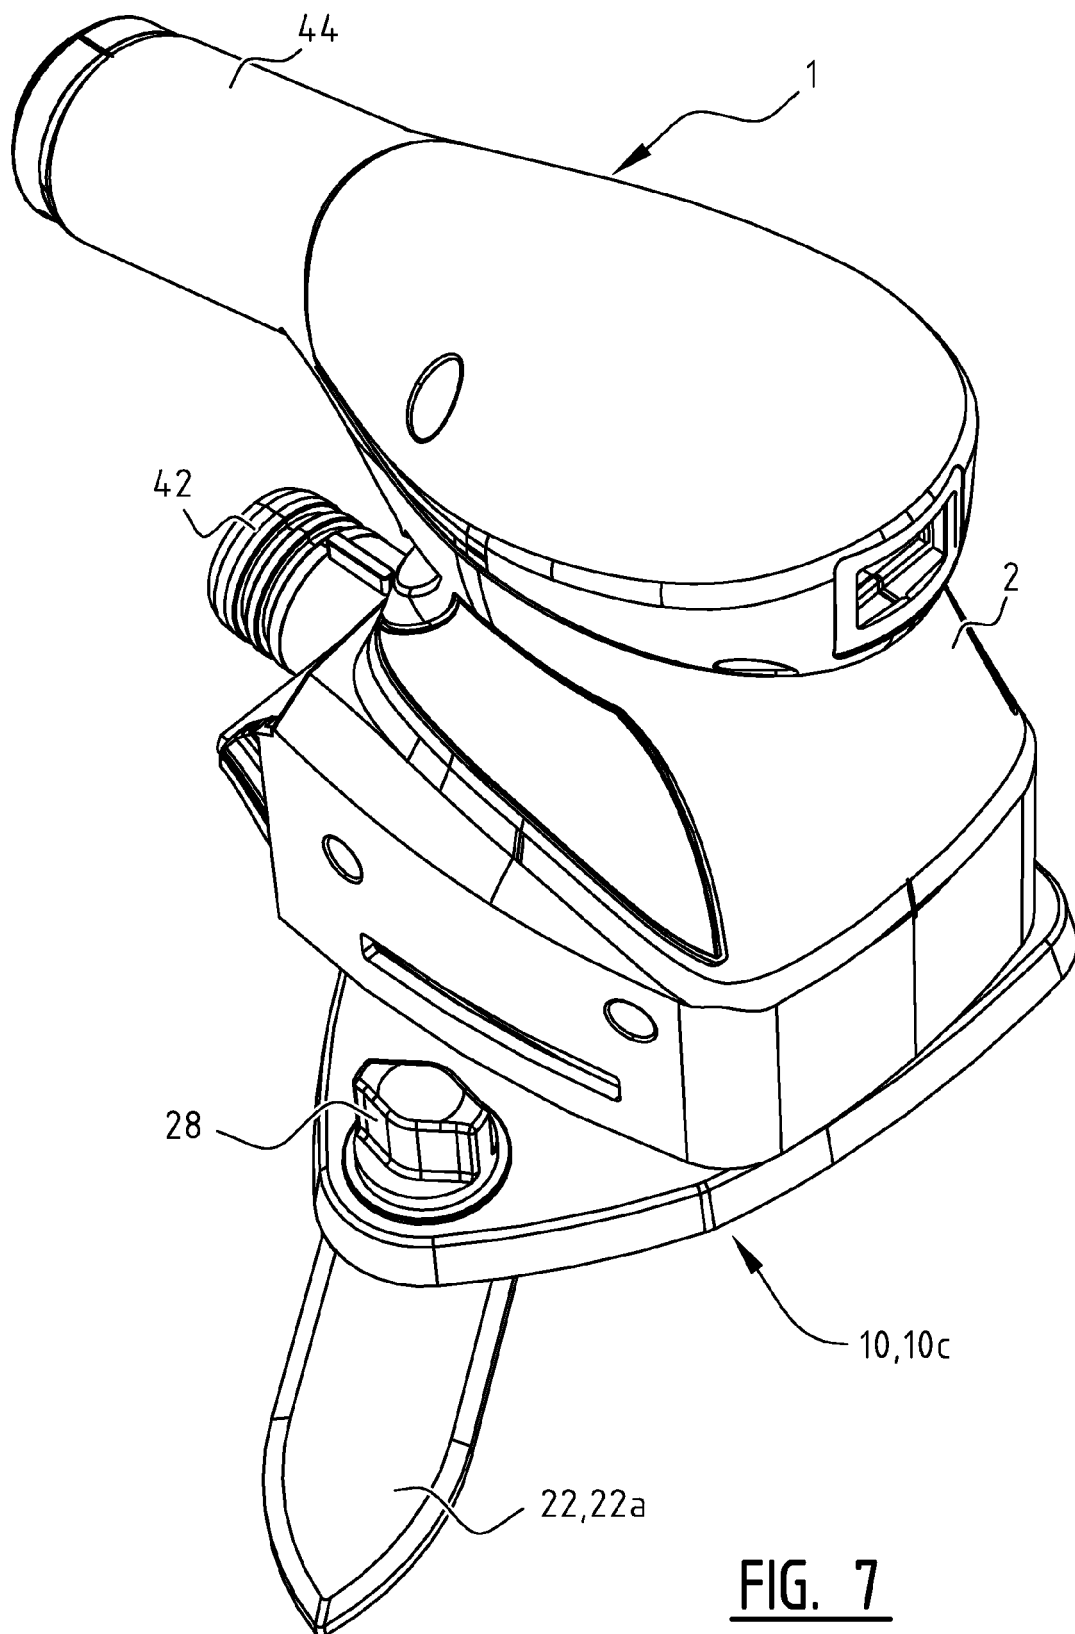
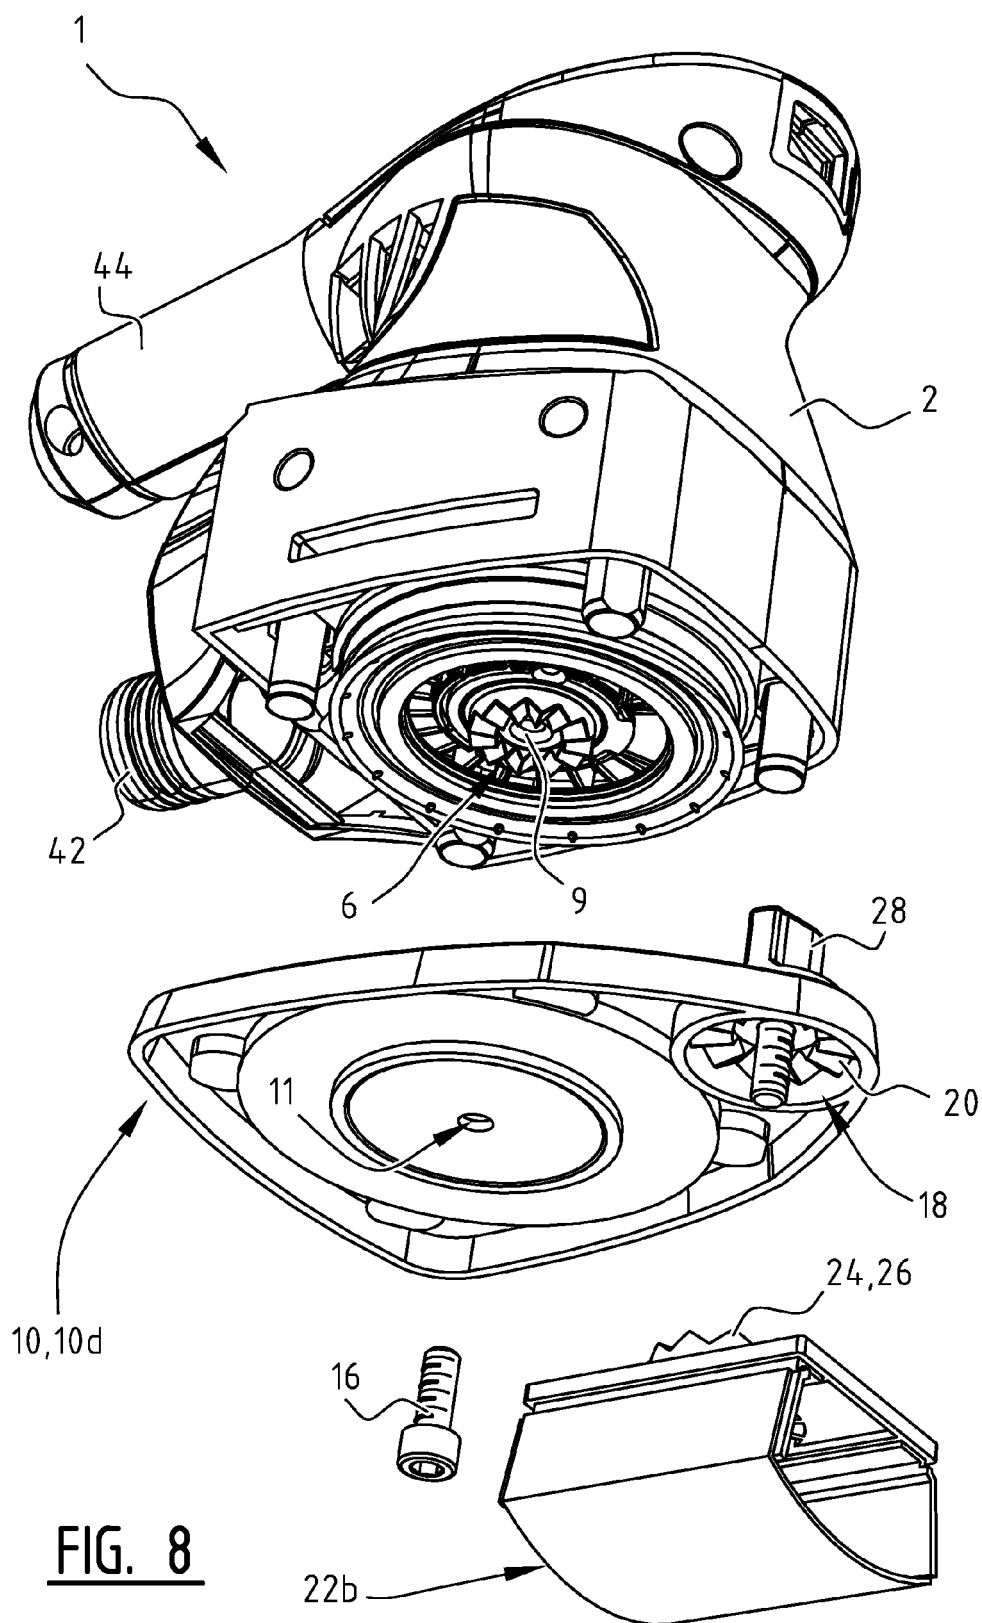


FIG. 7



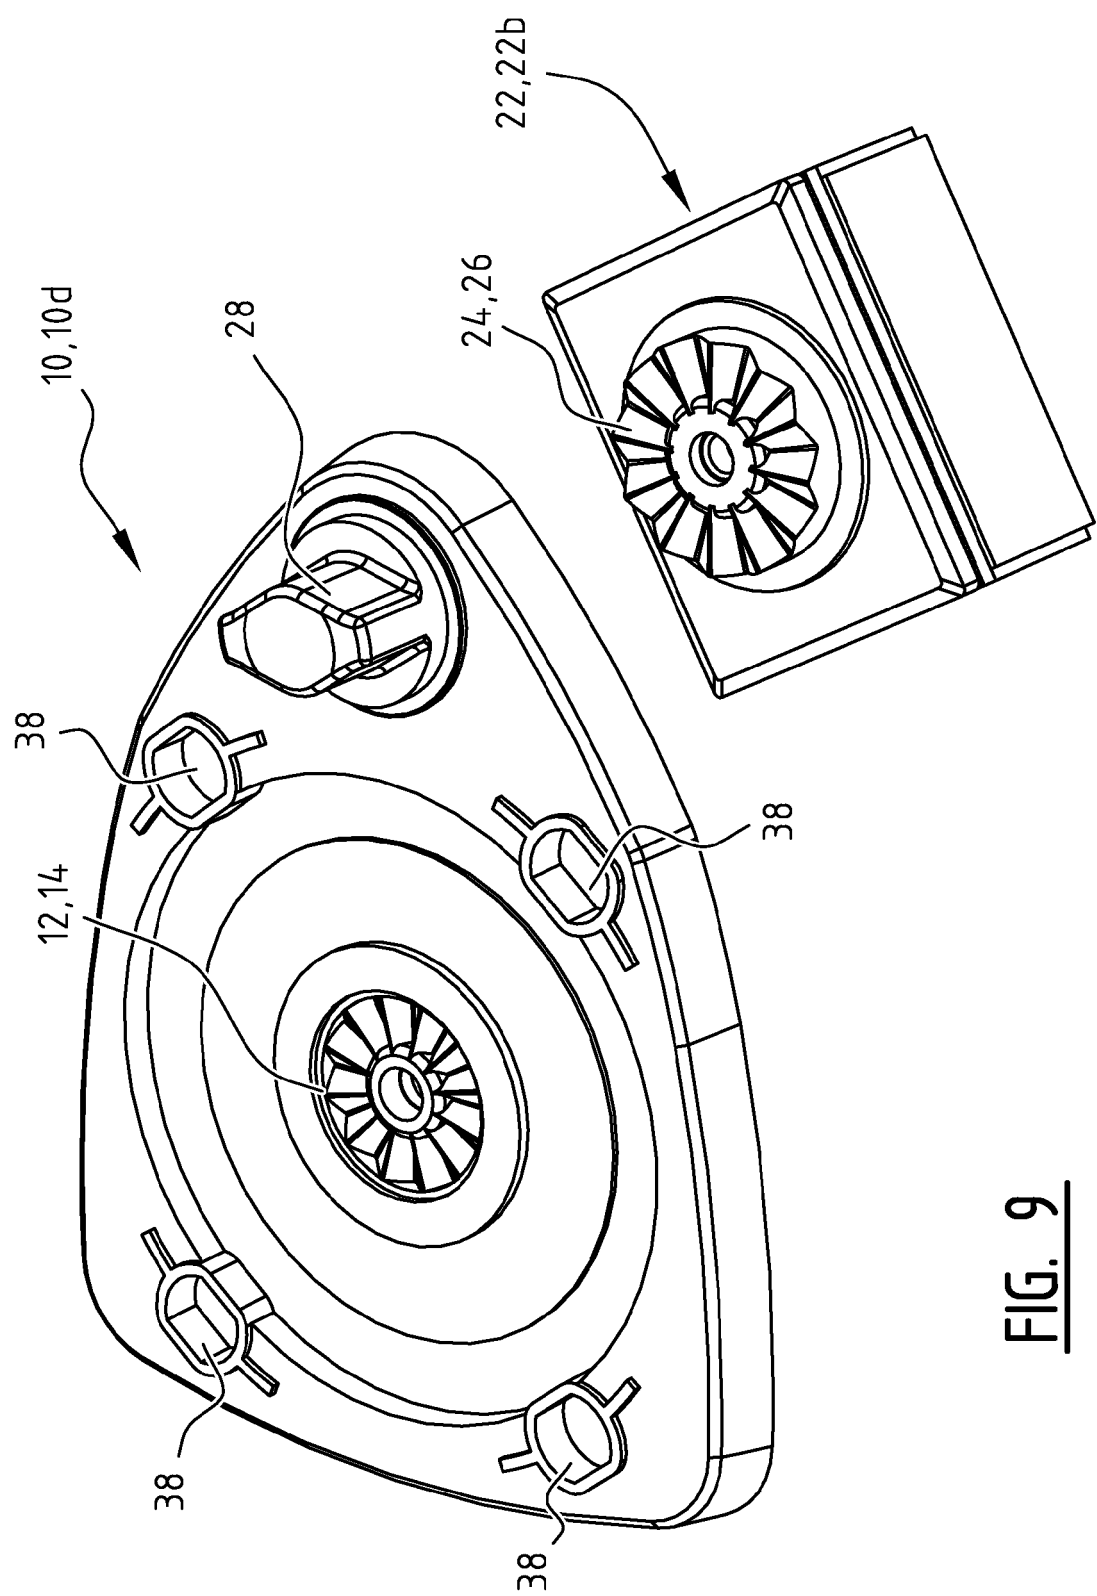


FIG. 9

30,30a

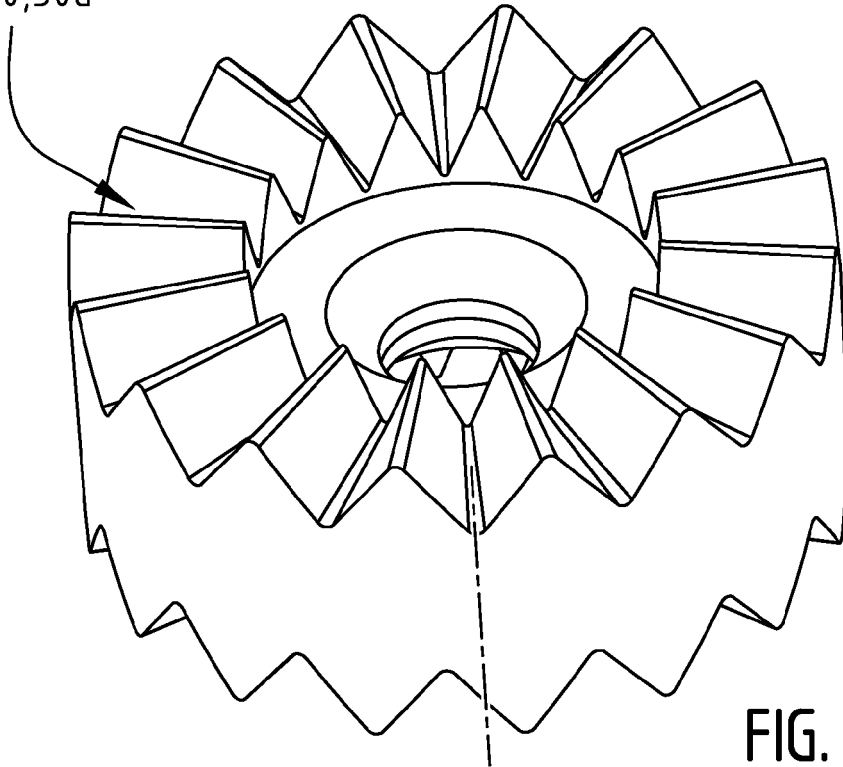


FIG. 10

30,30b

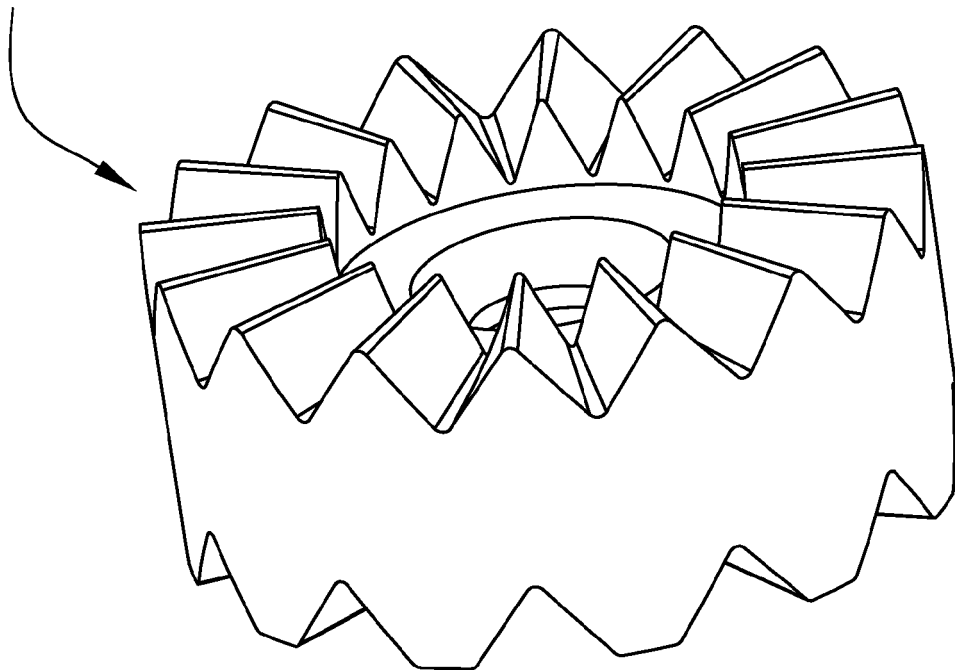


FIG. 11

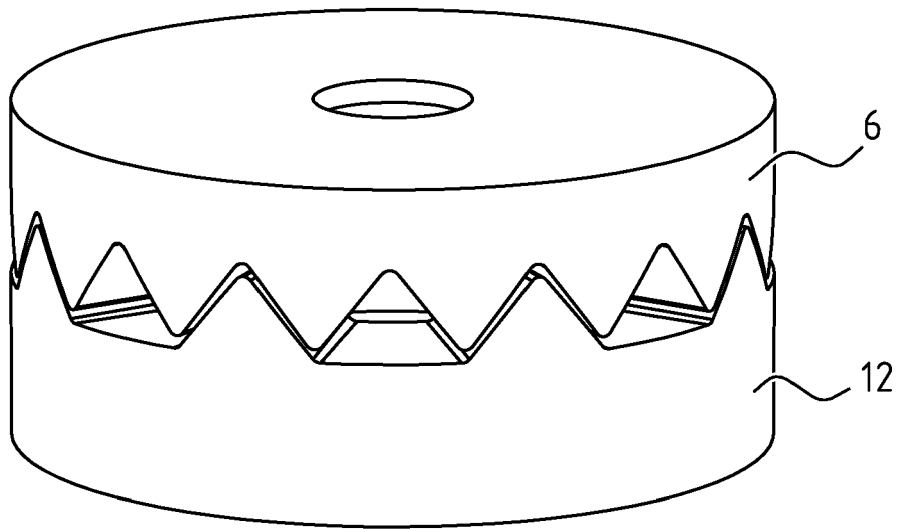


FIG. 12

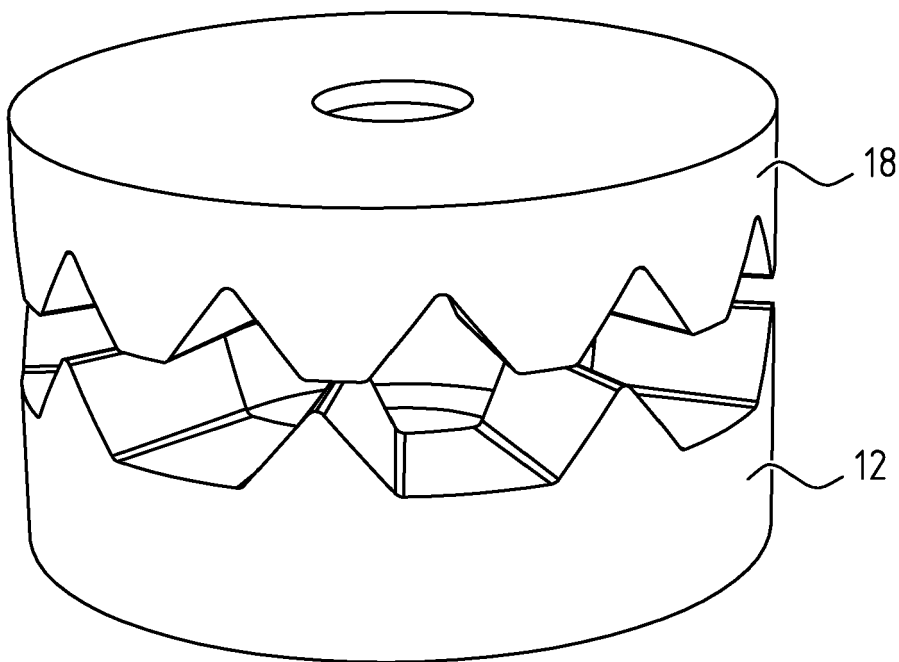


FIG. 13

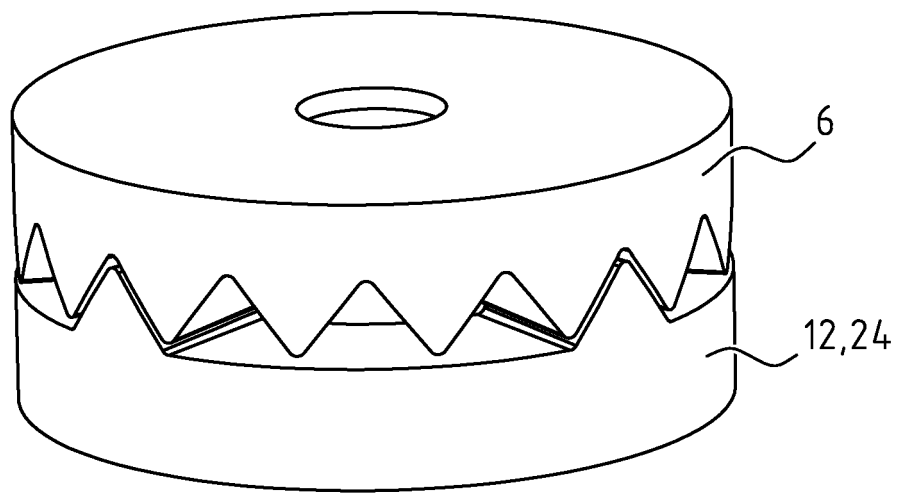


FIG. 14

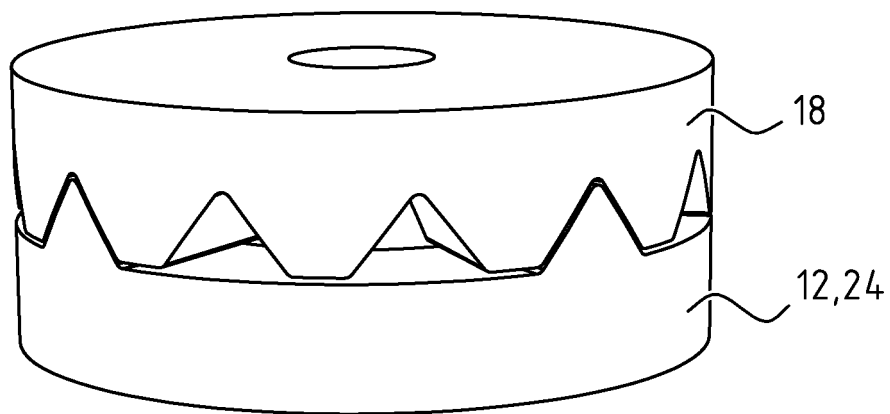


FIG. 15



EUROPEAN SEARCH REPORT

Application Number
EP 13 17 6389

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2 725 770 A (SHORT HAROLD O ET AL) 6 December 1955 (1955-12-06)	1-11, 13-15	INV. B24B23/03
Y	* column 2; figure 1 *	12	
X	FR 2 758 287 A1 (JEAN VAUTRIN [FR]) 17 July 1998 (1998-07-17)	1-11, 13-15	
Y	* page 3 - page 7; figures 1,2 *	12	
X	WO 2007/043871 A1 (BOSCH GMBH ROBERT [DE]; MOERBEEK RUBER JAN [NL] BOSCH GMBH ROBERT [DE]) 19 April 2007 (2007-04-19)	14,15	
Y	* claim 1; figures 3,10,13,18 *	12	
X	EP 1 454 710 A1 (CREDO TECH CORP [US]) 8 September 2004 (2004-09-08)	14,15	
Y	* paragraph [0079] - paragraph [0086]; figures 19-23 *	12	
X	EP 2 292 378 A1 (ERGOBIONIK GMBH [DE]) 9 March 2011 (2011-03-09)	14,15	
Y	* paragraph [0009] - paragraph [0014]; figures 1-2 *	12	
X	WO 2011/061022 A1 (METABOWERKE GMBH [DE]; LUDWIG KUETHER [DE]; HUBER FABIAN [DE]) 26 May 2011 (2011-05-26)	14,15	TECHNICAL FIELDS SEARCHED (IPC) B24B F16H F16D
A	* page 7 - page 11; figures 3-5 *	1-13	
X	GB 2 414 948 A (BOSCH GMBH ROBERT [DE]) 14 December 2005 (2005-12-14)	14,15	
A	* claims 1-4; figures 1-3 *	1-13	
X	GB 2 371 004 A (BOSCH GMBH ROBERT [DE]) 17 July 2002 (2002-07-17)	14,15	
A	* page 6 - page 7; figure 1 *	1-13	
-/--			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 January 2014	Examiner De Backer, Tom
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
EPO FORM 1503 03 82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 13 17 6389

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 31 21 694 A1 (IEG IND ENGINEERING GMBH [DE]) 17 February 1983 (1983-02-17)	14,15	
A	* page 3 - page 4; figure 3 *	1-13	
X	US 2006/065505 A1 (DOUGLAS JAMES MORLEY H [GB] DOUGLAS JAMES MORLEY HULME) 30 March 2006 (2006-03-30)	14,15	
A	* paragraph [0047]; figure 3 *	1-13	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search		Date of completion of the search	Examiner
Munich		23 January 2014	De Backer, Tom
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 17 6389

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-01-2014

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2725770	A	06-12-1955	NONE	
FR 2758287	A1	17-07-1998	NONE	
WO 2007043871	A1	19-04-2007	NL 1030176 C2 WO 2007043871 A1	17-04-2007 19-04-2007
EP 1454710	A1	08-09-2004	CA 2459636 A1 CA 2673618 A1 EP 1454710 A1 JP 2004261959 A US 2005009458 A1	03-09-2004 03-09-2004 08-09-2004 24-09-2004 13-01-2005
EP 2292378	A1	09-03-2011	NONE	
WO 2011061022	A1	26-05-2011	DE 102009053614 A1 EP 2467235 A1 US 2012282846 A1 WO 2011061022 A1	19-05-2011 27-06-2012 08-11-2012 26-05-2011
GB 2414948	A	14-12-2005	GB 2414948 A GB 2414949 A	14-12-2005 14-12-2005
GB 2371004	A	17-07-2002	DE 10055246 A1 GB 2371004 A JP 4214197 B2 JP 2002192452 A	16-05-2002 17-07-2002 28-01-2009 10-07-2002
DE 3121694	A1	17-02-1983	NONE	
US 2006065505	A1	30-03-2006	AT 323843 T AU 2003278483 A1 DE 60304706 T2 EP 1518058 A1 ES 2264530 T3 IT MI20021352 A1 JP 4160046 B2 JP 2005535838 A US 2006065505 A1 WO 2004001249 A1	15-05-2006 06-01-2004 12-04-2007 30-03-2005 01-01-2007 19-12-2003 01-10-2008 24-11-2005 30-03-2006 31-12-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82