

(19)



(11)

EP 1 512 815 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
22.08.2007 Bulletin 2007/34

(51) Int Cl.:
E05B 65/12 ^(2006.01) **E05B 65/20** ^(2006.01)

(21) Application number: **04104196.3**

(22) Date of filing: **01.09.2004**

(54) **Lock for a door of a motor vehicle**

Schloss für eine Kraftfahrzeugtür

Serrure pour porte de véhicule automobile

(84) Designated Contracting States:
DE FR IT

(30) Priority: **02.09.2003 IT TO20030670**

(43) Date of publication of application:
09.03.2005 Bulletin 2005/10

(73) Proprietor: **INTIER AUTOMOTIVE CLOSURES
S.p.A
10098 Rivoli (IT)**

(72) Inventors:
• **Taviani, Corrado
50054 Fucecchio (IT)**

• **Ottino, Franco Giovanni
56017 San Giuliano Terme (IT)**

(74) Representative: **Jorio, Paolo et al
Studio Torta S.r.l.
Via Viotti, 9
10121 Torino (IT)**

(56) References cited:
**EP-A- 0 978 609 DE-C- 3 414 475
GB-A- 2 334 297 US-A- 3 905 627
US-A- 5 516 164 US-A- 6 003 910
US-B1- 6 386 599 US-B1- 6 471 259**

EP 1 512 815 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a lock for a door of a motor vehicle.

[0002] As is known, locks for motor vehicles generally comprise a supporting body designed to be fixed to a door of the motor vehicle, and a closing mechanism carried by the supporting body and designed to couple with a lock striker integral with an upright of the frame of said door. There are also solutions, used much less frequently, wherein the supporting body of the lock is fixed to the upright and the lock striker is instead fixed to the door.

[0003] In both cases, the closing mechanism is composed essentially of a fork and of a dog hinged to the supporting body around respective fixed axes parallel with each other.

[0004] The fork has an engagement seat for a generally cylindrical portion of the aforesaid lock striker, is elastically loaded towards an opening position, wherein the lock striker can be engaged and disengaged from its seat, and is disengaged in a closing position, wherein it holds the cylindrical portion of the lock striker inside its seat and prevents disengagement.

[0005] The dog is thrust by a spring to couple via snap-action, by means of an engagement edge thereof, with a peripheral retention shoulder of the fork to block the latter in a releasable way in the closing position.

[0006] In particular, after the door is slammed the fork moves, under the thrust of the lock striker, from the opening position to an overtravel position disposed beyond the closing position; during the portion of travel between the closing position and the overtravel position, the fork moves, with its retention shoulder, beyond the dog, to enable the latter to snap, with its engagement edge, into a position facing the aforesaid shoulder. During subsequent elastic return of the fork towards the opening position, the retention shoulder is positioned against the engagement edge of the dog, thus defining the closing position of the fork on the lock striker.

[0007] As when motor vehicles are being driven they are normally subjected to vibrations and impacts that can be transmitted to the relative locks, the dog must ensure a certain retention load on the fork, to prevent inopportune opening of the doors. This is obtained by suitably sizing and shaping the fork and dog in the zone of interaction.

[0008] Nonetheless, the greater the retention load exerted by the dog on the fork in the closing position is, the greater the opening load of the lock will be, that is the force the user must exert to open the door of the motor vehicle.

[0009] GB-A-2334297 discloses a lock mechanism according to the preamble of claim 1. DE-C-3414475 discloses a lock comprising a closing mechanism designed to couple in a releasable way with a lock striker; the lock mechanism comprises a fork elastically loaded toward an opening position, wherein engagement and disengagement between said striker and a seat thereof are

possible; a dog that can couple via snap-action in a releasable way with the fork to block it in a closing position, in which it constraints the lock striker in its seat and prevents its disengagement; and a retention that can be coupled with the fork in the closing position.

[0010] The object of the present invention is to produce a lock for a door of a motor vehicle, which enables, simply and inexpensively, high retention loads to be obtained on the fork in the closing position and, simultaneously, decreased loads during the phase to open the door.

[0011] The aforesaid object is obtained by the present invention, as it relates to a lock for a door of a motor vehicle comprising a closing mechanism designed to couple in a releasable way with a lock striker, said closing mechanism comprising:

a fork elastically loaded towards an opening position, wherein engagement and disengagement between said lock striker and a seat thereof are possible;

and

a dog that can couple via snap-action in a releasable way with said fork to block it in at least a primary closing position, in which it constraints said lock striker in its seat and prevents disengagement thereof;

characterized in that it also comprises a supplementary retention lever that can be coupled with said fork to block it in a completely closed position, wherein the fork is disposed downstream the primary closing position with reference to the direction of movement from said opening position, is detached from said dog and prevents disengagement of said lock striker from its seat, it being possible to selectively deactivate said lever by operating said dog.

[0012] For better understanding of the present invention a preferred embodiment is described hereunder, purely as a non-limiting example and with reference to the accompanying drawings, in which:

Figure 1 is a partially sectional front view with parts removed for clarity, of a lock for a door of a motor vehicle, produced according to the present invention and disposed in an opening condition;

Figures 2 to 5 are partially sectional front views with parts removed for clarity, of the lock in Figure 1 during the closing sequence; and

Figure 6 is a partially sectional front view with parts removed for clarity, of the lock in Figure 1 during an initial phase of an opening movement.

[0013] With reference to the attached figures, number 1 indicates as a whole a lock for a door of a motor vehicle (not shown).

[0014] The lock 1 essentially comprises a supporting body 2 with a box-type structure, of which, for clarity, only a plate 3 is shown, partially and with a dashed line, designed to be fixed to the aforesaid door, and a closing mechanism 4 fastened to the supporting body 2 and de-

signed to cooperate with a cylindrical portion 5 of a lock striker 6 represented only in part, integral with a fixed upright (not shown) of the door.

[0015] In particular, the plate 3 defines a C-shaped lateral opening 7 designed to receive the portion 5 of the lock striker 6 during the phase to close the door.

[0016] The closing mechanism 4 essentially comprises a fork 8 and a dog 9 hinged around respective pins 10, 11 fixed integral with the plate 3 and with respective axes A, B parallel with each other and orthogonal to the plate 3.

[0017] The fork 8 is constituted by a shaped plate produced in metallic material, and hinged at the level of an intermediate portion 12 around the pin 10 and has a peripheral C-shaped seat 13 designed to receive the portion 5 of the lock striker 6 and delimited laterally by a pair of teeth 14, 15.

[0018] Advantageously, the fork 8 is coated externally by a shell made of plastic material, from which the free ends of the teeth 14 and 15 delimiting the seat 13 project.

[0019] The fork 8 is thrust in a known way by a spring (not shown) wound around the pin 10 and connected to the fork 8 and to the plate 3, towards an opening position (figure 1), wherein the seat 13 is facing the same part as the opening 7 of the plate 3 and therefore enables engagement and disengagement of the portion 5 of the lock striker 6.

[0020] Under the thrust of the lock striker 6 and after the door is slammed, the fork 8 rotates about the axis A to close or couple via snap-action with the dog 9 to assume, as will be explained in detail hereunder, two different closing positions, respectively the first and second snap-action coupling closing positions (figures 2 and 3), wherein the portion 5 of the lock striker 6 is blocked inside the seat 13 and the tooth 15 prevents escape by increasingly intercepting the opening 7.

[0021] In particular, the first and second snap-action coupling closing positions are defined by the dog 9 coupling with respective shoulders 16, 17 produced along the peripheral edge of the fork 8 on the opposite side of the teeth 14 and 15.

[0022] The dog 9 is composed of a shaped plate with an elongated structure extending essentially on the same lying plane as the fork 8, is hinged to the pin 11 at the level of one of its ends 20 and is designed to couple in a releasable way, by means of a lateral boss 21 with an L-shaped edge, with the shoulders 16, 17 of the fork 8.

[0023] The dog 9 is thrust in a known way towards the fork 8 by a helical spring (not shown) wound around the pin 11 and connected to the dog 9 and to the plate 3.

[0024] When there is no contact with the fork 8 or interaction with other elements of the lock 1 (as will be explained in greater detail hereunder), the dog 9 is thrust by its spring, with a free end 22 opposite the end 20, against a stop 23 orthogonally projecting in cantilever fashion from the plate 3.

[0025] Finally, in an intermediate position, the dog 9 is provided with a thrust boss 24 (the function of which will

be explained hereunder) orthogonally extending in cantilever fashion from an intermediate portion of the dog 9. More precisely, the boss 24 is disposed on the opposite side to the boss 21 with respect to the end 20 hinged to the plate 3.

[0026] As is known, the dog 9 is selectively movable against the action of its spring to disengage the fork 8 and free the lock striker 6, enabling the door to open. This movement may be obtained by lever mechanisms of known types (not shown), connected to the inner and outer handles (again not shown) associated with the door.

[0027] According to an important characteristic of the present invention, the lock 1 also comprises a supplementary retention lever 25 that can be activated selectively to block the fork 8 in a completely closed position (figure 5), wherein the fork 8 is disposed downstream the first and second snap-action coupling closing positions with reference to the direction of movement from the opening position and is detached from the dog 9, which is held by the stop 23.

[0028] In particular, the lever 25 has an elongated structure and extends on a lying plane parallel to the plane of the fork 8 and of the dog 9 so that it intersects the dog 9 transversely between the boss 24 and the end 22.

[0029] The lever 25 is hinged, at the level of one of its ends 26, to the plate 3 by means of a pin 27 with an axis C parallel to the axes A and B and fixed to the plate 3 in an axially fixed position and in an angularly revolving way.

[0030] The lever 25 has a structure tapered towards one of its ends 28 opposite the end 26 and carries, projecting in cantilever fashion, at the level of the end 28, a rolling roller 29 designed to couple with a notch 30 of the fork 8 to define the completely closed position (figure 5).

[0031] In particular, the roller 29 is preferably produced in vibration-damping plastic or chromed aluminum and enables the friction loads between the lever 25 and the fork 8 to be reduced to a minimum.

[0032] The lever 25 is loaded, analogously to the dog 9, towards the peripheral edge of the fork 8 by a helical spring of known type (not shown), wound around the pin 27.

[0033] At the level of the opening position of the fork 8, the lever 24 rests, with its roller 29, on the peripheral edge of the fork 8 on the side of the tooth 15 and comes into contact with the boss 24 laterally to hold the dog 9 in a position detached both from the fork and from the stop 23.

[0034] The notch 30 has an essentially flattened V-shaped profile and is produced along the peripheral edge of the fork 8 on the opposite side of the shoulder 16 with respect to the shoulder 17.

[0035] More specifically, the notch 30 is disposed on the fork 8 in a position so that it can be engaged by the roller 29 of the dog 9 at the end of the closing travel of the fork 8 under the thrust of the lock striker 6.

[0036] Blocking of the lever 25 in the condition of cou-

pling with the fork 8 and, consequently, movement and blocking of the fork 8 in the completely closed position are obtained by loading the lever 25 towards the bottom of the notch 30 performed by an electrically operated rotary type actuator 35 (per se known and shown to the extent required to understand the present invention), for example a geared motor, with a cylindrical output element 36 coupled angularly to the pin 27 in an eccentric position.

[0037] In this way, subsequent to coupling of the roller 29 with the notch 30, activation of the actuator 35 is designed to determine a movement of the lever 25 towards the fork 8 to make it rotate beyond its end of travel position in the closing direction on the lock striker 6, detaching the shoulder 17 of the fork 8 from the boss 21 of the dog 9.

[0038] Disengagement of the lever 25 from the fork 8 can be obtained by an action of lateral thrust performed by the boss 24 during rotation of the dog 9 away from the stop 23.

[0039] In particular, in order to be activated by the boss 24 of the dog 9, the lever 25 extends obliquely with respect to the direction of movement of the boss 24 consequent to a rotation of the dog 9 against the action of its spring.

[0040] Activation/deactivation of the actuator 35 is controlled by a pair of microswitches 37, 38 associated respectively with the lever 25 and with the dog 9.

[0041] In particular, the microswitch 37 is disposed on the opposite side of the lever 25 with respect to the fork 8 and is designed to interact, by means of a mechanical actuation element 39, with a tab 40 projecting radially from the end 26 of said lever 25.

[0042] More precisely, the microswitch 37 is held closed by the tab 40 in the condition of disengagement between the lever 25 and the fork 8 and opens through the effect of movement of the lever 25 in the coupling position with the fork 8, commanding activation of the actuator 35.

[0043] In an entirely analogous way, the microswitch 38 is disposed in proximity to the end 20 of the dog 9 on the opposite side to the one facing the fork 8 and is designed to interact, by means of a mechanical actuation element 41, with a tab 42 projecting radially from said end 20.

[0044] More precisely, the microswitch 38 is opened in the positions of the dog 9 corresponding to the completely closed position and the first and second snap-action coupling positions of the fork 8, and is closed by the tab 42 through the effect of movement of the dog 9 in the position in which it determines initial disengagement of the lever 25 from the fork 8, commanding deactivation of the actuator 35.

[0045] In use, closing of the lock 1, from outside or from inside the motor vehicle, takes place simply by slamming the door; in this way, the portion 5 of the lock striker 6 is made to knock against the tooth 14 of the fork 8, which rotates in a counter-clockwise direction from the opening position in figure 1.

[0046] Rotation of the fork 8 determines sliding of its peripheral edge on the roller 29 of the lever 25, moving the roller 29 and the notch 30 closer to each other.

[0047] In particular, during its travel the fork 8 passes beyond, with both its shoulders 16 and 17, the boss 21 of the dog 9 (figures 2 and 3) and brings the notch 30 to the level of the roller 29 of the lever 25.

[0048] At this point, the lever 25 couples via snap-action with the fork 8 with its roller 29 engaged in the notch 30. Through the effect of this movement, the tab 40 moves away from the mechanical actuation element 39, opening the microswitch 37 and determining activation of the actuator 35 (figure 4).

[0049] Consequent rotation of the output element 36 of the actuator 35 causes, due to its eccentric coupling with the pin 27, the lever 25 to move towards the fork 8.

[0050] As the direction of thrust of the lever 25 is lateral with respect to the axis A of rotation of the fork 8, the latter is loaded by a counter-clockwise torque that takes it to the completely closed position (figure 5).

[0051] In this position, the fork 8 is completely detached from the dog 9, which is in turn resting against the stop 23, and its shoulder 17 is facing the boss 21. In this way, the dog 9 defines a safety stop for the fork 8 in the event of accidental disengagement of the lever 25.

[0052] The lock 1 (figure 6) is opened from outside or from inside the motor vehicle by activating, using the handles associated with the door, the dog 9 in order to rotate it in a clockwise direction around the axis B against the action of its spring. Through the effect of this rotation, the boss 24 is brought into contact with the lever 25 laterally and determines clockwise rotation around the axis C to disengage it from the notch 30.

[0053] Following the aforesaid movement of the lever 25, the tab 42 closes the microswitch 38, determining deactivation of the actuator 35 and enabling the lock 1 to be returned to the opening condition.

[0054] By examining the characteristics of the lock 1 produced according to the present invention the advantages that can be obtained are apparent.

[0055] In particular, the solution described herein enables, by means of the lever 25, a high retention load to be obtained on the fork 8 in the completely closed position, with consequent unloading of the dog 9; the lock 1 may therefore be opened by acting on the dog 9 with a reduced load of manoeuvre.

[0056] The dog 9 therefore essentially assumes a safety function against any accidental disengagement of the fork 8 by the lever 25, for example due to vibrations or impacts that might occur while the motor vehicle is being driven.

[0057] Moreover, use of the rolling roller 29 on the end of the lever 25 enables friction between the lever 25 and the fork 8 to be reduced to a minimum.

[0058] Finally, it is clear that modifications and variations may be made to the lock 1 without departing from the scope of protection of the present invention.

[0059] In particular, the lock 1 could be fixed to the

upright of the door and could cooperate with a lock striker integral with the door.

Claims

1. Lock (1) for a door of a motor vehicle comprising a closing mechanism (4) designed to couple in a releasable way with a lock striker (6), said closing mechanism (4) comprising:

a fork (8) elastically loaded towards an opening position, wherein engagement and disengagement between said lock striker (6) and a seat (13) thereof are possible;

a dog (9) that can couple via snap-action in a releasable way with said fork (8) to block it in at least a primary closing position, in which it constrains said lock striker (6) in its seat (13) and prevents its disengagement; and

a supplementary retention lever (25) that can be coupled with said fork (8) to block it in a completely closed position, wherein said fork (8) is disposed downstream the primary closing position with reference to the direction of movement from said opening position, is detached from said dog (9) and prevents disengagement of said lock striker (6) from its seat (13);

characterized in that it is possible to selectively deactivate said lever (25) by operating said dog (9).

2. - Lock as claimed in claim 1, also comprising locking means (35) that can be activated selectively to block said lever (25) in the coupling arrangement with said fork (8) disposed in said completely closed position.
3. - Lock as claimed in claim 2, wherein said lever (25) rotates around a hinging pin (27) connected, in an axially fixed position and in a angularly revolving way, to supporting means (3) of said lock (1), and wherein said blocking means comprise an actuator (35) with an output element (36) coupled angularly in an eccentric position to said pin (27) of said lever (25).
4. - Lock as claimed in any one of the previous claims, wherein said dog (9) is elastically loaded towards said fork (8), and wherein stop means (23) are provided to hold said dog (9) detached from said fork (8) disposed in the completely closed position.
5. - Lock as claimed in any one of the previous claims, wherein said dog (9) and said lever (25) extend prevalently on parallel planes and reciprocally intersect, and wherein interaction means (24) are provided to determine disengagement of said lever (25) from said fork (8) following operation of said dog (9).

6. - Lock as claimed in claim 5, wherein said interaction means comprise a boss (24) projecting in cantilever fashion from said dog (9), designed to come into contact laterally with said lever (25) and with a trajectory of movement transverse to the direction in which said lever (25) extends.

7. - Lock as claimed in any one of the previous claims, wherein said lever (25) cooperates with said fork (8) by means of a rolling roller (29).

Patentansprüche

1. Schloss (1) für eine Tür eines Kraftfahrzeugs mit einem Schließmechanismus (4), der so ausgebildet ist, dass dieser in einer lösbaren Weise mit einem Schließdom (6) koppelt, wobei der Schließmechanismus (4) umfasst:

eine Gabel (8), die in eine Öffnungsposition elastisch vorgespannt ist, wobei ein Anliegen und Lösen zwischen dem Schließdom (6) und einem Sitz (13) desselben möglich ist;

eine Klaue (9), die über eine Schnappwirkung in einer lösbaren Weise mit der Gabel (8) koppeln kann, um diese in wenigstens einer ersten Schließposition zu blockieren, in welcher diese den Schließdom (6) in seinen Sitz (13) zwingt und ein Abheben verhindert; und

einen zusätzlichen Haltehebel (25), der mit der Gabel (8) gekoppelt werden kann, um diese in einer vollständigen Schließposition zu blockieren, wobei die Gabel (8) stromabwärts der ersten Schließposition in Bezug zur Bewegungsrichtung aus der Öffnungsposition angeordnet ist, von der Klaue (9) getrennt ist und das Abheben des Schließdorns (6) aus seinem Sitz (13) verhindert;

dadurch gekennzeichnet, dass es möglich ist, den Hebel (25) durch Betätigen der Klaue (9) wahlweise zu deaktivieren.

2. Schloss nach Anspruch 1, auch mit einer Riegeleinrichtung (35), die wahlweise aktiviert werden kann, um den Hebel (25) in der Kopplungsanordnung mit der in der vollständig geschlossenen Position angeordneten Gabel (8) zu blockieren.
3. Schloss nach Anspruch 2, in welchem der Hebel (25) um einen Gelenkzapfen (27) dreht, der in einer axial festgelegten Position und in einer winkelmäßig drehenden Weise mit einer Trägereinrichtung (3) des Schlosses (1) verbunden ist, und wobei die Blockiereinrichtung ein Stellglied (35) mit einem Ausgangselement (36) umfasst, das winkelmäßig in einer exzentrischen Position zum Zapfen (27) des Hebels

(25) gekoppelt ist.

4. Schloss nach einem der vorigen Ansprüche, in welchem die Klaue (9) zur Gabel (8) elastisch vorgespannt ist, und in welchem Stoppmittel (23) vorgesehen sind, um die Klaue (9) getrennt von der in der vollständig geschlossenen Position angeordneten Gabel (8) zu halten.
5. Schloss nach einem der vorigen Ansprüche, in welchem sich die Klaue (9) und der Hebel (25) vornehmlich auf parallelen Ebenen erstrecken und wechselseitig überkreuzen, und in welcher Interaktionsmittel (24) vorgesehen sind, um das Ablösen des Hebels (25) von der Gabel (8) infolge einer Betätigung der Klaue (9) zu bedingen.
6. Schloss nach Anspruch 5, in welchem die Interaktionsmittel einen Ansatz (24) umfassen, der in freitragender Weise von der Klaue (9) vorsteht und so ausgebildet ist, dass dieser in seitlichem Kontakt mit dem Hebel (25) und mit einer Bewegungsbahn quer zur Richtung, in welcher sich der Hebel (25) erstreckt, gelangt.
7. Schloss nach einem der vorigen Ansprüche, in welchem der Hebel (25) mittels einer Freilaufrolle (29) mit der Gabel (8) kooperiert.

Revendications

1. Serrure (1) destinée à une porte d'un véhicule automobile comprenant un mécanisme de fermeture (4) conçu pour être couplé d'une manière détachable à une gâche de serrure (6), ledit mécanisme de fermeture (4) comprenant :



une fourche (8) chargée élastiquement vers une position d'ouverture, dans laquelle un engagement et un désengagement entre ladite gâche de serrure (6) et un support (13) de celle-ci sont possibles ;



une came (9) qui peut être couplé par pression de manière détachable à ladite fourche (8) pour la bloquer dans au moins une position de fermeture primaire, dans laquelle il contraint ladite gâche de serrure (6) dans son support (13) et empêche son désengagement ; et



un levier de retenue supplémentaire (25) qui peut être couplé à ladite fourche (8) pour la bloquer dans une position complètement fermée, ladite fourche (8) étant disposée en aval de la position de fermeture primaire en référence à la direction de déplacement depuis ladite position d'ouverture, étant détachée de ladite came (9) et empêchant le désengagement de ladite gâche de serrure (6) de son support (13) ;

caractérisée en ce qu'il est possible de désactiver sélectivement ledit levier (25) en actionnant ladite came (9).

2. Serrure selon la revendication 1, comprenant également un moyen de verrouillage (35) qui peut être activé sélectivement pour bloquer ledit levier (25) dans l'agencement de couplage avec ladite fourche (8) disposée dans ladite position complètement fermée.
3. Serrure selon la revendication 2, dans laquelle ledit levier (25) tourne autour d'une cheville d'articulation (27) reliée, dans une position axialement fixe et d'une manière angulairement pivotante, à un moyen de support (3) de ladite serrure (1), et dans laquelle ledit moyen de verrouillage comprend un actionneur (35) avec un élément de sortie (36) couplé angulairement dans une position excentrique par rapport à ladite cheville d'articulation (27) dudit levier (25).
4. Serrure selon l'une quelconque des revendications précédentes, dans laquelle ladite came (9) est élastiquement chargée vers ladite fourche (8), et dans laquelle un moyen d'arrêt (23) est prévu pour maintenir ladite came (9) détaché de ladite fourche (8) disposée dans la position complètement fermée.
5. Serrure selon l'une quelconque des revendications précédentes, dans laquelle ladite came (9) et ledit levier (25) s'étendent de façon répandue sur des plans parallèles et se croisent réciproquement, et dans laquelle un moyen d'interaction (24) est prévu pour déterminer le désengagement dudit levier (25) de ladite fourche (8) suivant le fonctionnement de ladite came (9).
6. Serrure selon la revendication 5, dans laquelle ledit moyen d'interaction comprend un bossage (24) se projetant en porte-à-faux depuis ladite came (9), conçu pour entrer en contact latéralement avec ledit levier (25) et avec une trajectoire de déplacement transversale à la direction dans laquelle ledit levier (25) s'étend.
7. Serrure selon l'une quelconque des revendications précédentes, dans laquelle ledit levier (25) coopère avec ladite fourche (8) au moyen d'un rouleau roulant (29).

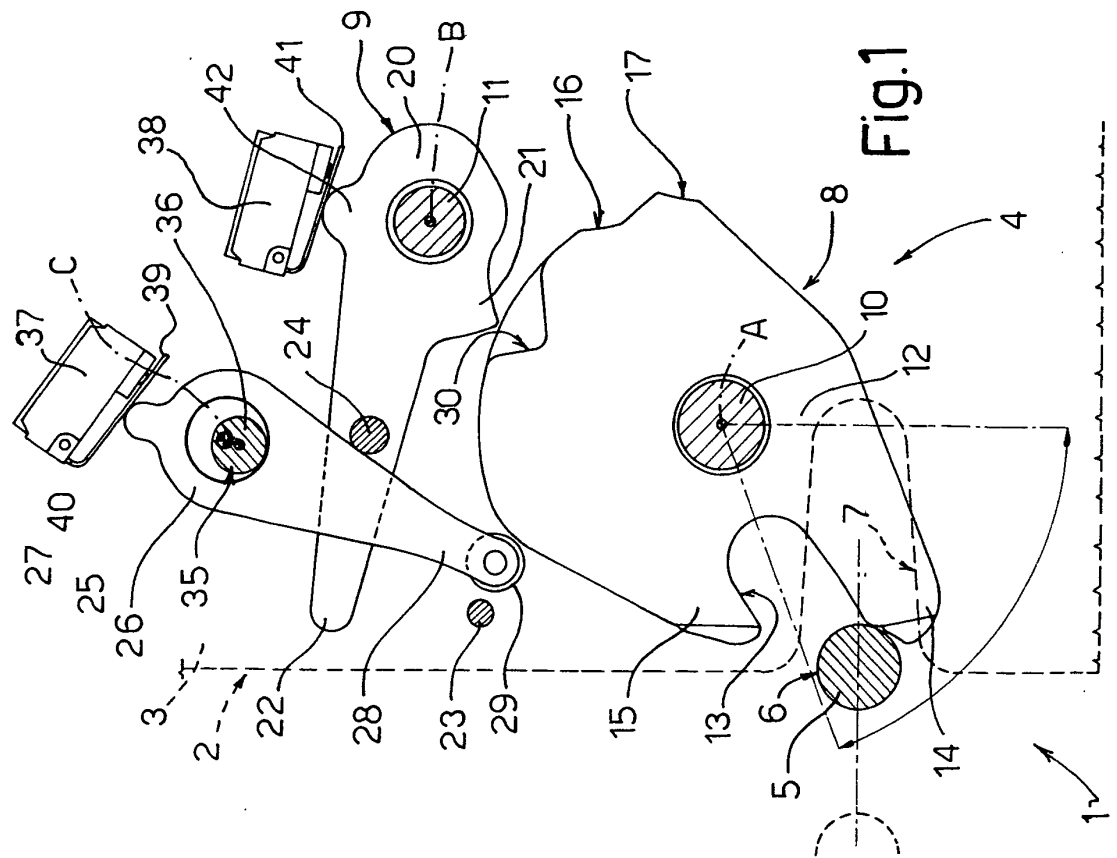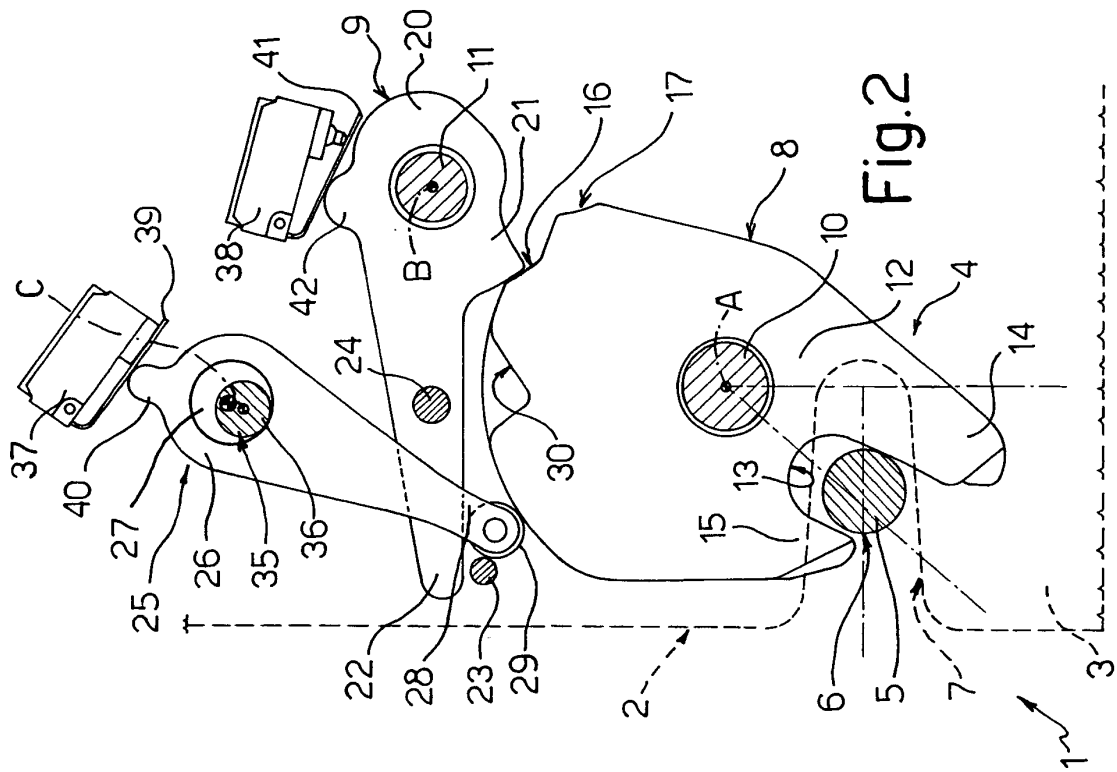

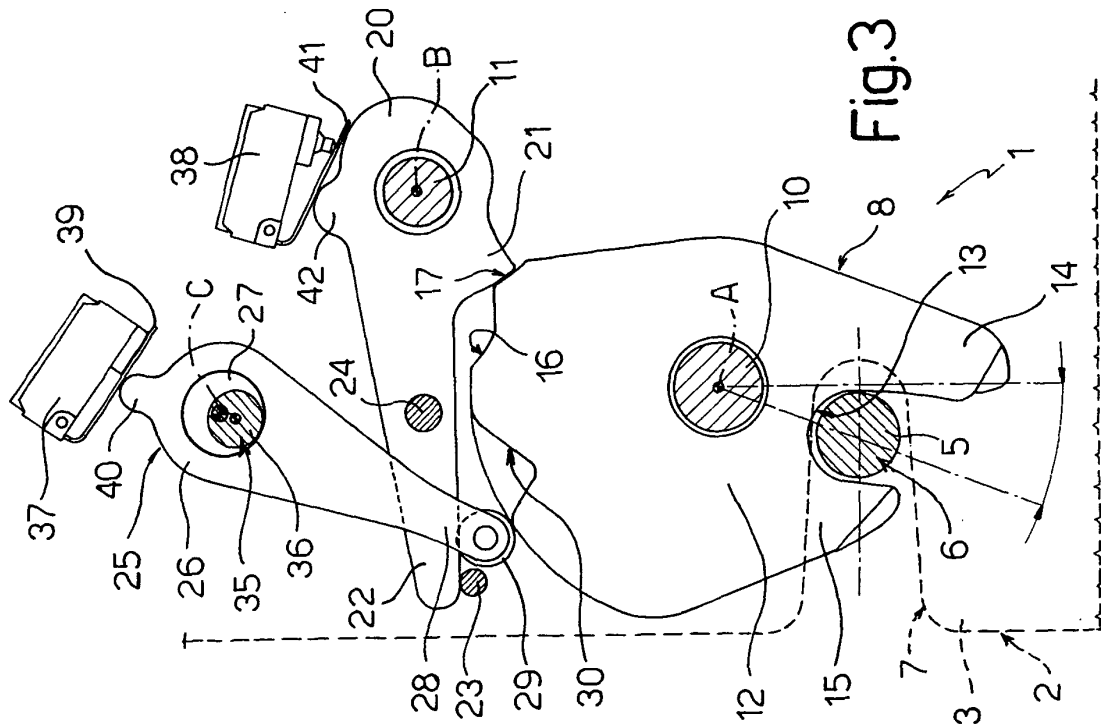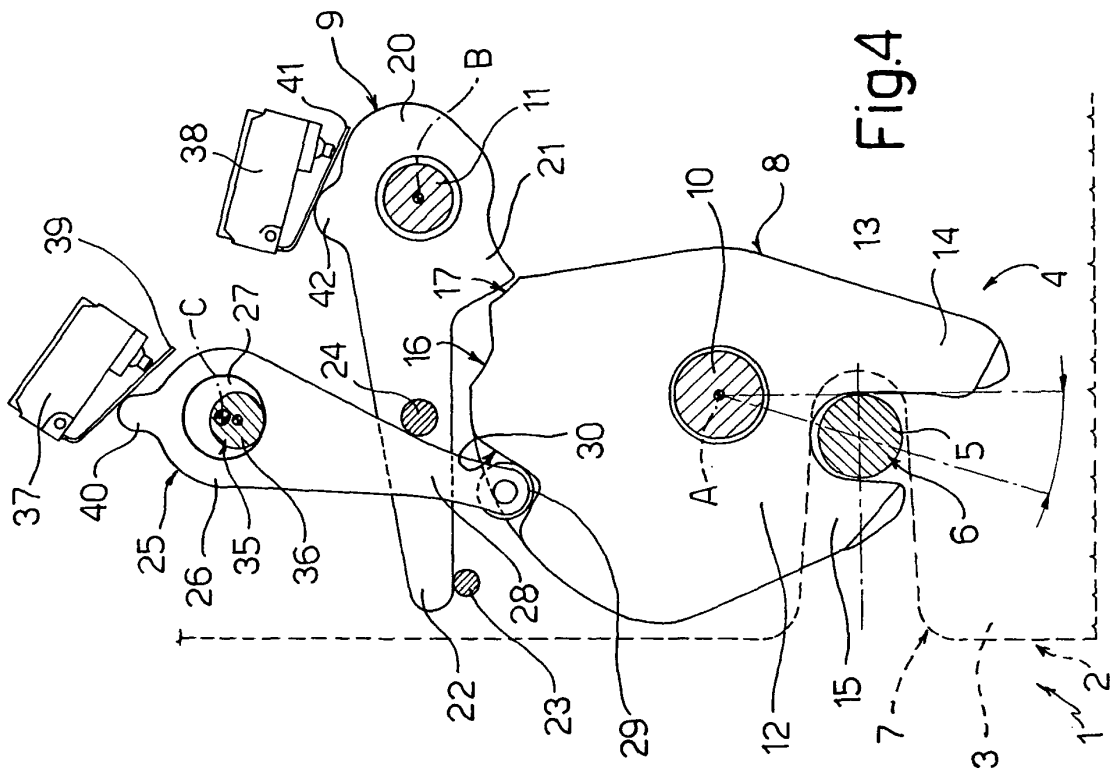

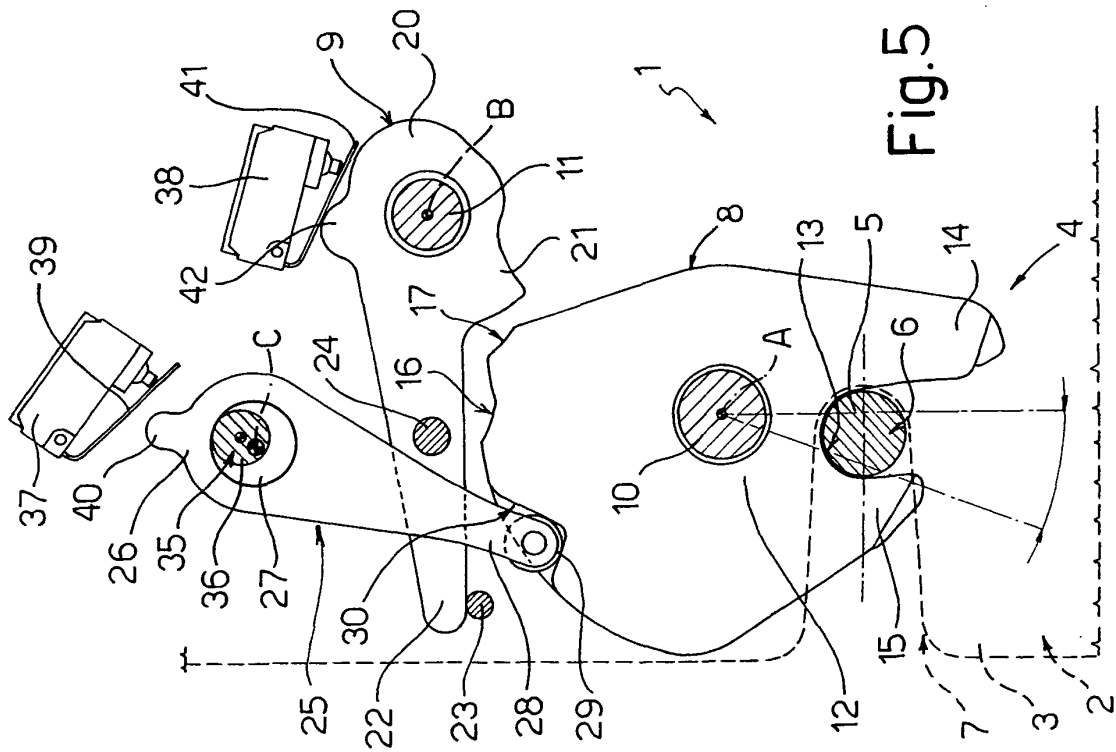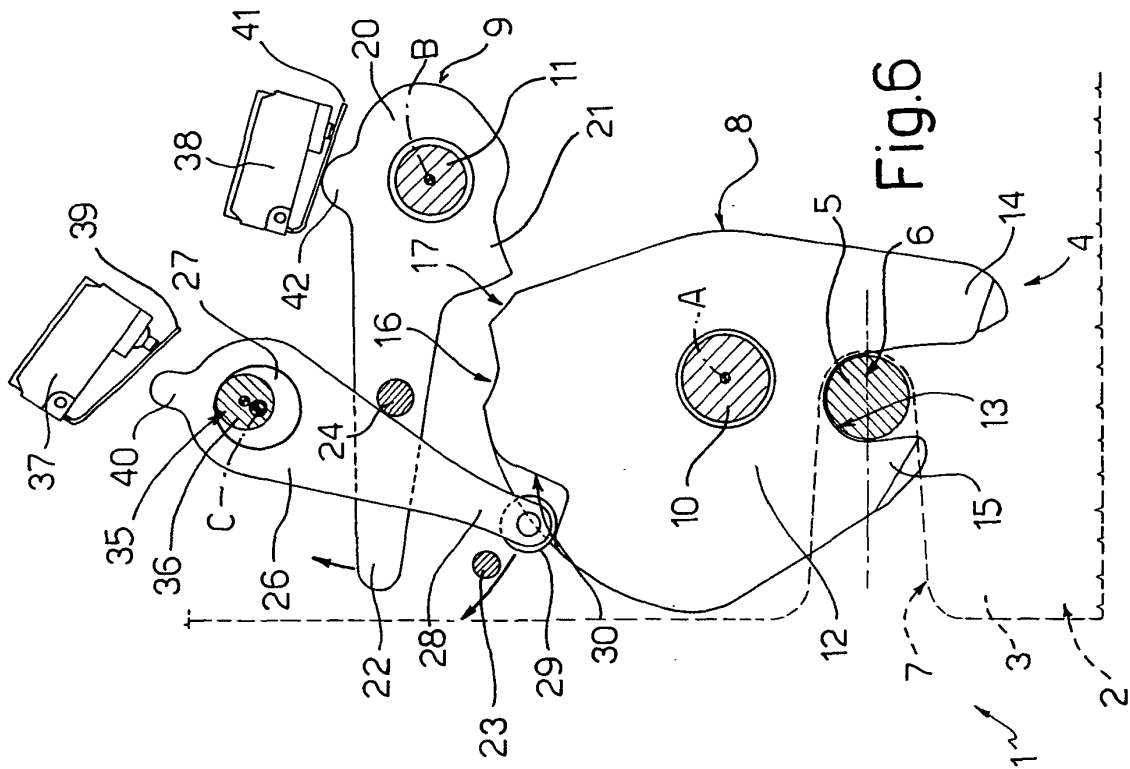

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2334297 A [0009]
- DE 3414475 C [0009]