



- (51) **International Patent Classification:**
F16H 7/08 (2006.01) *F02B 67/06* (2006.01)
- (21) **International Application Number:**
PCT/US2013/072574
- (22) **International Filing Date:**
2 December 2013 (02.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/738,547 18 December 2012 (18.12.2012) US
61/774,059 7 March 2013 (07.03.2013) US
- (71) **Applicant:** BORGWARNER INC. [US/US]; Patent Department, 3850 Hamlin Road, Auburn Hills, Michigan 48326 (US).
- (72) **Inventors:** TODD, Kevin B.; 7 Ocean Drive, Freeville, New York 13068 (US). SMITH, Dale N.; 17 Hollister Road, Freeville, New York 13068 (US).
- (74) **Agents:** BROWN, Michael F. et al.; Brown & Michaels, PC, 400 M & T Bank Building, 118 North Tioga, Street - The Commons, Ithaca, NY 14850 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) **Title:** TENSIONER WITH SPRING FORCE CONTROL IN A SECOND BORE

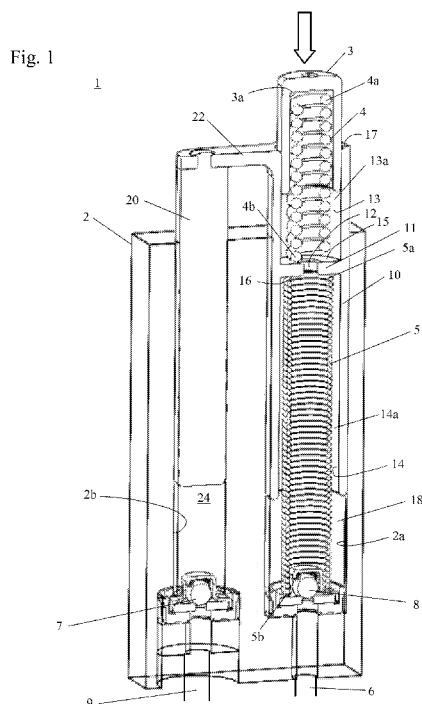

(57) **Abstract:** A tensioner for tensioning a chain span which uses two pistons. The movement of the two pistons may be coupled together. The first piston provides damping to the chain span and a second piston provides variable, dominant and automatically adjusting spring force to the chain span. The tensioner automatically adjusts the mean tension force to keep the chain tension as low as possible without sacrificing chain control, significantly improving drive efficiency at new chain conditions and conditions with dynamic loads.



-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*
- Published:**
- *with international search report (Art. 21(3))*

TENSIONER WITH SPRING FORCE CONTROL IN A SECOND BORE

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The invention pertains to the field of tensioners. More particularly, the invention
5 pertains to a tensioner with spring force control in a second bore of the housing.

DESCRIPTION OF RELATED ART

Generally, in timing chains for valve drives of internal combustion engines,
camshaft chains in use for a camshaft-camshaft drive, and balancer chains have tensioners
that are used on the slack side of a chain to take up slack in the chain and to apply tension
10 to the chain.

During operation, a piston of the tensioner presses against the chain to maintain
tension in the chain. When tension in the chain increases during operation due to
resonance of a chain span, a high load from the chain acts on the piston of the tensioner,
causing the piston to extend as the tensioner pumps up to keep the tension in the chain.

15 Chain drive tensioner spring force is often too high for most operating conditions
because the spring force needs to be sufficient to handle worst case operating conditions of
the tensioner system. The effectiveness of the tensioner and the overall system behavior
and efficiency could be improved if the tensioner spring force could be varied with
operating conditions, taking into account wear and stretching that occurs in the chain
20 during the life of the chain.

SUMMARY OF THE INVENTION

A tensioner for tensioning a chain span which uses two pistons. The movement of
the two pistons may be coupled together. The first piston provides damping to the chain
span and a second piston provides variable and automatically adjusting spring force to the
25 chain span. The tensioner automatically adjusts the mean tension force to keep the chain
tension as low as possible without sacrificing chain control, significantly improving drive
efficiency at new chain conditions and conditions with dynamic loads.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 shows a schematic of a tensioner of a first embodiment of the present invention.

Fig. 2a shows a schematic of a tensioner of a second embodiment tensioning a chain under normal operating conditions. Fig. 2b shows a schematic of a tensioner tensioning a chain in response to high dynamic load.

Fig. 3a shows a schematic of a tensioner of a third embodiment tensioning a chain under normal operating conditions. Fig. 3b shows a schematic of a tensioner tensioning a chain in response to high dynamic load.

Fig. 4a shows a schematic of a tensioner of a fourth embodiment tensioning a chain under normal operating conditions. Fig. 4b shows a schematic of a tensioner tensioning a chain in response to high dynamic load.

Fig. 5 shows a schematic of a first piston in a first bore connected to a second piston in a second bore.

Fig. 6 shows a schematic of a second piston in a second bore moving a first piston in a first bore through an extension of the first piston.

Fig. 7 shows an example of the tensioner of the first embodiment tensioning a chain through an arm.

DETAILED DESCRIPTION OF THE INVENTION

Figures 1-7 show tensioners using a passive control system to maintain tension of a chain span or belt. Passive control is defined as a system in which no feedback is used to regulate the position of a first piston relative to a second piston or between the position of a moveable sleeve relative to the position of a piston.

The tensioner systems of the present invention include a tensioner (described in further detail below) for a closed loop chain drive system used in an internal combustion engine. It may be utilized on a closed loop power transmission system between a driveshaft and at least one camshaft or on a balance shaft system between the driveshaft and a balance shaft. The tensioner system may also include an oil pump and be used with

fuel pump drives. Additionally, the tensioner system of the present invention may also be used with belt drives.

Figure 1 shows tensioner systems using passive control to maintain the position of a moveable sleeve 10 relative to a piston 3. Passive control is defined as a system in which no feedback is used to regulate the position of a movable sleeve 10 relative to a piston 3 of the tensioner 1. The passive system is in contrast to an active control system in which real time feedback of components of the engine are used to regulate the position of the movable sleeve 10.

The tensioner 1 includes a housing 2 having a first axially extending piston bore 2a. Received within the bore 2a of the housing 2 is a moveable sleeve 10. The moveable sleeve 10 has a first open end 13a and a second open end 14a which are separated by an inner flange 11 with a through hole 12. The first open end 13a is defined by a top inner diameter portion 13, a top surface 15 of the inner flange 11 and the second open end 14a is defined by a bottom inner diameter portion 14 and a bottom surface 16 of the inner flange 11. The through hole 12 of the inner flange 11 connects the first open end 13a with the second open end 14a. A top surface 17 of the moveable sleeve 10 is exposed to atmospheric pressure of the engine.

Received within the first open end 13a of the moveable sleeve 10, defined by the top inner diameter portion 13 and the top surface 15 of the inner flange 11, is a hollow piston 3. Within the hollow piston 3 is a piston spring 4 biasing the piston 3 outwards from the housing 2. The piston spring 4 has a first end 4a in contact with the inner portion 3a of the hollow piston 3 and a second end 4b in contact with a top surface 15 of the inner flange 11 of the moveable sleeve 10. It should be noted that while the piston 3 is shown as being hollow, the present invention could also apply to a solid piston, with the piston spring connecting the end of the piston.

Received within the second opening 14a of the moveable sleeve 10, defined by the bottom inner diameter portion 14 and the bottom surface 16 of the inner flange 11, is a bias sleeve spring 5. The first end 5a of the bias sleeve spring 5 is in contact with a bottom surface 16 of the inner flange 11 of the moveable sleeve 10 and the second end 5b of the bias sleeve spring 5 is in contact with a check valve 8 of the bore 2a. The bias sleeve spring 5 provides a bias force to maintain some outward force on the moveable sleeve 10.

A pressure chamber 18 is formed between the top inner diameter portion 13 of the moveable sleeve 10, the bottom inner diameter portion 14 of the moveable sleeve 10, the bore 2a of the housing, and the interior 3a of the piston 3. The through hole 12 is present in the inner flange 11 and allows fluid to flow from the second opening 14a to the first opening 13a of the moveable sleeve 10.

At the bottom of the bore 2a is an inlet supply line 6 which provides fluid to the pressure chamber 18 through an inlet check valve 8.

At least a portion of the moveable sleeve 10 is coupled to a second piston 20 received within a second axially extending piston bore 2b of the housing 2 through a coupling 22. While the second piston 20 is shown as being connected to the top of the moveable sleeve 10, the connection can occur on other parts of the moveable sleeve 10. The coupling 22 may be a sleeve tab as shown in Figure 1 or a flexible linkage. The second piston 20 does not need to be rigid or hard connection to the moveable sleeve 10 and can bias the moveable sleeve 10 from any contact point on the moveable sleeve 10.

Furthermore, while the second bore 2b of the housing 2 is shown as being parallel to the first bore 2a, the second bore 2b may be perpendicular to the first bore 2a or at some other angle relative to the first bore 2a.

In an alternate embodiment, the orientation of the second piston 20 could be inverted or reoriented to act on a coupling 22 that then biases the moveable sleeve 10, outwards from the housing 2.

In yet another embodiment, the secondary piston 20 could also have a flange around its outer diameter with a chamber on either side as shown in International Application No. PCT/US2012/053830, which is hereby incorporated by reference.

At the bottom of the second bore 2b is an inlet supply line 9 which provides fluid through an inlet check valve 7 to a pressure chamber 24 formed between the second piston 20 and the bore 2b of the housing 2. The coupling 22 between the second piston 20 and the moveable sleeve 10 is such that, if the second piston 20 is moved, the moveable sleeve 10 moves and vice versa. The fluid from the inlet supply line 9 may also be controlled by a control valve (not shown).

When the tensioner 1 is tensioning a new chain, during operation, fluid is supplied to the first hydraulic chamber 18 from an inlet supply line 6 through an inlet check valve 8 to pressurize the first hydraulic chamber 18 and bias the piston 3 outward from the housing 2 in addition to the spring force from piston spring 4 biasing a span of the closed loop chain.

The supply providing fluid to the first bore 2a through the first inlet supply line 6 may be the same as the supply providing fluid to second bore 2b through inlet supply line 9. Alternatively, the supply supplying fluid to the first bore 2a and the second bore 2b of the housing 2 can be different.

When the tensioner 1 is tensioning a worn chain without high load, during operation, fluid is supplied to the first hydraulic chamber 18 through an inlet check valve 8 from an inlet supply line 6 to pressurize the first hydraulic chamber 18 and bias the piston 3 outward from the housing 2. The piston 3 is also biased outward from the housing 2 by the spring 4 to bias a span of the closed loop chain. As the chain wears, the piston 3 has to be biased further outwards from the housing 2 in order to adequately tension the chain. The bias sleeve spring 5 within the second open end 14a of the moveable sleeve 10 biases the inner flange 11 outward from the housing 2, moving the end 4b of the spring 4 further outwards from the housing 2 and towards the chain.

When the tensioner 1 is tensioning a worn chain during high dynamic chain load, the high dynamic load force from the chain (shown by the arrow) pushes the piston 3 inwards towards the housing 2 and then outwards from the housing 2, moving the second piston 20 inwards and outwards as well, pumping up the pressure or pressurizing the second pressure chamber 24, by drawing fluid through the inlet check valve 7 in the second bore 2b of the housing 2. The pressurization of the second pressure chamber 24 in the second bore 2a moves the second piston 20 and thus the moveable sleeve 10 outwards from the housing 2. The movement of the moveable sleeve 10 causes the inner flange 11 of the moveable sleeve 10 to exert an outward force on the piston 3 through the piston spring 4, opposing the inward force of the dynamic load.

Once the high load is removed from the piston 3, the second pressure chamber 24 is depressurized and fluid leaks out to the engine through clearance between the second bore 2b and the second piston 20.

Within the tensioner system of the present invention, movement of the moveable sleeve 10 moves the second end 4b of the piston spring 4 biasing the piston 3 outwards from the housing 2, and therefore the spring force acting on the piston 3 is variable allowing the piston 3 to continually tension the chain, even when the chain becomes worn and stretched.

Furthermore, a vent or pressure relief valve (not shown) may be present within the hollow piston 3.

Seals (not shown) may be present between the bore 2a and the moveable sleeve 10 or any other place within the tensioner as necessary.

Hydraulic stiffness of the tensioner is created by the pressure chambers 18 and 24 of the tensioner and substantially prevents inward movement of the piston 3 and the moveable sleeve 10 towards the housing 2 when the chain span is under load.

In an alternate embodiment, the moveable sleeve 10 may be received within another sleeve in the first bore 2a to aid in eliminating pressure that could result in undesired pump-up.

It should be noted that this is a mean position control device. It is unlikely that frequency response would be sufficient to dynamically vary the moveable sleeve position within an engine cycle. Pressure acting on the bottom surfaces of movable sleeve 10 may result in undesired pump-up. In an alternate embodiment, the moveable sleeve 10 may be received within another sleeve in the first bore 2a to aid in eliminating pressure that could result in undesired pump-up. In another alternate embodiment, the piston 3 may fit over the outside of moveable sleeve 10 so the top and bottom surfaces of the moveable sleeve 10 are exposed to the same pressure.

Figures 2a-2b shows a tensioner of a second embodiment using passive control to tension a chain under various conditions; Figure 2a is tensioning a chain without high loads; and Figure 2b is tensioning a chain with high load.

The tensioner includes a housing 102 having a first axially extending bore 102a parallel to a second axially extending bore 102b. While the second bore 102c of the

housing 102 is shown as being parallel to the first bore 102a, the second bore 102c may be perpendicular to the first bore 102a or at some other angle relative to the first bore 102a.

Slidably received within the first axially extending bore 102a is a first piston 103. The first piston 103 has a body with a first end 103a, a second end 103c, and a hollow interior 103b. Present within the hollow interior 103b of the first piston 103 is a first piston spring 104. The first piston spring 104 has a first end 104a in contact with the interior 103b of the first piston 103 or a volume reducer 105 and a second end 104b in contact with a bottom 102b of the first axially extending bore 102a of the housing 102. A first pressure chamber 111 is formed between the first piston 103 and the first axially extending bore 102a. Fluid is supplied to the first pressure chamber 111 through a first supply 106 through an inlet check valve 108. The first piston 103 is biased outwards from the housing 102 to bias a chain or belt through the first end 103a of the first piston 103 by the force of the first piston spring 104 and the pressure of oil in the first pressure chamber 111.

Alternatively, the first piston 103 may not be hollow and the first piston spring 104 would contact the body of the first piston 103 and the bottom 102b of the first axially extending bore 102a.

The second axially extending bore 102c receives a moveable sleeve 112. The moveable sleeve 112 has a first open end 112a and a second open end 112b which are separated by an inner flange 113. The first open end 112a of the moveable sleeve 112 is defined by a top inner diameter portion 118 and a top surface 113a of the inner flange 113. The second open end 112b of the moveable sleeve 112 is defined by a bottom inner diameter portion 119 and a bottom surface 113b of the inner flange 113. The top surface 112d of the moveable sleeve 112 and top surface 113a of the inner flange is exposed to atmospheric pressure of the engine.

Received within the first open end 112a of the moveable sleeve 112 is a second piston 110 having a body with a first end 110a and a second end 110b. A second piston spring 115 biases the second piston 110 outwards from the first open end 112a of the moveable sleeve 112 of the housing 102 so that the first end 110a of the second piston 110 can apply a force to the chain 400, preferably through an arm 401 as shown in Figure 7. The second piston spring 115 has a first end 115a in contact with the second end 110b of

the second piston 110 and a second end 115b in contact with the top surface 113a of the inner flange 113.

Alternatively, the second piston 110 may be hollow and the first end 110a of the second piston spring would contact a hollow interior of the second piston 110.

5 Received within the second open end 112b of the moveable sleeve 112 is a bias sleeve spring 116 and an optional volume reducer 114. The first end 116a of the bias sleeve spring 116 is in contact with a bottom surface 113b of the inner flange 113 or the volume reducer 114 and a second end 116b of the bias sleeve spring 116 is in contact with a bottom 102d of the second axially extending bore 102c of the housing 102. The bias
10 sleeve spring 116 maintains the position of the moveable sleeve 112 within the second axially extending bore 102c and prevents the moveable sleeve 112 from bottoming out within the second axially extending bore 102c. The bias sleeve spring 116 preloads the second piston spring 115, in other words, moving the second end 115b of the second piston spring 115 outwards from the housing 102. A second high pressure chamber 117 is
15 formed between the bottom inner diameter portion 119 of the moveable sleeve 112, the bottom surface 113b of the inner flange 113, and the bottom 102d of the second axially extending bore 102c. The volume reducer 114 may also be present within this chamber 117. There is no fluid communication between the first open end 112a and the second open end 112b of the moveable sleeve 112 save for any leakage that may occur from the
20 second high pressure chamber 117.

Fluid is supplied to the second high pressure chamber 117 through an inlet supply line 109 and preferably a check valve 107. The inlet supply 109 may or may not be connected to the inlet supply line 106.

25 The second piston spring 115 has a greater spring rate or spring constant than the first piston spring 104 or the bias sleeve spring 116.

Since there are two pistons 110, 103 to tension the chain span or belt, the leakage of the first pressure chamber 111 can be increased (as opposed to a conventional hydraulic tensioner where a certain mean pressure must be maintained within the pressure chamber to control the chain) to provide additional damping. The mean force required for chain
30 control is supplied by the second piston 110 in the second axially extending bore 102c.

When the tensioner is tensioning a new chain as shown in Figure 2a, during operation, fluid is supplied to the first pressure chamber 111 from the first inlet supply 106 and through an inlet check valve 108 and biases the first piston 103 outwards from the housing 102 in addition to the spring force of the first piston spring 104, biasing a span of the closed loop chain 400 or belt as shown in Figure 7. At the same time, the second piston 110 is also biased outwards from the moveable sleeve 112 by the second piston spring 115 to bias a span of the closed loop chain 400 or belt. Ideally, the first piston 103 and the second piston 110 are biased outwards from the housing 102 approximately the same amount. In other words, the first ends 103a, 110a of the first and second pistons 103, 110 are aligned as shown in Figure 2a and 7.

When the tensioner is tensioning a worn chain without high load, during operation, fluid is supplied to the first pressure chamber 111 through the first inlet supply 106 and through an inlet check valve 108 and biases the first piston 103 outwards from the housing 102 in addition to the spring force of the first piston spring 104, biasing a span of the closed loop chain 400 or belt. At the same time, the second piston 110 is also biased outwards from the moveable sleeve 112 by the second piston spring 115 due to the movement of the moveable sleeve 112 by the bias sleeve spring 116 to bias the span of the closed loop chain 400 or belt. As the chain wears, additional slack is present in the chain span and the first piston 103 and second piston 110 would need to be extended further outwards from the housing 102 to bias and adequately tension the chain 400.

When the tensioner is tensioning a chain during high dynamic chain load, the high dynamic load force from the chain (shown by the arrow) pushes the first piston 103 and the second piston 110 inwards towards the housing 102 and then outwards from the housing 102, pumping up the pressure or pressurizing the second pressure chamber 117, by drawing fluid through the inlet check valve 107 into the second bore 102c of the housing 102. The pressurization of the second pressure chamber 117 in the second bore 102c moves the moveable sleeve 112 outwards from the housing 102. The movement of the moveable sleeve 112 causes the inner flange 113 of the moveable sleeve 112 to exert an outward force on the second piston 110 through the second piston spring 115, opposing the inward force of the dynamic load.

Once the inward force of the dynamic load has been opposed, fluid within the second pressure chamber 117 leaks to the engine through the second axially extending bore 102c or through the volume reducer 114. This leakage reduces the mean pressure present within the second pressure chamber 117.

5 It should be noted that at all operating conditions, the pressure in the second pressure chamber 117 will pump up to maintain a minimum preload in the second piston spring 115. When the force or preload in the second piston spring 115 gets too low, the moveable sleeve 112 moves out from the housing, due to the bias sleeve spring 116 and pressure in the second pressure chamber 117 and draws more oil in through the inlet check
10 valve 107.

Therefore, the first piston 103 in the first axially extending bore 102a provides the dominant damping of the chain span 400 or belt and the second piston 110 in the second axially extending bore 102c provides the dominant and automatically adjusting spring force. The tensioner of the present invention automatically adjusts the mean tension force
15 to keep the chain tension as low as possible without sacrificing chain control, significantly improving drive efficiency at new chain conditions and conditions with dynamic loads.

Figures 3a-3b shows a tensioner of a third embodiment using passive control to tension a chain under various conditions; Figure 3a is tensioning a chain without high loads; and Figure 3b is tensioning a chain with high load.

20 The tensioner includes a housing 102 having a first axially extending bore 102a parallel to a second axially extending bore 102c. While the second bore 102c of the housing 102 is shown as being parallel to the first bore 102a, the second bore 102c may be perpendicular to the first bore 102a or at some other angle relative to the first bore 102a.

Slidably received within the first axially extending bore 102a is a first piston 103.
25 The first piston 103 has a body with a first end 103a, a second end 103c, and a hollow interior 103b. Present within the hollow interior 103b of the first piston 103 is a first piston spring 104. The first piston spring 104 has a first end 104a in contact with the interior 103b of the first piston 103 or a volume reducer 105 and a second end 104b in contact with a bottom 102b of the first axially extending bore 102a of the housing 102. A first
30 pressure chamber 111 is formed between the first piston 103 and the first axially extending

bore 102a. Fluid is supplied to the first pressure chamber through a first supply 106 through an inlet check valve 108. The first piston 103 is biased outwards from the housing 102 to bias the chain through the first end 103a of the first piston by the force of the first piston spring 104 and the pressure of oil in the first pressure chamber 111.

5 Alternatively, the first piston 103 may not be hollow and the first piston spring 104 would contact the body of the first piston 103 and the bottom 102b of the first axially extending bore 102a.

10 The second axially extending bore 102c slidably receives a second external piston 150 and a third piston 152. The second external piston 150 has a body with a first end 150a, a second end 150c, and a hollow interior 150b. Present within the hollow interior 150b is a second piston spring 151 for biasing the second piston 150 outwards from the housing 102. The second piston spring 151 has a first end 151a in contact with the interior 150b of the second external piston 150 and a second end 151b in contact with a first end 152a of the third piston 152. Alternatively, the second external piston 150 may not be
15 hollow and the first end 151a of the second piston spring 151 would contact the body of the second external piston 150.

20 The third piston 152 has a body with a first end 152a, a second end 152c, and a hollow interior 152b. Present within the hollow interior 152b is a third piston spring 154 for biasing the third piston 152 outwards from the housing and preloading the second piston spring 151, in other words moving the second end 151b of the second piston spring 152 outwards from the housing 102. The third piston spring 154 has a first end 154a in contact with the hollow interior 152b or a volume reducer 153 and the second end 154b is in contact with the bottom 102c of the second axially extending bore 102c of the housing 102.

25 A second high pressure chamber 155 is formed between the hollow interior 152b, the second axially extending bore 102c, and the third piston spring 154. Fluid is supplied to the second high pressure chamber 155 through an inlet supply 109 and preferably a check valve 107. The inlet supply 109 may or may not be connected to the inlet supply line 106.

There is no fluid communication between the hollow interior 150b of the second piston 150 and the second high pressure chamber 155 save for any leakage that may occur.

The second piston spring 151 has a greater spring rate or spring constant than the first piston spring 104 and the third piston spring 154.

5 Since there are two pistons 150, 103 to tension the chain span or belt, the leakage of the first pressure chamber 111 can be increased (as opposed to a conventional hydraulic tensioner where a certain mean pressure must be maintained within the pressure chamber to control the chain) to provide additional damping. The mean force required for chain control is supplied by the second piston 150 in the second axially extending bore 102c.

10 When the tensioner is tensioning a new chain as shown in Figure 3a, during operation, fluid is supplied to the first pressure chamber 111 from the first inlet supply 106 and through an inlet check valve 108 and biases the first piston 103 outwards from the housing 102 in addition to the spring force of the first piston spring 104, biasing a span of the closed loop chain 400 or belt as shown in Figure 7. At the same time, the second piston
15 150 is also biased outwards from the second axially extending bore 102c by the second piston spring 151 to bias a span of the closed loop chain 400 or belt. Ideally, the first piston 103 and the second piston 150 are biased outwards from the housing 102 approximately the same amount. In other words, the first ends 103a, 150a of the first and the second pistons 103, 150 are aligned as shown in Figure 3a and 7.

20 When the tensioner is tensioning a worn chain without high load, during operation, fluid is supplied to the first pressure chamber 111 through the first inlet supply 106 and through an inlet check valve 108 and biases the first piston 103 outwards from the housing 102 in addition to the spring force of the first piston spring 104, biasing a span of the closed loop chain 400 or belt. At the same time, the second piston 150 is also biased
25 outwards further through the second piston spring 151 due to the movement of the third piston 152 by the third piston spring 154 to bias the span of the closed loop chain 400 or belt. As the chain wears further, additional slack is present in the chain span and the first piston 103 and second piston 150 would need to be extended further outwards from the housing 102 to bias and adequately tension the chain 400.

When the tensioner is tensioning a chain during high dynamic chain load, the high dynamic load force from the chain (shown by the arrow) pushes the first piston 103 and the second piston 150 inwards towards the housing 102 and then outwards from the housing 102, pumping up the pressure or pressurizing the second pressure chamber 155, by drawing fluid through the inlet check valve 107 into the second bore 102c of the housing 102. The pressurization of the second pressure chamber 155 in the second bore 102c moves the third piston 152 outwards from the housing 102. The movement of the third piston 152 causes the first end 152a of the third piston 152 to exert an outward force on the second piston 150 through the second piston spring 151, opposing the inward force of the dynamic load.

Once the inward force of the dynamic load has been opposed, fluid within the second pressure chamber 155 leaks to the engine through the second axially extending bore 102c or through the volume reducer 153. This leakage reduces the mean pressure present within the second pressure chamber 155.

It should be noted that at all operating conditions, the pressure in the second pressure chamber 155 will pump up to maintain a minimum preload in the second piston spring 151. When the force or preload in the second piston spring 151 gets too low, the third piston 152 moves out from the housing, due to the third piston spring 154 and pressure in the second pressure chamber 155 and draws more oil in through the inlet check valve 107.

Therefore, the first piston 103 in the first axially extending bore 102a provides the dominant damping of the chain span or belt and the second piston 150 in the second axially extending bore 102c provides the dominant and automatically adjusting spring force. The tensioner of the present invention automatically adjusts the mean tension force to keep the chain tension as low as possible without sacrificing chain control, significantly improving drive efficiency at new chain conditions and conditions with dynamic loads.

Figures 4a-4b shows a tensioner of a fourth embodiment using passive control to tension a chain under various conditions; Figure 4a is tensioning a chain without high loads; and Figure 4b is tensioning a chain with high load.

The tensioner includes a housing 102 having a first axially extending bore 102a parallel to a second axially extending bore 102b. While the second bore 102c of the housing 102 is shown as being parallel to the first bore 102a, the second bore 102c may be perpendicular to the first bore 102a or at some other angle relative to the first bore 102a.

5 Slidably received within the first axially extending bore 102a is a first piston 103. The first piston 103 has a body with a first end 103a, a second end 103c, and a hollow interior 103b. Present within the hollow interior 103b of the first piston 103 is a first piston spring 104. The first piston spring 104 has a first end 104a in contact with the interior 103b of the first piston 103 or a volume reducer 105 and a second end 104b in contact
10 with a bottom 102b of the first axially extending bore 102a of the housing 102. A first pressure chamber 111 is formed between the first piston 103 and the first axially extending bore 102a. Fluid is supplied to the first pressure chamber through a first supply 106 through an inlet check valve 108. The first piston 103 is biased outwards from the housing 102 to bias the chain through the first end 103a of the first piston 103 by the force of the
15 first piston spring 104 and the pressure of oil in the first pressure chamber 111.

Alternatively, the first piston 103 may not be hollow and the first piston spring 104 would contact the body of the first piston 103 and the bottom 102b of the first axially extending bore 102a.

20 The second axially extending bore 102b slidably receives a second piston 200. The second piston 200 has a body with a first end 200a, a second end 200c and a hollow interior 200b. The hollow interior 200b receives a shaft 202a of a “Y” shaped internal piston 202. The shaft 202a of the Y-shaped internal piston 202 is connected to a body with a first end 202d, a second end 202b and a hollow interior 202c. Between the second end 200c of the second piston 200 and the first end 202d of the body of the internal piston
25 202d is a second piston spring 201. The second piston spring 201 has a first end 201a in contact with the second end 200c of the second piston 200 and a second end 201b in contact with the first end 202d of the internal piston 202. The second piston spring 201 biases the second piston 200 outwards from the housing 102.

30 Alternatively, the second piston spring may be present between the shaft 202a of the Y-shaped internal piston 202 and the hollow interior 200b of the second piston 200.

Within the hollow interior 202c of the internal piston 202 is an internal piston spring 204. The internal piston spring 204 has a first end 204a in contact a hollow interior 202c of the internal piston 202 or a volume reducer 206 and a second end 204b in contact with the bottom 102d of the second axially extending bore 102c. The internal piston spring 204 biases the internal piston 202 outwards from the housing 102, biasing the second piston 200 outwards from the housing by changing the preload on the second piston spring 201. In other words, moving the second end 201b of the second piston spring 201 outwards from the housing 102.

A second high pressure chamber 205 is formed between the hollow interior 202c of the internal piston 202 and the bottom 102d of the second axially extending bore 102c of the housing 102. Fluid is supplied to the second pressure chamber 205 through an inlet supply 109 and preferably a check valve 107. The inlet line 109 may or may not be connected to the inlet supply line 106.

The second piston spring 201 has a greater spring rate or spring constant than the first piston spring 104 and the internal piston spring 204.

Since there are two pistons 200, 103 to tension the chain span or belt, the leakage of the first pressure chamber 111 can be increased (as opposed to a conventional hydraulic tensioner where a certain mean pressure must be maintained within the pressure chamber to control the chain) to provide additional damping. The mean force required for chain control is supplied by the second piston 200 in the second axially extending bore 102c.

When the tensioner is tensioning a new chain as shown in Figure 4a, during operation, fluid is supplied to the first pressure chamber 111 from the first inlet supply 106 and through an inlet check valve 108 and biases the first piston 103 outwards from the housing 102 in addition to the spring force of the first piston spring 104, biasing a span of the closed loop chain 400 or belt as shown in Figure 7. At the same time, the second piston 200 is also biased outwards from the second axially extending bore 102c by the second piston spring 201 to bias a span of the closed loop chain or belt. Ideally, the first piston 103 and the second piston 200 are biased outwards from the housing 102 approximately the same amount. In other words, the first ends 103a, 200a of the first and the second pistons 103, 200 are aligned as shown in Figure 4a and 7.

When the tensioner is tensioning a worn chain without high load, during operation, fluid is supplied to the first pressure chamber 111 through the first inlet supply 106 and through an inlet check valve 108 and biases the first piston 103 outwards from the housing 102 in addition to the spring force of the first piston spring 104, biasing a span of the closed loop chain 400 or belt. At the same time, the second piston 200 is also biased outwards further through the second piston spring 201 due to the movement of the internal piston 202 by the internal piston spring 204 to bias the span of the closed loop chain 400 or belt. As the chain wears, additional slack is present in the chain span and the first piston 103 and second piston 200 would need to be extended further outwards from the housing 102 to bias and adequately tension the chain 400.

When the tensioner is tensioning a chain during high dynamic chain load, the high dynamic load force from the chain (shown by the arrow) pushes the first piston 103 and the second piston 200 inwards towards the housing 102 and then outwards from the housing 102, pumping up the pressure or pressurizing the second pressure chamber 205, by drawing fluid through the inlet check valve 107 in the second bore 102c of the housing 102. The pressurization of the second pressure chamber 205 in the second bore 102c moves the internal piston 202 outwards from the housing 102. The movement of the internal piston 202 causes the first end 202d of the internal piston 202 to exert an outward force on the second piston 200 through the second piston spring 201, opposing the inward force of the dynamic load.

Once the inward force of the dynamic load has been opposed, fluid within the second pressure chamber 205 leaks to the engine through the second axially extending bore 102c or through the volume reducer 206. This leakage reduces the mean pressure present within the second pressure chamber 205.

It should be noted that at all operating conditions, the pressure in the second pressure chamber 205 will pump up to maintain a minimum preload in the second piston spring 201. When the force or preload in the second piston spring 201 gets too low, the internal piston 202 moves out from the housing, due to the internal piston spring 204 and pressure in the second pressure chamber 205 and draws more oil in through the inlet check valve 107.

Therefore, the first piston 103 in the first axially extending bore 102a provides the dominant damping of the chain span or belt and the second piston 200 in the second axially extending bore 102c provides the dominant and automatically adjusting spring force. The tensioner of the present invention automatically adjusts the mean tension force to keep the chain tension as low as possible without sacrificing chain control, significantly improving drive efficiency at new chain conditions and conditions with dynamic loads.

Figures 5-6 show different options for simultaneously controlling the first piston and the second piston of the embodiments of the present invention. Referring to Figure 5, the first piston 103 and the second piston 150 are directly attached through a linkage 310. Therefore, the movement of the first piston 103 and the second piston 150 are tied to each other. When the first piston 103 and the second piston 150 are coupled, the first piston spring 104 is optional. It should be noted that while the linkage was shown with the tensioner of the third embodiment, it can similarly be applied to the tensioners of Figures 2a-2b and 4a-4b.

Figure 6 shows an alternate configuration in which the first piston has an extension 312 with a top surface 312a and a bottom surface 312b. The bottom surface 312b of the extension 312 is pushed on by the second piston 150 as the second piston 150 is biased outwards from the housing 102. It should be noted that while the linkage was shown with the tensioner of the third embodiment, it can similarly be applied to the tensioners of Figures 2a-2b and 4a-4b. In this embodiment, the first piston spring 104 is optional.

The volume reducers shown in any of the above embodiments may be replaced with a pressure relief valve or vent.

It should also be noted that the tensioner of Figures 2a-2b is shown in Figure 7, however any of the tensioners present in the application would work with the chain span.

In any of the above embodiments, the external first pistons and second pistons may have grooves on an outer circumference that engage and ratchet with a pawl or ratchet clip as known in the art.

Accordingly, it is to be understood that the embodiments of the invention herein described are merely illustrative of the application of the principles of the invention.

Reference herein to details of the illustrated embodiments is not intended to limit the

scope of the claims, which themselves recite those features regarded as essential to the invention.

What is claimed is:

1. A tensioner for a passive tensioner system tensioning a span of chain or a belt, comprising:

5 a housing having a first axially extending bore with a first fluid input, and a second axially extending bore with a second fluid input;

a first piston slidably received by the first axially extending bore, the first piston comprising a body having a first end and a second end;

10 a first pressure chamber for biasing the first piston outwards from the housing, defined between the first piston and the first axially extending bore and in fluid communication with the first fluid input;

a hollow moveable sleeve slidably received by the second axially extending bore, comprising a hollow body having a first open end and a second open end separated by an inner flange having a top surface and a bottom surface;

15 a second piston having a body coaxially arranged within the moveable sleeve and received by the first open end of the movable sleeve;

a second piston spring for biasing the second piston outwards from the moveable sleeve, received by the first open end of the moveable sleeve, having a first end contacting the second piston and a second end contacting the top surface of a flange of the moveable sleeve;

20 a bias spring for biasing the moveable sleeve outwards from the housing, received within the second open end of the moveable sleeve with a first end of the bias spring in contact with the bottom surface of the inner flange of the moveable sleeve and a second end in contact with the second axially extending bore of the housing;

25 a second pressure chamber defined between the bottom surface of the inner flange of the moveable sleeve and the second bore, in fluid communication with the second fluid input; and

a check valve between the second pressure chamber and the second fluid input;

wherein when dynamic load from the chain or belt moves the first piston and the second piston inwards and outwards from the housing, fluid from the second fluid input is drawn into the second pressure chamber through the check valve, creating a fluid pressure in the second pressure chamber, causing the movable sleeve to move outwards from the housing and exert an outward force on the second piston through the second piston spring, opposing an inward force of the dynamic load.

2. The tensioner of claim 1, wherein the first piston and the second piston are coupled for movement together.

3. The tensioner of claim 2, wherein the first piston and the second piston are coupled for movement together by coupling the body of the first piston and the body of the second piston.

4. The tensioner of claim 2, wherein the first piston further comprises an extension having a top surface and a bottom surface, wherein the second piston pushes on the bottom surface of the first extension, coupling the second piston to the first piston for movement together.

5. The tensioner of claim 1, wherein the body of the first piston further comprises an open end at the second end of the body and a closed end at the first end of the body, a bottom surface at the open end, and a hollow interior having an inner diameter.

6. The tensioner of claim 5, further comprising a first piston spring for biasing the first piston outwards from the housing, received within the hollow interior of the first piston, the first piston spring having a first end contacting the hollow interior of the first piston and a second end contacting the first axially extending bore.

7. The tensioner of claim 6, wherein the second piston spring has a greater spring constant than the first piston spring and the bias spring.

8. The tensioner of claim 5, further comprising a volume reducer received by the hollow interior of the first piston and the second open end of the moveable sleeve.

9. The tensioner of claim 1, further comprising a first piston spring for biasing the first piston outwards from the housing, the first piston spring having a first end contacting the second end of the first piston and a second end contacting the first axially extending bore.
- 5 10. The tensioner of claim 1, wherein the first fluid input and the second fluid input are connected to the same fluid supply.
11. The tensioner of claim 1, wherein the first fluid input and the second fluid input are connected to different fluid supplies.
12. The tensioner of claim 1, further comprising a check valve between the first fluid input
10 and the first pressure chamber.
13. The tensioner of claim 1, further comprising a vent for venting fluid from the first pressure chamber.
14. The tensioner of claim 1, further comprising a vent for venting fluid from the second pressure chamber.
- 15 15. The tensioner of claim 1, further comprising at least one pressure relief valve in the first pressure chamber.
16. A tensioner for a passive tensioner system tensioning a span of chain or a belt comprising:
- 20 a housing having a first axially extending bore with a first fluid input and a second axially extending bore with a second fluid input;
- a first piston slidably received by the first axially extending bore, the first piston comprising a body having a first end and a second end;
- a first pressure chamber for biasing the first piston outwards from the housing, defined between the first piston and the first axially extending bore and in
25 fluid communication with the first fluid input;
- a second piston slidably received within the second axially extending bore, the second piston comprising a body having a first end and a second end;

a third piston slidably received within the second axially extending bore, the third piston comprising a body having a first end with a top surface and a second end;

5 a second piston spring received in the second axially extending bore, the second piston spring having a first end in contact with the second piston and a second end in contact with the top surface of the third piston;

a third piston spring received in the second axially extending bore, the third piston spring having a first end in contact with the third piston and a second end in contact with the second axially extending bore;

10 a second pressure chamber defined between the third piston and the second axially extending bore, in fluid communication with the second fluid input; and

a check valve between the second pressure chamber and the second fluid input;

15 wherein when dynamic load from the chain or belt moves the first piston and the second piston inwards and outwards from the housing, fluid from the second fluid input is drawn into the second pressure chamber through the check valve, creating a fluid pressure in the second pressure chamber, causing the third piston to move outwards from the housing and exert an outward force on the second piston through the second piston spring, opposing an inward force of the dynamic load.

20 17. The tensioner of claim 16, wherein the body of the second piston further comprises an open end at the second end and a closed end at the first end, a bottom surface at the open end, a top surface at the closed end, and a hollow interior having an inner diameter.

25 18. The tensioner of claim 17, wherein the second piston spring is received by the hollow interior of the second piston, the second piston spring having a first end in contact with the hollow interior of the second piston.

19. The tensioner of claim 16, wherein the body of the third piston further comprises an open end at the second end and a closed end at the first end, a bottom surface at the open end, and a hollow interior having an inner diameter.

20. The tensioner of claim 19, wherein the third piston spring is received by the hollow interior of the third piston, the third piston spring having a first end in contact with the hollow interior of the third piston.
21. The tensioner of claim 16, wherein the first piston and the second piston are coupled
5 for movement together.
22. The tensioner of claim 21, wherein the first piston and the second piston are coupled for movement together by coupling the body of the first piston and the body of the second piston.
23. The tensioner of claim 21, wherein the first piston further comprises an extension
10 having a top surface and a bottom surface, wherein the second piston pushes on the bottom surface of the first extension, coupling the second piston to the first piston for movement together.
24. The tensioner of claim 16, wherein the body of the first piston further comprises an open end at the second end and a closed end at the first end, a bottom surface at the
15 open end, a top surface at the closed end, and a hollow interior having an inner diameter.
25. The tensioner of claim 24, further comprising a first piston spring received within the hollow interior of the first piston, for biasing the first piston outwards from the housing, the first piston spring having a first end contacting the hollow interior of
20 the first piston and a second end contacting the first axially extending bore.
26. The tensioner of claim 25, wherein the second piston spring has a greater spring constant than the first piston spring and the third piston spring.
27. The tensioner of claim 24, further comprising a volume reducer received by the hollow interior of the first piston.
- 25 28. The tensioner of claim 16, further comprising a first piston spring for biasing the first piston outwards from the housing, the first piston spring having a first end contacting the second end of the first piston and a second end contacting the first axially extending bore.

29. The tensioner of claim 16, further comprising a vent for venting fluid from the first pressure chamber.

30. The tensioner of claim 16, wherein the first fluid input and the second fluid input are connected to the same fluid supply.

5 31. The tensioner of claim 16, wherein the first fluid input and the second fluid input are connected to different fluid supplies.

32. A tensioner for a passive tensioner system tensioning a span of chain or a belt comprising:

10 a housing have a first axially extending bore with a first fluid input and a second axially extending bore with a second fluid input;

a first piston slidably received by the first axially extending bore, the first piston comprising a body having a first end and second end;

15 a first pressure chamber for biasing the first piston outwards from the housing, defined between the first piston and the first axially extending bore and in fluid communication with the first fluid input;

a second piston slidably received within the second axially extending bore, the second piston comprising a body having an open end and a closed end, a bottom surface at the open end, a top surface at the closed end, and a hollow interior having an inner diameter;

20 an internal piston slidably received within the second axially extending bore, the internal piston comprising a shaft connected to a body received within the hollow interior of the second piston, the body of the internal piston having a first end and a second end;

25 a second piston spring received by the hollow interior of the second piston, the second piston spring having a first end in contact with the hollow interior of the second piston and a second end in contact with the top surface of the internal piston;

an internal piston spring received in the second axially extending bore, the internal piston spring having a first end in contact with the internal piston and a second end in contact with the second axially extending bore;

a second pressure chamber defined between the internal piston and the second axially extending bore, in fluid communication with the second fluid input; and

a check valve between the second pressure chamber and the second fluid input;

wherein when dynamic load from the chain or belt moves the first piston and the second piston inwards and outwards from the housing, fluid from the second fluid input is drawn into the second pressure chamber through the check valve, creating a fluid pressure in the second pressure chamber, causing the internal piston to move outwards from the housing and exert an outward force on the second piston through the second piston spring, opposing an inward force of the dynamic load.

33. The tensioner of claim 32, wherein the body of the internal piston further comprises an open end at the second end and a closed end at the first end, a bottom surface at the open end, a top surface at the closed end, and a hollow interior having an inner diameter.

34. The tensioner of claim 33, wherein the internal piston spring is received by the hollow interior of the internal piston, the internal piston spring having a first end in contact with the hollow interior of the internal piston.

35. The tensioner of claim 32, wherein the first piston and the second piston are coupled for movement together.

36. The tensioner of claim 35, wherein the first piston and the second piston are coupled for movement together by coupling the body of the first piston and the body of the second piston.

37. The tensioner of claim 35, wherein the first piston further comprises an extension having a top surface and a bottom surface, wherein the second piston pushes on the bottom surface of the first extension, coupling the second piston to the first piston for movement together.

38. The tensioner of claim 32, wherein the body of the first piston further comprises an open end at the second end and a closed end at the first end, a bottom surface at the open end, a top surface at the closed end, and a hollow interior having an inner diameter.
- 5 39. The tensioner of claim 38, further comprising a first piston spring received within the hollow interior of the first piston, for biasing the first piston outwards from the housing, the first piston spring having a first end contacting the hollow interior of the first piston and a second end contacting the first axially extending bore.
- 10 40. The tensioner of claim 32, further comprising a first piston spring for biasing the first piston outwards from the housing, the first piston spring having a first end contacting the second end of the first piston and a second end contacting the first axially extending bore.
41. The tensioner of claim 39, wherein the second piston spring has a greater spring constant than the first piston spring and the internal piston spring.
- 15 42. The tensioner of claim 38, further comprising a volume reducer received by the hollow interior of the first piston.
43. The tensioner of claim 32, wherein the first fluid input and the second fluid input are connected to the same fluid supply.
44. The tensioner of claim 32, wherein the first fluid input and the second fluid input are connected to different fluid supplies.
- 20 45. A tensioner for a passive tensioner system tensioning a chain having a chain span or a belt comprising:
- a housing have a first bore with a first fluid input and a second bore with a second fluid input;
- 25 a hollow moveable sleeve slidably received by the first bore comprising a hollow body defining a first open end and a second open end separated by an inner flange having a top surface, a bottom surface and a through hole;

a first piston coaxially arranged within the moveable sleeve and received by the first open end of the movable sleeve;

a piston spring in contact with the first piston for biasing the first piston outwards from the moveable sleeve, having a first piston spring end contacting the first piston and a second piston spring end contacting the top surface of a flange of the moveable sleeve;

a bias spring received within the first bore of the housing and the hollow interior of the moveable sleeve, for biasing the moveable sleeve outwards from the housing, with a first bias spring end in contact with the bottom surface of the inner flange of the moveable sleeve and a second bias spring end;

a first pressure chamber defined between the hollow moveable sleeve, hollow interior of the first piston the bias spring and the first bore of the housing and in fluid communication with the first fluid input;

a second piston slidably received by the second bore of the housing and coupled to the moveable sleeve through a coupling;

a second pressure chamber defined between the second piston and the second bore, in fluid communication with the second fluid input;

a check valve between the second pressure chamber and the second fluid input;

wherein when dynamic load from the chain or belt moves the first piston inwards and outwards from the housing, the second piston, coupled to the first piston, moves inwards into the housing and outwards into the housing, drawing fluid from the second fluid input and the check valve, into the second pressure chamber, creating a fluid pressure in the second pressure chamber, causing the movable sleeve to move outwards from the housing and exert an outward force on the first piston through the piston spring, opposing an inward force of the dynamic load.

46. The tensioner of claim 45, wherein the first fluid input and the second fluid input are connected to the same fluid supply.

47. The tensioner of claim 45, wherein the first fluid input and the second fluid input are connected to different fluid supplies.
48. The tensioner of claim 45, wherein the first bore is parallel to the second bore.
49. The tensioner of claim 45, wherein the first bore is perpendicular to the second bore.
- 5 50. The tensioner of claim 45, wherein the coupling is flexible.
51. The tensioner of claim 45, wherein the coupling is rigid.
52. The tensioner of claim 45, wherein the piston further comprises a body having an open end and a closed end and a hollow interior having an inner diameter.
53. The tensioner of claim 52, wherein the first piston spring end contacts the inner surface
10 of the closed end of piston.
54. The tensioner of claim 45, further comprising a check valve between the first fluid input and the first pressure chamber.

1/10

Fig. 1


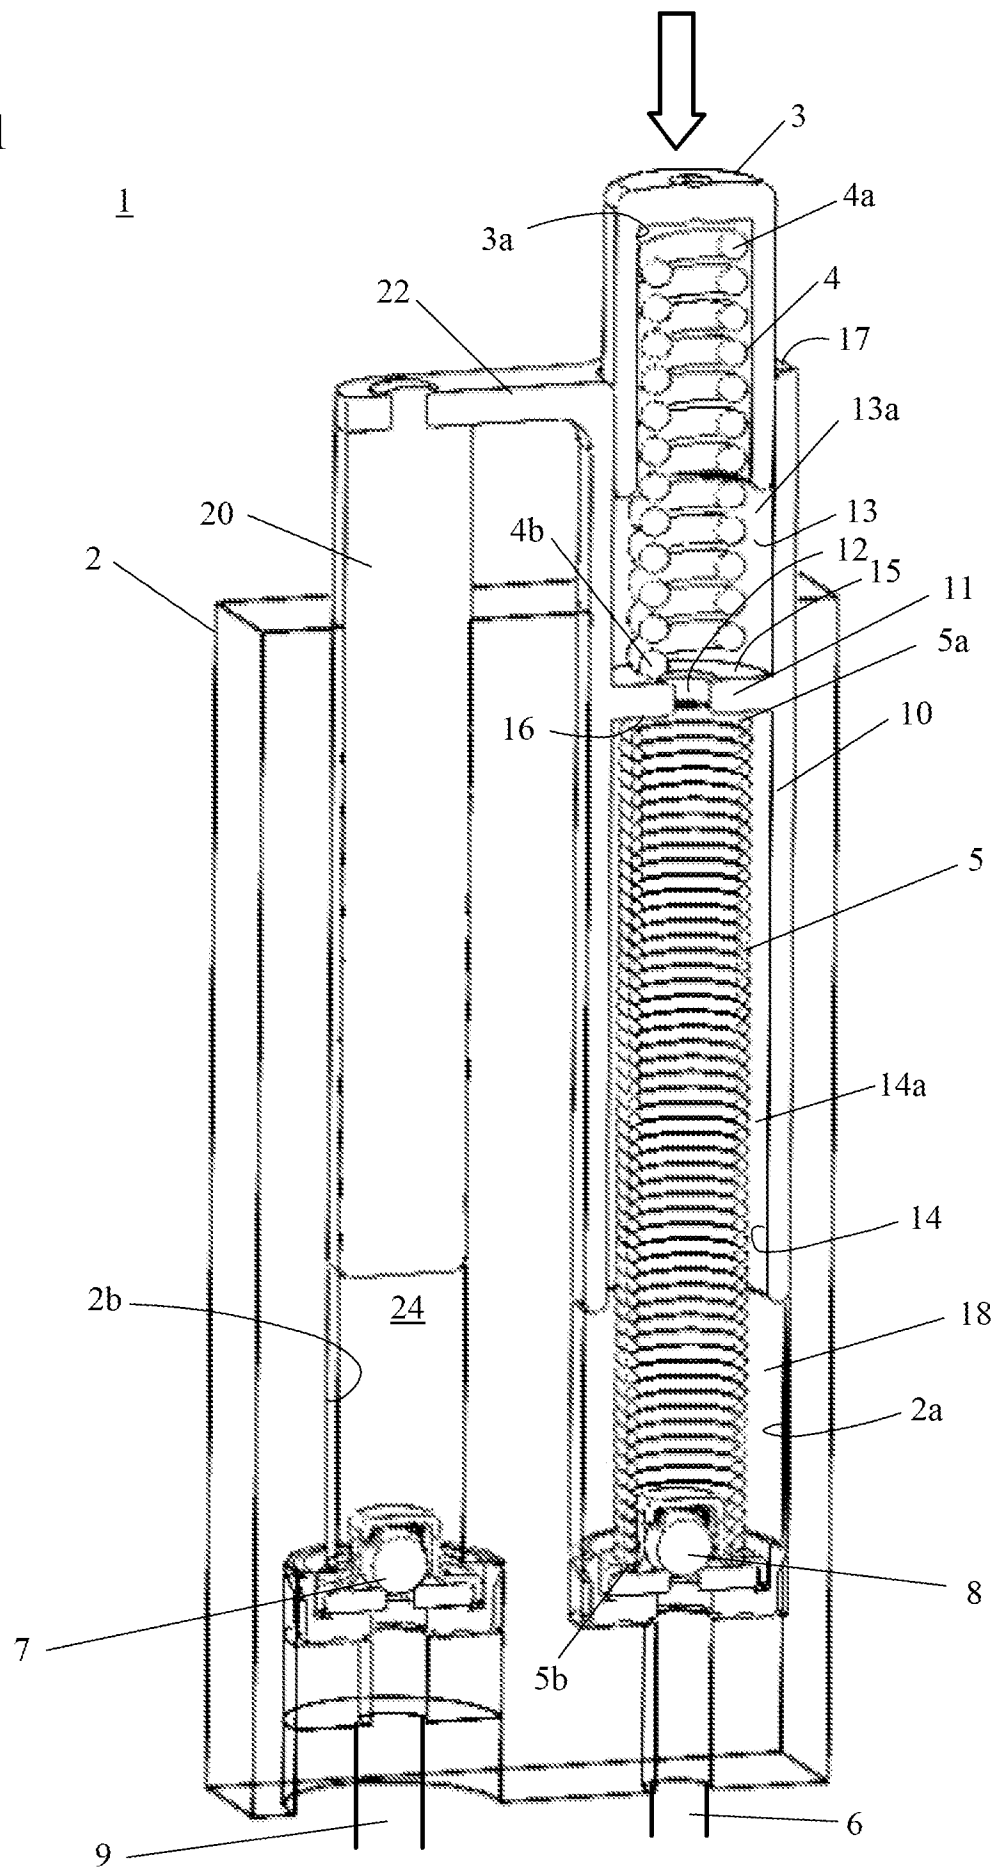


Fig. 2a

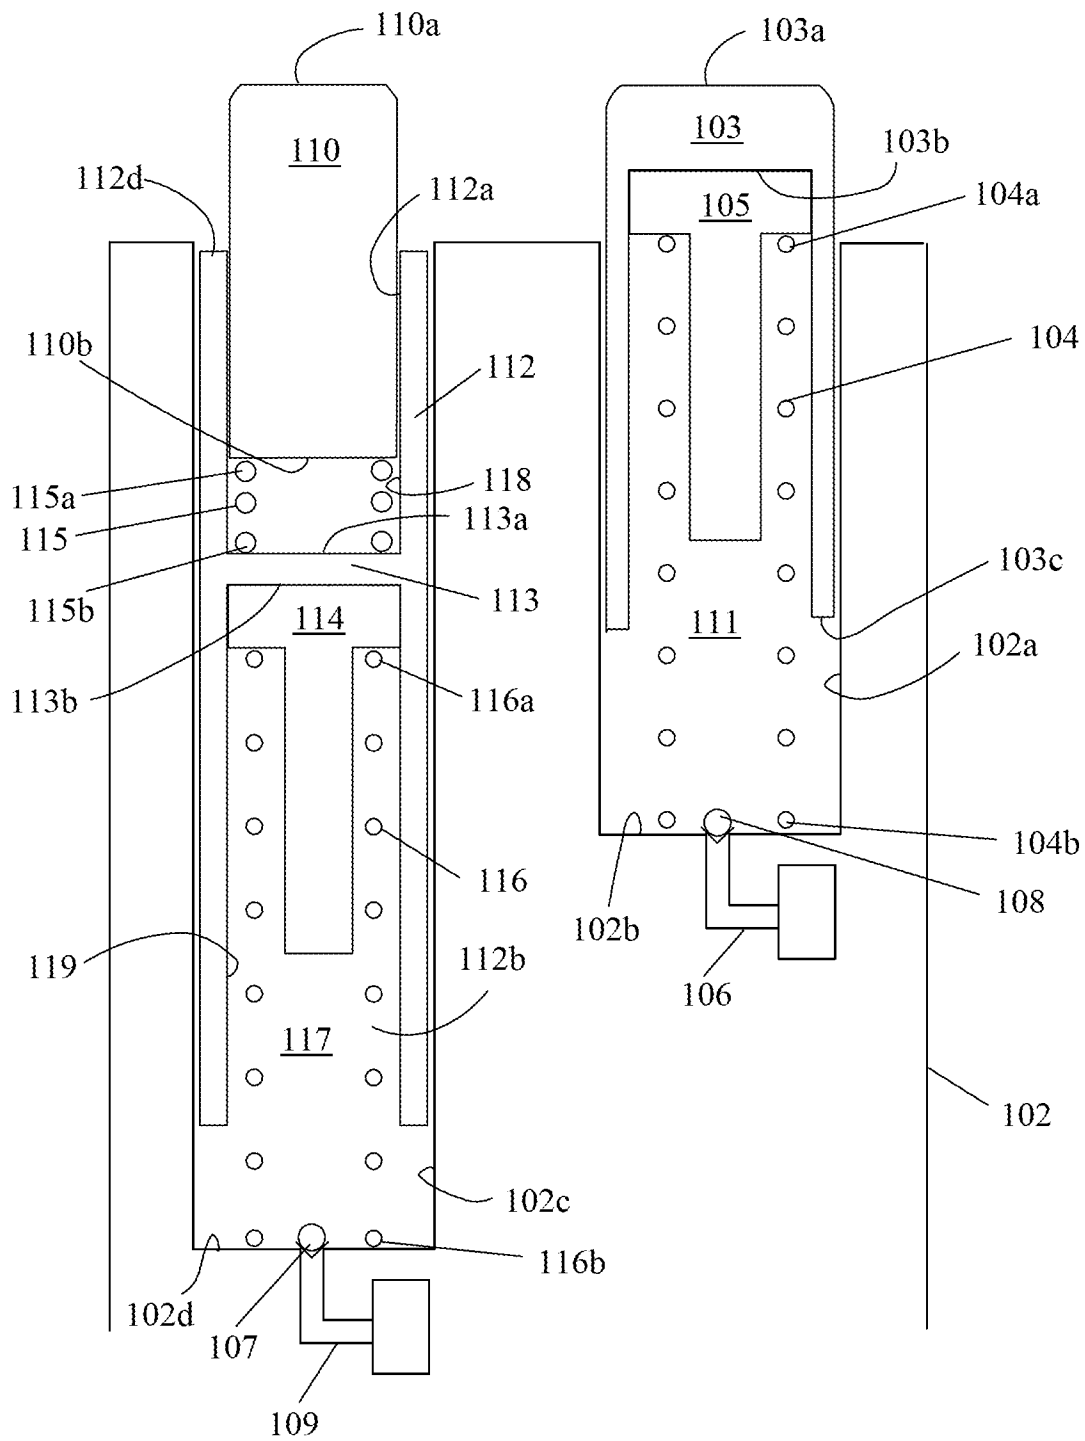

3/10

Fig. 2b

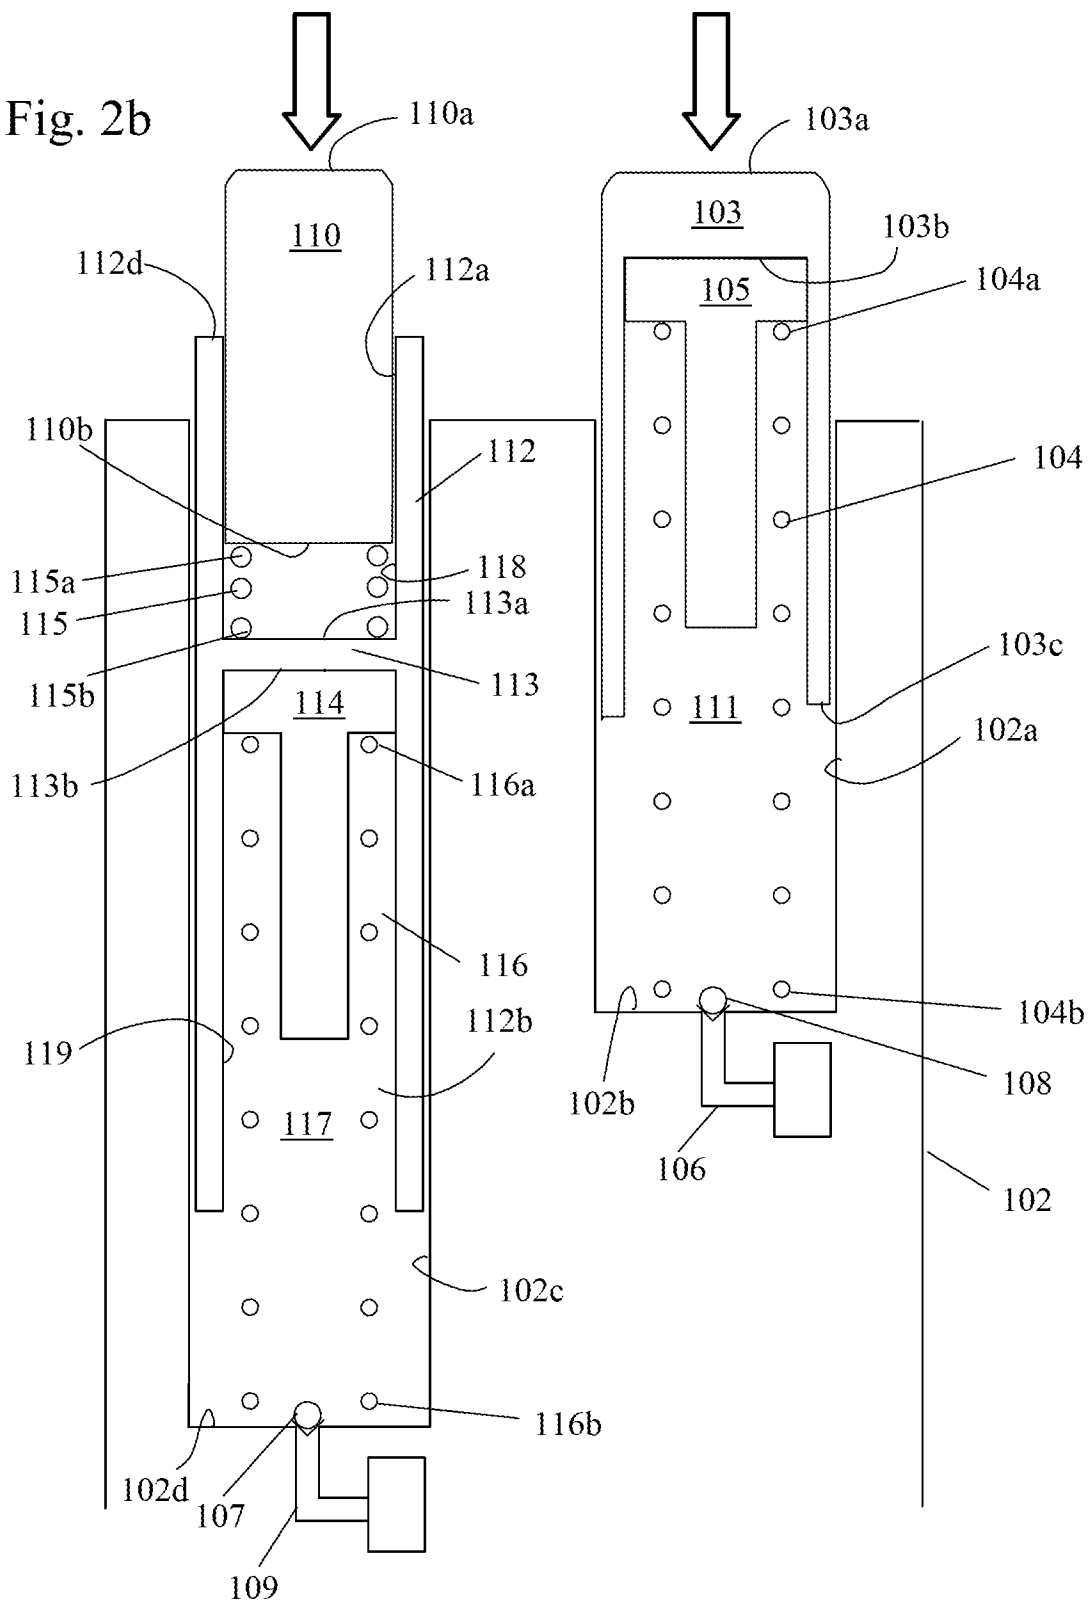
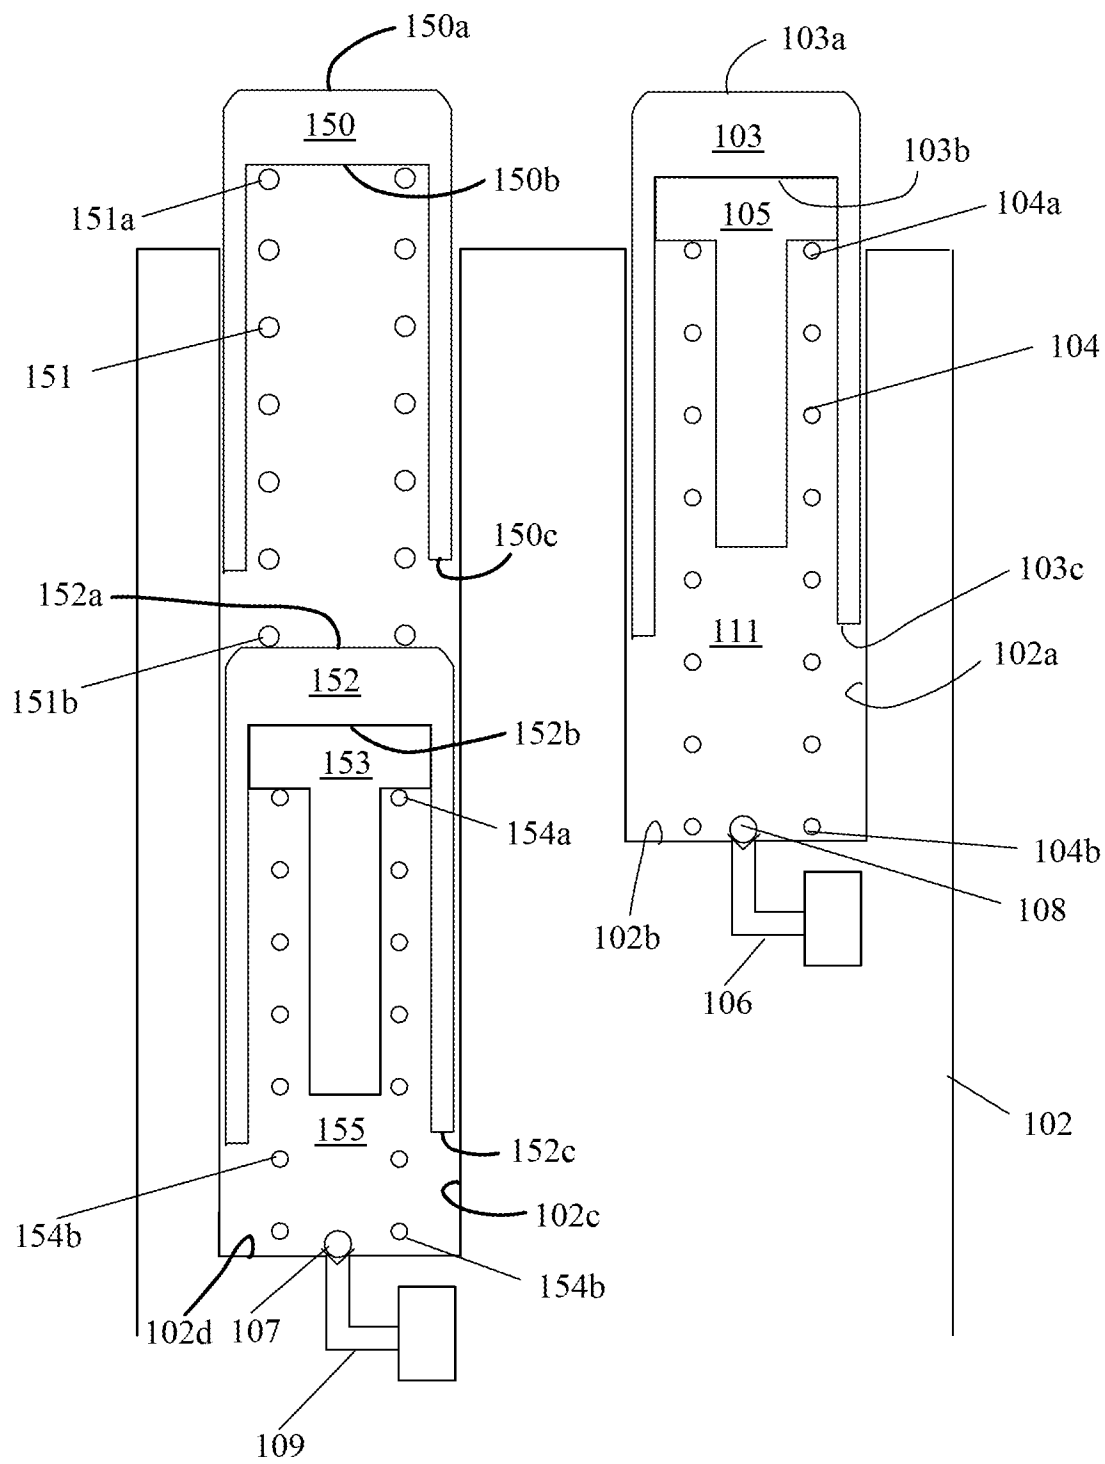


Fig. 3a



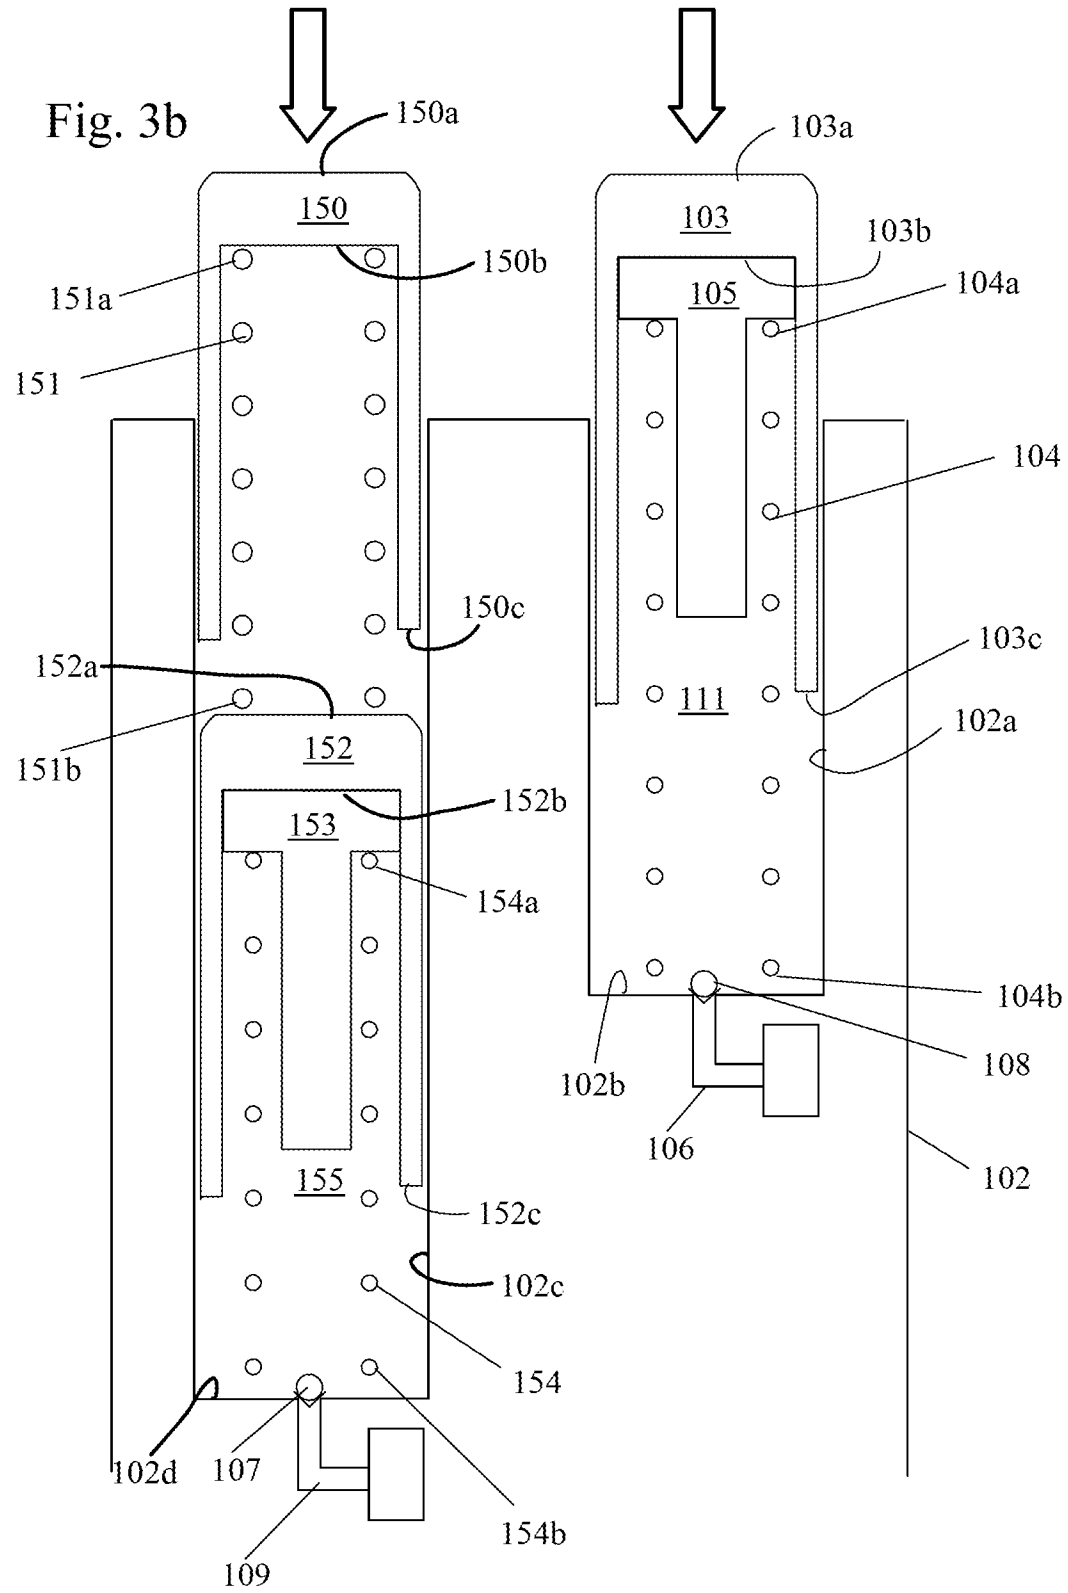


Fig. 4a

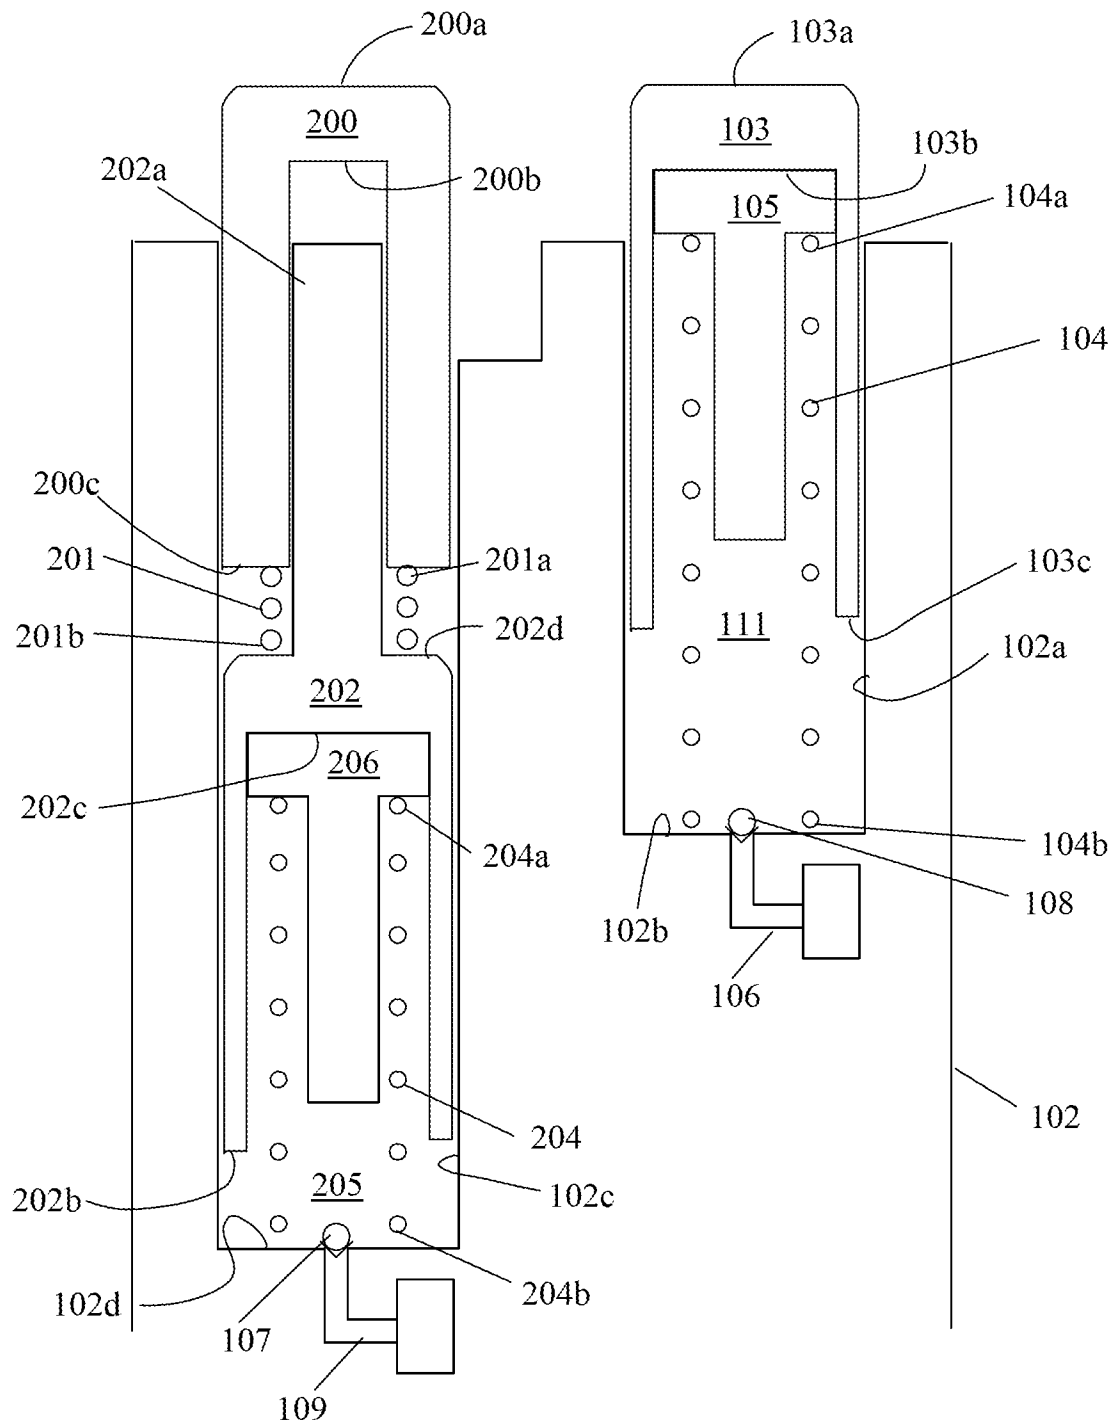


Fig. 4b

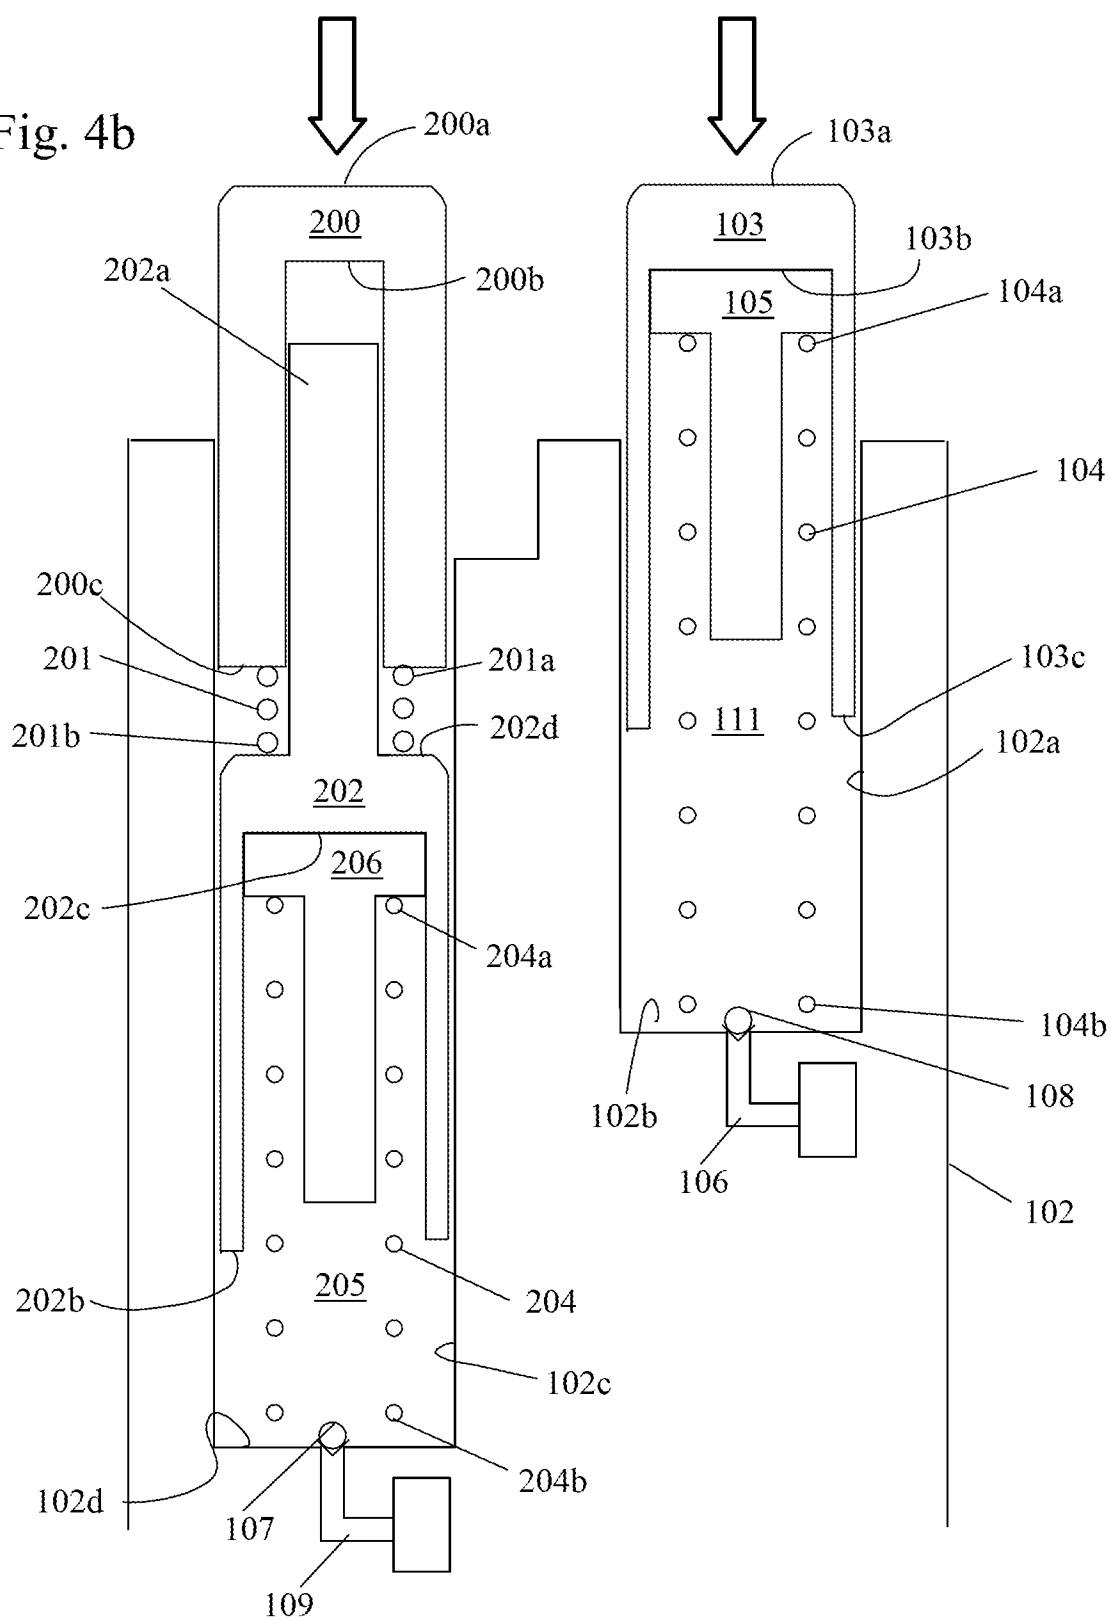


Fig. 5

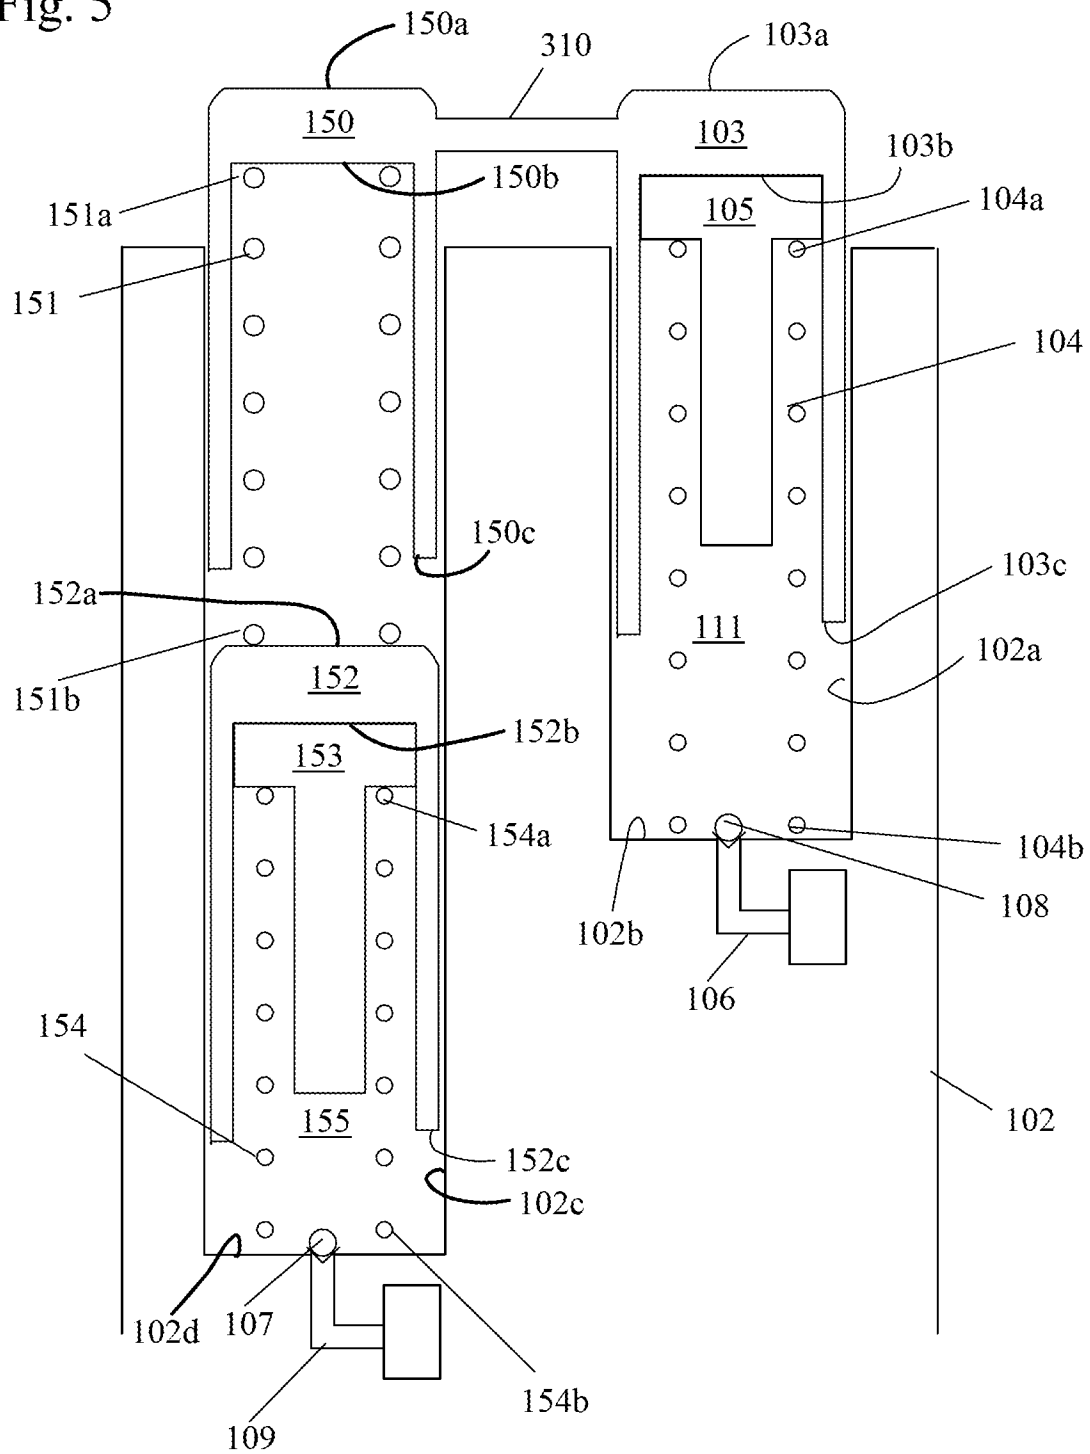


Fig. 6


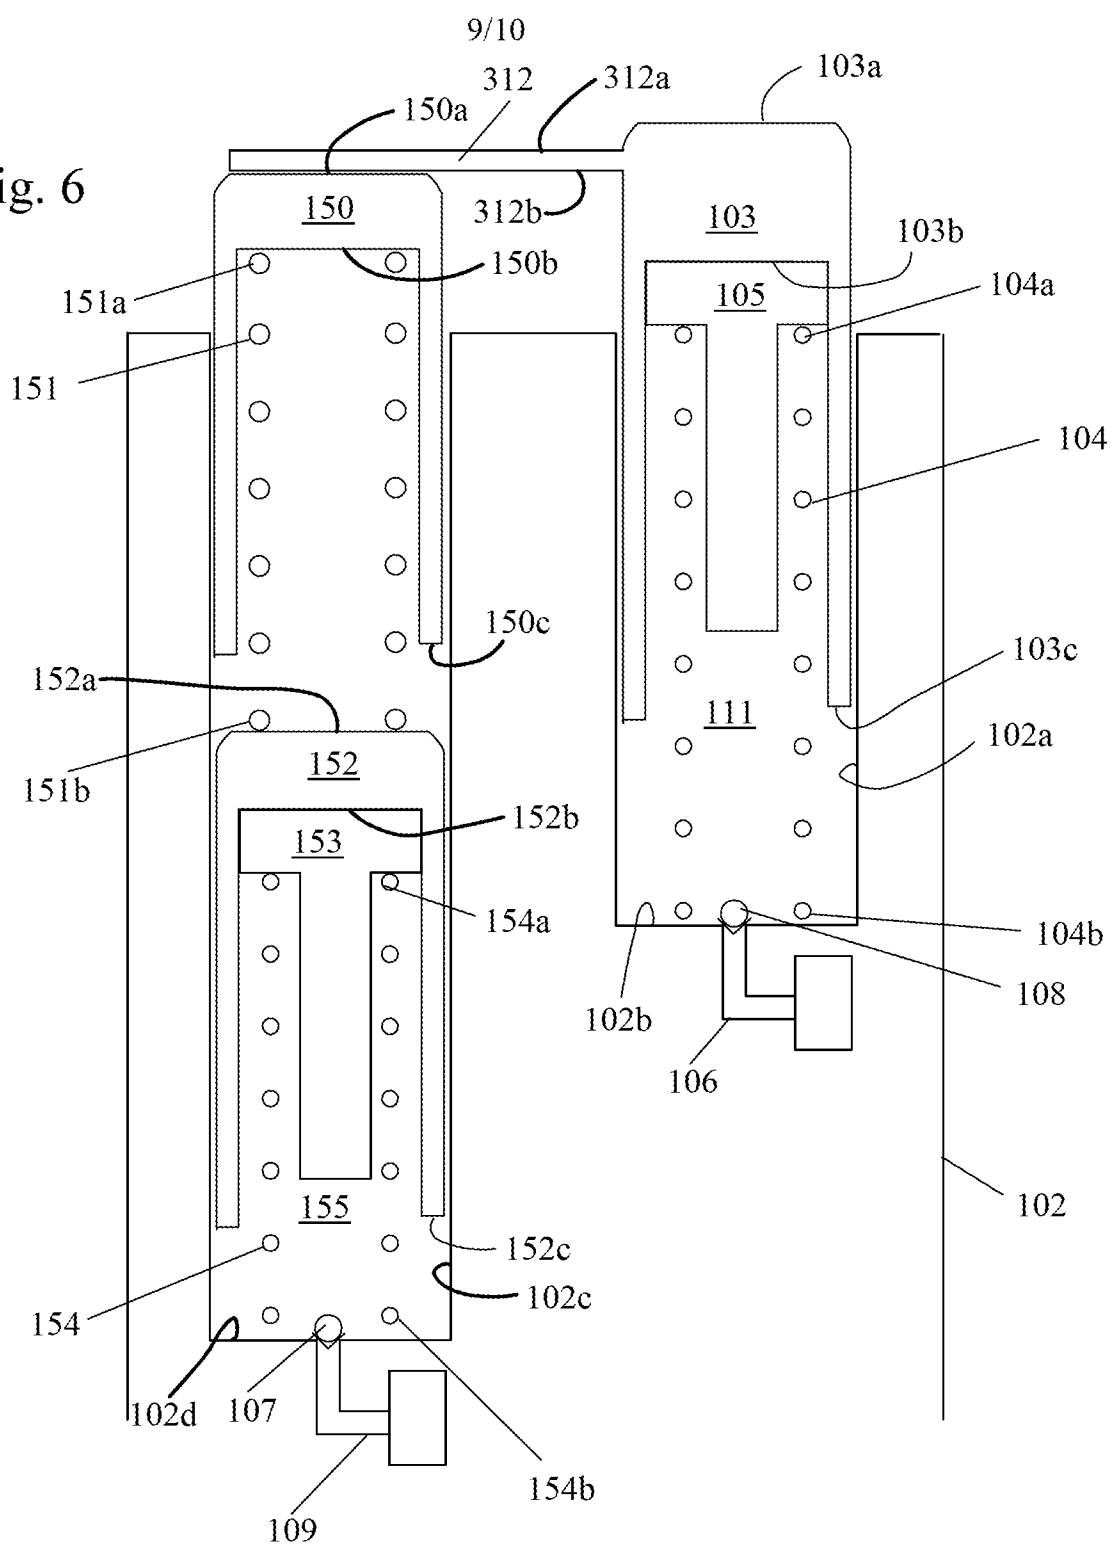


Fig. 7

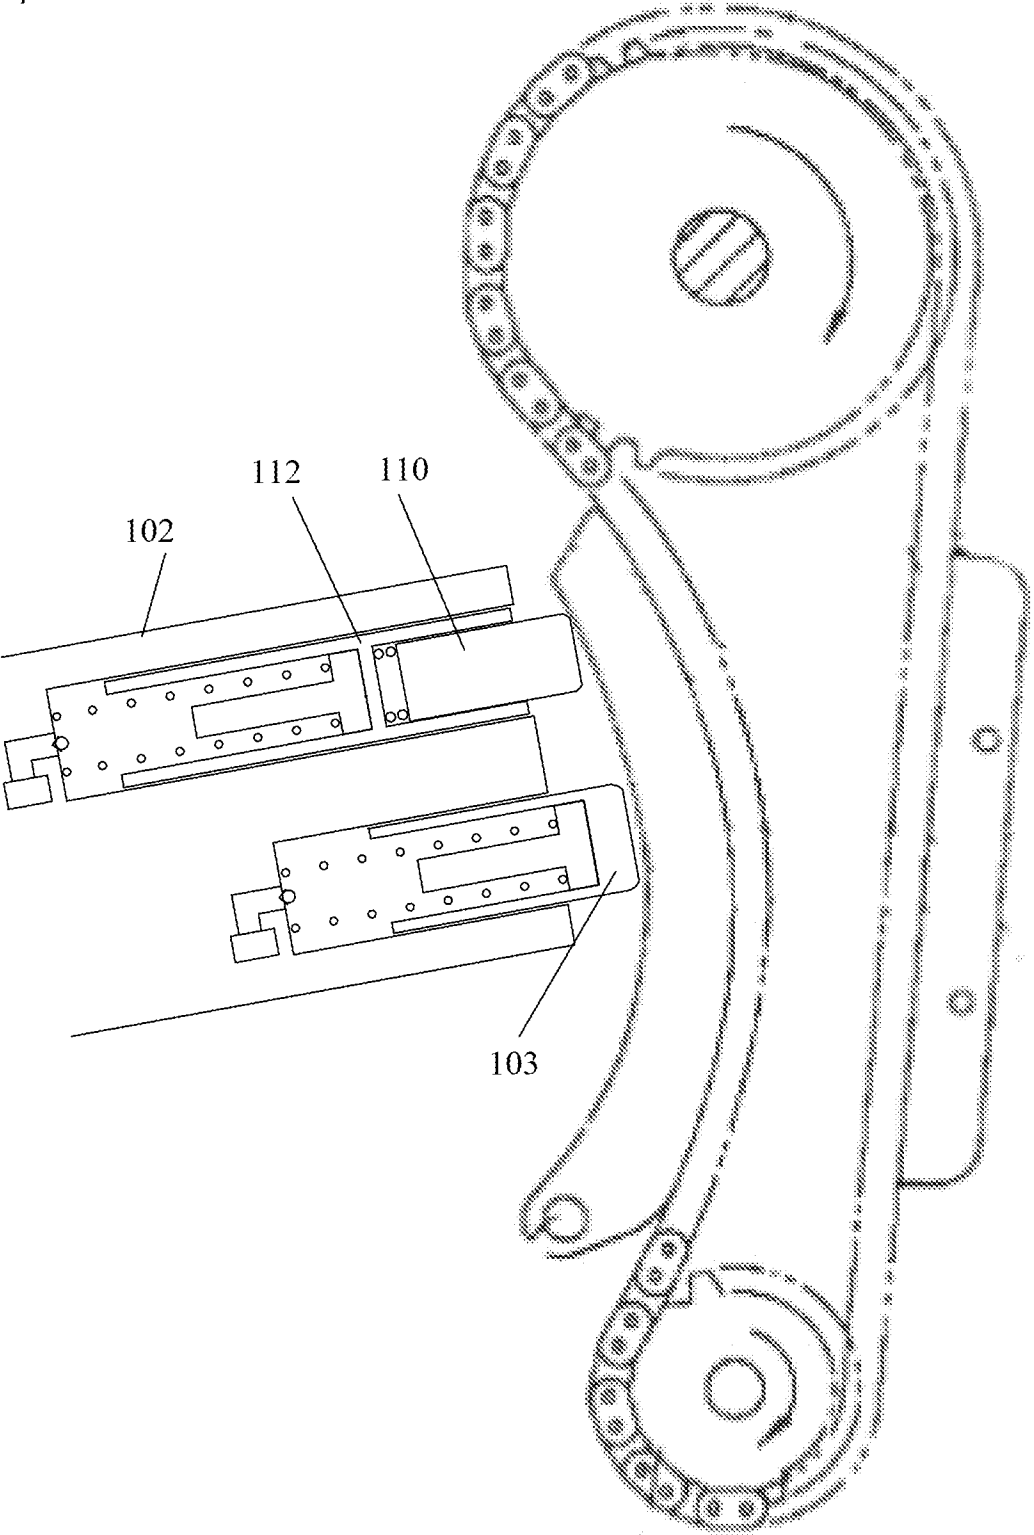

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/072574**A. CLASSIFICATION OF SUBJECT MATTER****F16H 7/08(2006.01)i, F02B 67/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F16H 7/08; F16H 7/22; F02B 67/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: second, auxiliary, dual, parallel, piston, chamber, bore, and sleeve

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,700,216 A (SIMPSON et al.) 23 December 1997 See column 3, lines 19-30, column 3, line 66 - column 4, line 20; figure 3.	1,5,6,9-14
A		2-4,7,8,15-54
Y	US 6,117,033 A (SIMPSON, ROGER T.) 12 September 2000 See column 3, line 32 - column 4, line 15; figure 1.	1,5,6,9-14
A	US 2002-0022541 A1 (ULLEIN et al.) 21 February 2002 See paragraph [0036]; figure 3.	1-54
A	US 5,993,342 A (WIGSTEN et al.) 30 November 1999 See column 4, line 62 - column 5, line 29; figure 3.	1-54
A	US 6,592,479 B2 (NAKAKUBO et al.) 15 July 2003 See column 3, line 63 - column 4, line 31; figure 1.	1-54



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 March 2014 (19.03.2014)

Date of mailing of the international search report

20 March 2014 (20.03.2014)

Name and mailing address of the ISA/KR


International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HAN, Joong Sub

Telephone No. +82-42-481-5606



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/072574

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5700216 A	23/12/1997	EP 0846892 A1 JP 10-292856 A	10/06/1998 04/11/1998
US 6117033 A	12/09/2000	EP 0989331 A2 EP 0989331 A3 JP 2000-145903 A	29/03/2000 21/08/2002 26/05/2000
US 2002-0022541 A1	21/02/2002	DE 10038606 A1 US 7108621 B2	28/03/2002 19/09/2006
US 5993342 A	30/11/1999	EP 0867637 A1 EP 0867637 B1 JP 11-022792 A	30/09/1998 15/05/2002 26/01/1999
US 6592479 B2	15/07/2003	DE 60134522 D1 EP 1201964 A2 EP 1201964 A3 EP 1201964 B1 JP 03356762 B2 JP 2002-130401 A KR 10-0473208 B1 KR 10-2002-0032377 A US 2002-0052259 A1	07/08/2008 02/05/2002 21/04/2004 25/06/2008 16/12/2002 09/05/2002 07/03/2005 03/05/2002 02/05/2002