

(19)



SUOMI - FINLAND

(FI)

PATENTTI- JA REKISTERIHALLITUS
PATENT- OCH REGISTERSTYRELSEN
FINNISH PATENT AND REGISTRATION OFFICE

(10) **FI 20175193 A1**

(12) **JULKISEKSI TULLUT PATENTTIHAKEMUS
PATENTANSÖKAN SOM BLIVIT OFFENTLIG
PATENT APPLICATION MADE AVAILABLE TO THE
PUBLIC**

(21)	Patenttihakemus - Patentansökan - Patent application	20175193
(51)	Kansainvälinen patenttiluokitus - Internationell patentklassifikation - International patent classification H02J 7/00 (2006.01) G01R 31/3835 (2019.01)	
(22)	Tekemispäivä - Ingivningsdag - Filing date	02.03.2017
(23)	Saapumispäivä - Ankomstdag - Reception date	02.03.2017
(41)	Tullut julkiseksi - Blivit offentlig - Available to the public	03.09.2018
(43)	Julkaisupäivä - Publiceringsdag - Publication date	14.06.2019

(71) Hakija - Sökande - Applicant

1•Tespac Oy, Stenbäckinkatu 4 B, 00250 HELSINKI, SUOMI - FINLAND, (FI)

(72) Keksijä - Uppfinnare - Inventor

1•NASKALI, Matti, VALENCIA, ESPANJA, (ES)

(74) Asiamies - Ombud - Agent

Berggren Oy, PL 16 (Eteläinen Rautatiekatu 10 A), 00101 HELSINKI

(54) Keksinnön nimitys - Uppfinningens benämning - Title of the invention

Menetelmä, ohjausyksikkö ja elektroninen latausjärjestely akun varaustason määrittämiseksi akun latauksen aikana

Förfarande, styrenhet och elektroniskt laddningsarrangemang för att bestämma laddningsstatus på ett batteri under laddningen av batteriet

Method, controlling unit and electronic charging arrangement for determining state of charge of a battery during charging of the battery

(57) Tiivistelmä - Sammandrag - Abstract

Esitetään menetelmä, ohjausyksikkö ja elektroninen latausjärjestely akun (205) varaustason määrittämiseksi akun (205) latauksen aikana. Menetelmä käsittää akun (205) lataamisen (110) latausvirralla (410) ensimmäisen ajanjakson (T1) aikana, latausvirran (410) keskeyttämisen (120) ensimmäisen ajanjakson (T1) jälkeen ainakin keskeytysajanjaksoksi (T2), akun (205) napajännitteen (420) muutoksen määrittämisen (130) keskeytysajanjakson (T2) aikana, ja napajännitteen (420) määritettyyn muutokseen (480) perustuvan varaustason määrittämisen (140).

A method, a controlling unit and an electronic charging arrangement for determining a state of charge of a battery (205) during charging of the battery (205) are presented. The method comprises charging (110) the battery (205) with a charging current (410) during a first time period (T1), interrupting (120) the charging current (410) after the first time period (T1) at least for an interruption time period (T2), determining (130) a change (480) of terminal voltage (420) of the battery (205) during the interruption time period (T2), and determining (140) the state of charge based on the determined change (480) of terminal voltage (420).

METHOD, CONTROLLING UNIT AND ELECTRONIC CHARGING ARRANGEMENT FOR DETERMINING STATE OF CHARGE OF A BATTERY DURING CHARGING OF THE BATTERY

TECHNICAL FIELD

- 5 The invention concerns in general the technical field of charging of electrical energy storages. The invention concerns especially, however, not exclusively, determining state of charge of a battery during charging of the battery.

BACKGROUND

- 10 Charging a battery is a slow process compared to storing energy in to various other types of energy storages, for example, when fuelling a car. The amount of energy stored per unit of time, that is, charging power, is typically much lower in case of electrical charging compared to various other techniques.

- 15 Most common method to charge a battery is so called constant-current-constant-voltage method. According to this method, the charging current lower or equivalent to the maximum allowed charging current of the battery is fed being through the terminals of the battery, and in the final state a constant voltage is applied on battery terminals while the current continues to reduce until it becomes low enough to determine that the battery is fully charged.

- 20 The constant-current-constant-voltage method is applied especially in charging of lithium cobalt oxide (LiCoO_2) batteries, which are very critical on the constant voltage accuracy as these batteries are capable of absorbing more charge than their specified capacities if over charged with higher than the specified voltage. Overcharging these batteries increases their volatility and probability to fail. Some other characteristics of these batteries with respect to
- 25 the volatility, for example an internal impedance, however, remain essentially the same in LiCoO_2 batteries even when overcharged. Some lithium-ion (Li-ion) batteries that are often used in high power applications like electric cars and power grid load balancing, for example lithium magmanese oxide (LiMnO), lithium metatitanate (Li_2TiO_3) and lithium iron phosphate (LiFePO_4) batteries,
- 30 differ from LiCoO_2 battery in a way they function, that is, they have no capacity to accommodate more charge than their specified capacity and are thus less sensitive to the charging voltage.

Some earlier attempts have been made in order to shorten the charging times of batteries. These relate to estimating the battery open-circuit voltage while the battery circuit is not physically open, but the charging is in progress in the first phase using a constant current, or at least close to a constant current, that is, during "constant current mode". The charging current is then driven to zero or to even negative values for a period of time during which the magnitude of the open-circuit voltage may be measured and compared to the estimated open-circuit voltage. The performance of the above-described methods is very susceptible with respect to the accuracy of the estimated open-circuit voltage for the particular battery affected by the charging current, temperature, battery size, and of course on the number of cells, i.e. battery internal resistances and design voltages.

There is still a need for developing methods for determining the state of charge of batteries during charging in order to facilitate quicker and accurate charging.

SUMMARY

An objective of the present invention is to present a method, a controlling unit and an electronic charging arrangement for determining the state of charge of a battery during charging of the battery. Another objective of the present invention is that the method, the controlling unit and the electronic charging arrangement avoids the use of constant-voltage mode of charging and reduces the time for the current to reduce until it becomes low enough to determine the fully charged condition, therefore, facilitating quick and accurate charging of batteries.

The objectives of the present invention are reached by a method, a controlling unit and an electronic charging arrangement as defined by the respective independent claims.

According to a first aspect, a method for determining a state of charge of a battery during charging of the battery is provided. The method comprises:

- charging the battery with a charging current during a first time period,
- interrupting the charging current after the first time period at least for an interruption time period,

- determining a change of terminal voltage of the battery during the interruption time period, and
- determining the state of charge based on the determined change of terminal voltage.

5 The charging may comprise charging the battery with a constant current.

The interrupting may comprise interrupting the charging current by opening a switch through which the charging current is injected into the battery via battery terminals for providing an open-circuit condition for the battery. The switch may be a semiconductor switch or a mechanical switch.

10 The method may comprise a delay time period after the first time period prior to the determining of the change of the terminal voltage for the charging current to diminish.

The determining of the change of terminal voltage may comprises measuring the terminal voltage at two time instances during the interruption time period,
15 and determining the difference between the measured voltage values.

The determining of the state of charge comprises comparing the determined change of the terminal voltage to a threshold value for the change of terminal voltage.

20 The method may comprise determining a third voltage value in the end of the first time period or in the beginning of the interruption time period to be utilized as a reference value for determining fully charged condition of the battery.

According to a second aspect, a controlling unit for determining a state-of-charge of a battery during charging is provided. The controlling unit comprises

- at least one processor, and
 - 25 - at least one memory storing at least one portion of computer program code,
- wherein the at least one processor is configured to cause the controlling unit at least to perform to:

- charge the battery with a charging current during a first time period,

- interrupt the charging current after the first time period at least for an interruption time period,
 - determine a change of terminal voltage of the battery during the interruption time period, and
- 5 - determine the state of charge based on the determined change of terminal voltage.

According to a third aspect, an electronic charging arrangement for determining a state-of-charge of a battery during charging is provided. The electronic charging arrangement comprises charging means for charging the battery, wherein the charging means are electrically connected to battery terminals of the battery, determining means for determining a terminal voltage of the battery, and a controlling unit configured at least to:

- charge the battery with a charging current during a first time period,
 - interrupt the charging current after the first time period at least for an interruption time period,
 - determine a change of terminal voltage of the battery during the interruption time period, and
 - determine the state of charge based on the determined change (480) of terminal voltage; and
- 20 wherein the controlling unit and the determining means are at least communicatively connected to each other.

The controlling unit and the switch or the charging means may be at least communicatively connected to each other.

25 The present invention provides advantages such as by facilitating quicker and accurate charging of batteries which does not rely on the estimation of the open-circuit voltage of the battery. The methods, controlling units and electronic arrangement according to various embodiments of the present invention may be utilized in various applications requiring charging electrical batteries, such as, mobile terminal devices, automobiles, electric bikes or motorcycles,

30 home appliances, etc.

The terms "first", "second" and "third" do not denote any order, quantity, or importance, but rather are used to distinguish one element from another.

The exemplary embodiments of the present invention presented herein are not to be interpreted to pose limitations to the applicability of the appended claims.

- 5 The verb "to comprise" is used herein as an open limitation that does not exclude the existence of also un-recited features. The features recited in depending claims are mutually freely combinable unless otherwise explicitly stated.

- 10 The novel features which are considered as characteristic of the present invention are set forth in particular in the appended claims. The present invention itself, however, both as to its construction and its method of operation, together with additional objectives and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

BRIEF DESCRIPTION OF FIGURES

- 15 The embodiments of the present invention are illustrated by way of example, however, not by way of limitation, in the figures of the accompanying drawings which are briefly described in the following.

Figure 1 illustrates a flow diagram of a method according to an embodiment of the present invention.

- 20 Figure 2 illustrates schematically an electronic charging arrangement according to an embodiment of the present invention.

Figure 3 illustrates schematically an electronic charging arrangement according to an embodiment of the present invention.

- 25 Figure 4 illustrates schematically determination of the state of charge of a battery according to an embodiment of the present invention.

Figures 5A-5C illustrate schematically various known circuit models for a battery.

Figures 6A and 6B illustrates determination of the state of charge of a battery according to an embodiment of the present invention.

Figure 7 illustrates the determination of the state of charge according to an embodiment of the present invention.

Figure 8 illustrates a controlling unit according to an embodiment of the present invention.

5 DETAILED DESCRIPTION OF SOME EMBODIMENTS

Figure 1 illustrates a flow diagram of a method according to an embodiment of the present invention. At 100, referring to a start-up phase, the necessary hardware, such as a battery, measuring means for measuring voltages, electrical converter or converters for charging, electrical energy storages or means
10 for producing electrical power, conductors and other necessary electronics, computing units, etc., and software, may be obtained and configured for operation. Specific care must be taken that the individual elements and units work together in communication with each other, if necessary.

At 110, charging the battery with a charging current during a first time period
15 may take place.

Concerning step 110, the charging current may preferably be direct current (DC) which may be substantially constant or may vary during the first time period. The first time period may essentially be anything from very short to very long period of time. However, the first time period should be configured to last
20 at least for some charge to be able to be stored into the battery. On the other hand, the first time period shouldn't be so long that the battery will become overcharged before the state of charge of the battery is determined. The length of the first time period may be, for example, in the range from 0.1 to 60 seconds, preferably from 2.0 to 10 seconds and most preferably from 3.0 to 6.0
25 seconds.

In cases when the method according to an embodiment of the present invention is being repeated many times in a row or in subsequent time periods (between which there may or may not be periods of not performing the method) during charging of the battery, the length of the first time periods may be configured to vary with respect to each other, for example, so that when the state
30 of charge is approaching the fully charged condition, the length of the first time period is configured to shorten. During low charge conditions the first time period may be, for example, 10 or even 60 seconds, and once the battery is

nearly fully charged, the first time period may be changed so that it is configured to be, for example, 2.0 to 6.0 seconds. This is further illustrated in Fig. 7 which is described hereinlater more in detail.

At 120, interrupting the charging current after the first time period at least for
5 an interruption time period may take place.

The charging current may be interrupted, for example, by a switch, such as a semiconductor switch or a mechanical switch. The interruption of the charging current as defined herein entails providing at least momentarily, that is at least for the first time period, an electrical open-circuit condition for the battery under
10 charging. The open-circuit condition may, therefore, not need to be a physical open-circuit as is the case when utilizing a semiconductor switch.

The interruption time period may, preferably, be configured to be such that the terminal voltage of the battery has had enough time to go through the rapid transient caused by a voltage component caused by the charging current over
15 a resistance of the battery. This is further explained with respect to Figs. 4 and 5A-5C. In addition, the interruption time period should be configured to be at least long enough for the charging current actually drop to zero, the change of current which is affected, that is slowed down, by any inductances in the charging circuit or the battery. The interruption time period may be, for example,
20 from 0.1 to 5.0 seconds, preferably from 2.0 to 3.0, or 2.0 to 4.0 seconds.

In cases when the method according to an embodiment of the present invention is being repeated many times in a row or in subsequent time periods (between which there may or may not be periods of not performing the method) during charging of the battery, the length of the interruption time periods may
25 be configured to vary with respect to each other, for example, so that when the state of charge is approaching the fully charged condition, the length of the interruption time period is configured to shorten. During low charge conditions the interruption time period may be, for example, 4.0 to 5.0 seconds, and once the battery is nearly fully charged, the interruption time period may be changed
30 so that it is configured to be, for example, 1.0 to 2.0 seconds. This is further illustrated in Fig. 7 which is described hereinlater more in detail.

There may be a delay time period after the first time period prior to step 130 in order to wait the charging current to diminish before determining the change in terminal voltage. The charging circuit may include inductive components

which, as is known, slows down or “opposes” the change of current due to Lenz’s law. This may be beneficial in order for the transient not to affect the accuracy of the determination of the change of terminal voltage at step 130.

5 According to an embodiment of the present invention, a third voltage value determined in the end of the first time period or in the beginning of the interruption time period, that is right after the first time period, may be utilized as a reference value for determining fully charged condition of the battery. The utilization of the third voltage value is described in more detail hereinlater with respect to Figs. 6A and 7.

10 At 130, determining a change of terminal voltage of the battery during the interruption time period may take place.

The determination of the change of terminal voltage may be implemented, for example, by a voltage measurement sensor coupled to the battery terminals, or by the electrical converter providing the charging current typically comprising means for voltage measurement. Other known methods for determining voltage may also be used. The change of the terminal voltage may, preferably, be performed by measuring the terminal voltage at least twice during the interruption time period, and then determining the difference between the voltage values of the two measurements relative to the time between the measurements.

15
20

At 140, determining the state of charge based on the determined change of terminal voltage may take place.

The determination of the state of charge may be implemented by comparing the determined change of terminal voltage to a threshold value for the change of terminal voltage. In practice, this means comparing the slope of the change of terminal voltage to the threshold value for the slope.

25

At 199, the method execution may be stopped or ended. The method may be executed once, intermittently or, preferably, continuously in order to monitor the state of charge of the battery during charging. The method may be executed at least as long as the battery becomes fully charged, that is, until the full charge condition is detected.

30

Figure 2 illustrates schematically an electronic charging arrangement 200 according to an embodiment of the present invention. The battery 205 under charging conditions may comprise several battery units 210 connected in series or in parallel within the body 230 or the enclosure 230 of the battery 205.

5 According to some embodiments, several batteries 205, preferably having similar or substantially identical characteristics, may also be connected in series or in parallel.

In Fig. 2, the battery 205 is connected in parallel with charging means 240 for charging the battery 205, for example, a charging device 240, such as, an electrical converter 240. The electrical converter 240 may be any suitable converter converting currents and voltages at its input terminal to direct current (DC) and DC voltage values at its output for charging the battery 205 or batteries 205. The converter 240 may be unidirectional or bidirectional converter capable of charging and/or discharging the battery 205. The open-circuit voltage of the battery 205 may be determined by measuring voltage between the electrical connectors 220A and 220B. The current flow through these connectors is the charging or discharging current of the battery 205. Furthermore, the charging means 240 may comprise a controlling unit 250 for determining a state-of-charge of a battery during charging. The charging means 240 may be configured to execute the method according to an embodiment of the present invention, such as, illustrated in and described in connection with Fig. 1. The charging means 240 may also, as described already hereinafter, comprise determining means 260, such as a voltage measurement device, for determining the open-circuit voltage of the battery 205.

25 Figure 3 illustrates schematically an electronic charging arrangement according to an embodiment of the present invention. The battery 205 may be connected in parallel with charging means 240, however, the electronic charging arrangement 200 comprises separate components for implementing the method according to an embodiment of the present invention, such as, separate control unit 250, voltage detection means 260, and a switch 270 for causing the battery 205 to be in open-circuit condition.

Figure 4 illustrates schematically determination of the state of charge of a battery according to an embodiment of the present invention. Vertical axis represents charging current 410 marked with a dashed line and battery voltage 420 marked with a solid line. Horizontal axis represents time. The battery 205 is be-

ing charged with the charging current 410 during the first time period T1. After the first time period T1, the charging current 410 is being interrupted, and thus drops to zero. The charging current 410 remains negligible during an interruption time period T2. The total time period TT includes both the first time period T1 and the interruption time period T2, therefore, defining one charging period TT during which at least steps of charging the battery with a charging current during a first time period T1, interrupting the charging current after the first time period T1 at least for an interruption time period T2, and determining a change of terminal voltage of the battery during the interruption time period T2 are performed. The step related to determining the state of charge based on the determined change of terminal voltage may also take place during the charging time period TT, preferably during the interruption time period T2. According to an embodiment of the present invention, at least step 110-130 illustrated in and described related to Fig 1 may take place during the charging period TT. Also step 140 of Fig. 1 may take place during the interruption time period T2.

The interruption of the charging current 410 causes the charging current to reduce to zero as shown in Fig. 4 at 430. The slope of the charging current 410 at 430 may be affected by, for example, inductive components through which the charging current 410 flows. Although shown in Fig. 4 as an abrupt change of current, in practice the change may not be a step-like change but rather have a finite value for its slope. In Fig. 4, the change has been illustrated as abrupt for simplicity.

As the charging current 410 diminishes, the battery voltage 420 also goes through a change. This is illustrated in Fig. 4 at 440. This is mainly due to a voltage drop occurring in resistive elements through which the charging current 440 flows. This is described in more detail with respect to Figs. 5A-5C, which illustrates various circuit models of battery. The abrupt change of voltage 440

There may also be a delay time period TD after the first time period T1 for waiting before determining the change of battery voltage 420 in order for the current 410 to diminish to zero and/or to wait that transient related to the abrupt change of current 430 and/or voltage 440 have had time to disappear or at least to be attenuated.

During the interruption period T2, optionally after the delay time period TD, the battery voltage 420 exhibits a slope 450 during a relatively short period, at

least a part of which is visible during the interruption time period T2 in Fig. 4. The reason for this is described hereinlater with respect to Figs. 5A-5C. According to an embodiment of the present invention, the value of the slope 450 may be determined by determining instantaneous battery voltages, for example by measuring, at least at two time instances, namely, at the first 450 and the second 460 time instances. The slope 450 may then be determined by a ratio of the change of voltage 480 between the determined instantaneous battery voltages to the time period between the determinations of the voltages at said two time instances. The ratio may also be a reciprocal of said ratio. Although the battery voltage 420 is determined only at two time instances in Fig. 4, it is to be understood that said voltage may be determined at more than two time instances during at least the interruption time period T2. The slope 450 may then be determined, for example, by first calculating average value or values based on certain amount of determined voltage values, and then the averages may be used to determine the value of the slope 450. Other mathematical methods known to a skilled person may also be used for determining the value of the slope 450.

Figures 5A-5C illustrate schematically various known circuit models for a battery 205. U_{BAT} represents the voltage generated by the battery unit or units inside the battery 205. This is not readily measurable, however, it may be measured or at least estimated by a measurement of the battery open-circuit voltage, that is, when no charging current is being injected to the battery 205. During charging, all the components through which the current flows affect the measured battery terminal voltage U_{TER} . Various resistive elements of the battery 205 may be represented by resistive components, such as first R_{0A} , R_{0B} and second R_{2A} , R_{2B} resistive elements of the circuit diagrams. It should be noted that these components are not electronic components as such but merely represent resistivity within the battery and conductors comprised in it. The abrupt change 440 in battery voltage 420 relates to voltage drop over R_{0A} or R_{0B} , depending on the circuit diagram used, once the charging current 410 is interrupted. As shown in Fig. 5C, there may, however, be inductive elements L_1 , through which the charging current flows, thus opposing the sudden change 430 of charging current 410. This then also affects the slope of the change 440 of battery voltage 420. The second current I_{R2} through the second resistive element R_{2A} , R_{2B} , the first current I_{TER} through the first resistive ele-

ment R_{0A} , R_{0B} , and the current I_{C1} through the capacitive element C_{1A} , C_{1B} are shown with arrows in the diagrams indicating the direction of the currents.

Battery circuit diagrams typically also comprise capacitive element, such as, C_{1A} and C_{1B} . The voltage over the capacitive element U_{C1A} , U_{C1B} are shown in
 5 Figs. 5A-5C indicating the polarity of the voltage. Said capacitors represent or model the response to the easiest moving ions in a battery 205. When charging current is interrupted, for example, the easiest moving ions return to the lower voltage level of the battery either by exchanging electrons with other ions inside the battery, or in case of discharging, may exchange electrons with external circuit. In both cases the voltage drifts slowly down as is illustrated in
 10 and described with respect to Fig. 4. This drift, and the slope 450 it produces, is related to the capacitance C_{1A} or C_{1B} .

The characteristics of the charging current 410 and the battery voltage 420, and the changes related to thereof, are described herein with respect to the
 15 circuit diagram illustrated in Fig. 5B. Similar description may also be provided with respect to each of the circuit diagrams in Figs. 5A and 5C.

During the first time period T1, the charging current 410 flows into the battery due to the fact that the terminal voltage U_{TER} is higher than the voltage U_{BAT} produced by the battery unit(s) 210 comprised in the battery 205. The charging
 20 current flows through the first resistive element R_{0B} of Fig. 5B. If considering a constant charging current 410 for the sake of simplicity, the voltage U_{C1B} of the capacitive element C_{1B} settles to a value $U_{C1B} = U_{TER} - I_{TER}R_{0B}$. Furthermore, as at least part of the charging current 410 flows also through the second resistive element R_{2B} , the voltage of the U_{C1B} of the capacitive element C_{1B} must
 25 also satisfy the equation $U_{C1B} = U_{BAT} + I_{R2}R_{2B}$, that is, being at higher voltage level with respect to U_{BAT} . When the charging current 410 is interrupted after the first time period T1 and the battery is provided with an open-circuit condition, the battery terminal voltage U_{TER} drops abruptly due to a voltage drop over the first resistive element R_{0B} . After this, and partly already during it, the
 30 capacitive element C_{1B} having a higher voltage level U_{C1B} with respect to U_{BAT} , starts to discharge itself into the battery unit(s) 210 through the second resistive element R_{2B} . As the capacitive element C_{1B} discharges, its voltage U_{C1B} starts to decrease and approach U_{BAT} . This causes the slope 450 to the battery terminal voltage 420 measurable and detectable by measuring the terminal
 35 voltage during the interruption time period T2 at least at two time instances

460, 470. Based on this, it is clear that the interruption time period T2 and/or the delay time period TD should not last too long before the change in the terminal voltage is determined in order for the slope 450 not to disappear. It should be noted, however, that Fig. 5B merely illustrates one type of a circuit diagram of battery. In case of the circuit diagram in Fig. 5A, the slope 450 is due to discharging of the capacitive element C_{1A} through the second resistive element R_{2A} , and the change of voltage 440 due to the voltage drop over the first resistive element R_{0A} .

Figures 6A and 6B illustrate measured charging current 410 and battery terminal voltage 420 during charging TT, and illustrate the determination of the state of charge of a battery according to an embodiment of the present invention. The value of the charging current 410 is shown at the vertical axis on the left and the value of the battery terminal voltage 420 at the vertical axis on the right. The slope 450 of the battery terminal voltage 420 is clearly visible, however, still further emphasized by the straight line 450. The instant voltage drop in Fig. 4 looks slanted due to low sampling frequency. The actual voltage drop 440 is more abrupt than the used sample frequency could reveal. The voltage drift or slope 450 related to C_{1A} or C_{1B} is approximated with the straight line 450. During the interruption time period, the voltage clearly, however, slowly reduces. Though there are several samples taken during the interruption time period, used period does not show much reduction during the current interruption. The abrupt voltage drop 440 which is related to resistive element(s) of the battery and a part of the electrical arrangement for charging, and the slower voltage drop, that is, the slope 450 related to capacitive element(s) of the battery makes the method according to the various embodiments of the present invention to detect those to values robust and easy.

According to an embodiment of the present invention, the electronic charging arrangement and, particularly, the controlling unit thereof, monitors the battery terminal voltage 420 and calculates the value of the slope 450 continuously. Once it determines, after the first time period T1, that the slope 450 has reached more stable value, that is, after the abrupt change 440, the controlling unit may start the determination of the state of charge of the battery 205. Thus, the delay time period TD may be utilized to be long as it takes to detect said stable value of for the slope 450. Figure 6B illustrates the determination of the value of the slope 450 during another time instance or another charging period TT

during the same overall charging of the battery 205. The slopes 450 in Figs. 6A and 6B are quite similar representing partially charged battery 205.

Figure 7 illustrates measured charging current 410 and battery terminal voltage 420 during charging TT, and illustrates the determination of the state of charge of a battery 205 including the fully charged condition according to an embodiment of the present invention. As can be seen, the slopes 450 of the battery terminal voltage 420 shown in Fig. 7 determined during several consecutive interruption time periods T2 steepen with respect to each other when approaching the fully charged condition. The steepening nature of the slope 450 may be utilized for determining the state of charge of the battery 205. Once the battery 205 is fully charged, the effect of the capacitive element(s) on the voltage disappears and the abrupt change due to the resistive elements 440 is basically only detectable. This may be utilized for determining the state of charge of the battery 205 or at least when the battery 205 is fully charged.

When the battery gets fully charged there are no more ions available to transfer energy and store charge, that is, aspect related to the capacitive element(s) of the battery 205 as described hereinearlier. In practice, this doesn't happen instantaneously, but still quite fast, as it is seen that less and less ions are available when the battery gets nearer to full charge. As there are no ions available, the magnitude of the capacitive element(s) C_{1A} , C_{1B} , drastically reduces. The drastic reduction in the capacitive element(s) within 20 seconds can be seen Fig. 8 as the slope 450 rapidly steepens between consecutive charging periods.

According to various embodiments of the present invention, a value of the slope 450 may be compared to a threshold value for determining the state of charge, and/or when the battery 205 is fully charged.

As can be seen in Fig. 6A, 6B and 7, the method according to an embodiment of the present invention may be utilized intermittently or continuously comprising consecutive charging periods TT in order to fully charge the battery 205.

According to various embodiment of the present invention, such as related to the method illustrated in and described with respect to Fig. 1, determination of a further voltage value at 610, that is, a third voltage value, may be performed, by for example a voltage measurement, right after the first time period T1 or even at the very end of the first time period T1. The third voltage value at 610

may be used as a reference value for determining if the battery is fully charged. This may be implemented, for example, by utilizing a condition: (voltage at 610 – voltage at 460) $\leq$ (voltage at 460 – voltage at 470), then the battery is fully charged. The abovementioned condition may also be implemented

5 as ratios by taking into account the time between different measurements, that is, actually defining the values for the slopes 440, 450. The abovementioned condition basically compares the voltage slope 440 in the beginning of the interruption period T2 to the voltage slope 450 later during the interruption period. As can be seen in Fig. 7, the slope 450 becomes as steep as the slope

10 440 when the battery is fully charged. A coefficient FF for calculation of the condition may also be used, for example, $FF(\text{voltage at 610} - \text{voltage at 460}) \leq (\text{voltage at 460} - \text{voltage at 470})$, therefore, enabling defining a less strict condition, for example, by using 0.90 or 0.95 as the coefficient FF.

Figure 8 illustrates schematically a controlling unit 200 according to an embodiment of the present invention. External units 801 may be connected to a

15 communication interface 808 of the controlling unit 200. External unit 801 may comprise wireless connection or a connection by a wired manner. The communication interface 808 provides interface for communication with external units 801, such as, an electrical converter 240, the battery 205, or determination means for determining voltage 260. There may also be connecting to the

20 external system, such as a laptop or a handheld device. There may also be a connection to a database of the electronic charging arrangement 200 or an external database including information used in controlling the operation of the arrangement 200.

25 The controlling unit 200 may comprise one or more processors 804, one or more memories 806 being volatile or non-volatile for storing portions of computer program code 807A-807N and any data values and possibly one or more user interface units 810. The mentioned elements may be communicatively coupled to each other with e.g. an internal bus.

30 The processor 804 of the controlling unit 200 is at least configured to implement at least some method steps as described hereinafter. The implementation of the method may be achieved by arranging the processor 804 to execute at least some portion of computer program code 807A-807N stored in the memory 806 causing the processor 804, and thus the controlling unit 200, to

35 implement one or more method steps as described. The processor 804 is thus

arranged to access the memory 806 and retrieve and store any information therefrom and thereto. For sake of clarity, the processor 804 herein refers to any unit suitable for processing information and control the operation of the electronic charging arrangement 200, among other tasks. The operations may
5 also be implemented with a microcontroller solution with embedded software. Similarly, the memory 806 is not limited to a certain type of memory only, but any memory type suitable for storing the described pieces of information may be applied in the context of the present invention.

The specific examples provided in the description given above should not be
10 construed as limiting the applicability and/or the interpretation of the appended claims. Lists and groups of examples provided in the description given above are not exhaustive unless otherwise explicitly stated.

CLAIMS

1. A method for determining a state of charge of a battery (205) during charging of the battery (205), wherein the method comprises:

- 5 - charging (110) the battery (205) with a charging current (410) during a first time period (T1),

characterized in that the method comprises

- interrupting (120) the charging current (410) after the first time period (T1) at least for an interruption time period (T2),
- 10 - determining (130) a change (480) of terminal voltage (420) of the battery (205) during the interruption time period (T2), and
- determining (140) the state of charge based on the determined change (480) of terminal voltage (420).

2. The method according to claim 1, wherein the charging (110) comprises charging the battery (205) with a constant current.

- 15 3. The method according to claim 1 or 2, wherein the interrupting (120) comprises interrupting the charging current by opening a switch (270) through which the charging current (410) is injected into the battery (205) via battery terminals (220A, 220B) for providing an open-circuit condition for the battery (205).

- 20 4. The method according to claim 3, wherein the switch (270) is a semiconductor switch or a mechanical switch.

5. The method according to any one of the preceding claims, comprising a delay time period (TD) after the first time period (T1) prior to the determining (130) of the change (480) of the terminal voltage (420) for the charging current (410) to diminish.
- 25

6. The method according to any one of the preceding claims, wherein the determining of the change (480) of terminal voltage (420) comprises measuring the terminal voltage (420) at two time instances (460, 470) during the interruption time period (T2), and determining the difference between the measured voltage values.
- 30

7. The method according to any one of the preceding claims, wherein the determining (140) of the state of charge comprises comparing the determined change (480) of the terminal voltage (420) to a threshold value for the change (480) of terminal voltage (420).

5 8. A controlling unit (250) for determining a state-of-charge of a battery (205) during charging, wherein the controlling unit (250) comprises

- at least one processor (804), and

- at least one memory (806) storing at least one portion of computer program code (807A-807N),

10 **characterized in that** the at least one processor (804) is configured to cause the controlling unit (250) at least to perform to:

- charge (110) the battery (205) with a charging current (410) during a first time period (T1),

15 - interrupt (120) the charging current (410) after the first time period (T1) at least for an interruption time period (T2),

- determine (130) a change (480) of terminal voltage (420) of the battery (205) during the interruption time period (T2), and


- determine (140) the state of charge based on the determined change (480) of terminal voltage (420).

20 9. An electronic charging arrangement (200) for determining a state-of-charge of a battery (205) during charging, **characterized in that** the electronic charging arrangement (200) comprises charging means (240) for charging the battery (205), wherein the charging means (240) are electrically connected to battery terminals (220A, 220B) of the battery (205), determining means (260)
25 for determining a terminal voltage (420) of the battery (205), and a controlling unit (250) configured at least to:

- charge (110) the battery (205) with a charging current (410) during a first time period (T1),

30 - interrupt (120) the charging current (410) after the first time period (T1) at least for an interruption time period (T2),

- determine (130) a change (480) of terminal voltage (420) of the battery (205) during the interruption time period (T2), and
 - determine (140) the state of charge based on the determined change (480) of terminal voltage (420); and
- 5 wherein the controlling unit (250) and the determining means (260) are at least communicatively connected to each other.
10. The electronic charging arrangement (200) according to claim 9, wherein the controlling unit (250) and the switch (270) or the charging means (240) are at least communicatively connected to each other.

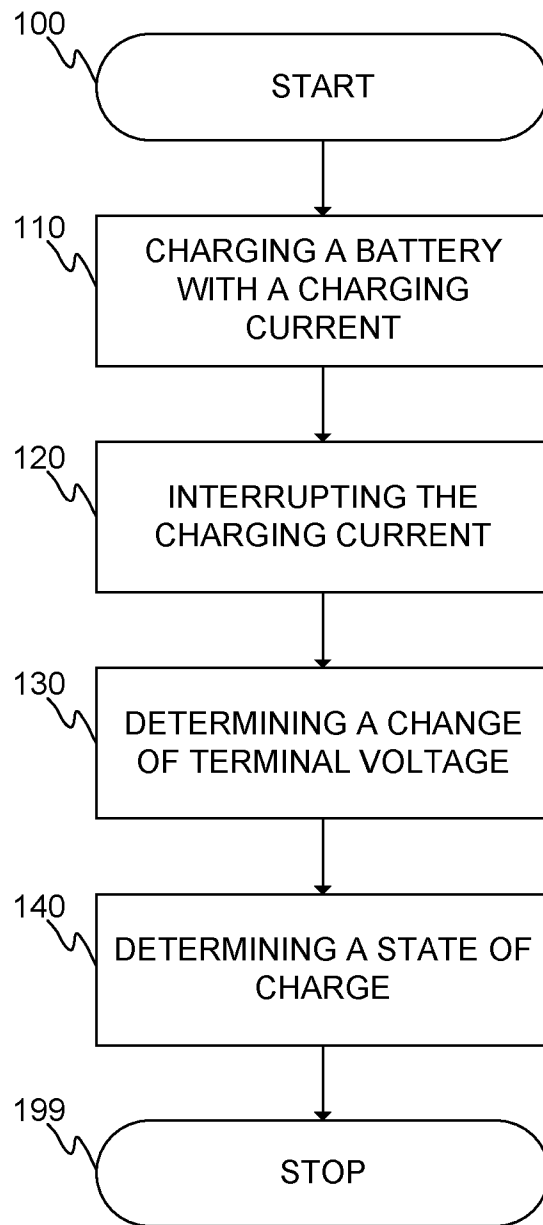**FIG. 1**

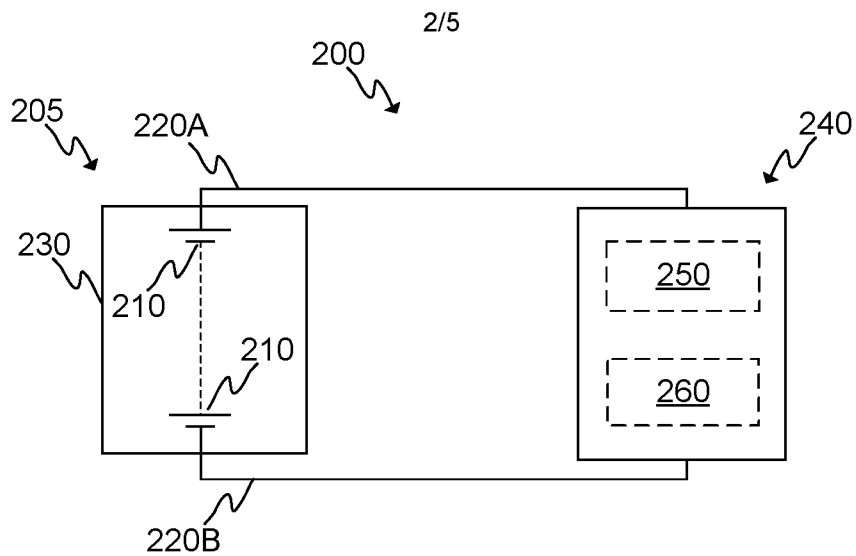


FIG. 2

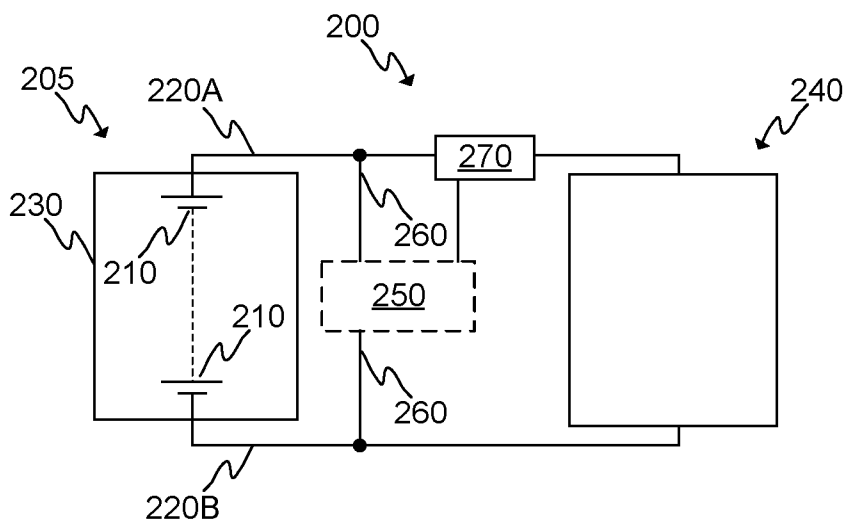


FIG. 3

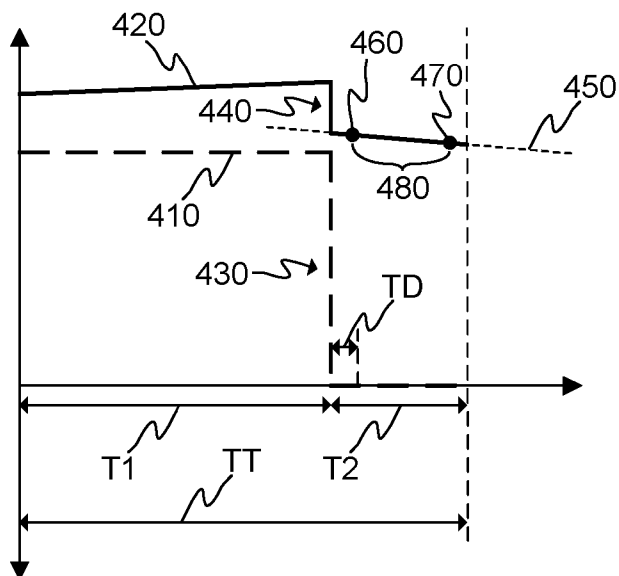


FIG. 4

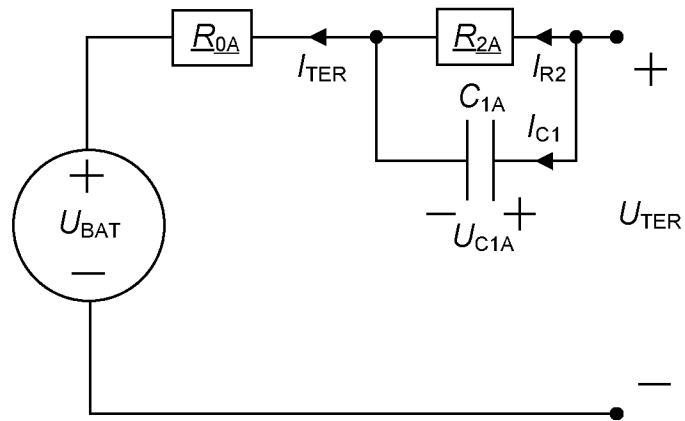


FIG. 5A

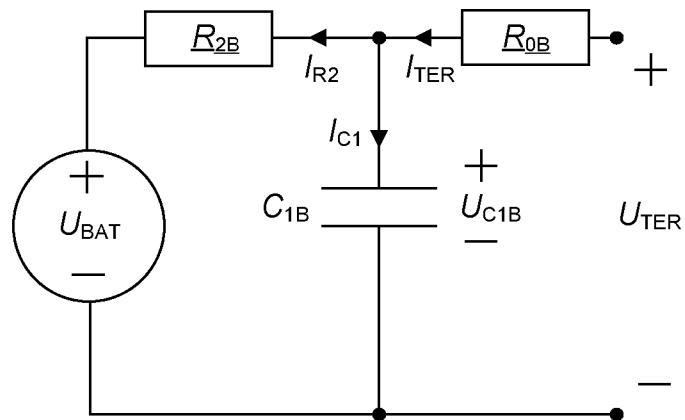


FIG. 5B

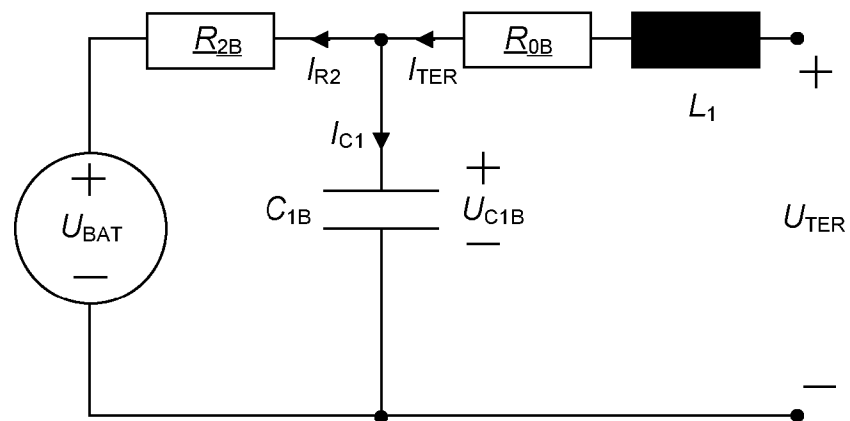


FIG. 5C

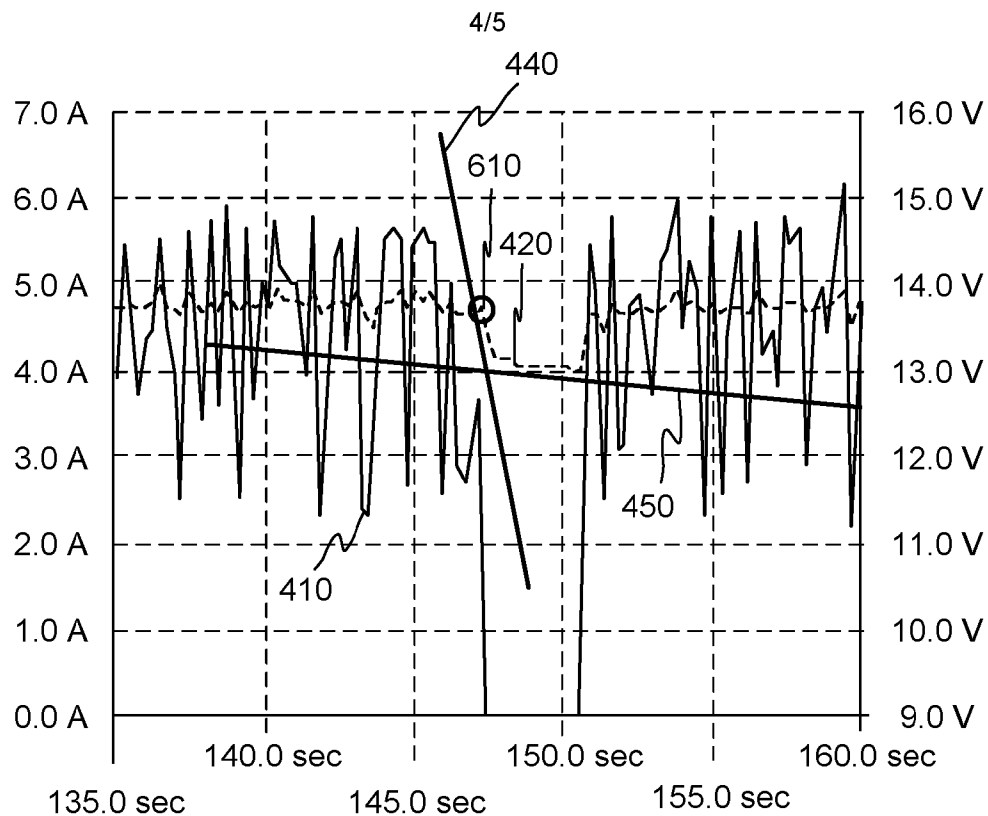


FIG. 6A

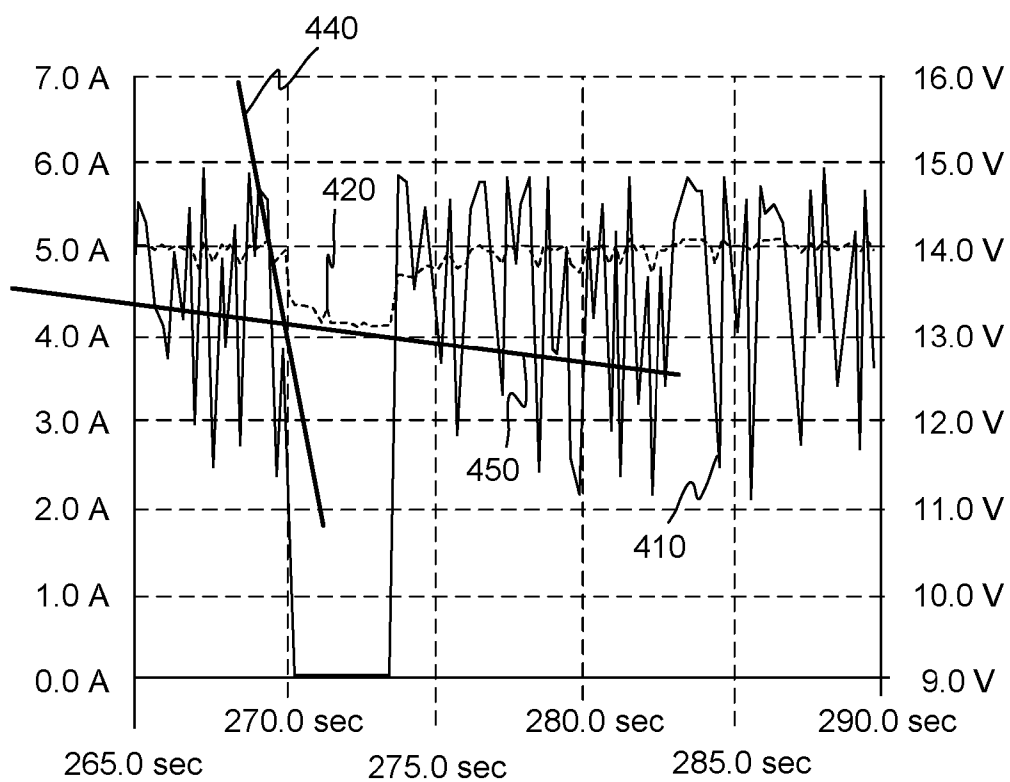


FIG. 6B

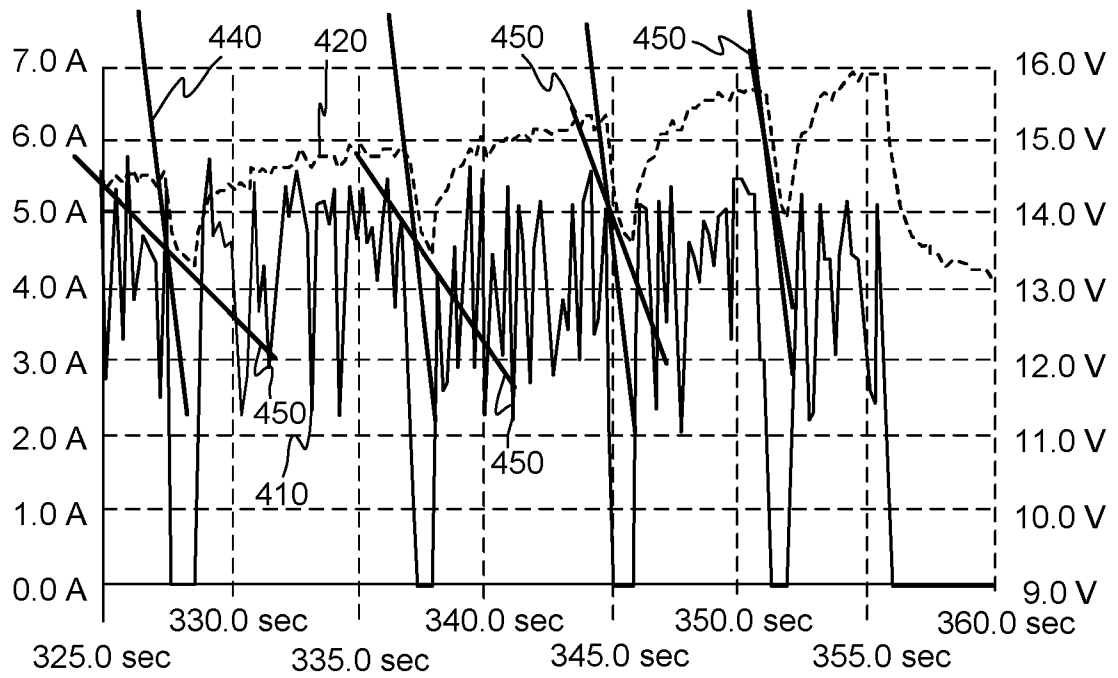


FIG. 7

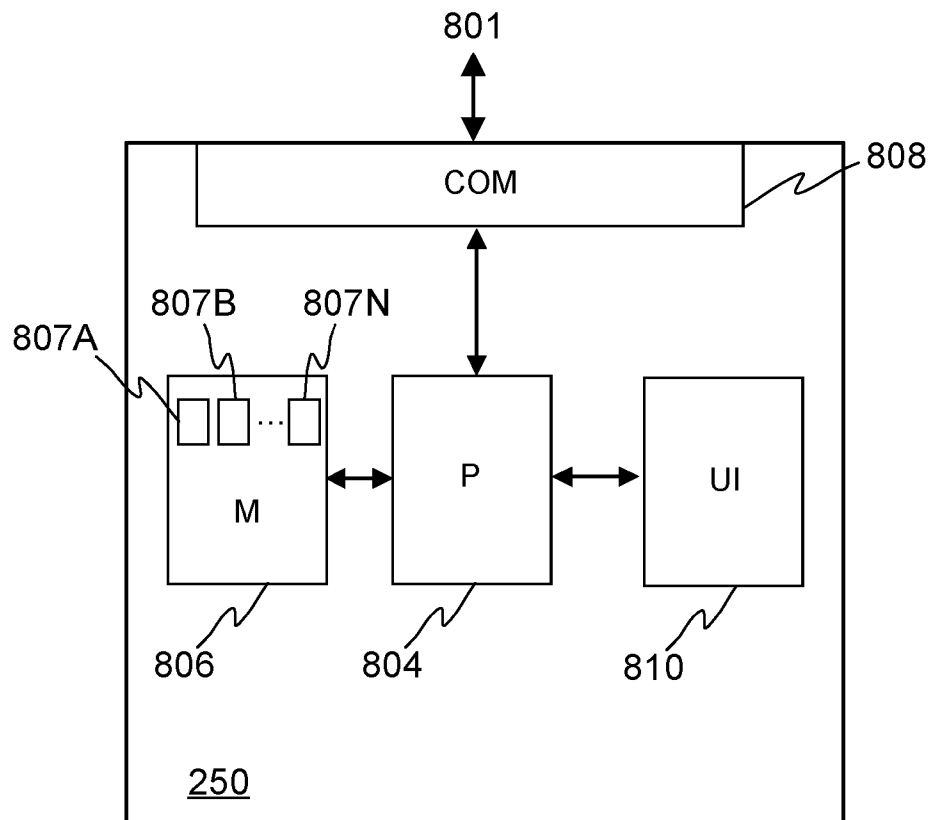


FIG. 8

FINNISH PATENT AND REGISTRATION OFFICE

P.O. Box 1160

FIN-00101 Helsinki

SEARCH REPORT

PATENT APPLICATION No.	CLASSIFICATION	
20175193	IPC <i>H02J 7/00</i> (2006.01)	CPC H02J 7/0047 H02J 7/0093 H02J 7/0085
PATENT CLASSES SEARCHED (classification systems and classes)		
IPC: H02J		
DATABASES CONSULTED DURING THE SEARCH		
EPODOC, WPIAP, EPO-Internal full-text databases, Full-text translation databases from Asian languages, PRH-Internal, NPL, BIOSIS, COMPDX, EMBASE, INSPEC, MEDLINE, TDB, XP3GPP, XPAIP, XPESP, XPETSI, XPI3E, XPIEE, XPIETF, XPIOP, XPIPCOM, XPJPEG, XPMISC, XPOAC, XPRD, XPTK		

DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*)	Bibliographic data on the document and relevant passages	Relevant to claims
X	US 2014145684 A1 (LIU ALBERT [US] et al.) 29 May 2014 (29.05.2014) abstract, paragraphs 0014, 0017, 0020 – 0022, claims, and figures	1 - 10
X	US 6229285 B1 (DING YI [US]) 08 May 2001 (08.05.2001) abstract, column 3 lines 8 – 21, column 7 lines 4 – 26, claims 1, 3, 5, and 8, and figures 1, 8, 16, and 17	1 - 10
Continued on the next sheet ☒		

*) X Document indicating that the invention is not novel or does not involve an inventive step with respect to the state of the art.
Y Document indicating that the invention does not involve an inventive step with respect to the state of the art if combined with one or more other documents in the same category.
A Document representing the general state of the art.

O Document referring to disclosure through lecture, use or other non-written means.
P Document published prior to the filing date but not prior to the earliest priority date.
T Document published after the filing date or priority date and illustrating the principle or theory underlying the invention.
E Earlier patent or utility model application that either is Finnish or designates Finland published on or after the filing date (priority date).
D Document that is mentioned in the application.
L Document which may throw doubts on priority claim(s), is cited to establish the publication date of another citation or is referred to for some other reason.

& Document member of the same patent family.

This document has been electronically signed.

Further information given in the annex ☐

Date

15.08.2017

Patent Examiner

Matti Liukkonen

Telephone (029) 509 5000

PATENT APPLICATION No.

20175193

DOCUMENTS CONSIDERED TO BE RELEVANT, CONTINUED

Category*)	Bibliographic data on the document and relevant passages	Relevant to claims
X	US 5905364 A (OOKITA HIROTAKA [JP]) 18 May 1999 (18.05.1999) abstract, column 1 lines 38 – 47, column 2 lines 1 – 24, column 3 lines 15 – 35, column 4 lines 22 – 47, column 5 lines 17 – 29, column 7 lines 40 – 57, claims 1, 2, and 13, and figures 1, 4, and 6	1 - 10
X	US 9455587 B2 (SCHUMACHER OTTO [DE] et al.) 27 September 2016 (27.09.2016) abstract, column 1 lines 25 – 50, column 2 lines 17 – 64, column 3 lines 11 – 28, column 3 line 49 – column 4 line 18, column 4 lines 29 – 34, column 6 lines 18 – 37, column 8 lines 10 – 33, column 9 lines 15 – 30, claims 1, 2, 5, 6, 11, 12, and 14, and figures 5 – 7	1 - 10