



(51) International Patent Classification:

E21B 47/007 (2012.01)

(21) International Application Number:

PCT/US2011/041867

(22) International Filing Date:

24 June 2011 (24.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **LAND-MARK GRAPHICS CORPORATION** [US/US]; 2107 Citywest Boulevard, Building 2, Houston, TX 77042-3021 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MITCHELL, Robert, Franklin** [US/US]; 2212 Tanglely, Houston, TX 77005 (US).

(74) Agent: **JENSEN, William, P.**; Crain, Caton & James, P.C., 1401 McKinney Street, Suite 1700, Houston, TX 77010 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SYSTEMS AND METHODS FOR DETERMINING THE MOMENTS AND FORCES OF TWO CONCENTRIC PIPES WITHIN A WELLBORE

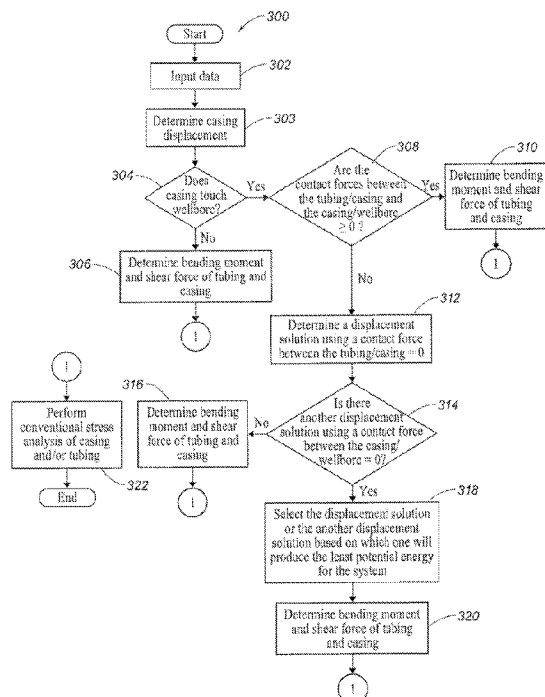


FIG. 3

(57) Abstract: Systems and methods for determining the bending moment and shear force of tubing and casing when the tubing buckles and contacts the casing.

SYSTEMS AND METHODS FOR DETERMINING THE MOMENTS AND FORCES OF TWO CONCENTRIC PIPES WITHIN A WELLBORE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] Not applicable.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] Not applicable.

FIELD OF THE INVENTION

[0003] The present invention generally relates to systems and methods for determining the moments and forces of two concentric pipes within a wellbore. More particularly, the present invention relates to determining the bending moment and shear force of tubing and casing when the tubing buckles and contacts the casing.

BACKGROUND OF THE INVENTION

[0004] Oil wells typically have multiple concentric pipes called casing strings. In **FIG. 1**, the configuration **100** of two concentric pipes is illustrated. The internal pipe **102** is designated “tubing” and the external pipe **104** is designated “casing.” There is a wellbore **106** that is considered rigid in this analysis.

[0005] For a set of two concentric strings, if the internal pipe has a compressive axial force, it will typically deform into a helically shaped configuration within the other string, as shown in **FIG. 1**. The cross-sectional areas of the various pipes are described by:

$$\begin{aligned}
 A_{ti} &= \pi r_{ti}^2 \\
 A_{te} &= \pi r_{te}^2 \\
 A_{ci} &= \pi r_{ci}^2 \\
 A_{ce} &= \pi r_{ce}^2
 \end{aligned}
 \tag{1}$$

where r_{ti} is the inside radius of the tubing, r_{te} is the outside radius of the tubing, r_{ci} is the inside radius of the casing, and r_{ce} is the outside radius of the casing. Clearances between the various pipes and the wellbore are given as:

$$\begin{aligned} r_c &= r_{ci} - r_{te} \\ r_{wc} &= r_w - r_{ce} \end{aligned} \quad (2)$$

[0006] Where r_c is the radial clearance between the tubing and casing, and r_{wc} is the radial clearance between the casing and the wellbore and r_w is the wellbore radius. Most analyses of this problem assume that the outer casing is rigid. In reality, this external casing is also elastic and would displace due to the loads generated by contact with the internal pipe. Further, if both strings have compressive axial forces, both strings will buckle, and the resulting buckled configuration must fit together so that contact forces between the two strings are positive and the pipes do not each occupy the same space. If the two strings have an external, cylindrical rigid wellbore, then any contact forces with this wellbore must also be positive and the buckled pipe system must lie within this wellbore. This configuration is illustrated as a cross-section in **FIG. 1** before buckling takes place. The post-buckling configuration **200** is illustrated in **FIG. 2**.

[0007] There is only one known solution to the problem presented by multiple concentric buckling pipes, which is described in SPE 6059 by Stan A. Christman entitled "*Casing Stresses Caused by Buckling of Concentric Pipes*." In this article, a composite pipe based on the summed properties of the individual pipes is proposed. Further, the pipes do not touch each other, but are assumed to remain concentric. The deficiency in this analysis is that it does not conform to the requirements that i) the contact forces between the two strings are positive and the pipes do not each occupy the same space; and ii) the contact forces with the wellbore are positive and the

buckled pipe system lies within the wellbore. As a result the assumption that the pipes do not touch each other but remain concentric renders an inaccurate displacement solution.

SUMMARY OF THE INVENTION

[0008] The present invention therefore, overcomes one or more deficiencies in the prior art by providing systems and methods for determining the bending moment and shear force of tubing and casing when the tubing buckles and contacts the casing.

[0009] In one embodiment, the present invention includes a method for determining the moments and forces of two concentric pipes within a wellbore, comprising: i) determining an external pipe displacement using a computer processor; ii) determining whether the external pipe contacts the wellbore based on the external pipe displacement; iii) determining a bending moment and a shear force of an internal pipe and the external pipe based on contact between the internal pipe and the external pipe and the external pipe displacement if the external pipe does not contact the wellbore; iv) determining whether contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero if the external pipe contacts the wellbore; v) determining the bending moment and the shear force of the internal pipe and the external pipe based on contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero; vi) determining a displacement solution using a contact force between the internal pipe and the external pipe equal to zero if the contact forces between the internal pipe and the external pipe and between the internal pipe and the wellbore are not greater than or equal to zero; vii) determining whether there is another displacement solution using

a contact force between the external pipe and the wellbore equal to zero if the contact forces between the internal pipe and the external pipe and between the external pipe and wellbore are not greater than or equal to zero; and viii) determining the bending moment and the shear force of the internal pipe and the external pipe based on the displacement solution or the another displacement solution if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.

[0010] In another embodiment, the present invention includes a non-transitory program carrier device tangibly carrying computer executable instructions for determining the moments and forces of two concentric pipes within a wellbore, the instructions being executable to implement: i) determining an external pipe displacement; ii) determining whether the external pipe contacts the wellbore based on the external pipe displacement; iii) determining a bending moment and a shear force of an internal pipe and the external pipe based on contact between the internal pipe and the external pipe and the external pipe displacement if the external pipe does not contact the wellbore; iv) determining whether contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero if the external pipe contacts the wellbore; v) determining the bending moment and the shear force of the internal pipe and the external pipe based on contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero; vi) determining a displacement solution using a contact force between the internal pipe and the external pipe equal to zero if the contact forces between the internal pipe and the external pipe and between the internal pipe and the wellbore are

not greater than or equal to zero; vii) determining whether there is another displacement solution using a contact force between the external pipe and the wellbore equal to zero if the contact forces between the internal pipe and the external pipe and between the external pipe and wellbore are not greater than or equal to zero; and viii) determining the bending moment and the shear force of the internal pipe and the external pipe based on the displacement solution or the another displacement solution if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.

[0011] In yet another embodiment, the present invention includes a method for determining the moments and forces of two concentric pipes within a wellbore, comprising: i) determining an external pipe displacement using a computer processor; ii) determining whether the external pipe contacts the wellbore based on the external pipe displacement; and iii) determining a bending moment and a shear force of an internal pipe and the external pipe based on at least one of contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore.

[0012] In yet another embodiment, the present invention includes a non-transitory program carrier device tangibly carrying computer executable instructions for determining the moments and forces of two concentric pipes within a wellbore, the instructions being executable to implement: i) determining an external pipe displacement; ii) determining whether the external pipe contacts the wellbore based on the external pipe displacement; and iii) determining a bending moment and a shear force of an internal pipe and the external pipe based on at least one of contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore.

[0013] Additional aspects, advantages and embodiments of the invention will become apparent to those skilled in the art from the following description of the various embodiments and related drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The present invention is described below with references to the accompanying drawings in which like elements are referenced with like reference numerals, and in which:

[0015] **FIG. 1** is a cross sectional view illustrating two concentric pipes within a wellbore before buckling.

[0016] **FIG. 2** is an elevational view of the two concentric pipes illustrated in **FIG. 1** after buckling.

[0017] **FIG. 3** is a flow diagram illustrating one embodiment of a method for implementing the present invention.

[0018] **FIG. 4** is a block diagram illustrating one embodiment of a system for implementing the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0019] The subject matter of the present invention is described with specificity, however, the description itself is not intended to limit the scope of the invention. The subject matter thus, might also be embodied in other ways, to include different steps or combinations of steps similar to the ones described herein, in conjunction with other present or future technologies. Moreover, although the term “step” may be used herein to describe different elements of methods employed, the term should not be interpreted as implying any particular order among or between various steps herein disclosed unless otherwise expressly limited by the description to a particular order. While the present invention may be applied in the oil and gas industry, it is not

limited thereto and may also be applied in other industries to achieve similar results.

The nomenclature used herein is described in Table 1 below.

A_{ci}	==	casing inside area, (in ²)
A_{ce}	==	casing outside area, (in ²)
A_{ti}	==	tubing inside area, (in ²)
A_{te}	==	tubing outside area, (in ²)
E	==	Young's modulus (psi)
E_c	==	Young's modulus of the casing (psi)
E_t	==	Young's modulus of the tubing (psi)
F	==	axial tension in casing (lbf)
I	==	moment of inertia (in ⁴)
I_c	==	moment of inertia of the casing (in ⁴)
I_t	==	moment of inertia of the tubing (in ⁴)
M	==	bending moment, (in-lbf)
M_c	==	bending moment of the casing, (in-lbf)
M_t	==	bending moment of the tubing, (in-lbf)
P	==	axial compression in tubing (lbf)
p_1	==	pressure inside tubing (psi)
p_2	==	pressure outside tubing and inside casing (psi)
p_3	==	pressure outside casing (psi)
r_{ci}	==	casing inside radius, (in)
r_{ce}	==	casing outside radius, (in)
r_{ti}	==	tubing inside radius, (in)
r_{te}	==	tubing outside radius, (in)
r_c	==	nominal radial clearance between the tubing and casing (in)
r_{ic}	==	$r_{oc} - t_c$, (in)
r_{oc}	==	nominal radial clearance between the casing and exterior wellbore (in)
r_w	==	the wellbore radius, (in)
s	==	measured depth, (in)
t_c	==	the thickness of the casing (in)
u_1	==	tubing displacement in coordinate direction 1, (in)
u_2	==	tubing displacement in coordinate direction 2, (in)
v_1	==	casing displacement in coordinate direction 1, (in)
v_2	==	casing displacement in coordinate direction 2, (in)
V	==	shear force (lbf)
V_c	==	shear force in the casing (lbf)
V_t	==	shear force in the tubing (lbf)
w_c	==	tubing contact force buckled in a rigid cylinder, (lbf/in)
$\hat{w}_c$	==	tubing contact force buckled in an elastic cylinder, (lbf/in)
w_{tc}	==	the contact force between the tubing and casing, (lbf/in)
w_{wc}	==	the contact force between the wellbore and the casing, (lbf/in)
$2\pi/\beta$	==	the pitch of a displacement function representing a helix
u	==	absolute radial displacement of the casing, (in)
τ	==	shear stress, (psi)
σ_r	==	radial stress, (psi)
σ_θ	==	hoop stress, (psi)
σ_z	==	axial stress, (psi)

Table 1

Method Description

[0020] Referring now to **FIG. 2**, the general configuration **200** of the two concentric pipes in **FIG. 1** is illustrated after buckling. For purposes of the following description, the tubing **102** is the internal pipe and the casing **104** is the external pipe although the internal pipe and the external pipe may be both tubing or both casing. The tubing **102** has buckled in a helical shape due to the applied compressive force P and contacts the casing **104**. P and F are “compressive force” and “effective tension,” respectively:

$$\begin{aligned} P &= -F_t + p_1 A_{ti} - p_2 A_{te} \\ F &= F_c + p_2 A_{ci} - p_3 A_{ce} \end{aligned} \quad (3)$$

where F_t is the tubing axial tension, F_c is the casing axial tension, p_1 is the fluid pressure inside the tubing, p_2 is the pressure outside the tubing (inside the casing), and p_3 is the pressure outside the casing. The effect of pressure on the buckling behavior of pipe is well known in the art.

[0021] The buckled tubing has the form:

$$u_1 = r_c \sin(\beta s) \quad (4a)$$

$$u_2 = r_c \cos(\beta s) \quad (4b)$$

$$\beta = \sqrt{\frac{P}{2E_t I_t}} \quad (4c)$$

[0022] Where u_1 is the displacement in the 1 coordinate direction, u_2 is the displacement in the 2 coordinate direction, P is the axial compressive force on the tubing, E_t is Young's modulus for the tubing, I_t is the moment of inertia of the tubing $= \frac{1}{4} \pi (r_o^2 - r_i^2)$, and r_c is the radial clearance between the internal tubing and the external casing given in equations (2). The displacement represented by equations

(4a) and (4b) is a helix with a pitch equal to $2\pi/\beta$. Thus, β represents a possible displacement solution in equation (4c).

[0023] The contact force between the tubing and casing is:

$$\hat{w}_c = \frac{r_c P^2}{4E_t I_t} \quad (5)$$

[0024] The equilibrium equations of the outer casing with load applied by the internal tubing are:

$$\begin{aligned} E_c I_c \frac{d^4 v_1}{ds^4} - F \frac{d^2 v_1}{ds^2} - \hat{w}_c \sin(\beta s) &= 0 \\ E_c I_c \frac{d^4 v_2}{ds^4} - F \frac{d^2 v_2}{ds^2} - \hat{w}_c \cos(\beta s) &= 0 \end{aligned} \quad (6)$$

where v_1 is the displacement of the casing in the 1 coordinate direction, v_2 is the displacement of the casing in the 2 coordinate direction, F is the effective axial tensile force on the casing, E_c is Young's modulus for the casing, I_c is the moment of inertia of the casing $= \frac{1}{4}\pi(r_{oc}^2 - r_{ci}^2)$, and $\hat{w}_c$ is the contact force on the casing by the tubing. The contact force will be different from equation (5) because the radial clearance may change because of displacements v_1 and v_2 . The particular solution to equations (6) suitable for this analysis is:

$$\begin{aligned} v_1 &= \nu \sin(\beta s) \\ v_2 &= \nu \cos(\beta s) \end{aligned} \quad (7)$$

[0025] The contact force becomes:

$$\hat{w}_c = \frac{(r_c + \nu)P^2}{4E_t I_t} \quad (8)$$

where the radial clearance is increased by the casing displacement ν . Substituting equations (7) and equation (8) into equations (6), ν may be solved by:

$$\nu = \frac{r_c P E_t I_t}{2F E_t I_t + P(E_c I_c - E_t I_t)} \quad (9)$$

[0026] For simplicity, a rigid wellbore outside the casing is assumed. Thus, the radial clearance of the casing (r_{oc}) will put a limit on the magnitude of the casing displacement (v). When the casing displacement does not exceed the limit, meaning the buckled tubing contacts the casing but the casing does not contact the wellbore, the following results may be used to determine the bending moment and shear force of the casing and tubing.

[0027] The bending moment of the casing and tubing due to the buckled internal tubing is:

$$M_c = \frac{r_c P^2 E_c I_c}{2P(E_c I_c - E_t I_t) + 4FE_t I_t} \quad (10a)$$

$$M_t = M_c = E_t I_t (r_c + v) \beta^2 \quad (10b)$$

[0028] And the shear force of the casing and tubing due to the buckled internal tubing is:

$$V_c = F - \frac{PE_c I_c}{E_t I_t} \quad (11a)$$

$$V_t = (r_c + v) \beta [E_t I_t \beta^2 - P] \quad (11b)$$

[0029] When the casing displacement exceeds the limit, meaning the casing contacts the wellbore, it is not immediately clear that β will be given by equation (4c). If the principle of virtual work is applied to the sum of the casing and tubing bending energy and the work done by the casing and tubing axial loads (axial movement of each of the two strings are assumed independent of each other), then:

$$\beta^2 = \frac{Pr_{ic}^2 - Fr_{oc}^2}{EI_t r_{ic}^2 + EI_c r_{oc}^2} \quad (12)$$

where $r_{ic} = r_{oc} - t_c$, with t_c equal to the thickness of the casing. Note that equation (12) is still valid for negative F , that is, both strings may be buckled. Equation (12) is not valid for $\beta^2 < 0$. There are two further conditions that β must satisfy:

$$\text{The contact force between the tubing and casing } (w_{ic}) \text{ must be } \geq 0 \quad (13)$$

$$\text{The contact force between the casing and wellbore } (w_{wc}) \text{ must be } \geq 0 \quad (14)$$

[0030] The expectation is that since v is greater than r_{oc} , then the displacement solution β given by equation (4c) will satisfy condition (13), so a solution for β exists, although it may not be given by equation (12). Equation (12), however, is preferred over equation (4c) for a possible displacement solution if it satisfies conditions (13) and (14). The contact forces are given by the following equilibrium equations:

$$r_{ic}[P\beta^2 - E_t I_t \beta^4] = w_{ic} \quad (15a)$$

$$r_{oc}[E_c I_c \beta^4 + F\beta^2] = -w_{wc} + w_{ic} \quad (15b)$$

where w_{ic} is the contact force between the tubing and casing, and w_{wc} is the contact force between the wellbore and the casing. Solving for w_{wc} :

$$w_{wc} = \beta^2 (Pr_{ic} - Fr_{oc}) - \beta^4 (E_t I_t r_{ic} + E_c I_c r_{oc}) \quad (16)$$

[0031] The contact forces are required to satisfy conditions (13) and (14):

$$\begin{aligned} w_{ic} &\geq 0 \\ w_{wc} &\geq 0 \end{aligned} \quad (17)$$

[0032] If equation (12) satisfies conditions (13) and (14), then it is a valid displacement solution for β . If conditions (13) and (14) are not satisfied, then β must lie in the range where conditions (13) and (14) are satisfied. The principle of virtual work used to determine equation (12) minimizes the potential energy of the system represented by the two concentric pipes (strings) in **FIG. 2**. When the optimal

displacement solution lies outside of the possible range of β , then the displacement solution is the boundary value of β that minimizes the potential energy of the system.

The boundaries on the possible values of β are determined by:

$$w_{ic} = 0 \Rightarrow \beta^2 = \frac{P}{E_t I_t} \quad (18)$$

or

$$w_{wc} = 0 \Rightarrow \beta^2 = \frac{Pr_{ic} - Fr_{oc}}{E_t I_t r_{ic} + E_c I_c r_{oc}} \quad (19)$$

[0033] As before, equation (19) is not a valid displacement solution for β if $\beta^2 < 0$, but equation (18) is always a valid displacement solution for β from the initial assumptions. Thus, there is at least one displacement solution for β that is given by equation (18). The total potential energy of the system is:

$$U = \frac{1}{2}(E_c I_c r_{oc}^2 + E_t I_t r_{ic}^2)\beta^4 + \frac{1}{2}(Fr_{oc}^2 - Pr_{ic}^2)\beta^2 \quad (20)$$

[0034] If equation (19) also provides another valid displacement solution for β , meaning $\beta^2 \geq 0$, then there are two potential displacement solutions for β given by equations (18) and (19). Therefore, if both equations (18) and (19) satisfy conditions (13) and (14), then the displacement solution for β that minimizes equation (20) is preferred and selected for determining the bending moment and shear force of the tubing and casing.

[0035] Given the displacement solution from equations (12), (18) and/or (19) that is the only valid solution or that is the solution that will produce the least potential energy for the system, the bending moment and shear force of the tubing and casing may be determined by the following equations when the casing contacts the wellbore:

$$M_t = E_t I_t r_{ic} \beta^2 \quad (21a)$$

$$M_c = E_c I_c r_{oc} \beta^2 \quad (21b)$$

$$V_c = r_{oc}\beta \left| E_c I_c \beta^2 - P \right| \quad (21c)$$

$$V_c = r_{oc}\beta \left| E_c I_c \beta^2 + F \right| \quad (21d)$$

[0036] Referring now to **FIG. 3**, a flow diagram illustrates one of embodiment of a method **300** for implementing the present invention.

[0037] In step **302**, data is input using the client interface/video interface described in reference to **FIG. 4**. The data may include, for example, the inside and outside diameters of the tubing and the casing, the axial force in the tubing and casing, the wellbore diameter and the pressures inside and outside the tubing and casing.

[0038] In step **303**, a casing displacement is determined. In one embodiment, a casing displacement may be determined by the result from equation (9). Other techniques well known in the art, however, may be used to determine a casing displacement.

[0039] In step **304**, the method **300** determines if the casing touches the wellbore. In one embodiment, this may be determined by comparing the casing displacement result from equation (9) with the casing radial clearance (r_{oc}) that is known. If the casing touches the wellbore, then the method **300** proceeds to step **308**. If the casing does not touch wellbore, then the method **300** proceeds to step **306**. Other techniques well known in the art, however, may be used to determine if the casing touches the wellbore.

[0040] In step **306**, the bending moment and shear force of the tubing and casing are determined. In one embodiment, the bending moment and shear force of the tubing and casing may be determined by using the result from equation (4c) and equations (10a) and (10b) to determine the bending moment of the casing and tubing, respectively, and by using the result from equation (4c) and equations (11a) and (11b)

to determine the shear force of the casing and tubing, respectively. Other techniques well known in the art, however, may be used to determine the bending moment and shear force of the casing and tubing.

[0041] In step **308**, the method **300** determines if the contact forces between the tubing/casing and the casing/wellbore are greater than or equal to zero. In one embodiment, this may be determined by using the result from equation (12) and equation (15a) to determine the contact force between the tubing and the casing and by using the result from equation (12) and equation (15b) to determine the contact force between the casing and the wellbore. If the contact forces between the tubing/casing and casing/wellbore are not greater than or equal to zero, then the method **300** proceeds to step **312**. If the contact forces between the tubing/casing and the casing/wellbore are greater than or equal to zero, then method **300** proceeds to step **310**. Other techniques well known in the art, however, may be used to determine the contact force between the tubing and the casing and the contact force between the casing and the wellbore.

[0042] In step **310**, the bending moment and shear force of the tubing and casing are determined. In one embodiment, the bending moment and shear force of the tubing and casing may be determined by using the result from equation (12) and equations (21a), (21b) to determine the bending moment of the tubing and casing, respectively, and by using the result from equation (12) and equations (21c), (21d) to determine the shear force of the tubing and casing, respectively. Other techniques well known in the art, however, may be used to determine the bending moment and shear force of the casing and tubing.

[0043] In step **312**, a displacement solution is determined using a contact force between the tubing/casing equal to zero. In one embodiment, a displacement solution

may be determined by the result from equation (18) using a contact force between the tubing/casing equal to zero. Other techniques well known in the art, however, may be used to determine a displacement solution when the contact force between the tubing and the casing equals zero.

[0044] In step **314**, the method **300** determines if there is another displacement solution using a contact force between the casing/wellbore equal to zero. In one embodiment, another displacement solution may be determined by the result from equation (19) using a contact force between the casing/wellbore equal to zero. If there is another displacement solution using a contact force between the casing/wellbore equal to zero, then the method **300** proceeds to **318**. If there is not another displacement solution using a contact force between the casing/wellbore equal to zero, then the method **300** proceeds to step **316**. Other techniques well known in the art, however, may be used to determine if there is another displacement solution when the contact force between the casing and the wellbore equals zero.

[0045] In step **316**, the bending moment and shear force of the tubing and casing are determined. In one embodiment, the bending moment and shear force of the tubing and casing may be determined by using the result from equation (18) and equations (21a), (21b) to determine the bending moment of the tubing and casing, respectively, and by using the result from equation (18) and equations (21c), (21d) to determine the shear force of the tubing and the casing, respectively. Other techniques well known in the art, however, may be used to determine the bending moment and shear force of the casing and tubing.

[0046] In step **318**, the displacement solution from step **312** or the another displacement solution from step **314** is selected based on which one will produce the least potential energy for the system. In one embodiment, the displacement solution

and the another displacement solution may be used to determine the total potential energy of the system in equation (20). The result producing the least potential energy for the system is selected. Other techniques well known in the art, however, may be used to select the displacement solution or the another displacement solution for the system.

[0047] In step **320**, the bending moment and shear force of the tubing and casing are determined. In one embodiment, the bending moment and shear force of the tubing and casing may be determined by using the displacement solution or the another displacement solution selected in step **318** and equations (21a), (21b) to determine the bending moment of the tubing and casing, respectively, and by using the displacement solution or the another displacement solution selected in step **318** and equations (21c), (21d) to determine the shear force of the tubing and casing, respectively. Other techniques well known in the art, however, may be used to determine the bending moment and shear force of the casing and tubing.

[0048] In step **322**, a conventional stress analysis of the casing and/or tubing may be performed using techniques and/or applications well known in the art.

System Description

[0049] The present invention may be implemented through a computer-executable program of instructions, such as program modules, generally referred to as software applications or application programs executed by a computer. The software may include, for example, routines, programs, objects, components, and data structures that perform particular tasks or implement particular abstract data types. The software forms an interface to allow a computer to react according to a source of input. WellCat™ and StressCheck™, which are commercial software applications marketed by Landmark Graphics Corporation, may be used to implement the present

invention. The software may also cooperate with other code segments to initiate a variety of tasks in response to data received in conjunction with the source of the received data. The software may be stored and/or carried on any variety of memory media such as CD-ROM, magnetic disk, bubble memory and semiconductor memory (*e.g.*, various types of RAM or ROM). Furthermore, the software and its results may be transmitted over a variety of carrier media such as optical fiber, metallic wire and/or through any of a variety of networks such as the Internet.

[0050] Moreover, those skilled in the art will appreciate that the invention may be practiced with a variety of computer-system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable-consumer electronics, minicomputers, mainframe computers, and the like. Any number of computer-systems and computer networks are acceptable for use with the present invention. The invention may be practiced in distributed-computing environments where tasks are performed by remote-processing devices that are linked through a communications network. In a distributed-computing environment, program modules may be located in both local and remote computer-storage media including memory storage devices. The present invention may therefore, be implemented in connection with various hardware, software or a combination thereof, in a computer system or other processing system.

[0051] Referring now to **FIG. 4**, a block diagram illustrates one embodiment of a system for implementing the present invention on a computer. The system includes a computing unit, sometimes referred to a computing system, which contains memory, application programs, a client interface, a video interface and a processing unit. The computing unit is only one example of a suitable computing environment and is not

intended to suggest any limitation as to the scope of use or functionality of the invention.

[0052] The memory primarily stores the application programs, which may also be described as program modules containing computer-executable instructions, executed by the computing unit for implementing the present invention described herein and illustrated in **FIG. 3**. The memory therefore, includes a bending moment and shear force module, which enables the methods illustrated and described in reference to **FIG. 3** and integrates functionality from the remaining application programs in **FIG. 4**. The bending moment and shear force module, for example, may be used to execute many of the functions described in reference to steps **302-320** in **FIG. 3**. WellCat[™] and StressCheck[™] may be used, for example, to execute the functions described in reference to step **322** in **FIG. 3**.

[0053] Although the computing unit is shown as having a generalized memory, the computing unit typically includes a variety of computer readable media. By way of example, and not limitation, computer readable media may comprise computer storage media. The computing system memory may include computer storage media in the form of volatile and/or nonvolatile memory such as a read only memory (ROM) and random access memory (RAM). A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within the computing unit, such as during start-up, is typically stored in ROM. The RAM typically contains data and/or program modules that are immediately accessible to and/or presently being operated on by the processing unit. By way of example, and not limitation, the computing unit includes an operating system, application programs, other program modules, and program data.

[0054] The components shown in the memory may also be included in other removable/non-removable, volatile/nonvolatile computer storage media or they may be implemented in the computing unit through application program interface ("API"), which may reside on a separate computing unit connected through a computer system or network. For example only, a hard disk drive may read from or write to non-removable, nonvolatile magnetic media, a magnetic disk drive may read from or write to a removable, non-volatile magnetic disk, and an optical disk drive may read from or write to a removable, nonvolatile optical disk such as a CD ROM or other optical media. Other removable/non-removable, volatile/non-volatile computer storage media that can be used in the exemplary operating environment may include, but are not limited to, magnetic tape cassettes, flash memory cards, digital versatile disks, digital video tape, solid state RAM, solid state ROM, and the like. The drives and their associated computer storage media discussed above provide storage of computer readable instructions, data structures, program modules and other data for the computing unit.

[0055] A client may enter commands and information into the computing unit through the client interface, which may be input devices such as a keyboard and pointing device, commonly referred to as a mouse, trackball or touch pad. Input devices may include a microphone, joystick, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit through a system bus, but may be connected by other interface and bus structures, such as a parallel port or a universal serial bus (USB).

[0056] A monitor or other type of display device may be connected to the system bus via an interface, such as a video interface. A graphical user interface ("GUI") may also be used with the video interface to receive instructions from the client interface

and transmit instructions to the processing unit. In addition to the monitor, computers may also include other peripheral output devices such as speakers and printer, which may be connected through an output peripheral interface.

[0057] Although many other internal components of the computing unit are not shown, those of ordinary skill in the art will appreciate that such components and their interconnection are well known.

[0058] While the present invention has been described in connection with presently preferred embodiments, it will be understood by those skilled in the art that it is not intended to limit the invention to those embodiments. It is therefore, contemplated that various alternative embodiments and modifications may be made to the disclosed embodiments without departing from the spirit and scope of the invention defined by the appended claims and equivalents thereof.

CLAIMS

1. A method for determining the moments and forces of two concentric pipes within a wellbore, comprising:
 - determining an external pipe displacement using a computer processor;
 - determining whether the external pipe contacts the wellbore based on the external pipe displacement;
 - determining a bending moment and a shear force of an internal pipe and the external pipe based on contact between the internal pipe and the external pipe and the external pipe displacement if the external pipe does not contact the wellbore;
 - determining whether contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero if the external pipe contacts the wellbore;
 - determining the bending moment and the shear force of the internal pipe and the external pipe based on contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero;
 - determining a displacement solution using a contact force between the internal pipe and the external pipe equal to zero if the contact forces between the internal pipe and the external pipe and between the internal pipe and the wellbore are not greater than or equal to zero;
 - determining whether there is another displacement solution using a contact force between the external pipe and the wellbore equal to zero if the

contact forces between the internal pipe and the external pipe and between the external pipe and wellbore are not greater than or equal to zero; and determining the bending moment and the shear force of the internal pipe and the external pipe based on the displacement solution or the another displacement solution if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.

2. The method of claim 1, further comprising selecting the displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if there is not another displacement solution.
3. The method of claim 1, further comprising selecting the displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the another displacement solution.
4. The method of claim 1, further comprising selecting the another displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the another displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the displacement solution.
5. The method of claim 1, further comprising performing a stress analysis of the internal pipe and the external pipe based on the bending moment and the shear force of the internal pipe and the external pipe.
6. The method of claim 1, wherein

$$D = \frac{r_c P E_i I_i}{2 F E_i I_i + P (E_c I_c - E_i I_i)}$$

is used to determine the casing displacement.

7. The method of claim 1, wherein

$$M_i = M_c = E_i I_i (r_c + v) \beta^2$$

$$M_w = \frac{r_c P^2 E_c I_w}{2P(E_c I_c - E_i I_i) + 4FE_i I_i}$$

$$V_i = (r_c + v) \beta [E_i I_i \beta^2 - P]$$

$$V_c = F - \frac{PE_c I_c}{E_i I_i}$$

are used to determine the bending moment and the shear force of the internal pipe and the external pipe if the external pipe does not contact the wellbore.

8. The method of claim 1, wherein

$$\beta^2 = \frac{Pr_{ic}^2 - Fr_{oc}^2}{EI_i r_{ic}^2 + EI_c r_{oc}^2}$$

$$r_{ic} [P\beta^2 - E_i I_i \beta^4] = w_{ic}$$

$$r_{oc} [E_c I_c \beta^4 + F\beta^2] = -w_{wc} + w_{ic}$$

are used to determine the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore.

9. The method of claim 1, wherein

$$\beta^2 = \frac{Pr_{ic}^2 - Fr_{oc}^2}{EI_i r_{ic}^2 + EI_c r_{oc}^2}$$

is used to determine the bending moment and the shear force of the internal pipe and the external pipe if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero.

10. The method of claim 1, wherein

$$w_{ic} = 0 \Rightarrow \beta^2 = \frac{P}{E_i I_i}$$

is used to determine the displacement solution.

11. The method of claim 10, wherein

$$w_{wc} = 0 \Rightarrow \beta^2 = \frac{Pr_{ic} - Fr_{oc}}{E_i I_i r_{ic} + E_e I_e r_{oc}}$$

is used to determine the another displacement solution.

12. The method of claim 11, wherein

$$w_{ic} = 0 \Rightarrow \beta^2 = \frac{P}{E_i I_i}$$

or

$$w_{wc} = 0 \Rightarrow \beta^2 = \frac{Pr_{ic} - Fr_{oc}}{E_i I_i r_{ic} + E_e I_e r_{oc}}$$

is used to determine the bending moment and the shear force of the internal pipe and the external pipe if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.

13. The method of claim 3, wherein

$$U = \frac{1}{2}(E_e I_e r_{oc}^2 + E_i I_i r_{ic}^2)\beta^4 + \frac{1}{2}(Fr_{oc}^2 - Pr_{ic}^2)\beta^2$$

is used to determine the total potential energy for the system.

14. A non-transitory program carrier device tangibly carrying computer executable instructions for determining the moments and forces of two concentric pipes within a wellbore, the instructions being executable to implement:

determining an external pipe displacement;

determining whether the external pipe contacts the wellbore based on the external pipe displacement;

determining a bending moment and a shear force of an internal pipe and the external pipe based on contact between the internal pipe and the external

pipe and the external pipe displacement if the external pipe does not contact the wellbore;

determining whether contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero if the external pipe contacts the wellbore;

determining the bending moment and the shear force of the internal pipe and the external pipe based on contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero;

determining a displacement solution using a contact force between the internal pipe and the external pipe equal to zero if the contact forces between the internal pipe and the external pipe and between the internal pipe and the wellbore are not greater than or equal to zero;

determining whether there is another displacement solution using a contact force between the external pipe and the wellbore equal to zero if the contact forces between the internal pipe and the external pipe and between the external pipe and wellbore are not greater than or equal to zero; and

determining the bending moment and the shear force of the internal pipe and the external pipe based on the displacement solution or the another displacement solution if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.

15. The program carrier device of claim 14, further comprising selecting the displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if there is not another displacement solution.
16. The program carrier device of claim 14, further comprising selecting the displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the another displacement solution.
17. The program carrier device of claim 14, further comprising selecting the another displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the another displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the displacement solution.
18. The program carrier device of claim 14, further comprising performing a stress analysis of the internal pipe and the external pipe based on the bending moment and the shear force of the internal pipe and the external pipe.
19. The program carrier device of claim 14, wherein

$$v = \frac{r_c PE_i I_i}{2FE_i I_i + P(E_c I_c - E_i I_i)}$$

is used to determine the casing displacement.

20. The program carrier device of claim 14, wherein

$$M_i = M_c = E_i I_i (r_c + v) \beta^2$$

$$M_c = \frac{r_c P^2 E_c I_c}{2P(E_c I_c - E_t I_t) + 4FE_t I_t}$$

$$V_t = (r_c + D)\beta[E_t I_t \beta^2 - P]$$

$$V_c = P - \frac{PE_c I_c}{E_t I_t}$$

are used to determine the bending moment and the shear force of the internal pipe and the external pipe if the external pipe does not contact the wellbore.

21. The program carrier device of claim 14, wherein

$$\beta^2 = \frac{Pr_{ic}^2 - Fr_{oc}^2}{EI_t r_{ic}^2 + EI_c r_{oc}^2}$$

$$r_{ic}[P\beta^2 - E_t I_t \beta^3] = w_w$$

$$r_{oc}[E_c I_c \beta^3 + F\beta^2] = -w_{oc} + w_w$$

are used to determine the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore.

22. The program carrier device of claim 14, wherein

$$\beta^2 = \frac{Pr_{ic}^2 - Fr_{oc}^2}{EI_t r_{ic}^2 + EI_c r_{oc}^2}$$

is used to determine the bending moment and the shear force of the internal pipe and the external pipe if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero.

23. The program carrier device of claim 14, wherein

$$w_w = 0 \Rightarrow \beta^2 = \frac{P}{E_t I_t}$$

is used to determine the displacement solution.

24. The program carrier device of claim 19, wherein

$$w_{wc} = 0 \Rightarrow \beta^2 = \frac{Pr_{ic} - Fr_{ic}}{E_i I_i r_{ic} + E_e I_e r_{ic}}$$

is used to determine the another displacement solution.

25. The program carrier device of claim 20, wherein

$$w_{ic} = 0 \Rightarrow \beta^2 = \frac{P}{E_i I_i}$$

or

$$w_{wc} = 0 \Rightarrow \beta^2 = \frac{Pr_{ic} - Fr_{ic}}{E_i I_i r_{ic} + E_e I_e r_{ic}}$$

is used to determine the bending moment and the shear force of the internal pipe and the external pipe if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.

26. The program carrier device of claim 16, wherein

$$U = \frac{1}{2}(E_e I_e r_{ic}^2 + E_i I_i r_{ic}^2)\beta^4 + \frac{1}{2}(Fr_{ic}^2 - Pr_{ic}^2)\beta^2$$

is used to determine the total potential energy for the system.

27. A method for determining the moments and forces of two concentric pipes within a wellbore, comprising:

determining an external pipe displacement using a computer processor;

determining whether the external pipe contacts the wellbore based on the external pipe displacement; and

determining a bending moment and a shear force of an internal pipe and the external pipe based on at least one of contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore.

28. The method of claim 27, wherein determining the bending moment and the shear force of the internal pipe and the external pipe is based on contact between the

internal pipe and the external pipe and the external pipe displacement if the external pipe does not contact the wellbore.

29. The method of claim 27, wherein determining the bending moment and the shear force of the internal pipe and the external pipe is based on contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero.
30. The method claim 27, wherein determining the bending moment and the shear force of the internal pipe and the external pipe is based on a displacement solution or another displacement solution if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.
31. The method of claim 30, wherein the displacement solution is determined using a contact force between the internal pipe and the external pipe equal to zero.
32. The method of claim 30, wherein the another displacement solution is determined using a contact force between the external pipe and wellbore equal to zero.
33. The method of claim 30, wherein the displacement solution is used to determine the bending moment and the shear force of the internal pipe and the external pipe if there is not another displacement solution.
34. The method of claim 30, further comprising selecting the displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the another displacement solution.

35. The method of claim 30, further comprising selecting the another displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the another displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the displacement solution.
36. A non-transitory program carrier device tangibly carrying computer executable instructions for determining the moments and forces of two concentric pipes within a wellbore, the instructions being executable to implement:
- determining an external pipe displacement;
 - determining whether the external pipe contacts the wellbore based on the external pipe displacement; and
 - determining a bending moment and a shear force of an internal pipe and the external pipe based on at least one of contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore.
37. The program carrier device of claim 36, wherein determining the bending moment and the shear force of the internal pipe and the external pipe is based on contact between the internal pipe and the external pipe and the external pipe displacement if the external pipe does not contact the wellbore.
38. The program carrier device of claim 36, wherein determining the bending moment and the shear force of the internal pipe and the external pipe is based on contact between the internal pipe and the external pipe and contact between the external pipe and the wellbore if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are greater than or equal to zero.

39. The program carrier device claim 36, wherein determining the bending moment and the shear force of the internal pipe and the external pipe is based on a displacement solution or another displacement solution if the contact forces between the internal pipe and the external pipe and between the external pipe and the wellbore are not greater than or equal to zero.
40. The program carrier device of claim 39, wherein the displacement solution is determined using a contact force between the internal pipe and the external pipe equal to zero.
41. The program carrier device of claim 39, wherein the another displacement solution is determined using a contact force between the external pipe and wellbore equal to zero.
42. The program carrier device of claim 39, wherein the displacement solution is used to determine the bending moment and the shear force of the internal pipe and the external pipe if there is not another displacement solution.
43. The program carrier device of claim 39, further comprising selecting the displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the displacement solution produces a total potential energy for a system represented by the internal pipe and the external pipe that is less than a total potential energy for the system produced by the another displacement solution.
44. The program carrier device of claim 39, further comprising selecting the another displacement solution to determine the bending moment and the shear force of the internal pipe and the external pipe if the another displacement solution produces a total potential energy for a system represented by the internal pipe and the external

pipe that is less than a total potential energy for the system produced by the displacement solution.

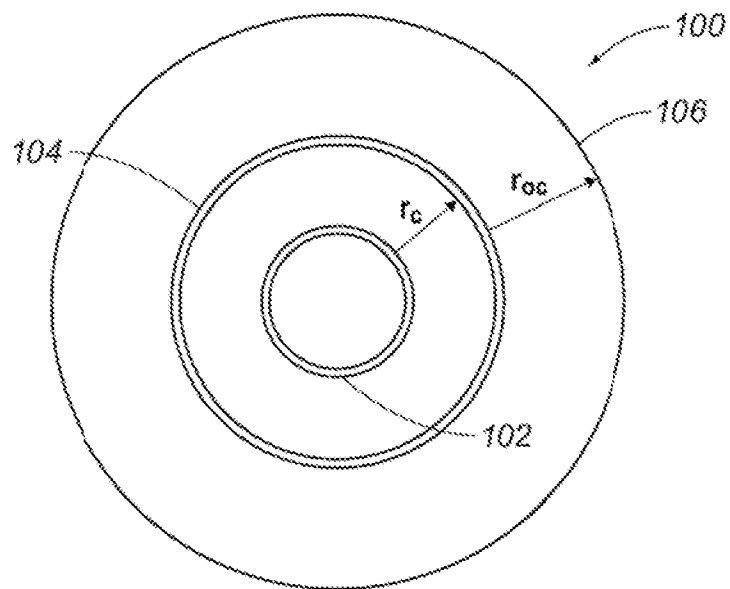


FIG. 1

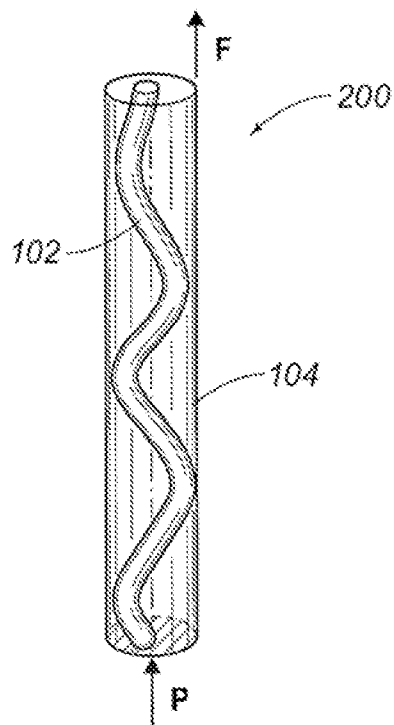


FIG. 2

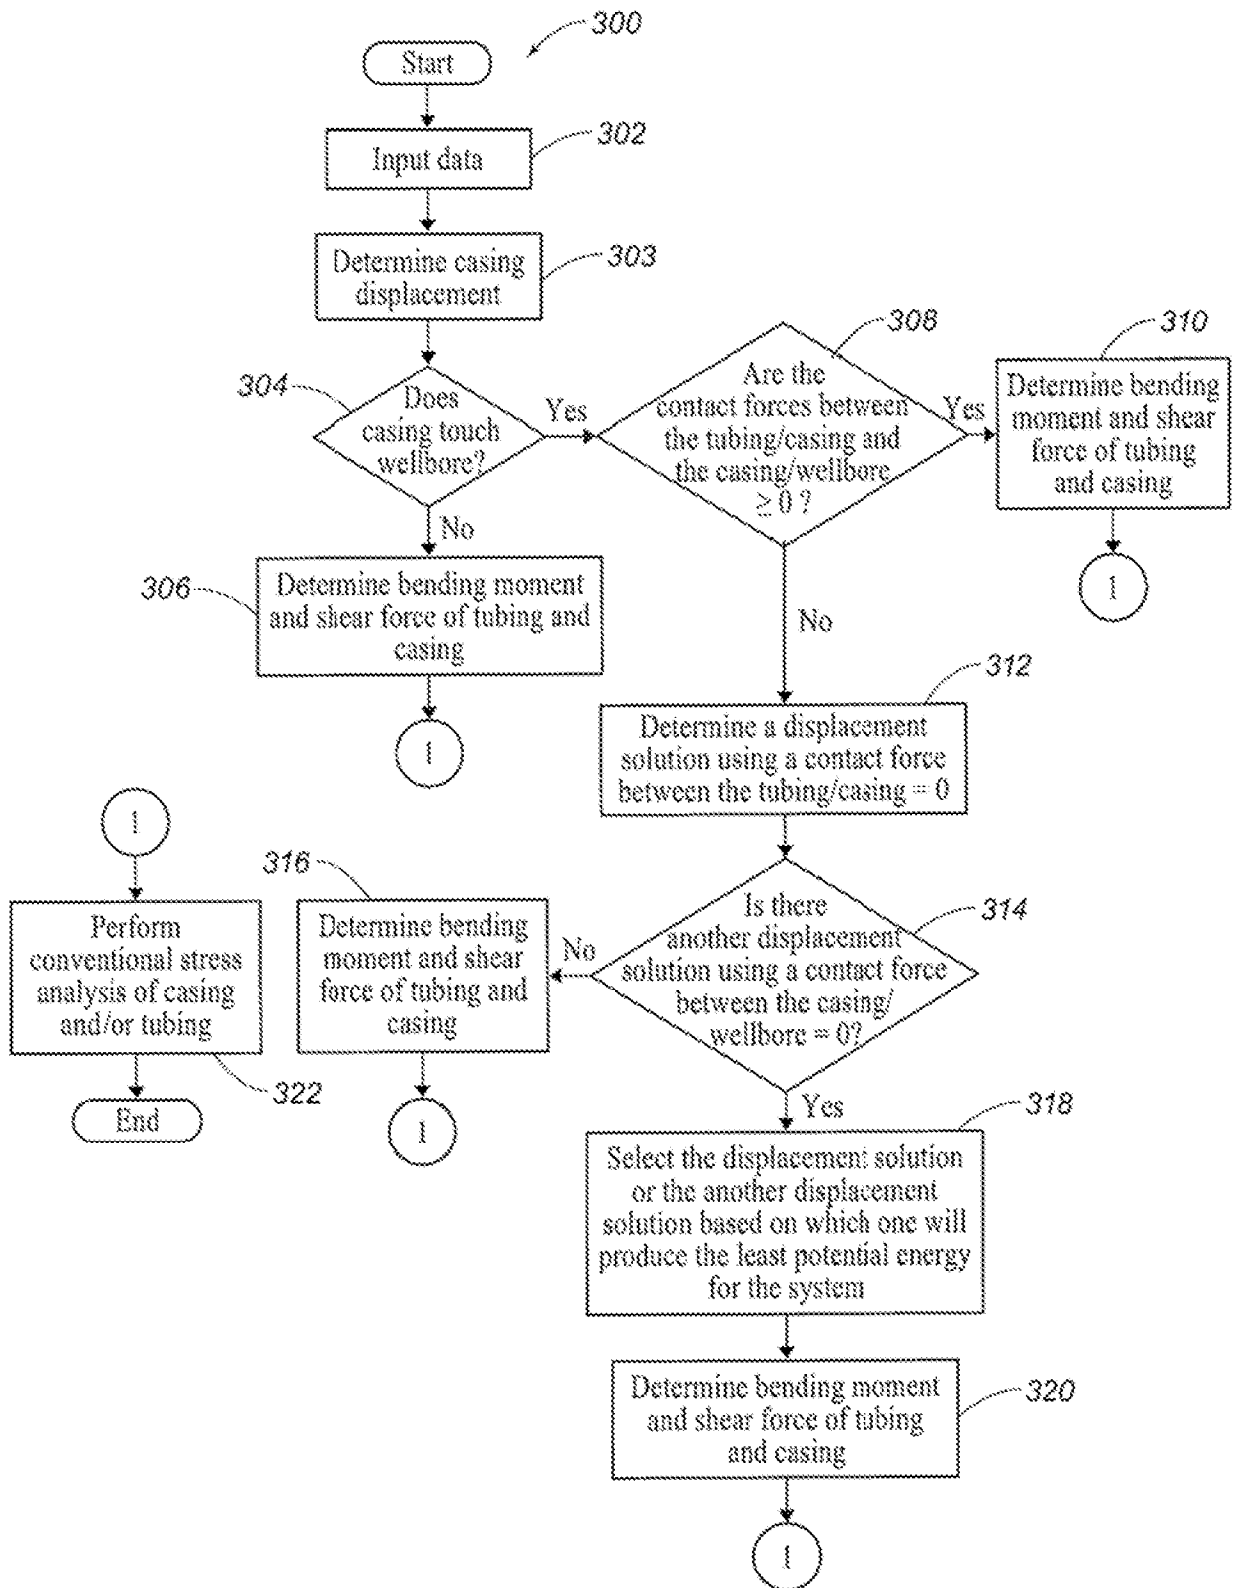
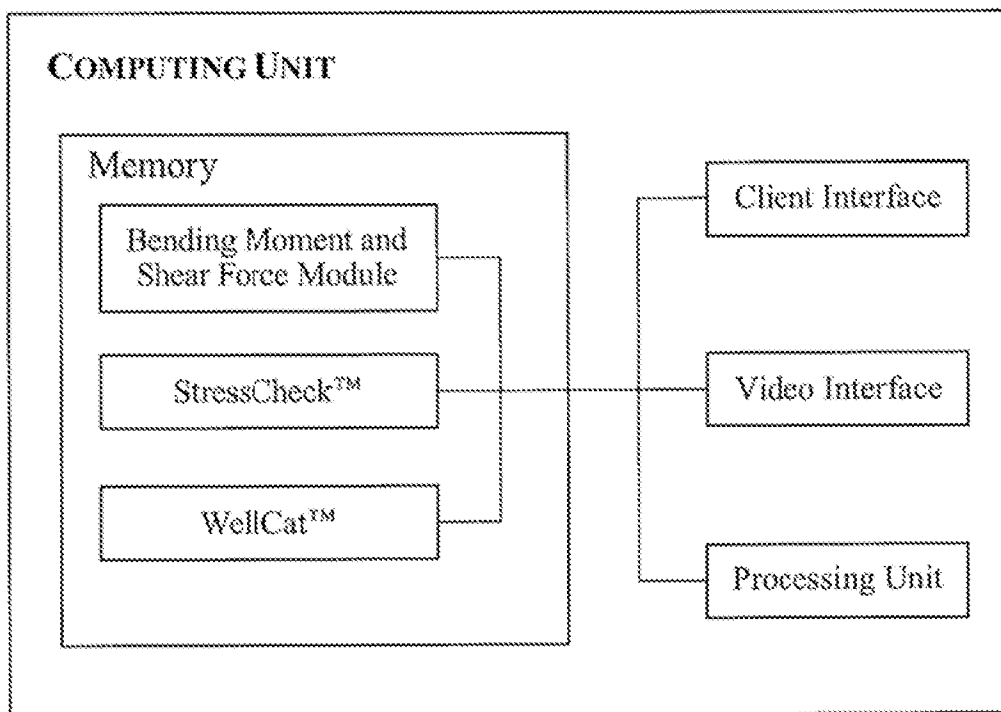


FIG. 3

*FIG. 4*