



(51) International Patent Classification:
H04W 4/02 (2009.01)

(21) International Application Number:
PCT/US2015/011362

(22) International Filing Date:
14 January 2015 (14.01.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/927,338 14 January 2014 (14.01.2014) US

(71) Applicant: **FIRST DATA CORPORATION** [US/US];
6200 South Quebec Street, Suite 270B, Greenwood Vil-
lage, Colorado 80111 (US).

(72) Inventor: **CHUNG, Alan L.**; 86 Chambers Street, Suite
704, New York, New York 10007 (US).

(74) Agents: **CHAN, Christopher J.** et al.; Sutherland Asbill &
Brennan LLP, 999 Peachtree Street, NE, Atlanta, Georgia
30309-3996 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: SYSTEMS AND METHODS FOR TRANSMITTING VARIABLE BEACON PROFILES

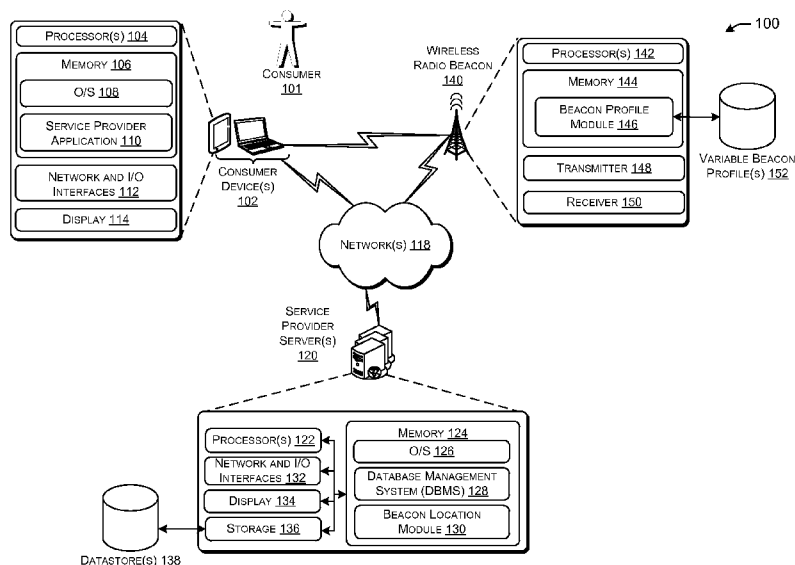


FIG. 1

(57) Abstract: Systems, devices, methods, computer-readable media, techniques, and methodologies are disclosed for transmitting variable beacon profiles. In some embodiments, a server may receive a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon. A temporal indicator indicating the first point in time may be received. Location information associated with the wireless beacon may be determined based at least in part on the variable beacon profile and the temporal indicator. The location information may be transmitted to a service provider application on a mobile device.



SYSTEMS AND METHODS FOR TRANSMITTING VARIABLE BEACON PROFILES

CROSS-REFERENCE TO RELATED APPLICATION

- 5 [0001] This application claims the benefit of U.S. Provisional Application No. 61/927,338, filed January 14, 2014, entitled "Systems and Methods for Transmitting Variable Beacon Profiles," the contents of which are hereby incorporated by reference.

FIELD OF THE DISCLOSURE

- 10 [0002] The disclosure generally relates to wireless beacons, and more particularly relates to systems and methods for transmitting variable beacon profiles.

BACKGROUND

- 15 [0003] Wireless beacons, such as radio beacons, may typically be associated with fixed beacon profiles. As such, fixed beacon profiles may enable relatively simple mappings between radio beacons and precise locations of the radio beacons. The relative ease of such mappings may present certain security and privacy concerns for consumers with mobile devices that communicate with the radio beacons.

BRIEF DESCRIPTION OF THE DISCLOSURE

- 20 [0004] This disclosure relates to systems and methods for transmitting variable beacon profiles. In one embodiment, a method may include receiving, by a server comprising one or processors, a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon; receiving, by the server, a temporal indicator indicating
25 the first point in time; determining, by the server based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon; and transmitting, by the server, the location information to a service provider application on a mobile device.

- 30 [0005] In one aspect of an embodiment, the variable beacon profile may include a rolling identifier at the first point in time. In one aspect of an embodiment, the wireless beacon may change the rolling identifier according to predetermined time intervals. In one aspect of an embodiment, determining the location information may include accessing, by the server and using the rolling identifier and the temporal indicator, a

lookup table in a database associated with the server; and determining, by the server based at least in part on accessing the lookup table, the location information. In one aspect of an embodiment, the method may include identifying, by the server, a duplicate rolling identifier in the lookup table, wherein the duplicate rolling identifier is the same as the rolling identifier, and wherein the duplicate rolling identifier is associated with different location information. In one aspect of an embodiment, the determining the location information may further include receiving, by the server, global positioning satellite (GPS) coordinates associated with the mobile device; and determining, by the server, that the location information associated with the rolling identifier indicates a closer proximity to the GPS coordinates than indicated by the different location information associated with the duplicate rolling identifier. In one aspect of an embodiment, the temporal indicator may include information associated with at least one of a date or time. In one aspect of an embodiment, the method may further include receiving, by the server, the variable beacon profile at a second point in time, the variable beacon profile comprising a different rolling identifier; receiving, by the server, a second temporal indicator indicating the second point in time; and determining, by the server based at least in part on the different rolling identifier and the second temporal indicator, the location information associated with the wireless beacon. In one aspect of an embodiment, transmitting the location information to mobile device may include at least one of transmitting a SMS message, transmitting a text message, transmitting an email, or transmitting offer information to an app executing on the consumer's mobile device. In one aspect of an embodiment, the wireless beacon may communicate with the mobile device via at least one of Bluetooth, Bluetooth Low-Energy, near field communication, infrared, or RFID.

[0006] In another embodiment, a system may include at least one processor; and at least one memory comprising computer-executable instructions, that when executed by the at least one processor, may cause the at least one processor to receive a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon; receive a temporal indicator indicating the first point in time; determine, based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon; and transmit the location information to a service provider application on a mobile device.

[0007] In one aspect of an embodiment, the variable beacon profile may include a rolling identifier at the first point in time. In one aspect of an embodiment, the wireless

beacon may change the rolling identifier according to predetermined time intervals. In one aspect of an embodiment, the computer-executable instructions to determine the location information may further include instructions to access, using the rolling identifier and the temporal indicator, a lookup table in a database associated with the server; and
5 determine, based at least in part on accessing the lookup table, the location information. In one aspect of an embodiment, may further include computer-executable instructions to identify a duplicate rolling identifier in the lookup table, wherein the duplicate rolling identifier is the same as the rolling identifier, and wherein the duplicate rolling identifier is associated with different location information. In one aspect of an embodiment, the
10 computer-executable instructions to determine the location information may further include instructions to receive global positioning satellite (GPS) coordinates associated with the mobile device; and determine that the location information associated with the rolling identifier indicates a closer proximity to the GPS coordinates than indicated by the different location information associated with the duplicate rolling identifier. In one
15 aspect of an embodiment, the temporal indicator may include information associated with at least one of a date or time. In one aspect of an embodiment, the system may include computer-executable instructions to receive the variable beacon profile at a second point in time, the variable beacon profile comprising a different rolling identifier; receive a second temporal indicator indicating the second point in time; and determine, based at
20 least in part on the different rolling identifier and the second temporal indicator, the location information associated with the wireless beacon. In one aspect of an embodiment, transmitting the location information to mobile device may include at least one of transmitting a SMS message, transmitting a text message, transmitting an email, or transmitting offer information to an app executing on the consumer's mobile device. In
25 one aspect of an embodiment, the wireless beacon may communicate with the mobile device via at least one of Bluetooth, Bluetooth Low-Energy, near field communication, infrared, or RFID.

[0008] In one embodiment, a computer-readable medium storing computer-executable instructions which, when executed by a processor, may cause the processor to perform
30 operations including receiving, by a server comprising one or processors, a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon; receiving, by the server, a temporal indicator indicating the first point in time; determining, by the server based at least in part on the variable beacon profile and

the temporal indicator, location information associated with the wireless beacon; and transmitting, by the server, the location information to a service provider application on a mobile device.

[0009] In one aspect of an embodiment, the variable beacon profile may include a rolling identifier at the first point in time. In one aspect of an embodiment, the wireless beacon may change the rolling identifier according to predetermined time intervals. In one aspect of an embodiment, determining the location information may include accessing, by the server and using the rolling identifier and the temporal indicator, a lookup table in a database associated with the server; and determining, by the server based at least in part on accessing the lookup table, the location information. In one aspect of an embodiment, the operations may include identifying, by the server, a duplicate rolling identifier in the lookup table, wherein the duplicate rolling identifier is the same as the rolling identifier, and wherein the duplicate rolling identifier is associated with different location information. In one aspect of an embodiment, the determining the location information may further include receiving, by the server, global positioning satellite (GPS) coordinates associated with the mobile device; and determining, by the server, that the location information associated with the rolling identifier indicates a closer proximity to the GPS coordinates than indicated by the different location information associated with the duplicate rolling identifier. In one aspect of an embodiment, the temporal indicator may include information associated with at least one of a date or time. In one aspect of an embodiment, the operations may further include receiving, by the server, the variable beacon profile at a second point in time, the variable beacon profile comprising a different rolling identifier; receiving, by the server, a second temporal indicator indicating the second point in time; and determining, by the server based at least in part on the different rolling identifier and the second temporal indicator, the location information associated with the wireless beacon. In one aspect of an embodiment, transmitting the location information to mobile device may include at least one of transmitting a SMS message, transmitting a text message, transmitting an email, or transmitting offer information to an app executing on the consumer's mobile device. In one aspect of an embodiment, the wireless beacon may communicate with the mobile device via at least one of Bluetooth, Bluetooth Low-Energy, near field communication, infrared, or RFID.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The detailed description is set forth with reference to the accompanying drawings. The use of the same reference numerals may indicate similar or identical items. Various embodiments may utilize elements and/or components other than those illustrated
5 in the drawings, and some elements and/or components may not be present in various embodiments. Elements and/or components in the figures are not necessarily drawn to scale. Throughout this disclosure, depending on the context, singular and plural terminology may be used interchangeably.

[0011] FIG. 1 illustrates an example system for transmitting variable beacon profiles
10 in accordance with one or more example embodiments.

[0012] FIG. 2 illustrates a data flow diagram for transmitting variable beacon profiles in accordance with one or more example embodiments.

[0013] FIG. 3 illustrates a flow diagram of an example data flow for transmitting variable beacon profiles in accordance with one or more example embodiments.

[0014] Certain implementations will now be described more fully below with
15 reference to the accompanying drawings, in which various implementations and/or aspects are shown. However, various aspects may be implemented in many different forms and should not be construed as limited to the implementations set forth herein; rather, these implementations are provided so that this disclosure will be thorough and complete, and
20 will fully convey the scope of the disclosure to those skilled in the art. Like numbers in the figures refer to like, but not necessarily the same or identical, elements throughout. Hence, if a feature is used across several drawings, the number used to identify the feature in the drawing where the feature first appeared will be used in later drawings.

DETAILED DESCRIPTION

OVERVIEW

[0015] Described herein are systems and methods for transmitting variable beacon
profiles. Broadly, the systems and methods described herein may facilitate the
transmission of variable beacon profiles associated with one or more wireless radio
30 beacons. The systems and methods describe herein may further facilitate the
determination of location information associated with the wireless radio beacons, based at
least in part on the variable beacon profiles.

[0016] Thus, according to one or more embodiments of the disclosure, a method is provided for transmitting variable beacon profiles. The method may include receiving, by a server comprising one or processors, a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon. The method may also include receiving a temporal indicator indicating the first point in time. Furthermore, the method may include determining, based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon. Additionally, the method may include transmitting the location information to a service provider application on a mobile device.

[0017] According to one or more other embodiments of the disclosure, a system is provided for transmitting variable beacon profiles. The system may include at least one memory for storing data and computer-executable instructions. The system may also include at least one processor to access the at least one memory and to execute the computer-executable instructions. The at least one processor may be configured to execute the instructions to receive, a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon. The at least one processor may also be configured to execute the instructions to receive a temporal indicator indicating the first point in time. The at least one processor may further be configured to execute the instructions to determine, based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon. Additionally, the at least one processor may further be configured to execute the instructions to transmit the location information to a service provider application on a mobile device.

[0018] According to one or more other embodiments of the disclosure, a non-transitory computer-readable medium is provided. The computer-readable medium may store computer-executable instructions, that when executed by at least one processor, causes the at least one processor to receive, a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon. The computer-readable medium may store further instructions that cause the at least one processor to receive a temporal indicator indicating the first point in time. Furthermore, the computer-readable medium may store instructions that cause the at least one processor to determine, based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon. The computer-readable medium may

also store instructions that cause the at least one processor to transmit the location information to a service provider application on a mobile device.

5 [0019] One or more technical solutions can be achieved by certain embodiments of the disclosure. For example, in at least one embodiment, a wireless radio beacon associated with a particular merchant may be configured to broadcast a variable beacon profile. The variable beacon profile may include a rolling identifier that may be changed by the wireless radio beacon at predetermined intervals. For example, the wireless radio beacon may change the rolling identifier on a daily basis.

10 [0020] Furthermore, a service provider server may store a lookup table, which may associate rolling identifiers and temporal indicators with location information associated with one or more wireless radio beacons. To this end, in order to determine the location of the wireless radio beacon associated with the merchant, the service provider server may be provided (e.g., such as by a mobile device of a consumer) with a rolling identifier associated with the wireless radio beacon and a temporal indicator. The temporal
15 indicator may indicate information associated with a date and/or time. Using the rolling identifier and the temporal indicator, the service provider server may identify the corresponding entry in the lookup table to determine the location of the wireless radio beacon.

[0021] These and other embodiments of the disclosure will be described in more detail
20 through reference to the accompanying drawings in the detailed description of the disclosure that follows. This brief introduction, including section titles and corresponding summaries, is provided for the reader's convenience and is not intended to limit the scope of the claims or the proceeding sections. Furthermore, the techniques described above and below may be implemented in a number of ways and in a number of contexts. Several
25 example implementations and contexts are provided with reference to the following figures, as described below in more detail. However, the following implementations and contexts are but a few of many.

ILLUSTRATIVE EMBODIMENTS

30 [0022] With reference now to FIG. 1, an example system 100 for transmitting variable beacon profiles is shown according to one or more embodiments of the disclosure. The system 100 may include one or more consumer device(s) 102 associated with a consumer, such as 101. The consumer device(s) 102 may be in communication, via one or more

networks 118, with one or more service provider servers 120, and/or one or more wireless radio beacons 132.

[0023] In general, the consumer device 102 may refer to any type of electronic device, and, more particularly, may refer to one or more of the following: a wireless communication device, a portable electronic device, a telephone (e.g., cellular phone, smart phone), a computer (e.g., laptop computer, tablet computer), a wearable computer device, a portable media player, a personal digital assistant (PDA), or any other electronic device having a networked capability. The consumer device(s) 102 may include one or more computer processors 104, and a memory 106 storing an operating system (O/S) 108 and a service provider application 110. In addition, the consumer device(s) 102 may include one or more network and I/O interfaces 112, and a display 114. In certain embodiments, the consumer device(s) 102 may include one or more sensors capable of gathering information associated with a present environment of the consumer device(s) 102, or similar hardware devices, such as a camera, microphone, antenna, a gesture capture or detection device, or Global Positioning Satellite (GPS) device.

[0024] The computer processors 104 may comprise one or more cores and may be configured to access and execute (at least in part) computer-readable instructions stored in the memory 106. The one or more computer processors 104 may include, without limitation: a central processing unit (CPU), a digital signal processor (DSP), a reduced instruction set computer (RISC), a complex instruction set computer (CISC), a microprocessor, a microcontroller, a field programmable gate array (FPGA), or any combination thereof. The consumer device 102 may also include a chipset (not shown) for controlling communications between the one or more processors 104 and one or more of the other components of the consumer device 102. In certain embodiments, the consumer device 102 may be based on an Intel® architecture or an ARM® architecture, and the processor(s) and chipset may be from a family of Intel® processors and chipsets. The one or more processors 104 may also include one or more application-specific integrated circuits (ASICs) or application-specific standard products (ASSPs) for handling specific data processing functions or tasks.

[0025] The memory 106 may include one or more computer-readable storage media (CRSM). In some embodiments, the memory 106 may include non-transitory media such as random access memory (RAM), flash RAM, magnetic media, optical media, solid state media, and so forth. The memory 106 may be volatile (in that information is retained

while providing power) or non-volatile (in that information is retained without providing power). Additional embodiments may also be provided as a computer program product including a transitory machine-readable signal (in compressed or uncompressed form). Examples of machine-readable signals include, but are not limited to, signals carried by the Internet or other networks. For example, distribution of software via the Internet may include a transitory machine-readable signal. Additionally, the memory 106 may store an operating system 108 that includes a plurality of computer-executable instructions that may be implemented by the computer processor to perform a variety of tasks to operate the interface(s) and any other hardware installed on the consumer device 102. The memory 106 may also store content that may be displayed by the consumer device 102 or transferred to other devices (e.g., headphones) to be displayed or played by the other devices. The memory 106 may also store content received from the other devices. The content from the other devices may be displayed, played, or used by the consumer device 102 to perform any necessary tasks or operations that may be implemented by the computer processor or other components in the consumer device 102.

[0026] The memory 106 may also include an operating system (O/S) 108, which may provide an interface between other application software executing on the consumer device 102 and hardware resources of the consumer device 102. More specifically, the operating system 108 may include a set of computer-executable instructions for managing hardware resources of the consumer device 102 and for providing common services to other application programs (e.g., managing memory allocation among various application programs). The operating system 108 may include any operating system now known or which may be developed in the future including, but not limited to, any consumer operating system, any server operating system, any mainframe operating system, or any other proprietary or freely available operating system.

[0027] The memory 106 may also include a service provider application 110, which may be configured to enable a consumer's access to one or more services offered by a service provider (e.g., via the service provider server(s)). Such services may include, but are not limited to, accessing loyalty account information associated with a consumer's activity with a merchant, such as purchase history, loyalty account points, redeemable coupons, redeemed coupon history, merchant offers, progress toward a loyalty account prize/offer, and/or the like. In certain embodiments, the service provider application 110 may be configured to receive a variable beacon profile, from the wireless radio beacon

140. Based at least in part on variable beacon profile, the service provider application 110 determine that the wireless radio beacon 140 is associated with a service provider and may transmit a request, to the service provider server(s) 120, for location information associated with the wireless radio beacon 140. In some embodiments, the service provider application 110 may also be configured to transmit one or more global positioning satellite (GPS) coordinates to the service provider server(s) 120.

[0028] The one or more network and I/O interfaces 112 may include one or more communication interfaces or network interface devices to provide for the transfer of data between the consumer device 102 and another device (e.g., network server) via one or more networks, such as 118. The communication interfaces may include, but are not limited to: personal area networks (PANs), wired local area networks (LANs), wireless local area networks (WLANs), wireless wide area networks (WWANs), and so forth. The consumer device 102 may be coupled to the network via a wired connection. However, the wireless system interfaces may include the hardware and software to broadcast and receive messages either using the Wi-Fi Direct Standard (see Wi-Fi Direct specification published in Oct. 2010) and/or the IEEE 802.11 wireless standard (see IEEE 802.11-2007, published March 8, 2007; IEEE 802.11n-2009, published Oct. 2009), or a combination thereof. The wireless system (not shown) may include a transmitter and a receiver or a transceiver (not shown) capable of operating in a broad range of operating frequencies governed by the IEEE 802.11 wireless standards. The communication interfaces may utilize acoustic, radio frequency, optical, or other signals to exchange data between the consumer device 102 and another device, such as an access point, a host computer, a server, a router, a reader device, and the like. The networks 118 may include, but are not limited to, the Internet, a private network, a virtual private network, a wireless wide area network, a local area network, a metropolitan area network, a telephone network, and so forth.

[0029] The display 114 may include, but is not limited to, a liquid crystal display, a light-emitted diode display, or an E-InkTM display as made by E Ink Corp. of Cambridge, Massachusetts. The display 114 may be used to show content to a user in the form of text, images, or video. In certain instances, the display 114 may also operate as a touch screen display that may enable the user to initiate commands or operations by touching the screen using certain finger or hand gestures.

[0030] As previously discussed, one or more service provider server(s) 120 may also be in communication with the network(s) 118. The service provider server(s) 120 may also include a processor 122 and memory 124, which may store an operating system (O/S) 126, a database management system (DBMS) 128, and a wireless beacon module 130. The service provider server(s) 120 may also include network and I/O interfaces 132, a display 134, and a storage 136. Storage 136 may provide non-transient storage of computer-executable instructions and other data and may include removable storage and/or non-removable storage including, but not limited to, magnetic storage, optical disk storage, and/or tape storage. The storage 136 may include storage that is internal and/or external to the service provider server(s) 120 and in some implementations, may store and/or may be otherwise associated with a datastore(s) 138. The datastore(s) 138 may be accessible by the DBMS 128.

[0031] The DBMS 128 stored in memory 124 may be configured to support functionality for accessing, retrieving, storing, and/or manipulating data stored in external datastore(s) 138, data stored in the memory 124, and/or data stored in the data storage 136. For example, the DBMS 128 may be configured to retrieve and/or otherwise access location information associated with the wireless radio beacon 140 (e.g., via a lookup table stored in the memory 124, storage 136, and/or datastore(s) 138. The DBMS 128 may use any of a variety of database models (e.g., relational model, object model, etc.) and may support any of a variety of query languages.

[0032] The beacon location module 130 may be configured to determine, retrieve, and/or otherwise access location information associated with the wireless radio beacon 140. For example, the wireless radio beacon 140 may be configured to receive a variable beacon profile (e.g., from the consumer device 102). To this end, the variable beacon profile may include a rolling beacon identifier associate with the wireless beacon 140. In addition, the beacon location module 130 may be configured to generate, receive, and/or otherwise access a temporal indicator, which may indicate a point in time at which the variable beacon profile (e.g., the rolling beacon identifier) was received, such as a date, time, and/or the like. Based at least in part on the rolling beacon identifier and the temporal indicator, the beacon location module 130 may determine location information associated with the wireless radio beacon 140. The location information may indicate the location of the wireless radio beacon 140.

[0033] For example, as previously discussed, the service provider server 120 may store a lookup table, such as in memory 124, storage 136, datastore(s) 138, and/or the like. In certain implementations, the lookup table may store associations between rolling beacon identifiers, temporal indicators, and location information. For example, the lookup
5 table may store location information indexed by the temporal indicators and the rolling beacon identifiers. Thus, upon receipt of the temporal indicator and the roll beacon identifier provided by the consumer device 102, the beacon location module 130 may perform a search in the lookup table based on such information.

[0034] As previously discussed, one or more wireless radio beacon(s) 140 may also be
10 in communication with the network(s) 118. The wireless radio beacon(s) 140 may also include processor(s) 142 and memory 144, which may store a beacon profile module 146. The wireless radio beacon 140 may further include a transmitter 148 and a receiver 150. The wireless radio beacon 140 may be a transmission-type device configured to periodically broadcast information. In some embodiments, the broadcast information may
15 include a variable beacon profile, which may include a rolling beacon identifier, though other types of information are also contemplated. Furthermore, various types of wireless technology may be employed to broadcast such information, including, but not limited to, Bluetooth, Bluetooth Low-Energy, Wi-Fi, NFC, Radio Frequency Identification (RFID), infrared, Long-Term Evolution (LTE), and/or LTE-Advanced. As previously discussed,
20 the broadcasted information may include a merchant identifier, location information (e.g., Global Positioning Satellite information, Wi-Fi Positioning System information, etc.), and/or any other type of information associated with the merchant. In certain embodiments, one or more wireless radio beacons 140 may be placed throughout a merchant location or retail store to periodically transmit the broadcasted information.

[0035] The beacon profile module 146 may be configured to determine and/or
25 otherwise implement one or more algorithms for determining information to be included in broadcasted variable beacon profile(s) 152. For instance, the beacon profile module 146 may be configured to periodically change and/or determine a rolling beacon identifier to be included in the variable beacon profile 152. In certain embodiments, the beacon
30 profile module 146 may change the rolling beacon identifier on a daily basis, although other time intervals are also contemplated. Moreover, various algorithms may exist for changing the rolling beacon identifier. For instance, the beacon profile module 146 may use and/or may otherwise be associated with a random number generator to generate

different rolling identifiers according to one or more predetermined time intervals (e.g., daily, weekly, monthly, etc.).

[0036] Referring now to FIG. 2, a diagram of an example data flow 200 is illustrated for transmitting variable beacon profiles in accordance with one or more example
5 embodiments. According to the data flow 200, a wireless radio beacon, such as 140 in FIG. 1, may be configured to periodically broadcast 202 information associated with a merchant and/or the wireless radio beacon 140. In certain implementations, the broadcast information may include a variable beacon profile, which may include a rolling beacon identifier, although other types of information are also possible. A consumer device, such
10 as 102 in FIG. 1, may be configured to receive the variable beacon profile (e.g., the rolling beacon identifier).

[0037] In certain embodiments, upon receipt of the variable beacon profile, the consumer device 102 may be configured to “wake-up” and/or launch a service provider application, such as 110 in FIG. 1. Upon receipt, the service provider application 110 may
15 be configured to transmit 204 the variable beacon profile to the service provider server(s) 120. In addition, according to certain embodiments, the consumer device(s) 102 may also be configured to transmit 206 one or more GPS coordinates to the service provider server(s) 120.

[0038] According to one or more embodiments, the service provider server(s) 120 in
20 FIG. 1 (e.g., via the beacon location module 130) may be configured to extract and/or otherwise determine the rolling beacon identifier from the variable beacon profile. Furthermore, the service provider server(s) 120 may be configured to receive, retrieve, generate, and/or otherwise access a temporal indicator indicating a point in time at which the variable beacon profile/rolling beacon identifier was received. To this end, the service
25 provider server(s) 120 may use the rolling beacon identifier and the temporal indicator to access 208 a lookup table stored in the datastore(s) 138. Based at least in part on this access to the lookup table, the service provider server(s) 120 may determine location information 210 associated with the wireless radio beacon 140. Upon determining the location information 210, the service provider server(s) 120 may be configured to transmit
30 212 the location information back to the consumer device(s) 102. In certain implementations, the location information may be provided 214 to the consumer 101 by the consumer device(s) 102 (e.g., via a display 114).

[0039] In other implementations, as a result of accessing the lookup table, the service provider server(s) 120 may determine that one or more duplicate rolling identifiers exist (e.g., are stored in the lookup table) that are the same as the rolling beacon identifier. For example, a duplicate rolling identifier may have the same numerical value as the rolling beacon identifier. However, the duplicate rolling identifier may be associated with a second, different location information, which may be different from the location information associated with the rolling beacon identifier. To this end, the service provider server(s) 120 may determine which of the location information or the second different location information is associated with a closer proximity to the GPS coordinates received from the consumer device 102. As such, the determined location information associated with the closer proximity may be transmitted 212 to the consumer device 102.

[0040] Turning now to FIG. 3, a flow diagram of an example method 300 for transmitting variable beacon profiles is illustrated in accordance with one or more example embodiments. The method may include block 310, in which a server, such as a service provider server, such as 120 in FIG. 1, may receive a variable beacon profile at a first point in time. The variable beacon profile may be associated with a wireless beacon, such as a wireless radio beacon, such as 140 in FIG. 1. In block 320, the service provider server 120 may receive a temporal indicator indicating the first point in time. In block 330, the service provider server 120 may determine, based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless radio beacon 140. In block 340, the service provider server 120 may transmit the location information to a service provider application on a consumer device such as 110 and 102, respectively, in FIG. 1.

[0041] The operations and processes described and shown above may be carried out or performed in any suitable order as desired in various implementations. Additionally, in certain implementations, at least a portion of the operations may be carried out in parallel. Furthermore, in certain implementations, less than or more than the operations described may be performed

[0042] These computer-executable program instructions may be loaded onto a special-purpose computer or other particular machine, a processor, or other programmable data processing apparatus to produce a particular machine, such that the instructions that execute on the computer, processor, or other programmable data processing apparatus create means for implementing one or more functions specified in the flow diagram block

or blocks. These computer program instructions may also be stored in a computer-readable storage media or memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable storage media produce an article of manufacture including
5 instruction means that implement one or more functions specified in the flow diagram block or blocks. As an example, certain implementations may provide for a computer program product, comprising a computer-readable storage medium having a computer-readable program code or program instructions implemented therein, said computer-readable program code adapted to be executed to implement one or more functions
10 specified in the flow diagram block or blocks. The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational elements or steps to be performed on the computer or other programmable apparatus to produce a computer-implemented process such that the instructions that execute on the computer or other programmable apparatus provide
15 elements or steps for implementing the functions specified in the flow diagram block or blocks

[0043] Conditional language, such as, among others, “can,” “could,” “might,” or “may,” unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain implementations could include, while
20 other implementations do not include, certain features, elements, and/or operations. Thus, such conditional language is not generally intended to imply that features, elements, and/or operations are in any way required for one or more implementations or that one or more implementations necessarily include logic for deciding, with or without user input or prompting, whether these features, elements, and/or operations are included or are to be
25 performed in any particular implementation.

[0044] Many modifications and other implementations of the disclosure set forth herein will be apparent having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the disclosure is not to be limited to the specific implementations disclosed and that
30 modifications and other implementations are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

CLAIMS

1. A method comprising:
 - receiving, by a server comprising one or processors, a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon;
 - receiving, by the server, a temporal indicator indicating the first point in time;
 - determining, by the server based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon; and
 - transmitting, by the server, the location information to a service provider application on a mobile device.
2. The method of claim 1, wherein the variable beacon profile comprises a rolling identifier at the first point in time.
3. The method of claim 2, wherein the wireless beacon changes the rolling identifier according to predetermined time intervals.
4. The method of claim 2, wherein determining the location information comprises:
 - accessing, by the server and using the rolling identifier and the temporal indicator, a lookup table in a database associated with the server; and
 - determining, by the server based at least in part on accessing the lookup table, the location information.
5. The method of claim 4, further comprising:
 - identifying, by the server, a duplicate rolling identifier in the lookup table, wherein the duplicate rolling identifier is the same as the rolling identifier, and wherein the duplicate rolling identifier is associated with different location information.
6. The method of claim 5, wherein the determining the location information further comprises:
 - receiving, by the server, global positioning satellite (GPS) coordinates associated with the mobile device; and

determining, by the server, that the location information associated with the rolling identifier indicates a closer proximity to the GPS coordinates than indicated by the different location information associated with the duplicate rolling identifier.

7. The method of claim 1, wherein the temporal indicator comprises information associated with at least one of a date or time.

8. The method of claim 1, further comprising:
receiving, by the server, the variable beacon profile at a second point in time, the variable beacon profile comprising a different rolling identifier;
receiving, by the server, a second temporal indicator indicating the second point in time; and
determining, by the server based at least in part on the different rolling identifier and the second temporal indicator, the location information associated with the wireless beacon.

9. The method of claim 1, wherein transmitting the location information to mobile device comprises at least one of transmitting a SMS message, transmitting a text message, transmitting an email, or transmitting offer information to an app executing on the consumer's mobile device.

10. The method of claim 1, wherein the wireless beacon communicates with the mobile device via at least one of Bluetooth, Bluetooth Low-Energy, near field communication, infrared, or RFID.

11. A system comprising:
at least one processor; and
at least one memory comprising computer-executable instructions, that when executed by the at least one processor, causes the at least one processor to:
receive a variable beacon profile at a first point in time, the variable beacon profile associated with a wireless beacon;
receive a temporal indicator indicating the first point in time;

determine, based at least in part on the variable beacon profile and the temporal indicator, location information associated with the wireless beacon; and
transmit the location information to a service provider application on a mobile device.

12. The system of claim 11, wherein the variable beacon profile comprises a rolling identifier at the first point in time.
13. The system of claim 12, wherein the wireless beacon changes the rolling identifier according to predetermined time intervals.
14. The system of claim 12, wherein the computer-executable instructions to determine the location information further comprises instructions to:
 - access, using the rolling identifier and the temporal indicator, a lookup table in a database associated with the server; and
 - determine, based at least in part on accessing the lookup table, the location information.
15. The system of claim 14, further comprising computer-executable instructions to:
 - identify a duplicate rolling identifier in the lookup table, wherein the duplicate rolling identifier is the same as the rolling identifier, and wherein the duplicate rolling identifier is associated with different location information.
16. The system of claim 15, wherein the computer-executable instructions to determine the location information further comprise instructions to:
 - receive global positioning satellite (GPS) coordinates associated with the mobile device; and
 - determine that the location information associated with the rolling identifier indicates a closer proximity to the GPS coordinates than indicated by the different location information associated with the duplicate rolling identifier.
17. The system of claim 11, wherein the temporal indicator comprises information associated with at least one of a date or time.

18. The system of claim 11, further comprising computer-executable instructions to:
 - receive the variable beacon profile at a second point in time, the variable beacon profile comprising a different rolling identifier;
 - receive a second temporal indicator indicating the second point in time; and
 - determine, based at least in part on the different rolling identifier and the second temporal indicator, the location information associated with the wireless beacon.
19. The system of claim 11, wherein to transmit the location information to mobile device comprises at least one of transmitting a SMS message, transmitting a text message, transmitting an email, or transmitting offer information to an app executing on the consumer's mobile device.
20. The system of claim 11, wherein the wireless beacon communicates with the mobile device via at least one of Bluetooth, Bluetooth Low-Energy, near field communication, infrared, or RFID.

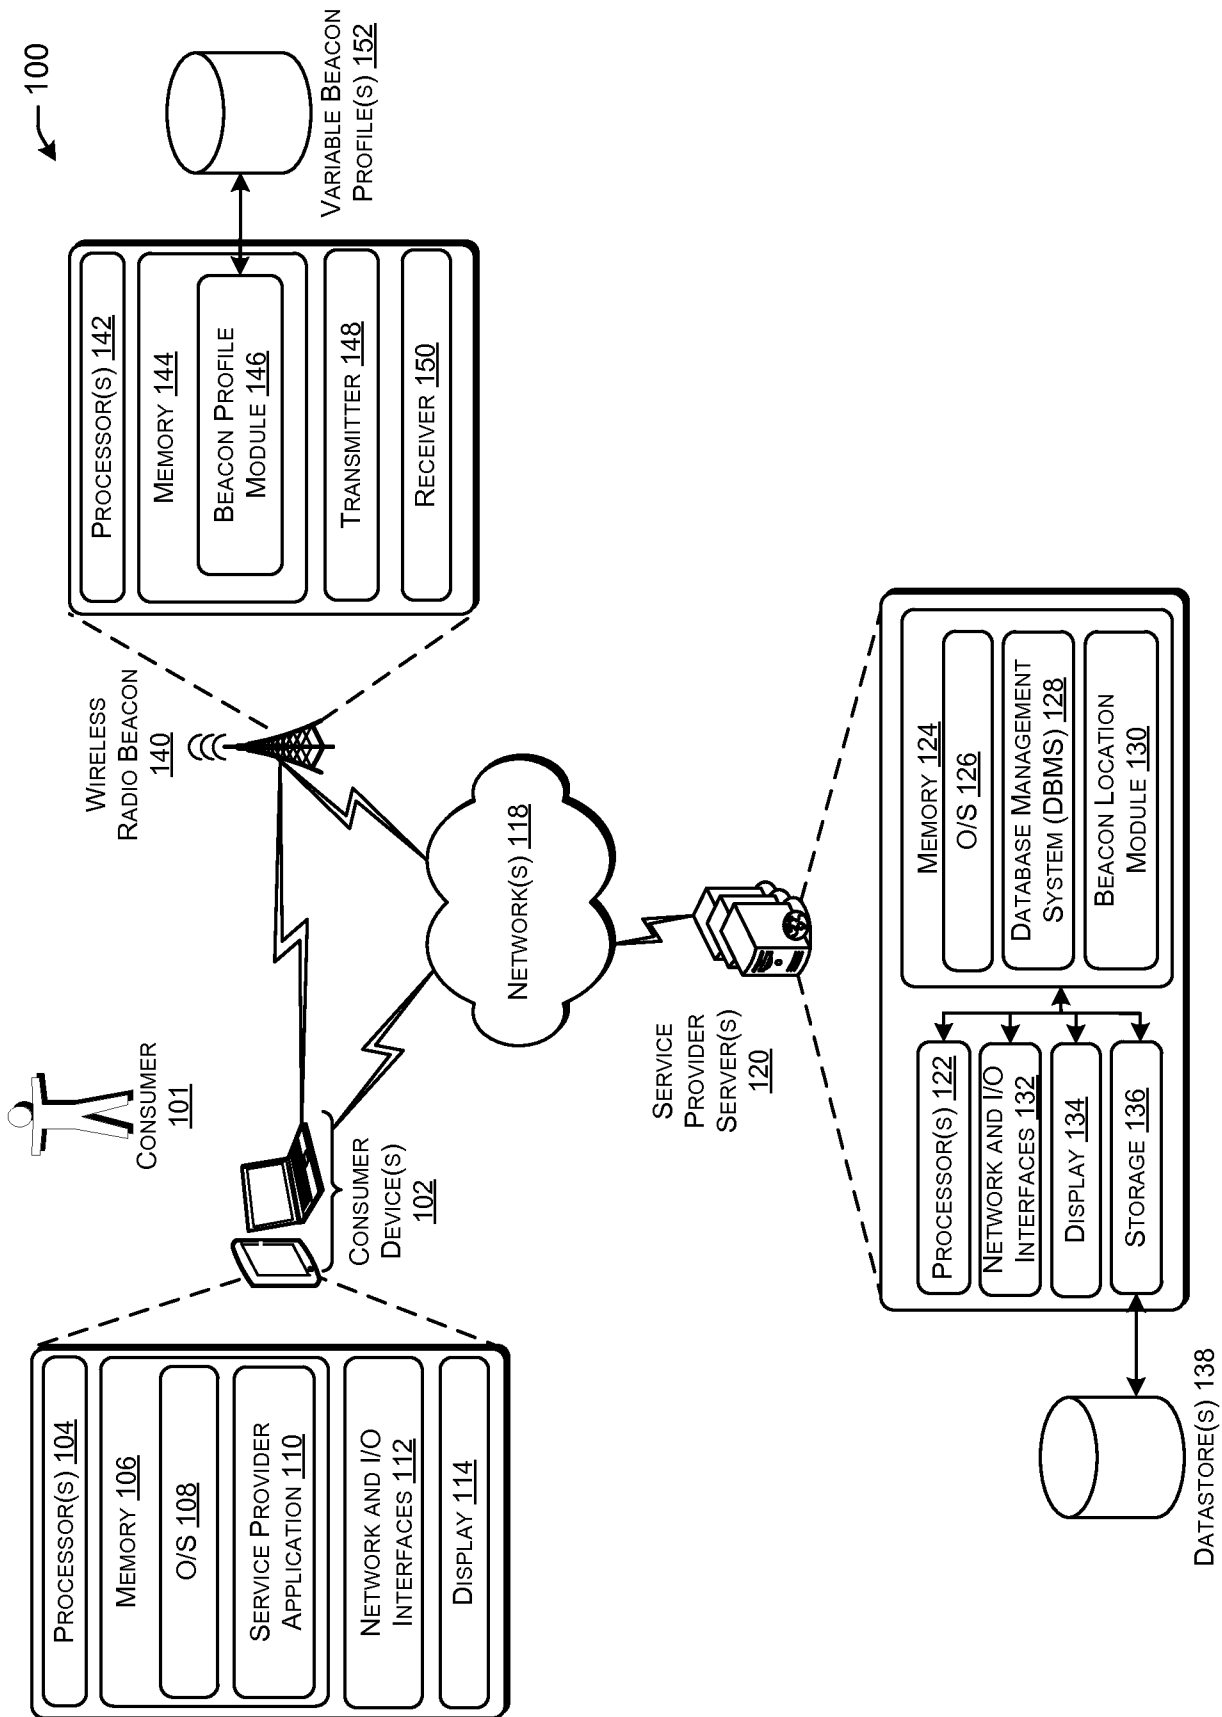


FIG. 1

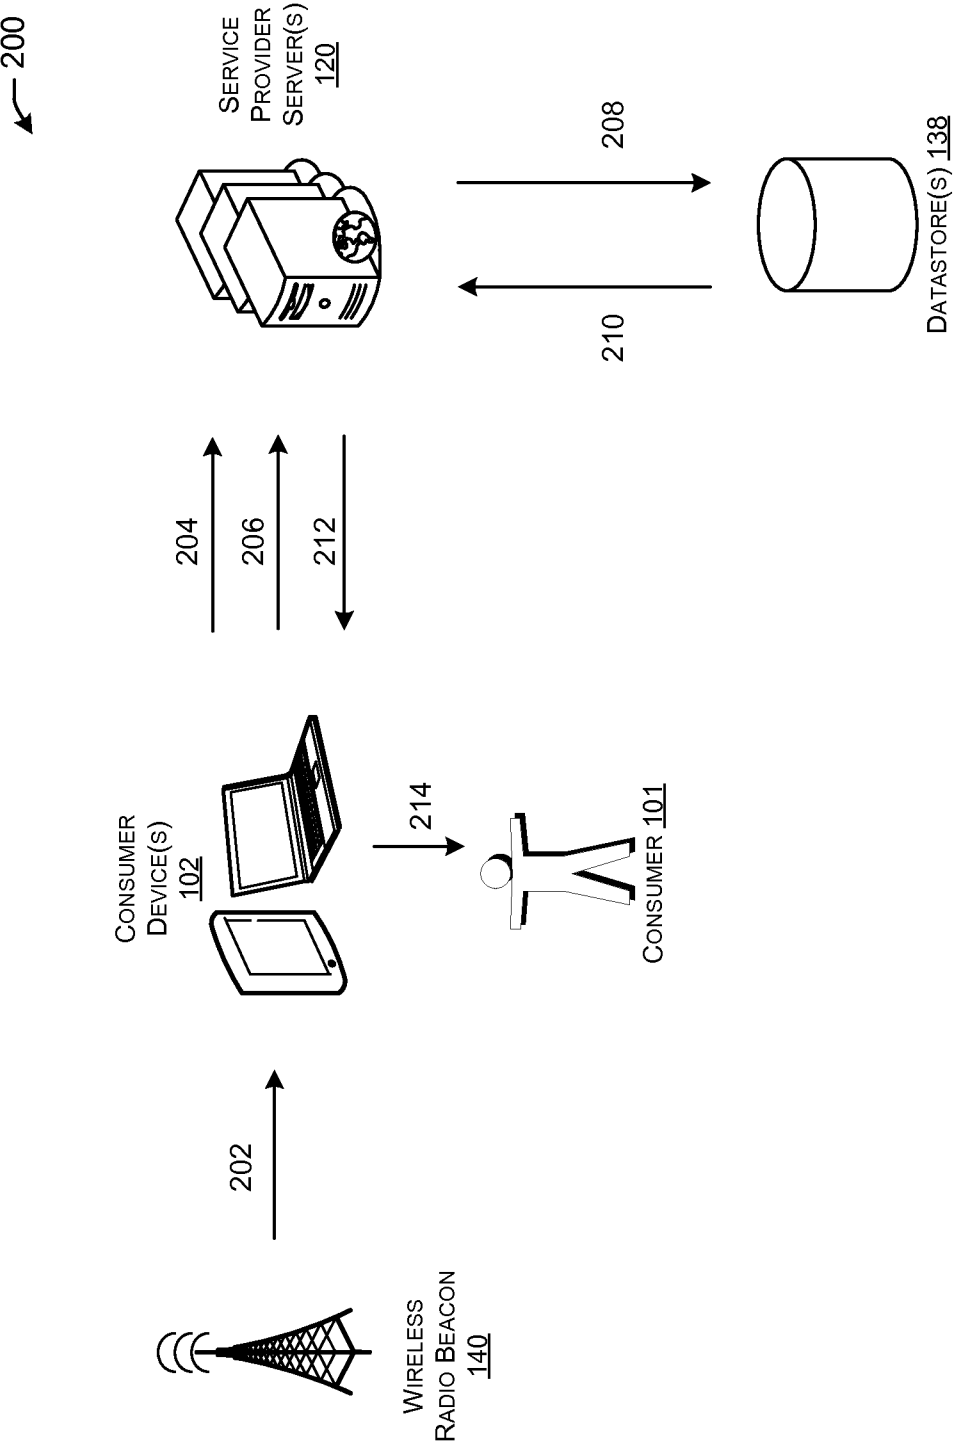


FIG. 2

3/3

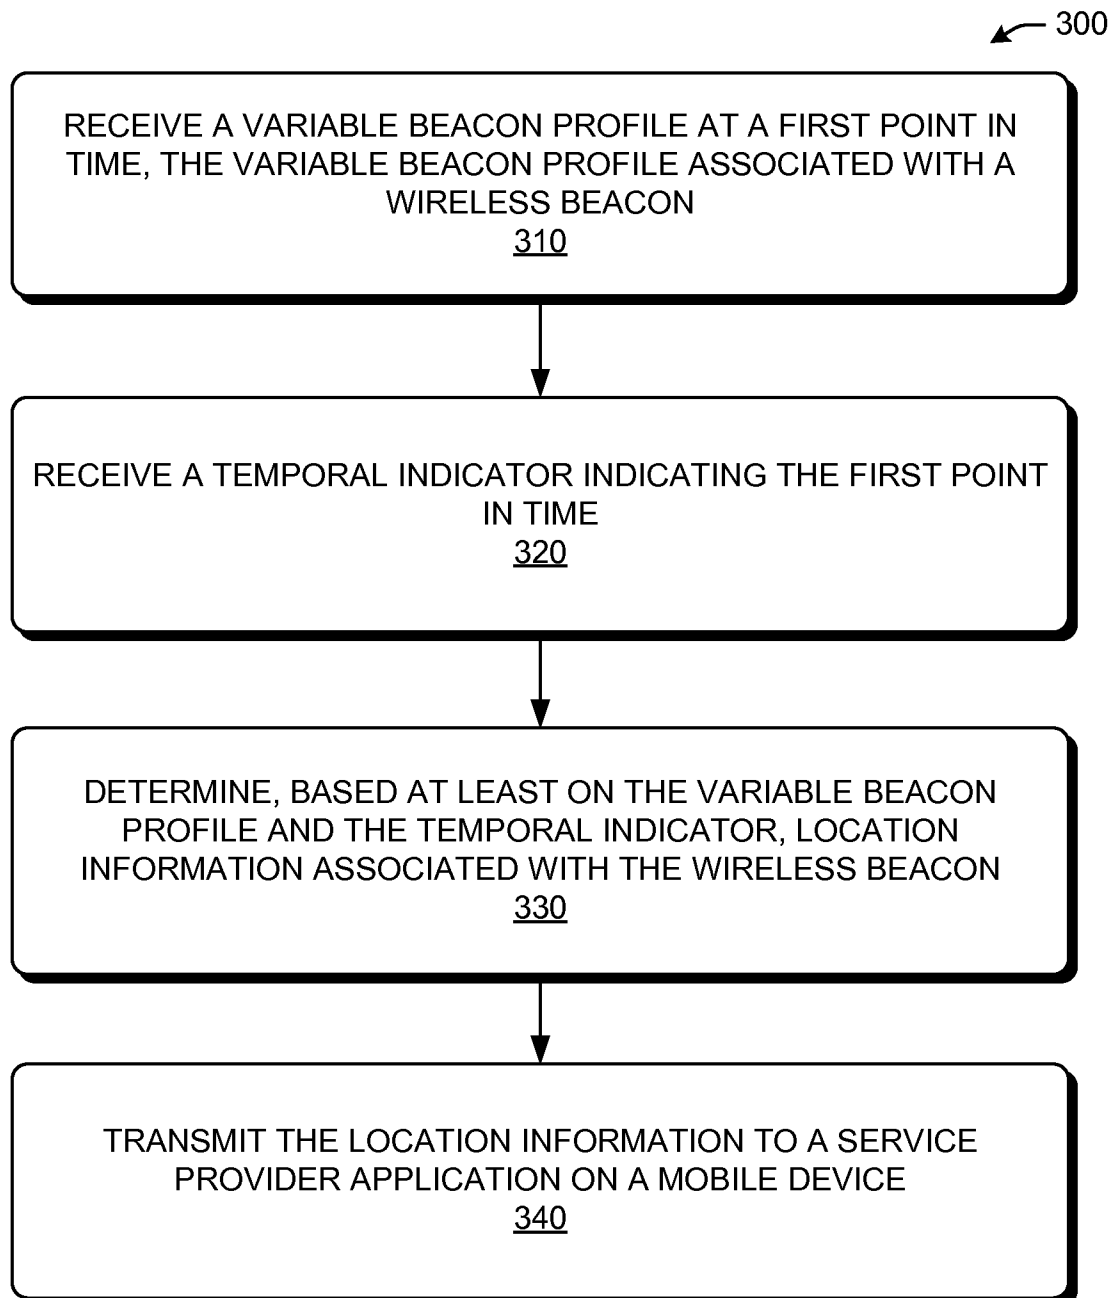


FIG. 3

A. CLASSIFICATION OF SUBJECT MATTER**H04W 4/02(2009.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W 4/02; G06F 3/048; G06F 15/16; H04H 60/90; H04B 1/40

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: variable beacon profile, rolling identifier, temporal indicator, location information, RFID

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2013-0217332 A1 (STEVEN R. ALTMAN et al.) 22 August 2013 See paragraphs [0200]-[0203], [0409], [0529]; claim 1; and figure 8.	1-20
Y	US 2009-0293011 A1 (ALADDIN A. NASSAR) 26 November 2009 See paragraphs [0020]-[0029], [0040]-[0042]; claim 1; and figures 3, 7.	1-20
A	HUN-WOOK KIM et al., 'Symmetric Encryption in RFID Authentication Protocol for Strong Location Privacy and Forward-Security', Hybrid Information Technology, 2006. ICHIT '06. International Conference on (Volume: 2), 9-11 November 2006 (http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4021293) See pages 718-723.	1-20
A	US 2013-0212176 A1 (DANIEL GEORGE KOULOMZIN et al.) 15 August 2013 See paragraphs [0016]-[0081], [0102]-[0109]; claim 1; and figures 1-2, 6-7.	1-20
A	US 2007-0167140 A1 (SUDHEER A. GRANDHI et al.) 19 July 2007 See paragraphs [0018]-[0023]; claim 1; and figures 2-4.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 May 2015 (08.05.2015)

Date of mailing of the international search report

08 May 2015 (08.05.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 7140

Authorized officer

YANG, Jeong Rok

Telephone No. +82-42-481-5709



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/011362

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013-0217332 A1	22/08/2013	CN 104246529 A	24/12/2014
		EP 2817651 A2	31/12/2014
		EP 2817937 A2	31/12/2014
		KR 10-2014-0144684 A	19/12/2014
		KR 10-2014-0146080 A	24/12/2014
		US 2013-0214909 A1	22/08/2013
		US 2013-0217333 A1	22/08/2013
		US 2013-0282438 A1	24/10/2013
		US 2013-0297422 A1	07/11/2013
		US 2014-0133656 A1	15/05/2014
		WO 2013-126747 A2	29/08/2013
		WO 2013-126747 A3	07/11/2013
		WO 2013-126759 A2	29/08/2013
		WO 2013-126759 A3	29/08/2013
		WO 2013-163326 A1	31/10/2013
		WO 2013-163333 A2	31/10/2013
		WO 2013-163333 A3	08/01/2015
		WO 2013-163334 A2	31/10/2013
		WO 2013-163338 A2	31/10/2013
US 2009-0293011 A1	26/11/2009	CN 102037467 A	27/04/2011
		EP 2286351 A2	23/02/2011
		EP 2286351 A4	03/04/2013
		JP 2011-521379 A	21/07/2011
		JP 2014-130625 A	10/07/2014
		KR 10-2011-0021801 A	04/03/2011
		TW 200949583 A	01/12/2009
		US 8839140 B2	16/09/2014
		WO 2009-142830 A2	26/11/2009
		WO 2009-142830 A3	04/03/2010
US 2013-0212176 A1	15/08/2013	AU 2013-200513 B1	11/04/2013
		CN 103327063 A	25/09/2013
		DE 102013101259 A1	14/08/2013
		GB 201302553 D0	27/03/2013
		GB 2499519 A	21/08/2013
		GB 2499519 B	18/12/2013
		KR 10-1302729 B1	03/09/2013
		KR 10-2013-0093559 A	22/08/2013
		US 8533266 B2	10/09/2013
US 2007-0167140 A1	19/07/2007	AR 059017 A1	05/03/2008
		AU 2007-207853 A1	26/07/2007
		AU 2007-207853 B2	06/01/2011
		BR PI0706879A2	12/04/2011
		CA 2637562 A1	26/07/2007
		CN 101385281 A	11/03/2009
		EP 1992117 A2	19/11/2008
		IL 192897 A	30/08/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/011362Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

IL 192897 D0	11/02/2009
JP 2009-524350 A	25/06/2009
KR 10-2008-0092447 A	15/10/2008
KR 10-2008-0095896 A	29/10/2008
MX 2008009166 A	25/09/2008
RU 2008133596 A	27/02/2010
RU 2010115360 A	27/10/2011
RU 2395913 C2	27/07/2010
US 8780871 B2	15/07/2014
WO 2007-084281 A2	26/07/2007
WO 2007-084281 A3	13/09/2007