

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015853 A1

(51) International Patent Classification⁷: **H04L 12/56**

Alexandru [FR/FR]; 43, Rue Charles de Gaulle, F-91400 Orsay (FR).

(21) International Application Number:
PCT/EP2004/051257

(74) Agent: **MCCORMACK, Derek, J.**; Motorola European Intellectual Property Operations, Midpoint, Alencon Link, Basingstoke Hampshire RG21 7PL (GB).

(22) International Filing Date: 25 June 2004 (25.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03291964.9 6 August 2003 (06.08.2003) EP

(71) Applicant (for all designated States except US): **MOTOROLA INC** [US/US]; 1303 E. Algonquin Road, Schaumburg, Illinois 60196 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **OLIVERAU, Alexis** [FR/FR]; 11, Rue Maurice Bertaux, F-91120 Palaiseau (FR). **JANNETEAU, Christophe** [FR/FR]; 10, rue Auguste Renoir, F-78390 Bois D'Arcy (FR). **PETRESCU,**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: A METHOD OF VALIDATED COMMUNICATION

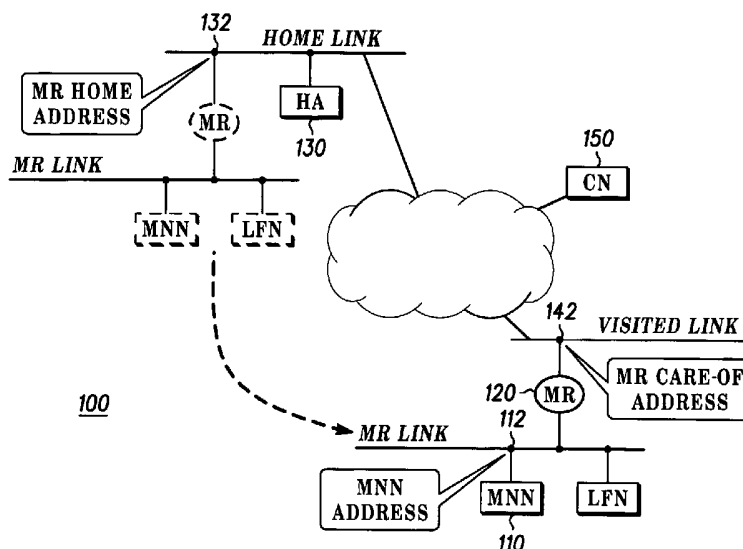

(57) Abstract: The present invention provides a method of validated communication between a mobile network node (MNN) and a correspondent node (CN) via at least a first mobile router (MR). The method is characterised by employing an extended return routability checking procedure (XRRP) wherein an MNN test initiation (MNNTI) message is sent by the MR, and a MNN test (MNNT) message is sent by the CN. This adds to the security of requiring the home and care-of addresses being consistent as noted previously in standard RRP, by enabling the generation of binding update validation receipt on any or all of the three HoT, CoT and MNNT test messages. The method is further characterised by sending from the MR an extended binding update (XBU), comprising the MNN's address (MNNA). By extending the binding update to include the MNNA in this manner, validated CN / MNN route optimisation can be achieved.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,

EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*
- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- 1 -

A method of validated communicationTechnical Field

5

The invention relates to a method of validated communication, in particular, it relates to a method of validated communication between a mobile network node and a correspondent node via at least a first mobile router.

10

Background

Traditional mobility support aims to provide continuous Internet connectivity to mobile hosts, such as for example a laptop computer with wireless connectivity. By contrast, network mobility support is concerned with situations where an entire network comprising potentially many hosts changes its point of attachment to the Internet topology and thus the route to reach it in the topology. Such a network in movement can be called a Mobile Network.

20

A number of scenarios exist where such Mobile Networks occur. To give just two examples:

25

i. A Personal Area Network (PAN, i.e. a network of several personal devices attached to an individual) will change its point of attachment to the Internet topology whilst the user is walking around town.

30

ii. A network embedded in a bus or aircraft providing on-board Internet access to passengers. These passengers may be using a single device (e.g. a laptop) or in turn own a Mobile Network (such as a PAN), which then illustrates the case of a Mobile Network visiting a Mobile Network (i.e. nested mobility).

35

- 2 -

A Mobile Network (MONET) can therefore be defined as a set of nodes, part of one or more IP-subnets attached to a Mobile Router (MR), that are mobile as a unit, with respect to the rest of the Internet. In other words, an MR and all
5 its attached nodes (so called Mobile Network Nodes or MNNs).

An MNN itself may be a local fixed node (LFN) permanently associated with a given mobile network, a local mobile node
10 (LMN) capable of altering its point of network attachment within the current mobile network and of leaving the current mobile network to attach elsewhere, or a visiting mobile node (VMN), whose home link is not on the current mobile network and has changed its point of attachment from
15 somewhere outside the current mobile network. As noted above, the MNN can be a simple mobile host or another mobile router, resulting in nested mobility.

With the change of attachment points available to mobile
20 networks, a method of optimising the route by which packets of data are sent and received by such networks is highly desirable for a number of reasons:

- 25 i. Route optimisation reduces delay by reducing packet path length;
- ii. It increases overall available bandwidth in the system because packets are routed through a shorter path, and are no longer tunnelled;
- 30 iii. It can increase the maximum transmission unit size on the communication path, reducing fragmentation of the payload.

- 3 -

The Mobility Support in the IPv6 ('mobile IPv6' or MIPv6) specification (see <http://www.ietf.org/>) proposes means to enable Route Optimisation (bi-directional communication using the shortest path) between an MN and a correspondent node (CN), but no mechanism has been proposed as yet to enable route optimisation between an MNN and a CN.

Referring to Figure 1, the basic network mobility support ("NEMO Basic Support Protocol" at <http://www.ietf.org/>) for communication between an MNN and a CN relies on bi-directional tunnelling between the mobile router (MR) and its home agent (HA):

- i. Inbound packets (from a CN to a MNN) are sent to the MR's home link; The MR's HA intercepts and tunnels them to the MR.
- ii. Outbound packets (from an MNN to a CN) are reverse-tunnelled by the MR to its HA.

However, this does not provide route optimisation to the MNN.

EP 1 158 742 A1 and associated paper, "Mobile Networks Support in Mobile IPv6 (Prefix Scope Binding Updates)", by T. Ernst, A. Olivereau, L. Bellier, C. Castelluccia, H. -Y. Lach, IETF Internet-Draft draft-ernst-mobileip-v6-network-03.txt, March 2002, describe how when an MR roams to a visited network, it sends a modified version of the MIPv6 binding update (BU), referred to by these documents as a prefix scope binding update (PSBU), to its home agent (HA).

The classical MIPv6 BU only informs the CN of where to send data addressed to a single mobile node (e.g. the mobile

- 4 -

5 routers home address (HoA) coupled to a roving care-of address (CoA)). The proposed PSBU does not bind an MR HoA to an MR CoA but the MR prefix to the MR CoA, thus informing the HA receiving the PSBU to send data addressed to any MNN attached to the MR on to the MR CoA.

10 Upon reception of a packet whose destination address matches with the MR prefix (e.g. the destination is an MNN), the Home Agent (HA) must then tunnel the packet to the MR CoA that will deliver it to the actual recipient.

15 Similarly the MR may send PSBUs to the correspondent nodes of the MNNs, which would achieve CN / MNN route optimisation.

20 However, this solution is only acceptable if the PSBU can be successfully validated by its recipient. Beyond peer authentication, the PSBU sender has to actually prove that it owns the whole prefix that it sends a PSBU for.

25 This is not a problem as long as the recipient of the PSBU is the MR Home Agent, which is expected to have initial knowledge about the prefix that belongs to the MR. However when the recipient is any CN, a mechanism has to be found to allow that CN to validate a PSBU. No mechanism has been proposed as yet, which greatly reduces the applicability of this solution.

30 One may consider the applicability of the methods already proposed for classic MIPv6 BU validation:

i. Cryptographically Generated Addresses.

- 5 -

5 In this solution, a home address (HoA) is bound to a public key that is part of a public/private key pair. This ensures that a malicious node cannot assume the mantle of the home address, as it does not own the corresponding private key.

10 In reference to PSBU, however, this method cannot be extended to prefix ownership as a large number of home addresses may share the same prefix. Moreover it is unlikely that MIPv6 or any future specification is going to allow any mobile network to assign its own address or prefix. Adding an additional hash to the prefix in order to make the ownership unique, is limited by the available number of bits in the network
15 prefix. Estimates suggest that only 2^{16} (approximately 65,000) public keys would need to be tested by an attacker to achieve a 50% chance of losing uniqueness and thus security.

- 20 ii. Return Routability Checking Procedure (RRP).
RRPs are now incorporated within the MIPv6 specification, and consist of a check by the correspondent node (CN) to verify that the specified home address (HoA) can actually be reached at the
25 specified care-of address (CoA), before accepting the binding update (BU). Essentially, the process comprises:
- A mobile node (MN) initiating the procedure by sending Home Test Initiation (HoTI) and Care-of
30 Test Initiation (CoTI) messages to the CN;

- 6 -

- The CN sending a Home Test (HoT) message to the home address of the MN and a Care-of Test (CoT) message to the care-of address of the MN;
- From the contents of both the HoT and the CoT, The
5 MN generates a key that it uses to sign the BU it is to send.

The MN thus needs to successfully receive both the HoT and the CoT to be able to generate a valid BU. This is
10 considered by the CN as a sufficient proof that the home and care-of addresses are valid for that MN.

In reference to PSBU, however, this mechanism cannot be used to ensure that a whole prefix can be reached
15 at a certain care-of address. Prefix ownership is much more than address ownership: to obtain a similar level of security, it would be necessary for the CN to check using RRP all possible addresses that can be derived from that network prefix.

20 This is clearly unacceptable, as standard prefix lengths lead to an enormous quantity of possible IPv6 addresses.

25 Consequently one concludes that PSBU cannot provide validated route optimisation to the mobile network, i.e. it cannot provide validated route optimisation to any mobile network node attached therein.

30 Thus a need still exists for a method of validated route optimisation for mobile network nodes.

- 7 -

The purpose of the present invention is to address the above need.

Summary of the Invention

5

The present invention provides a method of validated communication between a mobile network node (MNN) and a correspondent node (CN) via at least a first mobile router (MR) as described in the accompanying claims.

10

In a first aspect, the present invention provides a method of validated communication, as claimed in claim 1.

In a second aspect, the present invention provides
15 apparatus for validated communication, as claimed in claim 32.

In a third aspect, the present invention provides a mobile router operable to perform validated communication, as
20 claimed in claim 33.

In a fourth aspect, the present invention provides a correspondent node operable to perform validated communication, as claimed in claim 34.

25

Further features of the present invention are as defined in the dependent claims.

Embodiments of the present invention will now be described
30 by way of example with reference to the accompanying drawing(s), in which:

- 8 -

Brief description of the drawings

FIG. 1 is a schematic diagram of communication between a correspondent node and a mobile network node.

5

FIG. 2 is a comparative process chart detailing the differences between a return routability checking procedure known to the art and an extended return routability checking procedure in accordance with an embodiment of the present invention.

10

FIG. 3 is a block diagram of mobility options for an extended binding update message in accordance with an embodiment of the present invention.

15

FIG. 4. is a schematic diagram of communication between a correspondent node and a mobile network node in accordance with an embodiment of the present invention.

FIG. 5. is a block diagram detailing successive parsing of data packets in accordance with an embodiment of the present invention.

20

FIG. 6. is a schematic diagram of communication between a correspondent node and a mobile network node in accordance with an embodiment of the present invention.

25

Detailed description

A method of validated communication is disclosed. In the following description, a number of specific details are presented in order to provide a thorough understanding of

30

- 9 -

the present invention. It will be obvious, however, to a person skilled in the art that these specific details need not be employed to practice the present invention. In other instances, well known methods, procedures and components
5 have not been described in detail in order to avoid unnecessarily obscuring the present invention.

Referring to FIG. 1, a method of validated communication is presented, between a mobile network node (MNN) 110 and a
10 correspondent node (CN) 150 via at least a first mobile router (MR) 120.

FIG. 1 illustrates a mobile router (MR) 120 and its network that has moved from its home address 132 to an address 142
15 on a visited link, thus creating the need for a method of validated route optimisation for a mobile network node (MNN) (110).

Now also referring to FIG. 2, in an embodiment of the
20 present invention, the method employs an extended return routability checking procedure (XRRP) 200, wherein an MNN test initiation (MNNTI) message is sent 236 by the MR 120, and wherein a MNN test (MNNT) message is sent 256 by the CN 150.

25 This adds to the security of requiring the home and care-of addresses being consistent as noted previously in standard RRP, by enabling the generation of binding update validation keys based on receipt on any or all of the three
30 HoT, CoT and MNNT test messages.

- 10 -

Additionally referring to FIG. 3, the method of this embodiment of the invention also includes sending from the MR 120 an extended binding update (XBU) 300 comprising 320 the MNN's address (MNNA) 112.

5

By extending the binding update to include the MNNA in this manner, validated CN / MNN route optimisation can be achieved. In particular, the validated CN / MNN route optimisation can be achieved without the need for a pre-
10 established security context.

Additionally, it provides a suitable level of security to mobile network route optimisation - in particular a malicious node should not be able to assume the mantle of
15 an MNN's address and redirect data elsewhere, or assume the mantle of care-of address of an MR and launch denial of service attacks on it.

Moreover, it is transparent to the MNN, so that no changes
20 are needed to the node and consequently current equipment can enjoy the benefits of the present invention.

The extended return routability checking procedure 200 is detailed as follows:

25

The MR 120 detects that route optimisation is not being used for the MNN 110 whenever it receives a tunnelled packet from its home agent for that MNN 110.

30 Thus the validation process 200 between the MR 120 and correspondent node CN 150 is initiated upon receipt by the

- 11 -

MR 120 of a tunnelled packet from the home agent HA 130 of the MR 120 addressed to the mobile network node MNN 110.

- However, this may be subject to at least one of the
- 5 following set of conditions, namely that;
- i. The MNN 110 subscribes to a specified service;
 - ii. The CN 150 has not ignored a threshold number of prior XBUs 300;
 - 10 iii. The CN 150 has not ignored a threshold number of validation processes 200; and
 - iv. The MNN 110 satisfies a usage policy.

Upon initiation of a validation process 200, the MR 120 generates random values (hereinafter 'cookies') for a home

15 address test initiation (HoTI) message and a care-of address test initiation (CoTI) message, as known in the art.

In addition, however, it is now proposed that a further

20 cookie is generated, for an additional mobile network node test initiation (MNNTI) message.

The inventors of the present invention have appreciated the need for an additional message to be employed due to the

25 constraints of the current MIPv6 specification:

The MR 120 is required to prove the correctness of the binding MR HoA 132 / MR CoA 142, but in addition to that proof, a third check involving the MNN 110 is necessary for the desired level of validation. Thus essentially, either

30 the MNN 110 must be able to attest that it trusts the MR 120 to route its packets, or the MR 120 must be able to

- 12 -

prove that it is entitled to route the packets destined to the MNN 110.

In order to retain the advantage of being transparent to
5 the MNN 110, the inventors of the present invention chose the second mechanism: the MR 120 is to prove, upon request of the CN 150, that it is actually serving the MNN 110. MIPv6 specifies that the proof of home address ownership be performed through HoTI (Home Test Init) and HoT (Home Test)
10 messages respectively sent from MR HoA 132 to CN 150 and from CN 150 to MR HoA 132. Likewise, the proof of care-of address ownership is performed through CoTI (Care-of Test Init) and CoT (Care-of Test) messages respectively sent from MR CoA 142 to CN 150 and from CN 150 to MR CoA 142.

15 Thus the validation process (200) comprises the step (236) of the MR 120 sending a HoTI comprising the MR home address (HoA) 132 and a HoTI cookie to the CN 150; and the MR 120 sending a CoTI comprising the MR care-of address (CoA) 142
20 and a CoTI cookie to the CN 150 as known in the art, and additionally involves the MR 120 sending an MNNTI comprising the MNN address (MNNA) 112 and a MNNTI cookie to the CN 150.

25 The HoTI is sent via the MR home address (HoA) 132 and the CoTI is sent via the MR care-of address (CoA) 142.

Unlike the HoTI and CoTI messages however, the MNNTI message comprises a mobility option (as defined in MIPv6)
30 that in turn comprises MNN address 112.

- 13 -

In a preferred embodiment of the present invention, the MNNTI is sent via the MR HoA 132.

5 In an alternative embodiment of the present invention, the MNNTI is sent via the MR care-of address (CoA) 142. The MNNTI message then additionally comprises the MR home address (HoA) 132.

10 In an embodiment of the present invention, upon receipt of the relevant test initiation message, the CN 150 performs the step 246 of computing a home token from an HoA 132 extracted from a HoTI, together with a random key (KCN) and a nonce (a time-dependent value), and computing a care-of token from a CoA 142 extracted from a CoTI, KCN and a
15 nonce, as known in the art.

Additionally, upon receipt of an MNNTI, the CN 150 computes an MNN token from an MNNA 112 extracted from the MNNTI, together with KCN and a nonce.
20

Having generated tokens in response to the respective initialisation tests, the CN 150 performs the step 256 of sending a home address test (HoT) comprising a HoTI cookie, home nonce index and home token to the MR 120, and sending
25 a care-of address test (CoT) comprising a CoTI cookie, care-of nonce index and care-of token to the MR 120, as known in the art. A nonce index allows the CN to retrieve the nonce used to generate a token, without sending the nonce itself as this would compromise security.

30 Additionally, the CN 150 sends a mobile network node address test (MNNT) comprising an MNNTI cookie, MNN nonce

- 14 -

index and MNN token to the MNN 110, the MNNT further comprising;

a mobile router presence option (MRPO) that comprises the MR home address (HoA) 132.

5

The HoT is sent to the MR HoA 132, and the CoT is sent to the MR CoA 142. The MNNT is sent to the MNN address (MNNA) 112.

10 The intent is for the HoT and CoT to both reach the MR, and for the MNNT to reach the MNN.

Note that the MNN token will provide a more robust level of security within the validation process 200 if it remains
15 confidential. To this end, a home agent (HA) 130 may encrypt an MNNT when tunnelling said MNNT to an MR 120 if the CN 150 does not encrypt it.

The mobile router presence option (MRPO) is an IP hop-by-
20 hop option that instructs every router on the path to the recipient to examine it, although in practice only mobile routers will typically examine this option.

The inventors of the present invention have appreciated
25 that this is necessary because the CN 150 addresses the MNNT to the MNN 110 to ensure it is routed to the correct place, but it is desired that the MR 120 - if it is the valid MR in the correct place - is able to intercept the MNNT, in order to generate a validation key with it. This
30 requires the facility for the MR 120 to be able to examine some characterising portion of the MNNT, such as an MR HoA 132 within the MRPO.

- 15 -

Consequently the MR 120 compares its own home address 132 to an MR home address that it extracts from MNNTs that it receives for routing to the MNN 110.

5

In an alternative embodiment, the MRPO carries an MR care-of address (CoA) rather than an MR HoA, and the MR compares its own CoA 142 to an MR CoA that it extracts from MNNTs that it receives for routing to the MNN 110.

10

In the case of either HoA or CoA above, if the addresses match, the MR 120 does not forward the MNNT further to the MNN. Instead, it verifies that the MNNTI cookie extracted from the MNNT matches that sent by the MR 120 in the MNNTI, and upon verification of a match, extracts the MNN nonce index and MNN token from the MNNT.

15

The cookie thus provides a failsafe against maliciously constructed MNNTs.

20

The MR 120 is now in a position to generate a valid XBU.

Referring to FIG. 3, the MR 120, having received the MNNT, HoT and CoT, now possesses a home token, care-of token and MNN token generated by the CN 150. The MR is then able to generate a binding update validation key (KBM) 314 from the home token and care-of token that the CN 150 will recognise as belonging to the valid MR 120, as known in the art.

25

30 In addition, the MR 120 is also able to generate 266 an extended binding update (XBU) validation key (KBMNN) 324 from the MNN token.

- 16 -

In an embodiment of the present invention, the XBU is structured with the intent of being interpreted as a standard BU if received by a CN 150 incapable of understanding the extension.

The XBU is thus obtained by adding new options to the MIPv6 BU. The extended binding update thus comprises at least the following two options:

- i. MNN address 320; and
- ii. XBU signature 322.

An optional, yet preferred additional option iii. is the MNN nonce index 321.

The MNN address option 320 comprises the address of the MNN 112 for which the XBU is sent, whilst the XBU signature option 322 is generated 276 preferably based on a Message Authentication Code (MAC) that uses the KBMNN key 324, performed over the whole of the XBU.

The MR then sends the XBU to its recipient, typically the CN 150.

By incorporating a KBMNN key 324 based on the MNN token from the CN 150 in the signature 322, the CN 150 can validate a KBMNN based signature 322 extracted from an XBU 300 received by the CN 150 from the MR 120.

In an embodiment of the present invention, once the CN 150 has received and successfully validated an XBU 300, the CN

- 17 -

150 adds two entries to its binding cache (BC) derived from the validated XBU 300;

- i. MR HoA 132 is marked as reachable though the MR CoA 142, as known in the art; and
- 5 ii. additionally, MNNA 112 is marked as reachable through the MR HoA 132.

One may assume that the CN uses recursive parsing of its binding cache, as detailed in EP 02291331.3 (Motorola).

10 Thus when the CN parses its BC with the MNN address 112 as the point of entry, the MR HoA 132 is first returned; due to recursive parsing of the BC, the MR HoA 132 is then searched in the BC, returning the MR CoA 142.

15 In an alternative embodiment of the present invention, the two entries added to the binding cache of the CN 150 are;

- i. MR HoA 132 marked as reachable though the MR CoA 142, as known in the art; and
- 20 ii. additionally, MNNA 112 marked as reachable through the MR CoA 142.

Thus when the CN parses its BC with the MNN address 112 as the point of entry, the MR CoA 142 is first returned.

25 Then, in either embodiment, the CN 150 can then construct a packet with a single IP header whose destination is the first intermediate address, e.g. the MR CoA 142, followed by a routing header comprising other intermediate addresses such as the MR HoA 132 and
30 the MNNA 112, and followed finally by the payload.

- 18 -

More generally in the case of nested mobile routers, the CN 150 will route packets for the MNN 110 with an IP header destination of the top-level mobile router care-of address, and with a routing header comprising at least the care-of
5 addresses of subsequent mobile routers and the MNNA 112, followed finally by the payload.

It should be noted that if the CN 150 needs to refresh an expired MNN BC entry that was created in its binding cache
10 (BC) by an XBU 300, then the CN 150 has to send a modified version of classical MIPv6 Binding Request message. That extended binding request (XBR) is sent to the MR and comprises the address 112 of the MNN 110 for which it is issued. Note that for purposes such as expiry and
15 refreshment of data in the BC, one may distinguish the MNN BC entry ("MNN address is reachable at MR HoA") from the MR BC entry ("MR HoA is reachable at MR CoA") although both are created when CN 150 receives a validated XBU 300: typically, these two entries should not have the same
20 lifetime (the lifetime of MNN BC entry is much longer). To enable the CN 150 to make this distinction, the structure of the CN BC should be slightly modified (for example by adding a flag for each entry specifying whether it is a MNN entry or not).

25

In an embodiment of the present invention, for the situation where a mobile router visits a mobile router (nested mobility), then a mobile router, upon receiving a tunnelled packet from its home agent, sends an XBU to the
30 source address of the inner packet for the destination address of the inner packet.

- 19 -

Referring to parts 4A and 4B of FIG. 4, for the case of a first mobile router hosting a second mobile router:

A network of a first mobile router (MR1) 420 comprises a
5 second mobile router (MR2) 460, and a network of MR2 460
comprises an MNN 410.

In order to compile a sequence of bindings in the CN
binding cache that link the CN 150 to the MNN 110, the
10 validation process 200 is instigated twice, first upon
receipt of a first packet (FIG. 4A) by MR2 460 (tunnelled
by MR2's HA 470), and second by receipt of a second packet
(FIG. 4B) by MR1 420 (sent directly to the MR2 CoA 482 and
tunnelled by MR1's HA 430). The encircled numbers in the
15 FIGs 4A and 4B show the respective routes of the two
packets.

Referring to Fig. 4A, upon receiving a first tunnelled
packet MR1 420 sends an XBU 401 to the MR2's home agent
20 (HA2) 470 for MR2 CoA 482, since HA2 address and MR2 CoA
are respectively in the source and destination fields of
the inner packet. (The inner packet being defined as
beginning with the next IP header in a series within the
packet; referring to FIG. 5, packet 510 commences with IP
25 header 501, and its inner packet, also shown separately as
520, commences with header 502);

HA2 470 will typically ignore XBU 401; its purpose is to
'unwrap' the inner packet in a manner consistent with the
30 validation process.

- 20 -

MR1 420 forwards the inner packet to MR2 460; MR2 460, upon receiving the packet, detunnels a (second) inner packet and sends an XBU 402 to CN 450 for MNNA 412, since CN and MNN addresses are respectively in the source and destination
5 fields of the inner packet; MR2 460 finally forwards the inner packet to MNN 110.

The result is that CN updates its binding cache to indirectly link the MNNA 112 with the MR2 CoA 482.
10

Referring to FIG. 4B, upon receiving a second tunnelled packed sent directly to MR2 CoA 482 with a routing header comprising the MR2 HoA 472 and MNNA 412, HA1 430 intercepts it and tunnels it to MR1 CoA 442.

15 Upon its receipt, MR1 420 sends an XBU 403 to CN 450 for MR2 CoA 482, since CN and MR2 Care-of addresses are respectively in the source and destination fields of the inner packet.

20 The result is that CN updates its binding cache to indirectly link the MR2 CoA 482 with the MR1 CoA 442.

Consequently, all the four entries thus generated in the CN
25 BC, when parsed recursively, will route packets for the MNN 410 with an IP header destination of MR1 CoA 442, and with a routing header of {MR1 HoA 432, MR2 CoA 482, MR2 HoA 472, MNNA 412}.

30 It will be clear to a person skilled in the art that the above-described example is not limited to a single level of nesting of mobile networks.

In an enhanced embodiment of the present invention, for the situation where a mobile network visits a mobile network (nested mobility), there is an opportunity to avoid the sending of the first XBU 401 as described above. This has the added benefit that when n levels of mobile networks are nested, there is not a sequence of wasted XBUs. It also reduces the number of packets sent by the tunnelling method.

10

In this embodiment, a mobile router, upon receiving a tunnelled packet from its home agent, sends an XBU to the source address of the innermost packet for the destination address of the inner packet.

15

Referring to FIGs. 5 and 6, tunnelled packet 510 depicts a payload prepended with IP headers for each step of the route to the MNN. For simplicity, each IP header in packet 510 can be considered the header of a packet that comprises any subsequent packets and thus also the payload. Thus in this case the first packet 501 is addressed to MR1 CoA 442, whilst the innermost packet 506 is addressed to MNNA 112.

20

Upon receiving a first tunnelled packet 510, MR1 420 sends an XBU 516 to the source address of the innermost packet (CN) 512 for destination 514 of the second (or 'inner') packet 502, namely MR2 CoA 482.

25

This has the effect of enabling the CN to update its binding cache (BC) to link the MR1 CoA 442 to the MR2 CoA 482.

30

- 22 -

Passing the packet on to MR2 460, MR2 460 receives second packet 520. By repeating the above process, MR2 460 sends an XBU 526 to the source address of the innermost packet (CN) 522 for destination 524; an MR3 CoA, should it exist.

5

The process repeats until and including MR_n, to which the MNN 410 is attached, is reached, when MR_n sends an XBU 556 to the source address of the innermost packet CN 552 for the MNN 410.

10

The 2_n entries thus generated in the CN BC, when parsed recursively, will route packets for the MNN 510 with an IP header destination of MR1 CoA 542. Note that in FIG. 6 the contents of the BC have been re-ordered for clarity of presentation.

15

For the case of the architecture illustrated in FIG 6 (which replicates that of FIGs 4A and 4B), a network of a first mobile router (MR1) 420 comprises a second mobile router (MR2) 460, a network of MR2 460 comprising an MNN 410.

20

upon receiving a first tunnelled packet, MR1 420 sends an XBU 601 to the source address of the innermost packet (CN) for MR2 CoA 482;

25

MR1 passes the packet to MR2 460.

upon receiving that packet, MR2 460 sends an XBU 602 to the source address of the innermost packet (CN) for MNN, such that the four entries thus generated in the CN BC, when parsed recursively, will route packets for the MNN 410 with an IP header destination of MR1 CoA 442, and with a routing header of {MR1 HoA 432, MR2 CoA 482, MR2 HoA 472, MNNA 412}.

30

- 23 -

In an alternative embodiment of the present invention, a home address test initiation (HoTI) and mobile network node test initiation (MNNTI) may be combined, the resulting test initiation comprising a home/MNN TI cookie, MR HoA 132 and MNN address. It will be clear to a person skilled in the art that the processes described herein may readily be adapted to such a combined test initiation.

10 In a further alternative embodiment of the present invention, the MNNTI message is sent via the MR CoA 142.

In an alternative embodiment of the present invention, a care-of address test initiation (CoTI) and mobile network node test initiation (MNNTI) may be combined, the resulting test initiation comprising a care-of/MNN TI cookie, MR CoA 142 and MNN address. It will be clear to a person skilled in the art that the processes described herein may readily be adapted to such a combined test initiation.

20

In either of the above two alternative embodiments of the present invention, the MNNTI message sent via the MR CoA 142 may additionally comprise the MR HoA 132.

25 Apparatus for the role of correspondent node 150 may be any IP networkable appliance operable for use according to the methods described herein.

Apparatus for the role of mobile router 120 may be any IP networkable appliance capable of connecting a further IP networkable appliance operable for use according to the methods described herein.

30

Claims

1. A method of validated communication between a mobile network node (MNN) (110) and a correspondent node (CN) (150) via at least a first mobile router (MR) (120), and characterised by the following steps;
 - i. employing an extended return routability checking procedure (200) wherein an MNN test initiation (MNNTI) message is sent by the MR (120), and a MNN test (MNNT) message is sent by the CN (150); and
 - ii. sending from the MR (120) an extended binding update (XBU) comprising the MNN's address (MNNA) (112).
2. A method of validated communication according to claim 1, wherein
upon receipt of a tunnelled packet from the home agent (HA) (130) of the mobile router (MR) (120) addressed to the mobile network node (MNN) (110), the MR (120) initiates a validation process (200) between the MR (120) and correspondent node (CN) (150).
3. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and correspondent node (CN) (150) comprises the step (226) of;
The MR (120) generating random values (hereinafter 'cookies') for a home address test initiation (HoTI) message and a care-of address test initiation (CoTI) message,
and is further characterised by;

- 25 -

generating a cookie for a mobile network node test initiation (MNNTI) message.

4. A method of validated communication according to any
5 one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and correspondent node (CN) (150) comprises the step (236) of;
The MR (120) sending a HoTI comprising the MR home address (HoA) (132) and a HoTI cookie to the CN (150); and
10 The MR (120) sending a CoTI comprising the MR care-of address (CoA) (142) and a CoTI cookie to the CN (150),
and is further characterised by;
The MR (120) sending an MNNTI comprising the MNN address (MNNA) (112) and a MNNTI cookie to the CN (150).
15
5. A method of validated communication according to claim 4, wherein the HoTI is sent via the MR home address (HoA) (132), the CoTI is sent via the MR care-of address (CoA) (142) and the MNNTI is sent via either the HoA (132) or CoA
20 (142).
6. A method of validated communication according to claim 5, wherein if the MNNTI is sent via the MR care-of address (CoA) (142), the MNNTI message additionally comprises the
25 MR home address (HoA) (132).
7. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and
30 correspondent node (CN) (150) comprises the step (246) of;
the CN (150) computing a home token from an HoA (132) extracted from a HoTI, a random key (KCN) and a nonce; and

- 26 -

the CN (150) computing a care-of token from a CoA (142) extracted from a CoTI, the KCN and a nonce, and is further characterised by;
the CN (150) computing an MNN token from an MNNA (112) extracted from an MNNTI, the KCN and a nonce.

8. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and correspondent node (CN) (150) comprises the step (256) of;
the CN (150) sending a home address test (HoT) comprising a HoTI cookie, home nonce index and home token to the MR (120); and
the CN (150) sending a care-of address test (CoT) comprising a CoTI cookie, care-of nonce index and care-of token to the MR (120),
and is further characterised by;
the CN (150) sending a mobile network node address test (MNNT) comprising an MNNTI cookie, MNN nonce index and MNN token to the MNN (110), the MNNT further comprising;
a mobile router presence option (MRPO) that comprises the MR home address (HoA) (132).

9. A method of validated communication according to any one of the preceding claims 1 to 7, wherein a validation process (200) between the mobile router (MR) (120) and correspondent node (CN) (150) comprises the step (256) of;
the CN (150) sending a home address test (HoT) comprising a HoTI cookie, home nonce index and home token to the MR (120); and

- 27 -

the CN (150) sending a care-of address test (CoT) comprising a CoTI cookie, care-of nonce index and care-of token to the MR (120),

and is further characterised by;

- 5 the CN (150) sending a mobile network node address test (MNNT) comprising an MNNTI cookie, MNN nonce index and MNN token to the MNN (110), the MNNT further comprising;
a mobile router presence option (MRPO) that comprises the care-of address (CoA) (142).

10

10. A method of validated communication according to any one of claims 8 and 9, wherein the HoT is sent to the MR home address (HoA) (132), the CoT is sent to the MR care-of address (CoA) (142) and the MNNT is sent to the MNN address
15 (MNNA) (112).

11. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and
20 correspondent node (CN) (150) is characterised by the step of;

a home agent (HA) (130) encrypting an MNNT when tunnelling said MNNT to an MR (120).

- 25 12. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and correspondent node (CN) (150) is characterised by the step of;

- 30 the MR (120) comparing its own home address (132) to any MR home address that the MR (120) can extract from MNNTs that it receives for routing to an MNN (110).

13. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and
5 correspondent node (CN) (150) is characterised by the step of;

the MR (120) comparing its own care-of address (142) to any CoA that the MR (120) can extract from MNNTs that it receives for routing to an MNN (110).

10

14. A method of validated communication according to any one of claims 12 and 13, wherein if the addresses match,
the MR (120) does not forward the MNNT further;
verifies that an MNNTI cookie extracted from the MNNT
15 matches that sent by the MR (120) in the MNNTI; and
upon verification of a match, extracts the MNN nonce index and MNN token from the MNNT.

15. A method of validated communication according to any
20 one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and correspondent node (CN) (150) is characterised by the step (266) of;

the MR (120) generating an extended binding update
25 (XBU) validation key (KBMNN) (324) from an MNN token.

16. A method of validated communication according to any one of the preceding claims, wherein a validation process (200) between the mobile router (MR) (120) and
30 correspondent node (CN) (150) is characterised by the step (276) of;

- 29 -

the MR (120) generating an extended binding update (XBU) signature (322) using a KBMNN key (324).

17. A method according to claim 16 wherein the signature
5 is based upon a message authentication code using a KBMNN key (324).

18. A method of validated communication according to any one of the preceding claims, wherein the extended binding
10 update comprises at least two options:

- i. MNN address (320); and
- ii. XBU signature (322).

19. A method of validated communication according to claim
15 18 wherein the extended binding update further comprises an MNN nonce index option (321).

20. A method of validated communication according to any one of the preceding claims, wherein a validation process
20 (200) between the mobile router (MR) (120) and correspondent node (CN) (150) is characterised by the step of;

the CN (150) validating a KBMNN based signature (322) extracted from an XBU (300) received by the CN (150) from
25 the MR (120).

21. A method of validated communication according to any one of the preceding claims, wherein a validation process
(200) between the mobile router (MR) (120) and
30 correspondent node (CN) (150) is characterised by the step of;

- 30 -

the CN (150) adding two entries to its binding cache (BC) derived from a validated XBU (300);

- i. MR HoA (132) is marked as reachable though the MR CoA (142), as known in the art; and
- 5 ii. MNNA (112) is marked as reachable through the MR HoA (132).

22. A method of validated communication according to any one of the preceding claims, wherein a validation process
10 (200) between the mobile router (MR) (120) and correspondent node (CN) (150) is characterised by the step of;

the CN (150) adding two entries to its binding cache (BC) derived from a validated XBU (300);

- 15 i. MR HoA (132) is marked as reachable though the MR CoA (142), as known in the art; and
- ii. MNNA (112) is marked as reachable through the MR CoA (142).

20 23. A method of validated communication according to any one of claims 21 and 22, wherein if the MNN 110 is the addressee, the CN (150) recursively parses its BC,
and such that the CN (150) will route packets for the MNN (110) with an IP header destination of MR CoA (142),
25 and with a routing header comprising at least MNNA (412).

24. A method of validated communication according to any one of claims 21 and 22, wherein if the MNN (110) is the addressee under at least two nested mobile routers, then
30 the CN (150) recursively parses its BC,
and such that the CN (150) will route packets for the MNN 110 with an IP header destination of the top-level

- 31 -

mobile router care-of address, and with a routing header comprising at least the care-of addresses of subsequent mobile routers and the MNNA (112).

- 5 25. A method of validated communication according to any one of claims 2 to 23, wherein the mobile router (MR) (120) only initiates a validation process 200 between the MR (120) and correspondent node (CN) (150) if at least one of the following set of conditions is met;
- 10 i. The MNN (110) subscribes to a specified service;
ii. The CN (150) has not ignored a threshold number of prior XBUs (300);
iii. The CN (150) has not ignored a threshold number of validation processes; and
15 iv. The MNN (110) satisfies a usage policy.

26. A method of validated communication according to any one of claims 3 to 25, wherein a home address test initiation (HoTI) and mobile network node test initiation (MNNTI) are combined, the resulting test initiation
20 comprising a home/MNN TI cookie, MR HoA (132) and MNN address (112).

27. A method of validated communication according to any
25 one of claims 3 to 25, wherein a care-of address test initiation (CoTI) and mobile network node test initiation (MNNTI) are combined, the resulting test initiation comprising a care-of/MNN TI cookie, MR CoA (142) and MNN address (112).

- 32 -

28. A method of validated communication according to any one of the preceding claims, the method further characterised by the following step;

5 a mobile router (MR) 120, upon receiving a tunnelled packet from its home agent (HA) 130, sends an XBU 300 to the source address of the inner packet for the destination address of the inner packet.

29. A method of validated communication according to claim 10 28, wherein a network of a first mobile router (MR1) (420) comprises a second mobile router (MR2) (460), a network of MR2 (460) comprising an MNN (410), the method comprising the following steps;

upon receiving a first tunnelled packet MR1 (420) 15 sends an XBU (401) to the MR2's home agent (HA2) (470) for MR2 CoA (482);

MR1 (420) forwards an inner packet to MR2 (460);

MR2 (460) upon receiving the packet sends an XBU (402) to CN (450) for MNNA (412);

20 upon receiving a second tunnelled packet sent directly to MR2 CoA (482) with a routing header comprising the MR2 HoA (472) and MNNA (412), HA1 (430) intercepts it and tunnels an inner packet to MR1 CoA (442); and

MR1 (420) upon receiving the packet sends an XBU (403) 25 to CN (450) for MR2 CoA (482),

and such that the four entries thus generated in the CN BC, when parsed recursively, will route packets for the MNN (410) to with an IP header destination of MR1 CoA (442), and with a routing header of {MR1 HoA (432), MR2 CoA 30 (482), MR2 HoA (472), MNNA (412)}.

- 33 -

30. A method of validated communication according to any one of claims 1 to 27, the method further characterised by the following step;

5 a mobile router (MR) 120, upon receiving a tunnelled packet from its home agent (HA) 130, sends an XBU 300 to the source address of the innermost packet for the destination address of the inner packet.

31. A method of validated communication according to claim 10 30, wherein a network of a first mobile router (MR1) (420) comprises a second mobile router (MR2) (460), a network of MR2 (460) comprising an MNN (410), comprising the following steps;

upon receiving a first tunnelled packet, MR1 (420) 15 sends an XBU (601) to the source address of the innermost packet (CN) for MR2 CoA (482);

MR1 (520) passes the inner packet to MR2 (460).

upon receiving the inner packet, MR2 (460) sends an XBU (602) to the source address of the innermost packet 20 (CN) for MNN,

and such that the four entries thus generated in the CN BC, when parsed recursively, will route packets for the MNN (510) with an IP header destination of MR1 CoA (542), and with a routing header of {MR1 HoA (532), MR2 CoA (582), 25 MR2 HoA (572), MNNA (512)}.

32. Apparatus for use in a validated communication according to a method as claimed in any one of claims 1 to 31, between a mobile network node (MNN) (110) and a 30 correspondent node (CN) (150) via at least a first mobile router (MR) (120), and comprising:


- 34 -


- i. checking means for performing an extended return routability checking procedure (236) wherein an MNN test initiation (MNNTI) message is sent by the MR 120, and a MNN test (MNNT) message is sent by the CN (150); and
- ii. extended binding update means for sending (276) from the MR (120) an extended binding update (XBU) comprising the MNN's address (MNNA) (112).

33. A mobile router (MR) (120) for connection with at least one further IP networkable appliance in communication by a method as claimed in any one of claims 1 to 31, the MR (120) comprising MNN test initiation (MNNTI) message means for generating and sending said MNNTI message, and binding update means for generating and sending an extended binding update (XBU) (300) comprising the MNN's address (MNNA) (112).

34. A correspondent node (CN) (150) for connection with at least one IP networkable appliance in communication by a method as claimed in any one of claims 1 to 31, the CN (120) comprising MNN test (MNNT) message means for generating and sending said MNNT message, and validation means for validating a KBMNN based signature (322) extracted from an XBU (300).

1/6

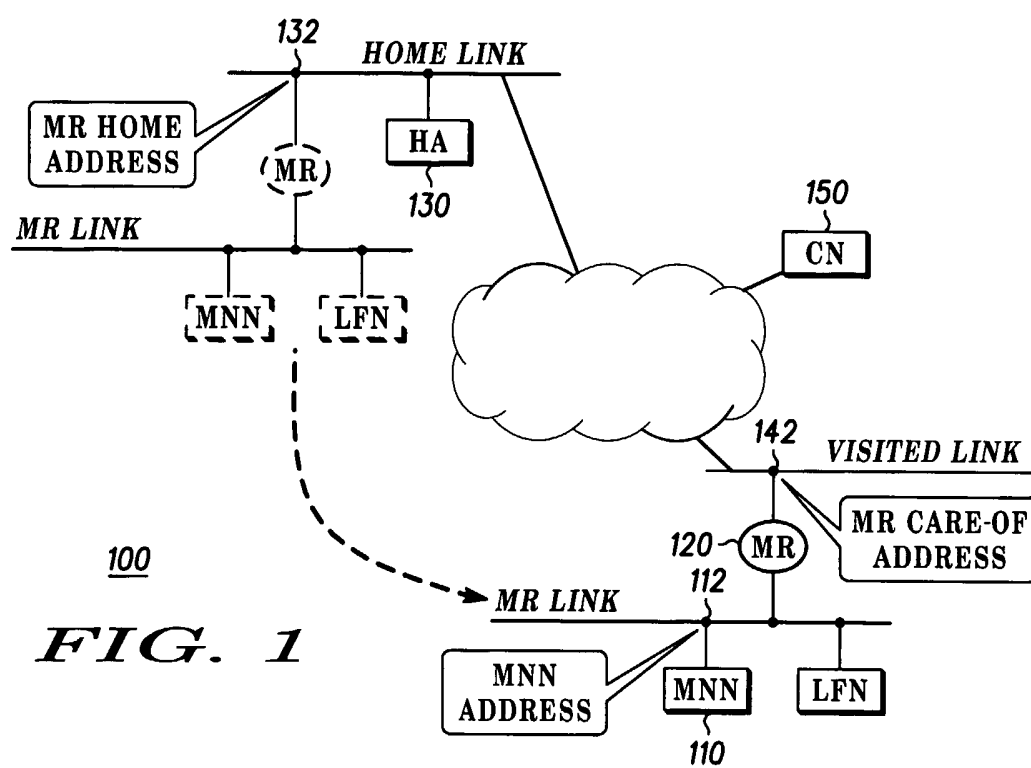

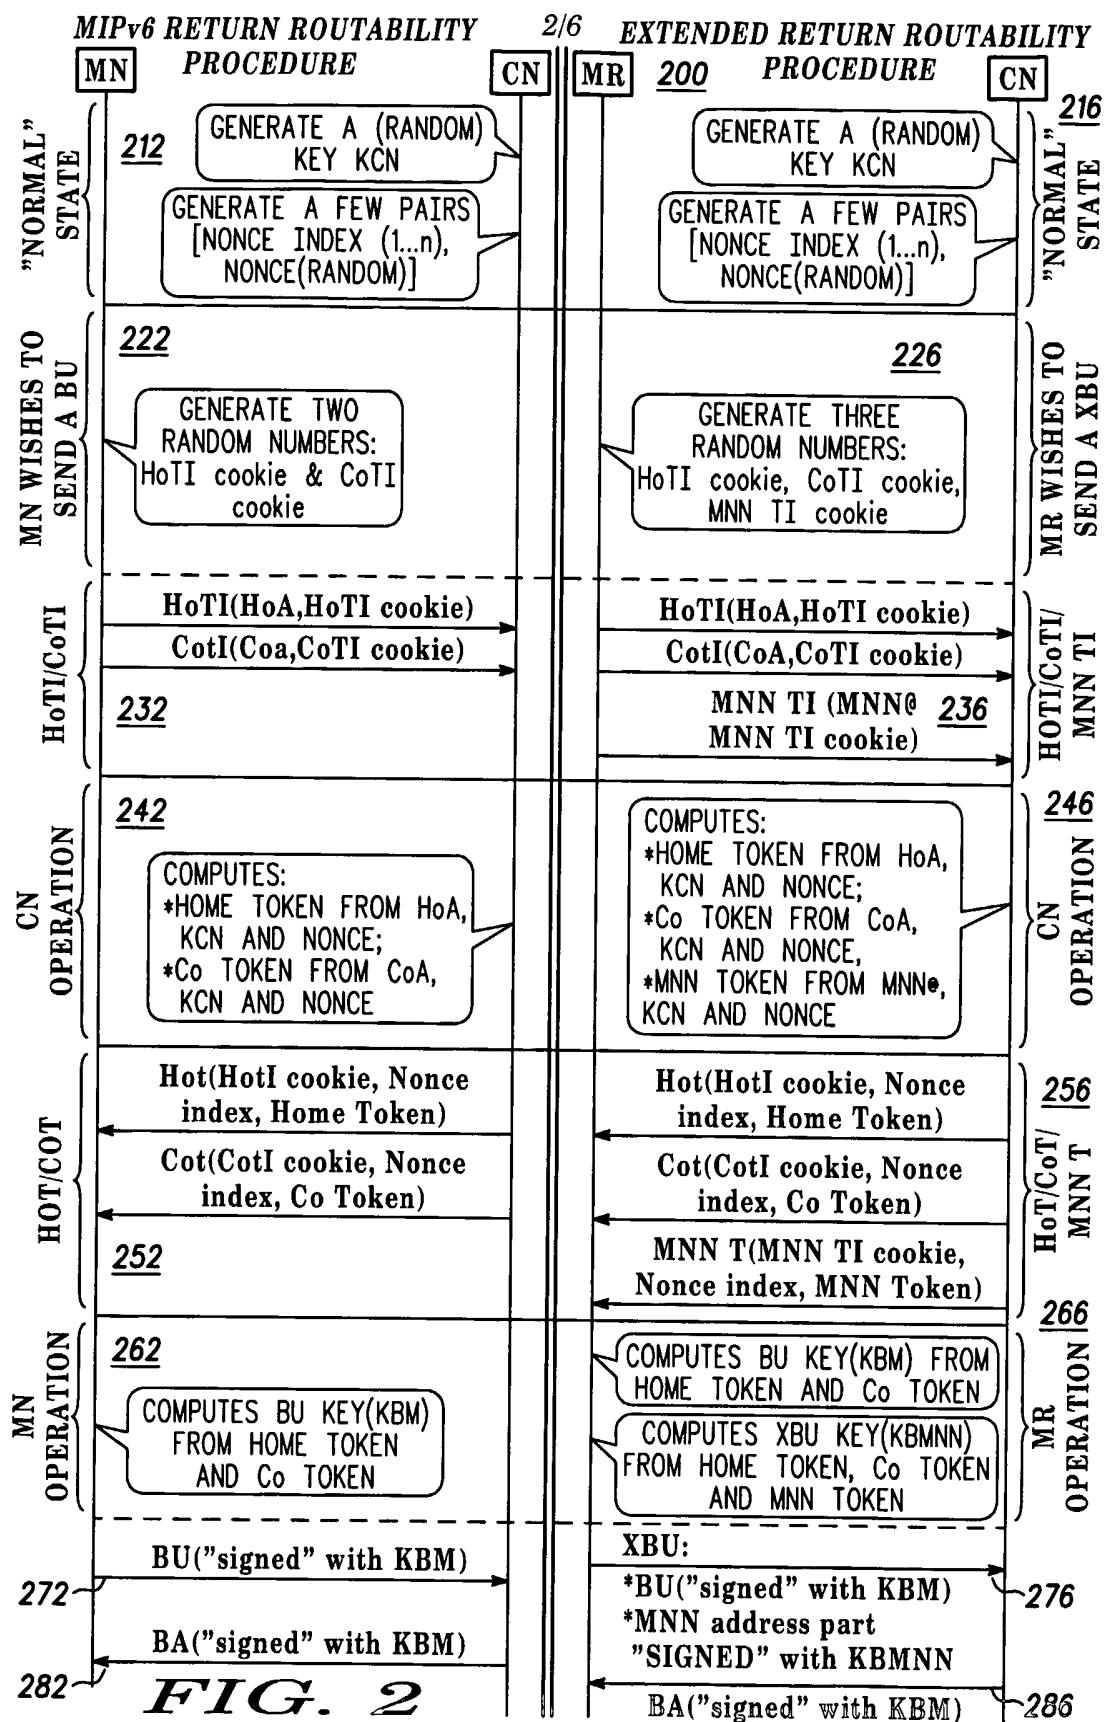



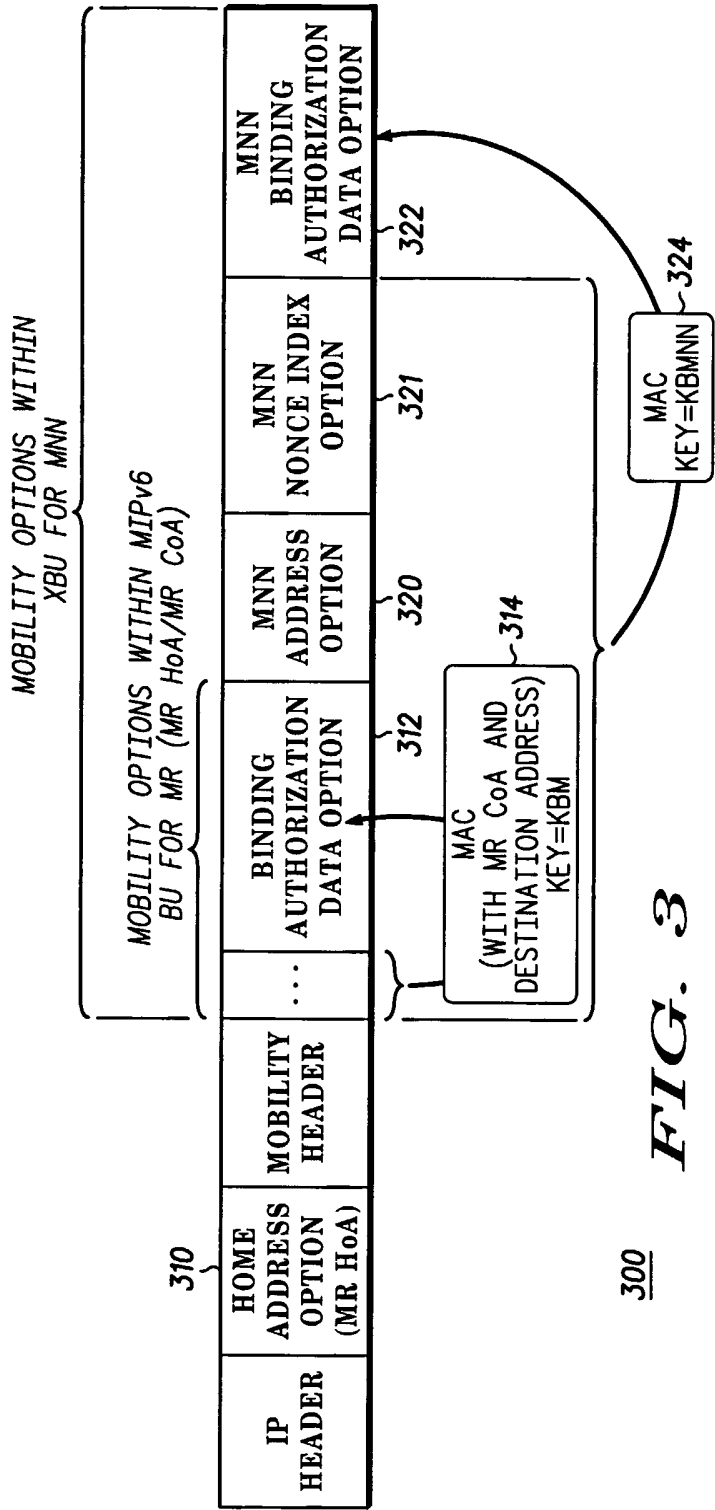


FIG. 3

300

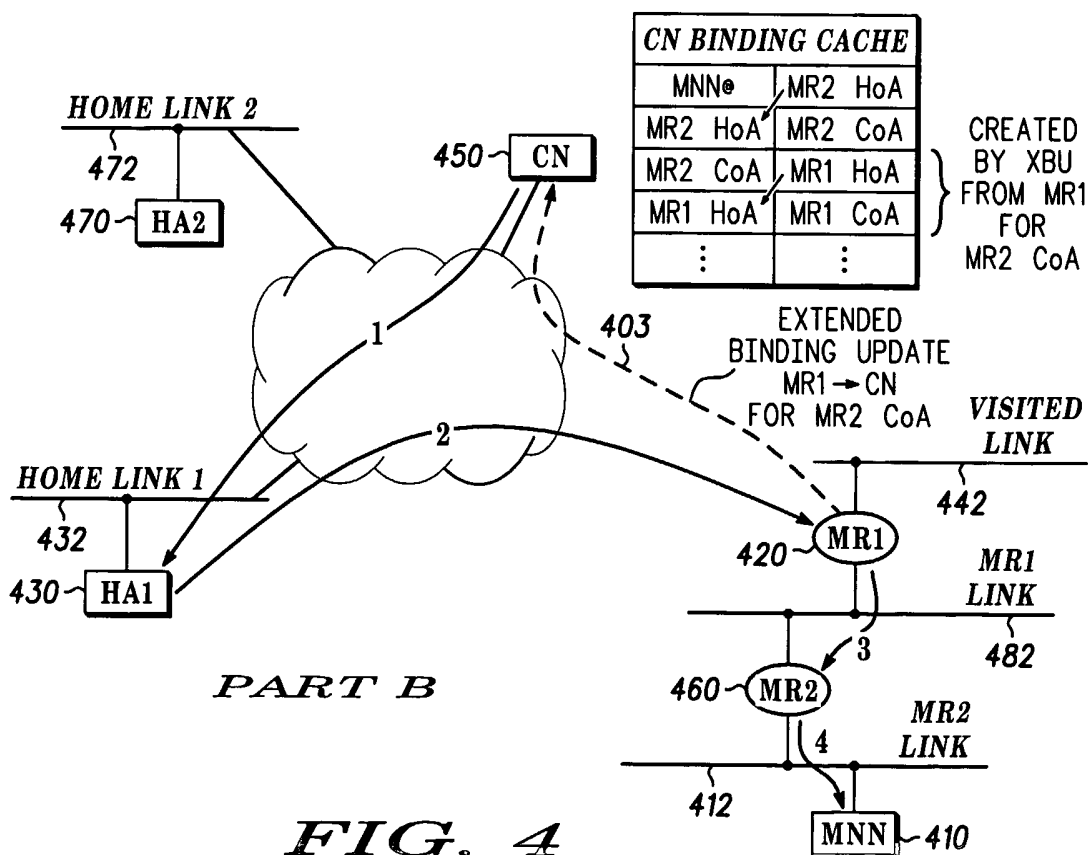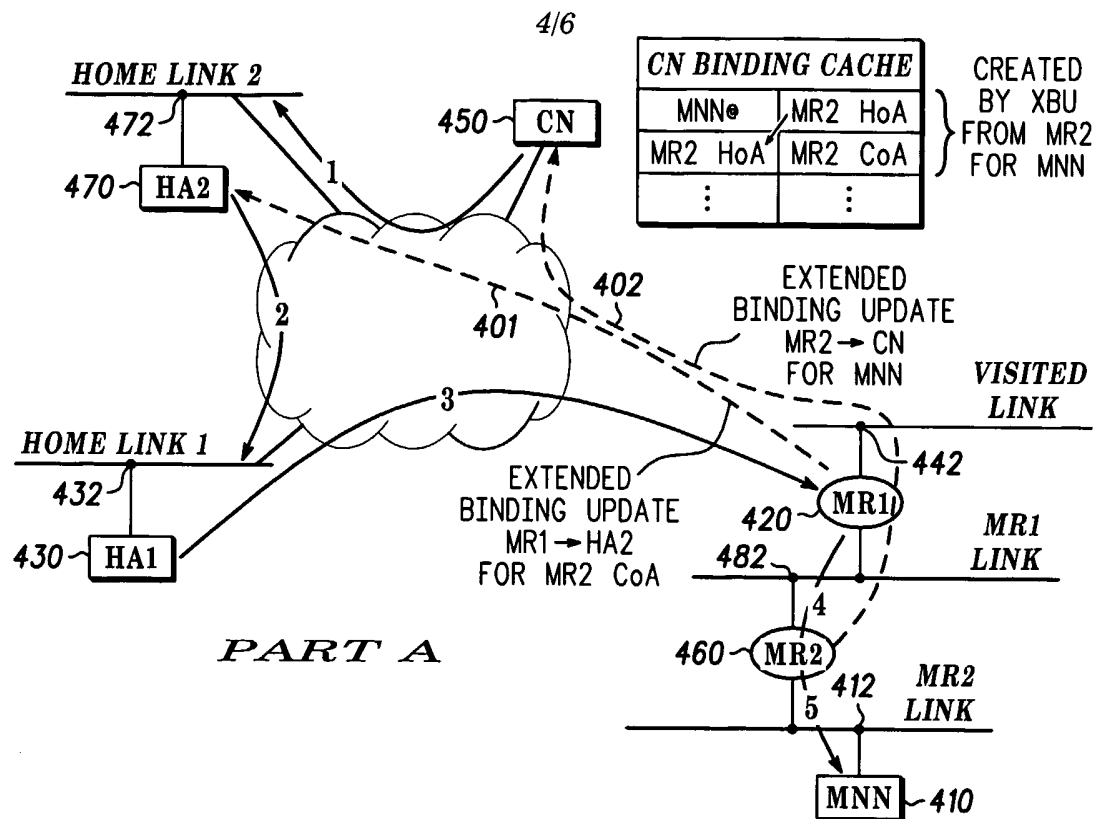

5/6


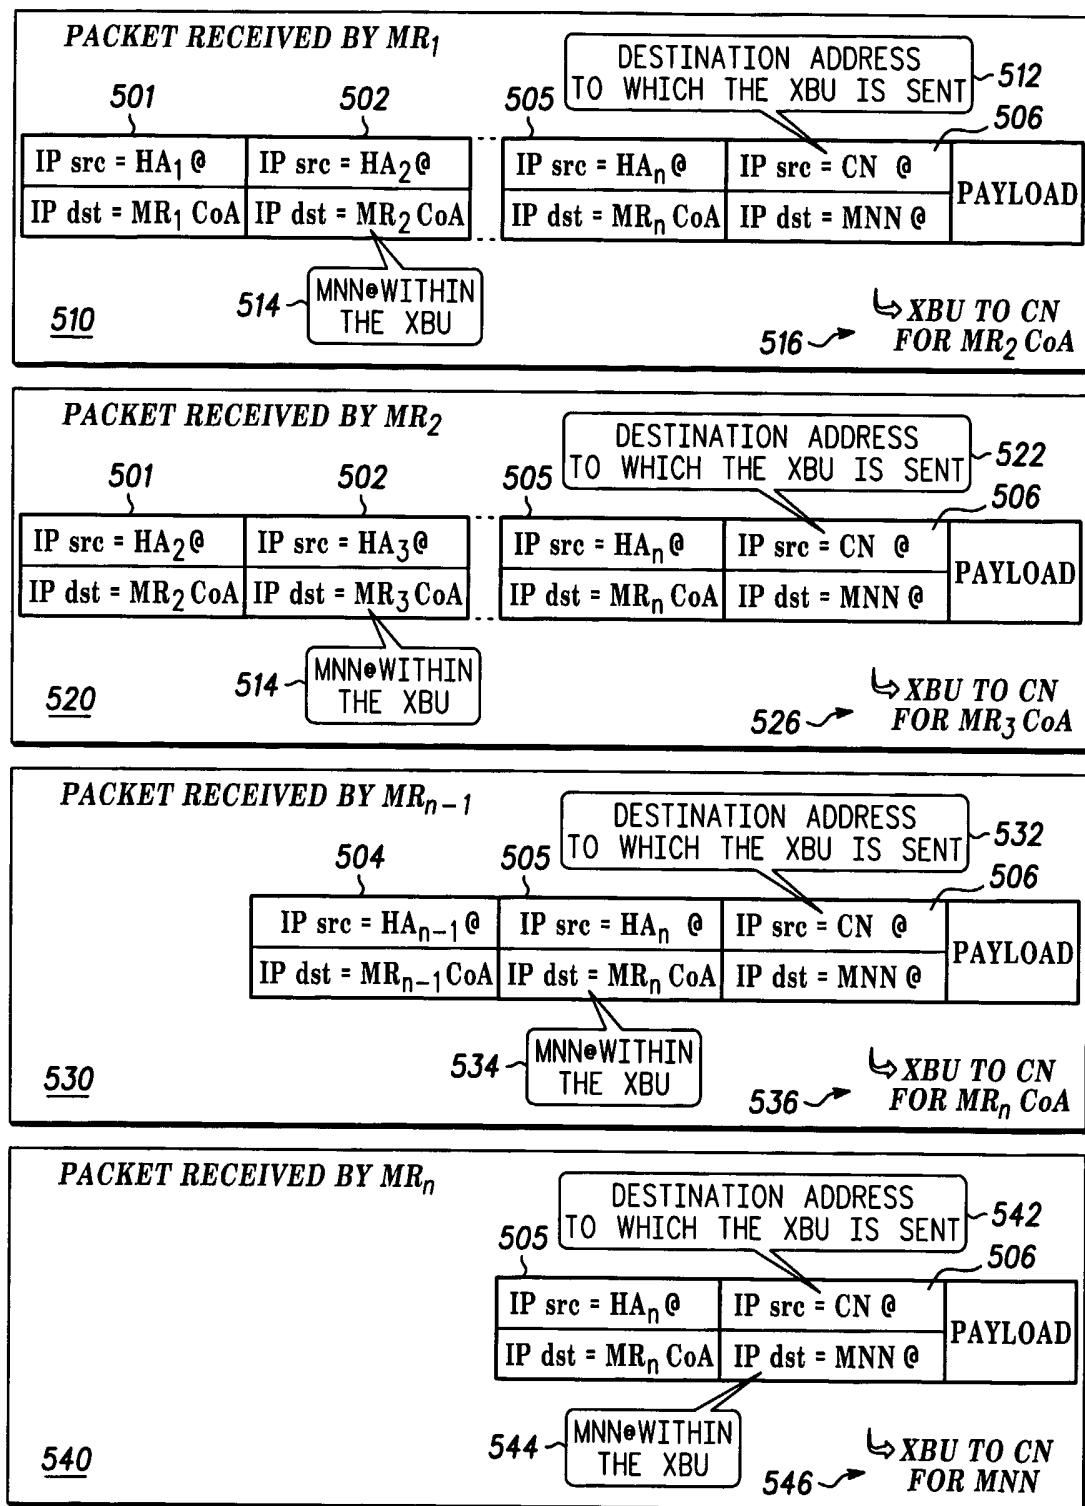


FIG. 5

6/6

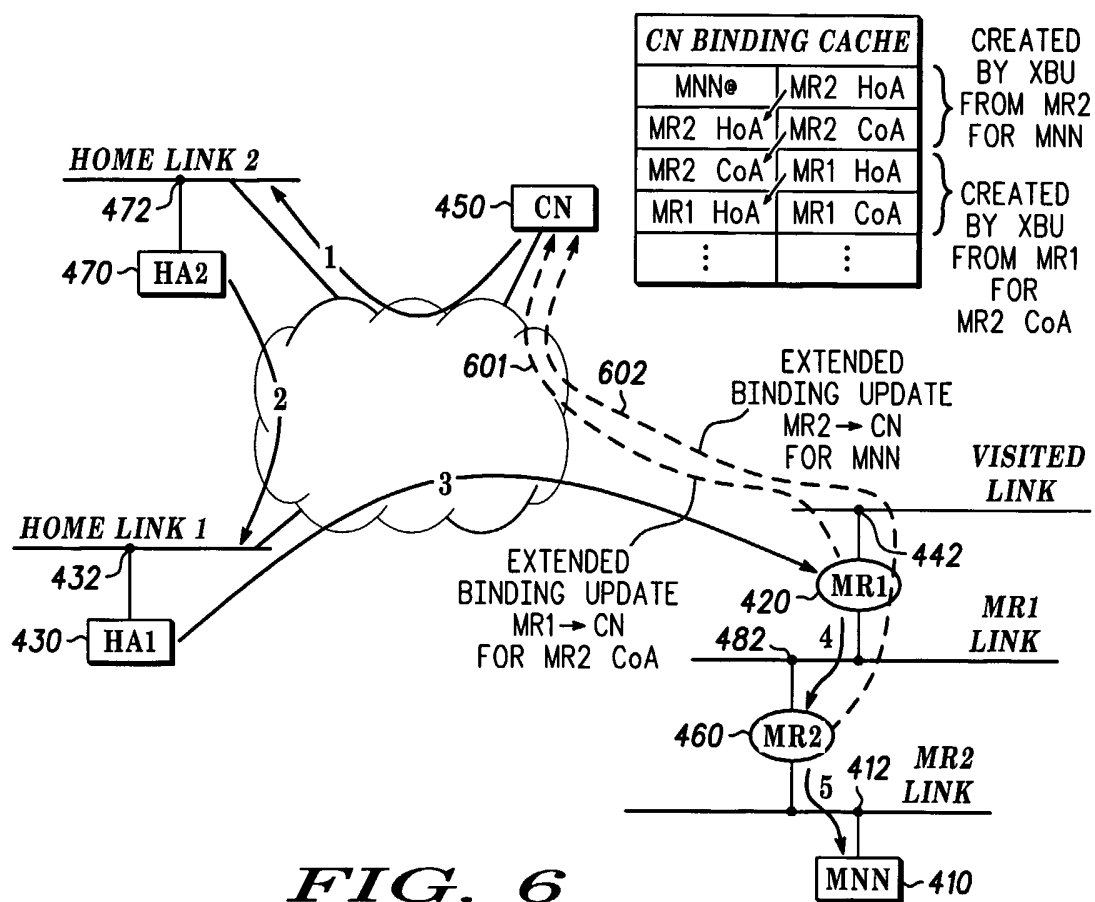

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/051257

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	D. JOHNSON, RICE UNIVERSITY; C. PERKINS, NOKIA RESEARCH CENTER; J. ARKKO, ERICSSON: "Mobility Support in IPv6" IETF MOBILE IP WORKING GROUP, INTERNET DRAFT, 'Online! 30 June 2003 (2003-06-30), XP002267140 Retrieved from the Internet: URL: http://www.ietf.org/ids.by.wg/mip6.htm 1> 'retrieved on 2004-01-13! cited in the application page 10 - page 87	1-3, 7-9, 32-34
Y	US 2003/095523 A1 (KORUS MICHAEL F ET AL) 22 May 2003 (2003-05-22) abstract paragraph '0002! - paragraph '0059!; figures ----- -/--	1-3, 7-9, 32-34



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

16 September 2004

Date of mailing of the international search report

27/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Aguilar Cabarrus, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/051257

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 158 742 A (MOTOROLA INC) 28 November 2001 (2001-11-28) cited in the application abstract paragraph '0017! - paragraph '0078! -----	1-34
A	WO 03/047183 A (LEPISTOE MIKA ;KOSKIAHDE TIMO (FI); NOKIA CORP (FI)) 5 June 2003 (2003-06-05) abstract page 3, line 15 - page 5, line 19 -----	1-34

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/051257

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2003095523	A1	22-05-2003	WO	03045087 A2	30-05-2003
EP 1158742	A	28-11-2001	EP	1158742 A1	28-11-2001
			AU	8382001 A	03-12-2001
			CN	1430844 T	16-07-2003
			WO	0191408 A1	29-11-2001
			EP	1290857 A1	12-03-2003
			JP	2003534719 T	18-11-2003
			US	2004010615 A1	15-01-2004
WO 03047183	A	05-06-2003	WO	03047183 A1	05-06-2003
			EP	1451979 A1	01-09-2004