



- (51) **International Patent Classification:**
H04W 8/24 (2009.01) *H04W 84/18* (2009.01)
- (21) **International Application Number:**
PCT/JP2009/006912
- (22) **International Filing Date:**
16 December 2009 (16.12.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2008-325795 22 December 2008 (22.12.2008) JP
2009-234415 8 October 2009 (08.10.2009) JP
- (71) **Applicant (for all designated States except US):** CANON KABUSHIKI KAISHA [JP/JP]; 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** SAKAI, Tatsuhiko [JP/JP]; C/O CANON KABUSHIKI KAISHA, 30-2, Shimomaruko, 3-chome, Ohta-ku, Tokyo, 1468501 (JP).
- (74) **Agent:** UCHIO, Hirokazu; C/O CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 1468501 (JP).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** COMMUNICATION-PARAMETER SETTING BETWEEN COMMUNICATION APPARATUS

[Fig. 6]

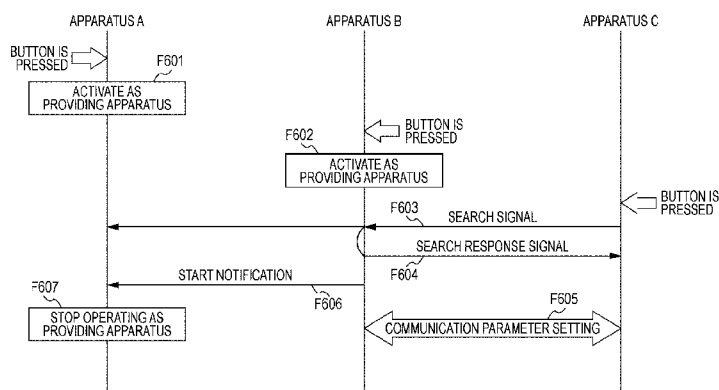

(57) **Abstract:** Even when multiple providing apparatuses joined in a network are activated as providing apparatuses, a new apparatus can be added to the network without degrading the network security or the ease of use of the providing apparatuses. a apparatus activates an operation as a providing apparatus of a communication-parameter in accordance with the a state notification of an operation as a providing apparatus of a communication-parameter, which is received from another communication apparatus.

Description

Title of Invention: COMMUNICATION-PARAMETER SETTING BETWEEN COMMUNICATION APPARATUS

Technical Field

[0001] The present invention relates to a communication apparatus that executes a communication-parameter setting process with another communication apparatus, a control method for the communication apparatus, a program, and a storage medium.

Background Art

[0002] In wireless communication represented by wireless local area networks (LANs) conforming to the Institute of Electrical and Electronics Engineers (IEEE) 802.11 standard series, there are many setting items that must be set prior to use.

[0003] For example, as setting items, there are communication parameters needed to perform wireless communication, such as the Service Set Identifier (SSID) which is a network identifier, an encryption method, an encryption key, an authentication method, and an authentication key. It is very complicated for the user to manually enter and set these communication parameters.

[0004] Therefore, various manufacturers have devised automatic setting methods for easily setting communication parameters in wireless devices. In these automatic setting methods, one device provides communication parameters to another device connected thereto using a procedure and messages determined in advance between these connected devices, and accordingly the communication parameters are automatically set.

[0005] Patent Citation 1 discloses an example of automatically setting communication parameters in wireless local area network (LAN) ad-hoc mode communication (hereinafter called ad-hoc communication).

[0006] The case where a new device is added, by using communication-parameter automatic setting, to an ad-hoc network configured by using communication-parameter automatic setting will be considered.

[0007] In this case, a device joined in the network is activated as a device that provides parameters (hereinafter called a providing apparatus), and the providing apparatus provides communication parameters of the network to a device newly added (hereinafter called a receiving apparatus).

[0008] The case where multiple providing apparatuses are activated by multiple users who simultaneously operate multiple devices joined in the network will be considered.

[0009] In this case, the receiving apparatus performs communication-parameter automatic setting with only one of the activated providing apparatuses. Thus, there is at least one

providing apparatus that does not provide communication parameters to the receiving apparatus.

[0010] The providing apparatus that does not provide communication parameters to the receiving apparatus remains to be able to provide communication apparatus to another device until a timeout occurs.

[0011] Therefore, the providing apparatus may perform communication-parameter automatic setting with another unintended receiving apparatus. This means that communication parameters may be mistakenly provided, resulting in a network security problem. When the providing apparatus activates its communication-parameter automatic setting function, the providing apparatus cannot perform other operations until the activated function is deactivated. It is therefore inconvenient to use the providing apparatus.

Citation List

Patent Literature

[0012] PTL 1: US 2006/0268744 (Japanese Patent Laid-Open No. 2006-311139)

Summary of Invention

[0013] The present invention provides techniques that make it possible to add a new device to a network, even when devices joined in the network are activated as providing apparatuses, without degrading the network security or the ease of use of the providing apparatuses.

Solution to Problem

[0014] A communication apparatus according to an aspect of the present invention includes a providing means; a receiving means; and a control means. The providing means is configured to operate as a providing apparatus that provides a communication parameter to a receiving apparatus that receives a provided communication parameter. The receiving means is configured to receive, from another communication apparatus, a state notification of an operation as a providing apparatus of a communication-parameter. The control means is configured to control an operation of the providing unit as a providing apparatus in accordance with the state notification received by the receiving means.

Brief Description of Drawings

[0015] [fig.1]Fig. 1 is a block diagram of an apparatus.

[fig.2]Fig. 2 is a software functional block diagram of the interior of a providing apparatus according to an embodiment of the present invention.

[fig.3]Fig. 3 is a software functional block diagram of the interior of a receiving apparatus according to the embodiment of the present invention.

[fig.4]Fig. 4 is a network diagram according to the embodiment of the present

invention.

[fig.5]Fig. 5 is a flowchart illustrating an operation of the providing apparatus at the time a state notification is received.

[fig.6]Fig. 6 is a sequence diagram illustrating operations of an apparatus A, an apparatus B, and an apparatus C at the time a start notification is sent.

[fig.7]Fig. 7 is a sequence diagram illustrating operations of the apparatus A, the apparatus B, and the apparatus C at the time a completion notification is sent.

[fig.8]Fig. 8 is a flowchart illustrating a second operation of the providing apparatus at the time a state notification is received.

[fig.9]Fig. 9 is a flowchart illustrating an operation of the providing apparatus at the time a setting button is operated.

[fig.10]Fig. 10 is a sequence diagram illustrating operations of the apparatus A, the apparatus B, and the apparatus C at the time an activation notification is sent.

Description of Embodiments

First Embodiment

- [0016] A communication apparatus according to an embodiment of the present invention will now herein be described in detail with reference to the drawings. Although the following description concerns an example in which a wireless LAN system conforming to the IEEE 802.11 series is employed, the communication configuration is not necessarily limited to a wireless LAN conforming to IEEE 802.11.
- [0017] An exemplary hardware configuration in the embodiment will be described.
- [0018] Fig. 1 is a block diagram illustrating an exemplary structure of each apparatus, which will be described later, according to an embodiment of the present invention. Fig. 1 illustrates the entirety of an apparatus 101. A control unit 102 controls the entire apparatus 101 by executing a control program stored in a storage unit 103. The control unit 102 additionally controls setting of communication parameters with another apparatus. The storage unit 103 stores the control program executed by the control unit 102 and various items of information, such as communication parameters. Various operations described later are performed by executing, with the control unit 102, the control program stored in the storage unit 103.
- [0019] A wireless unit 104 performs wireless communication. A display unit 105 performs various displays. The display unit 105 has a function of outputting information in a visually recognizable manner, as in a liquid crystal display (LCD) or a light-emitting diode (LED), or a function of outputting sounds, as in a loudspeaker.
- [0020] A setting button 106 is used for triggering or starting a communication-parameter setting process. Upon detection of an operation entered by a user using the setting button 106, the control unit 102 activates a communication-parameter automatic

setting function, which will be described later. The automatic setting function includes a providing function and a receiving function. The providing function executes a providing process. The receiving function executes a receiving process.

- [0021] An antenna control unit 107 controls an antenna 108. An input unit 109 is operated by the user to enter various instructions and commands.
- [0022] Fig. 2 is a block diagram illustrating an exemplary configuration of software function blocks performed by an apparatus that provides communication parameters (hereinafter called a providing apparatus) in a communication-parameter setting operation described later.
- [0023] Fig. 2 illustrates the entirety of an apparatus 201. The apparatus 201 includes a communication-parameter automatic setting function block 202. In this embodiment, automatic setting of communication parameters needed to perform wireless communication, such as the SSID which is a network identifier, an encryption method, an encryption key, an authentication method, and an authentication key, is performed.
- [0024] A packet receiving unit 203 receives packets related to various communications. Receiving of a beacon (broadcast signal) is performed by the packet receiving unit 203. A packet sending unit 204 sends packets related to various communications. Sending of a beacon is performed by the packet sending unit 204. Various items of information (self-information) of the sending source device are added to a beacon.
- [0025] A search-signal sending unit 205 controls sending of a device search signal, such as a probe request. A probe request may be a network search signal for searching for a desired network. Sending of a probe request is performed by the search-signal sending unit 205. Also, sending of a probe response, which is a response signal to a received probe request, is performed by the search-signal sending unit 205.
- [0026] A search-signal receiving unit 206 controls receiving of a device search signal, such as a probe request, from another apparatus. Receiving of a probe request is performed by the search-signal receiving unit 206. Also, receiving of a probe response is performed by the search-signal receiving unit 206. Various items of information (self-information) of the sending source device are added to a device search signal and a response signal in response thereto.
- [0027] A device operates as a providing apparatus when a communication-parameter providing function is activated. The device adds self-information indicating that the device is a providing apparatus to a beacon and a probe signal, and sends the beacon and the probe signal. When the device stops operating as a communication-parameter providing apparatus, the device deletes the self-information indicating that the device is a providing apparatus from a beacon and a probe signal.
- [0028] A network control unit 207 controls a network connection. A process of connecting to a wireless LAN ad-hoc network, for example, is performed by the network control

unit 207.

- [0029] In the communication-parameter automatic setting function block 202, an automatic-setting control unit 208 controls various protocols in communication-parameter automatic setting.
- [0030] A communication-parameter providing unit 209 provides communication parameters to a partner device. Under control of the automatic-setting control unit 208, a providing process in a communication-parameter automatic setting, which will be described later, is performed by the communication-parameter providing unit 209.
- [0031] Also, the automatic-setting control unit 208 determines whether a time elapsed since the device has become a providing apparatus by activating the communication-parameter providing function has exceeded a time limit. When it is determined that the elapsed time has exceeded the time limit, the automatic-setting control unit 208 performs control to deactivate the device as a providing apparatus.
- [0032] A state notification control unit 210 controls a process of sending notifications of the state of the communication-parameter automatic setting function.
- [0033] Sending of a state notification message indicating the state of the communication-parameter providing function, which will be described later, is performed by the state notification control unit 210. Also, receiving of a state notification message in the providing apparatus, which will be described later, is performed by the state notification control unit 210.
- [0034] A specific method of sending a state notification message is, for example, adding information regarding the state of the communication-parameter providing function to a beacon signal or a probe signal and broadcasting the beacon signal or the probe signal. Alternatively, a state notification message may be sent by using another signal that can be sent by using wireless LAN communication.
- [0035] Possible state notification messages include, for example, an activation notification indicating that the providing function of the device is active and the device is being activated as a providing apparatus, a state notification indicating the start of message exchange with a receiving apparatus, and a completion notification indicating completion of a providing process. That is, an apparatus that has received a state notification message can recognize that there exists an apparatus that is activated and operating as a communication-parameter providing apparatus (or that was activated as a communication-parameter providing apparatus (that completed a communication-parameter providing process)).
- [0036] Fig. 3 is a block diagram illustrating an exemplary configuration of software function blocks performed by an apparatus that receives communication parameters (hereinafter called a receiving apparatus) in a communication-parameter setting operation described later.

- [0037] Fig. 3 illustrates the entirety of an apparatus 301. The apparatus 301 includes a communication-parameter automatic setting function block 302. In this embodiment, automatic setting of communication parameters needed to perform wireless communication, such as the SSID which is a network identifier, an encryption method, an encryption key, an authentication method, and an authentication key, is performed.
- [0038] A packet receiving unit 303 receives packets related to various communications. Receiving of a beacon (broadcast signal) is performed by the packet receiving unit 303. A packet sending unit 304 sends packets related to various communications. Sending of a beacon is performed by the packet sending unit 304. Various items of information (self-information) of the sending source device are added to a beacon.
- [0039] A search-signal sending unit 305 controls sending of a device search signal, such as a probe request. A probe request may be a network search signal for searching for a desired network. Sending of a probe request is performed by the search-signal sending unit 305. Also, sending of a probe response, which is a response signal to a received probe request, is performed by the search-signal sending unit 305.
- [0040] A search-signal receiving unit 306 controls receiving of a device search signal, such as a probe request, from another apparatus. Receiving of a probe request is performed by the search-signal receiving unit 306. Also, receiving of a probe response is performed by the search-signal receiving unit 306. Various items of information (self-information) of the sending source device are added to a device search signal and a response signal in response thereto.
- [0041] The receiving apparatus detects the presence of a providing apparatus by sending a device search signal and receiving a response signal that is sent from the providing apparatus and that includes self-information indicating that the sender is a providing apparatus. Alternatively, the receiving apparatus detects the presence of a providing apparatus when the providing apparatus sends a beacon including self-information indicating that the sender is a providing apparatus, and the receiving apparatus receives the beacon.
- [0042] A network control unit 307 controls a network connection. A process of connecting to a wireless LAN ad-hoc network, for example, is performed by the network control unit 307.
- [0043] In the communication-parameter automatic setting function block 302, a communication-parameter receiving unit 308 receives communication parameters from a partner device.
- [0044] An automatic-setting control unit 309 controls various protocols in communication-parameter automatic setting.
- [0045] When the receiving apparatus detects the presence of a providing apparatus, the receiving apparatus joins in a network of the providing apparatus by using the network

control unit 307 under control of the automatic-setting control unit 309. After the participation, under control of the automatic-setting control unit 309, the receiving apparatus exchanges messages for receiving parameters with the providing apparatus by using the communication-parameter receiving unit 308, and receives communication parameters from the providing apparatus.

[0046] Also, the automatic-setting control unit 309 determines whether a time elapsed since the device has become a receiving apparatus by activating the communication-parameter automatic setting function has exceeded a time limit. When it is determined that the elapsed time has exceeded the time limit, the automatic-setting control unit 309 performs control to deactivate the device as a receiving apparatus.

[0047] Fig. 4 is a diagram illustrating a communication apparatus A401 (hereinafter called an apparatus A), a communication apparatus B402 (hereinafter called an apparatus B), a communication apparatus C403 (hereinafter called an apparatus C), and a network 404. The apparatus A and the apparatus B each have a communication-parameter providing function and a structure as a providing apparatus illustrated in Figs. 1 and 2 described above. The apparatus C has a communication-parameter receiving function and a structure as a receiving apparatus illustrated in Figs. 1 and 3. The apparatus A and the apparatus B are joining in network 404.

[0048] The case where a setting button of the apparatus C is operated when the apparatus C joins in the ad-hoc network 404 including the apparatus A and the apparatus B will be considered. When the setting button is operated, each of the apparatus A and the apparatus B activates the communication-parameter automatic setting function and is activated as a providing apparatus for providing communication parameters. When the setting button is operated, the apparatus C activates the communication-parameter automatic setting function and is activated as a communication-parameter receiving apparatus.

[0049] Fig. 5 is a flowchart illustrating an operation when a providing apparatus receives a state notification message from another providing apparatus. When a providing apparatus receives a message by using wireless LAN communication, the process illustrated in Fig. 5 is started.

[0050] After the process is started, the providing apparatus determines whether the received message is a state notification message (S501).

[0051] When the received message is a message other than a state notification message, the process is terminated. When the received message is a state notification message, it is determined that there exists an apparatus being activated as a communication-parameter providing apparatus (or an apparatus that has completed and terminated a communication-parameter providing process), and the providing apparatus determines whether the providing apparatus itself is being activated as a communication-parameter

providing apparatus (S502).

[0052] When the providing apparatus is not being activated as a providing apparatus, the process is terminated. When the providing apparatus is being activated as a providing apparatus, since there is another apparatus that is being activated as a providing apparatus (or another apparatus that has completed a communication-parameter providing process), the providing apparatus stops operating as a providing apparatus (S503), and terminates the process.

[0053] In this manner, when the providing apparatus receives a state notification message and detects that another apparatus is being activated as a providing apparatus, the providing apparatus stops operating as a providing apparatus. Accordingly, when the other providing apparatus provides communication parameters to the receiving apparatus, the providing apparatus can be prevented from operating as a providing apparatus and uselessly and continuously operating as a providing apparatus.

[0054] Figs. 6 and 7 are sequence diagrams illustrating an operation of each apparatus in the present embodiment.

[0055] Fig. 6 illustrates an operation when a providing apparatus sends, as a state notification message, a start notification message that notifies a receiver of the fact that the providing apparatus has started message exchange with a receiving apparatus.

[0056] When the setting buttons of the apparatus A and the apparatus B are operated by the users, the apparatus A and the apparatus B each activate an operation as a communication-parameter providing apparatus (F601 and F602).

[0057] When the setting button of the apparatus C is operated by the user, the apparatus C activates an operation as a communication-parameter receiving apparatus and sends a search signal for detecting the presence of a providing apparatus (F603).

[0058] Upon receipt of the search signal sent from the apparatus C, the apparatus B sends a search response signal including self-information indicating that the apparatus B is a providing apparatus to the apparatus C (F604).

[0059] Upon receipt of the search response signal sent from the apparatus B, the apparatus C detects that the apparatus B is a providing apparatus by referring to the details of the search response signal. After the detection, the apparatus C joined in the network 404 and exchanges messages with the apparatus B, thereby receiving communication parameters of the network 404 from the apparatus B (F605).

[0060] When the apparatus B starts message exchange for providing communication parameters to the apparatus C, the apparatus B sends a start notification message to other devices joined in the network 404 (F606).

[0061] The apparatus A, which has received the start notification message, performs the state notification receiving process described with reference to Fig. 5, and stops operating as a communication-parameter providing apparatus (F607).

- [0062] Next, Fig. 7 illustrates an operation when a providing apparatus sends, as a state notification message, a completion notification message that notifies a receiver of the fact that providing of communication parameters to a receiving apparatus has been completed.
- [0063] When the setting buttons of the apparatus A and the apparatus B are operated by the users, the apparatus A and the apparatus B each activate an operation as a communication-parameter providing apparatus (F701 and F702).
- [0064] When the setting button of the apparatus C is operated by the user, the apparatus C is activated as a communication-parameter receiving apparatus and sends a search signal for detecting the presence of a providing apparatus (F703).
- [0065] Upon receipt of the search signal sent from the apparatus C, the apparatus B sends a search response signal including self-information indicating that the apparatus B is a providing apparatus to the apparatus C (F704).
- [0066] Upon receipt of the search response signal sent from the apparatus B, the apparatus C detects that the apparatus B is a providing apparatus by referring to the details of the search response signal. After the detection, the apparatus C joins in the network 404 and exchanges messages with the apparatus B, thereby receiving communication parameters of the network 404 from the apparatus B (F705).
- [0067] When the apparatus B completes providing communication parameters to the apparatus C, the apparatus B sends a completion notification message to other devices joined in the network 404 (F706).
- [0068] The apparatus A, which has received the completion notification message, performs the state notification receiving process described with reference to Fig. 5, and stops operating as a communication-parameter providing apparatus (F707).
- [0069] According to the present embodiment, even in the case where there exist multiple providing apparatuses that are participating in a network, when one providing apparatus that provides communication parameters sends a state notification message, the other apparatus can stop operating as a providing apparatus. Therefore, the other apparatus is prevented from uselessly and continuously operating as a providing apparatus, and the other apparatus can stop operating as a providing apparatus more quickly than a conventional equivalent apparatus. Accordingly, the risk of providing communication parameters to an unintended receiving apparatus can be reduced. Also, the user of the other providing apparatus can quickly perform other operations.
- [0070] When the providing apparatus stops operating as a communication-providing providing apparatus, the providing apparatus may notify, by using the display unit 105, the user of the fact that the providing apparatus stops operating as a providing apparatus since there exists another providing apparatus. When the providing apparatus receives the completion notification message, the providing apparatus may notify, by

using the display unit 105, the user of the fact that providing of communication parameters to the receiving apparatus has been completed.

- [0071] When the providing apparatus starts and/or completes its operation as a providing apparatus, the providing apparatus may send a state notification message(s). When state notification messages are sent at multiple times, the receiving possibility is increased even when a message reception error occurs. As a result, the providing apparatus can more reliably stop operating as a providing apparatus.
- [0072] In the foregoing description, the case where the communication-parameter providing apparatus sends a state notification message has been described. Next, the case where, when the setting button of the providing apparatus is operated, the providing apparatus sends, as a state notification message, an activation notification message that notifies a receiver of the fact that the providing apparatus is activating its operation as a communication-parameter providing apparatus will be described using Figs. 8, 9 and 10.
- [0073] Fig. 8 is a flowchart illustrating a second operation when a providing apparatus receives a state notification message from another providing apparatus. When a providing apparatus receives a message by using wireless LAN communication, the process illustrated in Fig. 8 is started.
- [0074] After the process is started, the providing apparatus determines whether the received message is a state notification message (S801).
- [0075] When the received message is a message other than a state notification message, the process is terminated. When the received message is a state notification message, it is determined whether the received state notification message is an activation notification message that notifies a receiver of the fact that the sender is being activated as a communication-parameter providing apparatus (S802).
- [0076] When the received state notification message is an activation notification message, state information indicating that another providing apparatus is being activated as a providing apparatus is stored in the storage unit 103 (S803), and the process is terminated. When the received state notification message is not an activation notification message, it is determined whether the received state notification message is a completion notification message that notifies a receiver of the fact that providing of communication parameters has been completed (S804).
- [0077] When the received state notification message is a completion notification message, the state information stored in the storage unit 103 is deleted (S805), and the process is terminated. When the received state notification message is not a completion notification message, the process is terminated.
- [0078] Fig. 9 is a flowchart illustrating an operation when the setting button 106 is operated in a providing apparatus.
- [0079] When the setting button 106 is operated, the providing apparatus refers to the storage

unit 103, and determines whether state information indicating that another communication apparatus is being activated as a providing apparatus is stored (S901).

[0080] When the state information is stored, the providing apparatus is not activated as a providing apparatus, and the process is terminated. When the process is terminated, the user may be informed of the fact that another apparatus is being activated as a providing apparatus by using the display unit 105. When the state information is not stored in the storage unit 103, the providing apparatus is activated as a communication-parameter providing apparatus (S902).

[0081] Fig. 10 is a sequence diagram illustrating an operation of each apparatus when an activation notification message is sent as a state notification message.

[0082] When the user operates the setting button of the apparatus A, the apparatus A is activated as a communication-parameter providing apparatus (F1001). After the activation, the apparatus A sends an activation notification message to other devices joined in the network 404 (F1002).

[0083] The apparatus B, which has received the activation notification message, performs the state notification receiving process described with reference to Fig. 8, and stores state information indicating that another communication apparatus has started operating as a providing apparatus (F1003).

[0084] Thereafter, when the user operates the setting button of the apparatus B, the apparatus B performs the process described with reference to Fig. 9, and deactivates the apparatus B as a communication-parameter providing apparatus (F1004).

[0085] Then, when the user operates the setting button of the apparatus C, the apparatus C is activated as a communication-parameter receiving apparatus, and sends a search signal for detecting the presence of a providing apparatus (F1005).

[0086] Upon receipt of the search signal sent from the apparatus C, the apparatus A sends a search response signal including self-information indicating that the apparatus A is a providing apparatus to the apparatus C (F1006).

[0087] Upon receipt of the search response signal sent from the apparatus A, the apparatus C detects that the apparatus A is a providing apparatus by referring to the details of the search response signal. After the detection, the apparatus C joins in the network 404 and exchanges messages with the apparatus A, thereby receiving communication parameters of the network 404 from the apparatus A (F1007).

[0088] When the apparatus A completes providing communication parameters to the apparatus C, the apparatus A sends a completion notification message to other devices joined in the network 404 (F1008).

[0089] The apparatus B, which has received the completion notification message, performs the state notification receiving process described with reference to Fig. 8, and deletes the stored state information (F1009).

- [0090] Accordingly, when an apparatus detects, from a state notification message, that another apparatus is being activated as a providing apparatus and stores information indicating that the other apparatus is being activated as a providing apparatus, the apparatus can be prevented from being uselessly activated as a providing apparatus.
- [0091] Therefore, even when multiple devices joining in a network are activated as providing apparatuses, a new device can be relatively safely added to the network. Also, a new device can be added to the network without degrading the ease of use of the providing apparatuses.
- [0092] Although the preferred embodiment of the present invention has been described above, this is for illustrative purposes only, and the scope of the present invention is not restricted to the embodiment. Various modifications can be made to the embodiment without departing from the gist of the present invention.
- [0093] The foregoing description concerns the case where the wireless LAN conforming to IEEE 802.11 is used by way of example. However, the present invention is applicable to other wireless media such as a wireless universal serial bus (USB), MultiBand Orthogonal frequency-division multiplexing (OFDM) Alliance (MBOA), Bluetooth (registered trademark), ultra-wideband (UWB), and Zigbee. Alternatively, the present invention is applicable to a wired communication medium such as a wired LAN.
- [0094] UWB includes a wireless USB, wireless 1394, WiNET, and the like.
- [0095] Although the network identifier, the encryption method, the encryption key, the authentication method, and the authentication key serve as communication parameters in the description of the foregoing embodiments, other information may serve as communication parameters. That is, communication parameters include other information.

Other Embodiments

- [0096] Aspects of the present invention can also be realized by a computer of a system or apparatus (or devices such as a CPU or MPU) that reads out and executes a program recorded on a memory device to perform the functions of the above-described embodiment(s), and by a method, the steps of which are performed by a computer of a system or apparatus by, for example, reading out and executing a program recorded on a memory device to perform the functions of the above-described embodiment(s). For this purpose, the program is provided to the computer for example via a network or from a recording medium of various types serving as the memory device (e.g., computer-readable medium).
- [0097] While the present invention has been described with reference to exemplary embodiments, it is to be understood that the invention is not limited to the disclosed exemplary embodiments. The scope of the following claims is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures and functions.

[0098] This application claims the benefit of Japanese Patent Application No. 2008-325795, filed December 22, 2008, and Japanese Patent Application No. 2009-234415, filed October 8, 2009, which are hereby incorporated by reference herein in their entirety.

Claims

- [Claim 1] A communication apparatus, comprising:
a providing means for operating as a providing apparatus that provides a communication parameter to a receiving apparatus that receives a provided communication parameter;
a receiving means for receiving, from another communication apparatus, a state notification of an operation as a providing apparatus of a communication-parameter; and
a control means for controlling an operation of the providing means as a providing apparatus in accordance with the state notification received by the receiving means.
- [Claim 2] The communication apparatus according to claim 1, wherein, upon receipt of a state notification indicating that another communication apparatus has started message exchange for providing a communication parameter with the receiving apparatus, the control means stops the operation as the providing apparatus.
- [Claim 3] The communication apparatus according to claim 1 or 2, wherein, upon receipt of a state notification indicating that another communication apparatus has completed providing a communication parameter to the receiving apparatus, the control means stops the operation as the providing apparatus.
- [Claim 4] The communication apparatus according to any one of claims 1 to 3, wherein, when it is determined that another communication apparatus is being activated as a providing apparatus that provides a communication parameter, the control means does not activate the providing means as the providing apparatus.
- [Claim 5] The communication apparatus according to any one of claims 1 to 4, further comprising a notification means for notifying of an activation state as the providing apparatus or a state in a communication-parameter providing process as the providing apparatus to another communication apparatus joined in a network.
- [Claim 6] A control method for a communication apparatus, comprising:
a providing step of operating as a providing apparatus that provides a communication parameter to a receiving apparatus that receives a provided communication parameter;
a receiving step of receiving, from another communication apparatus, a state notification of an operation as a providing apparatus of a commu-


nication-parameter; and

a control step of controlling an operation as a providing apparatus in the providing step in accordance with the state notification received in the receiving step.


[Claim 7] A computer program for causing a computer to perform the control method according to claim 6.

[Claim 8] A computer-readable storage medium storing the computer program according to claim 7.


[Fig. 1]

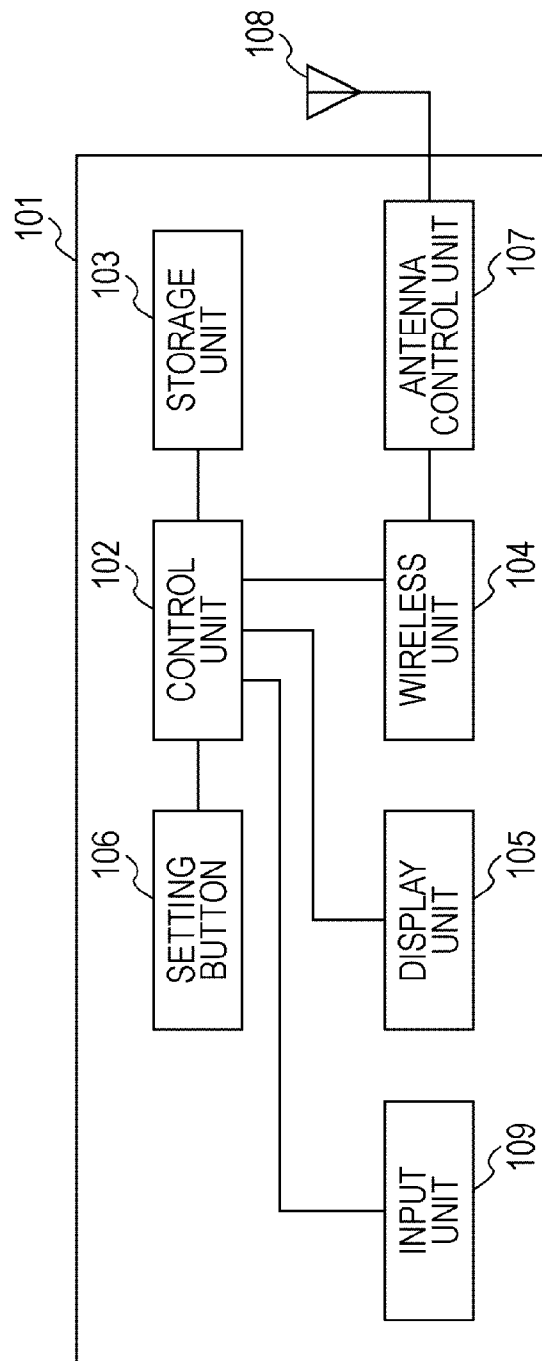


[Fig. 2]

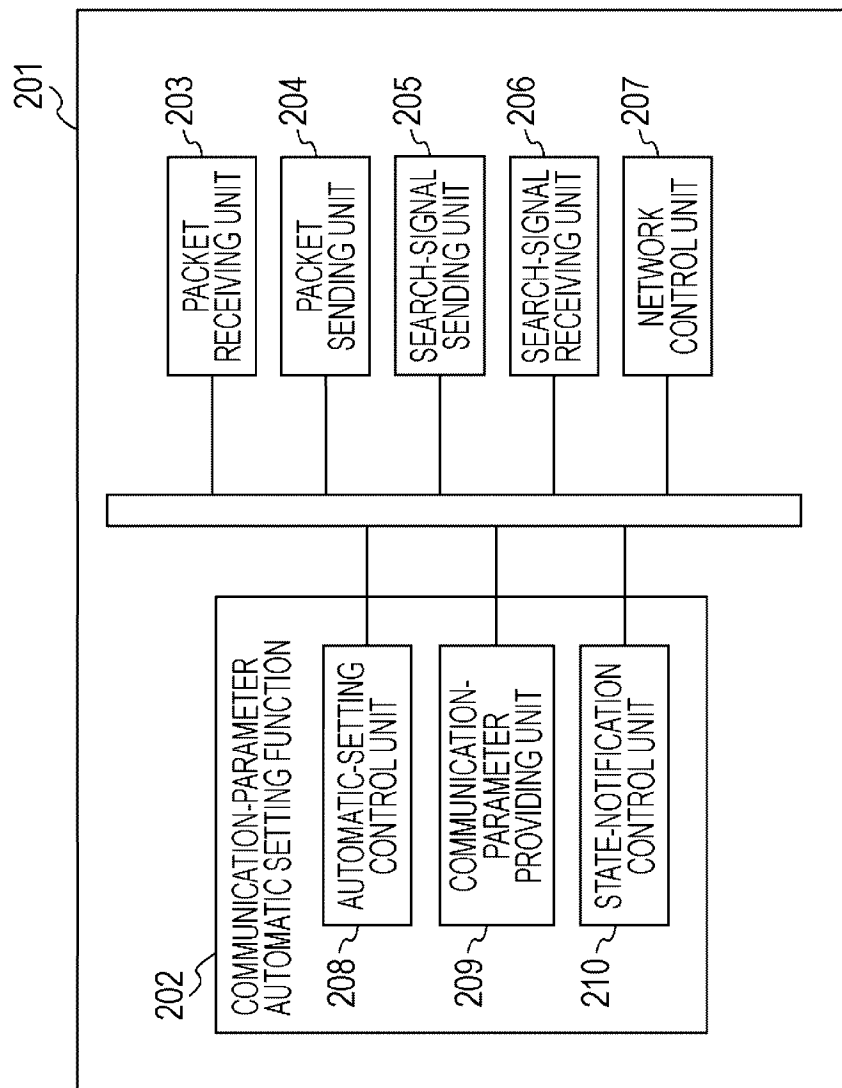


[Fig. 3]

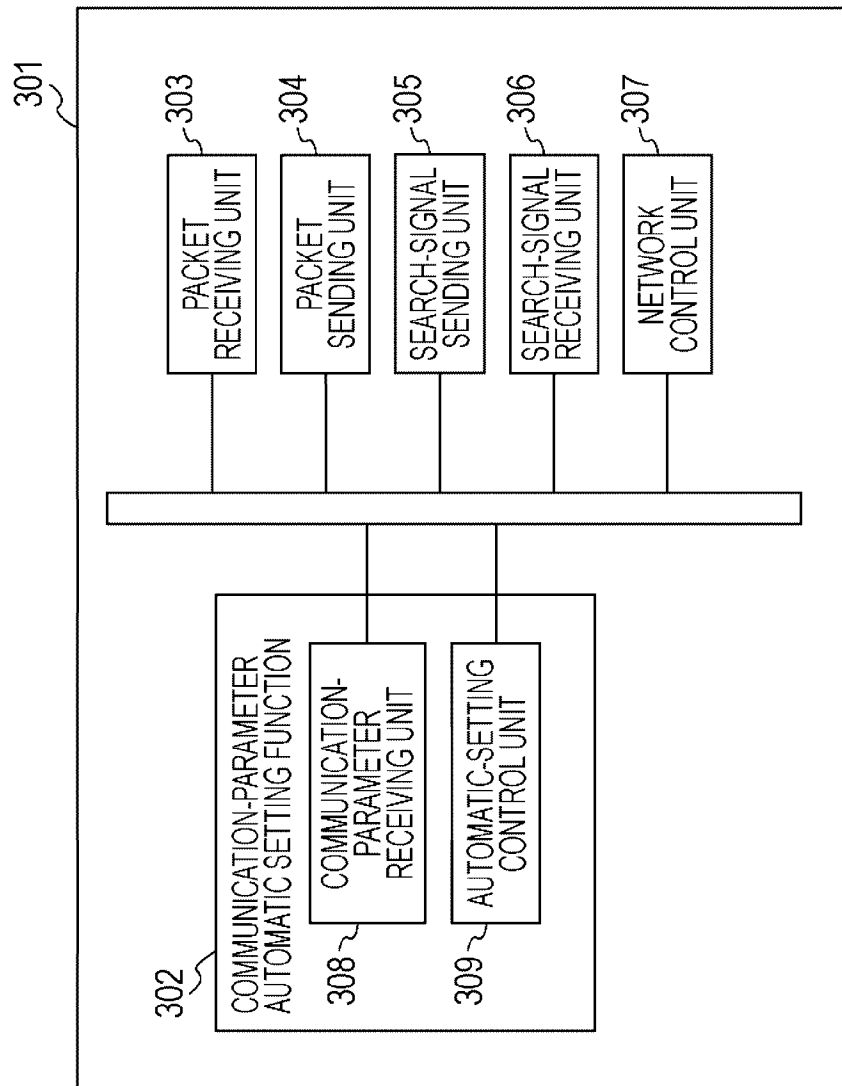


[Fig. 4]

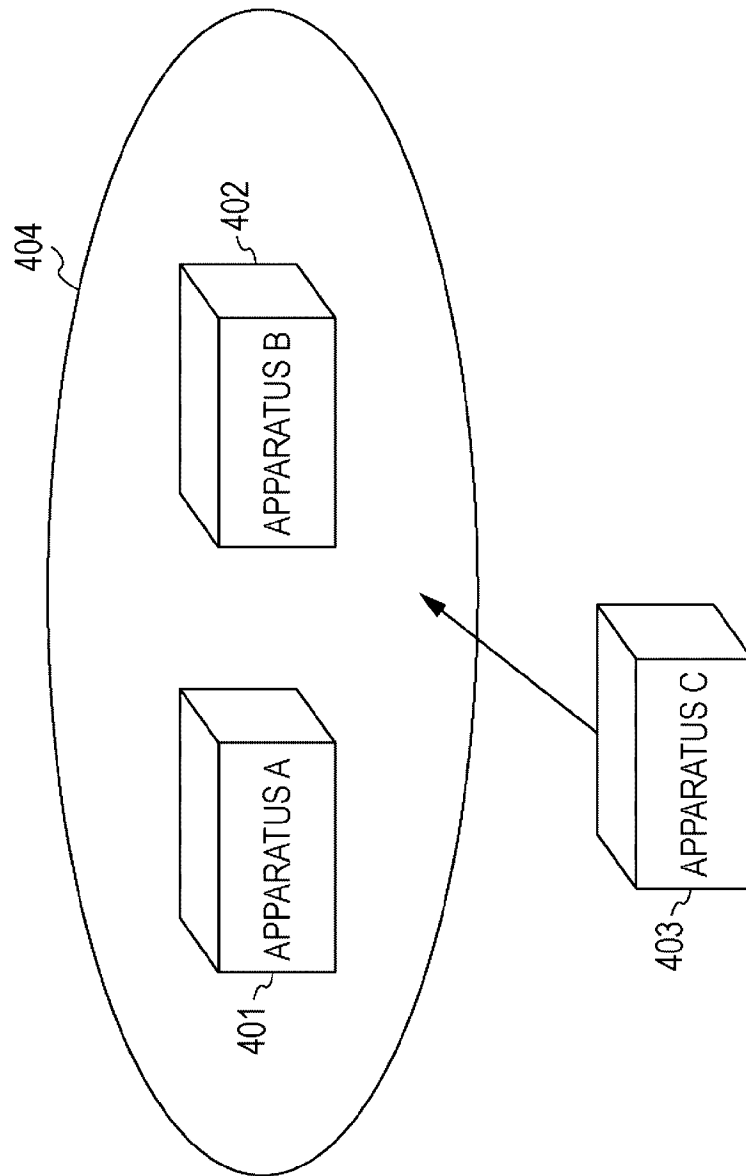


[Fig. 5]

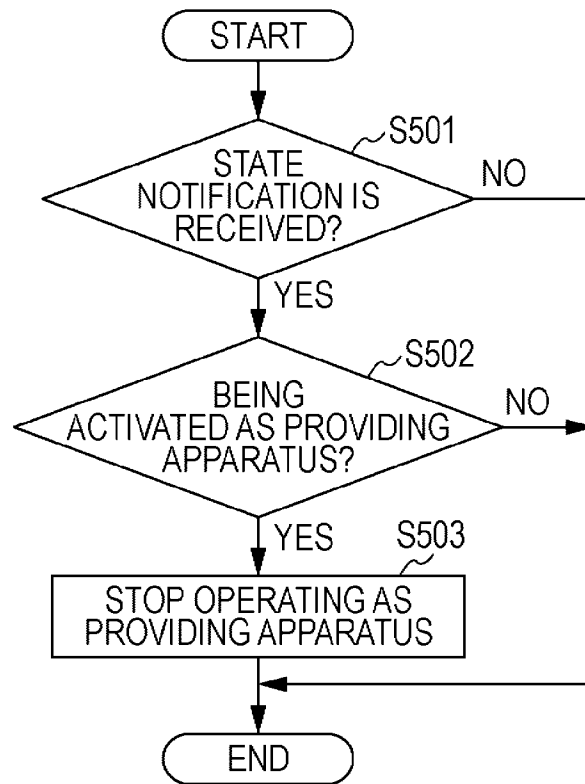


[Fig. 6]

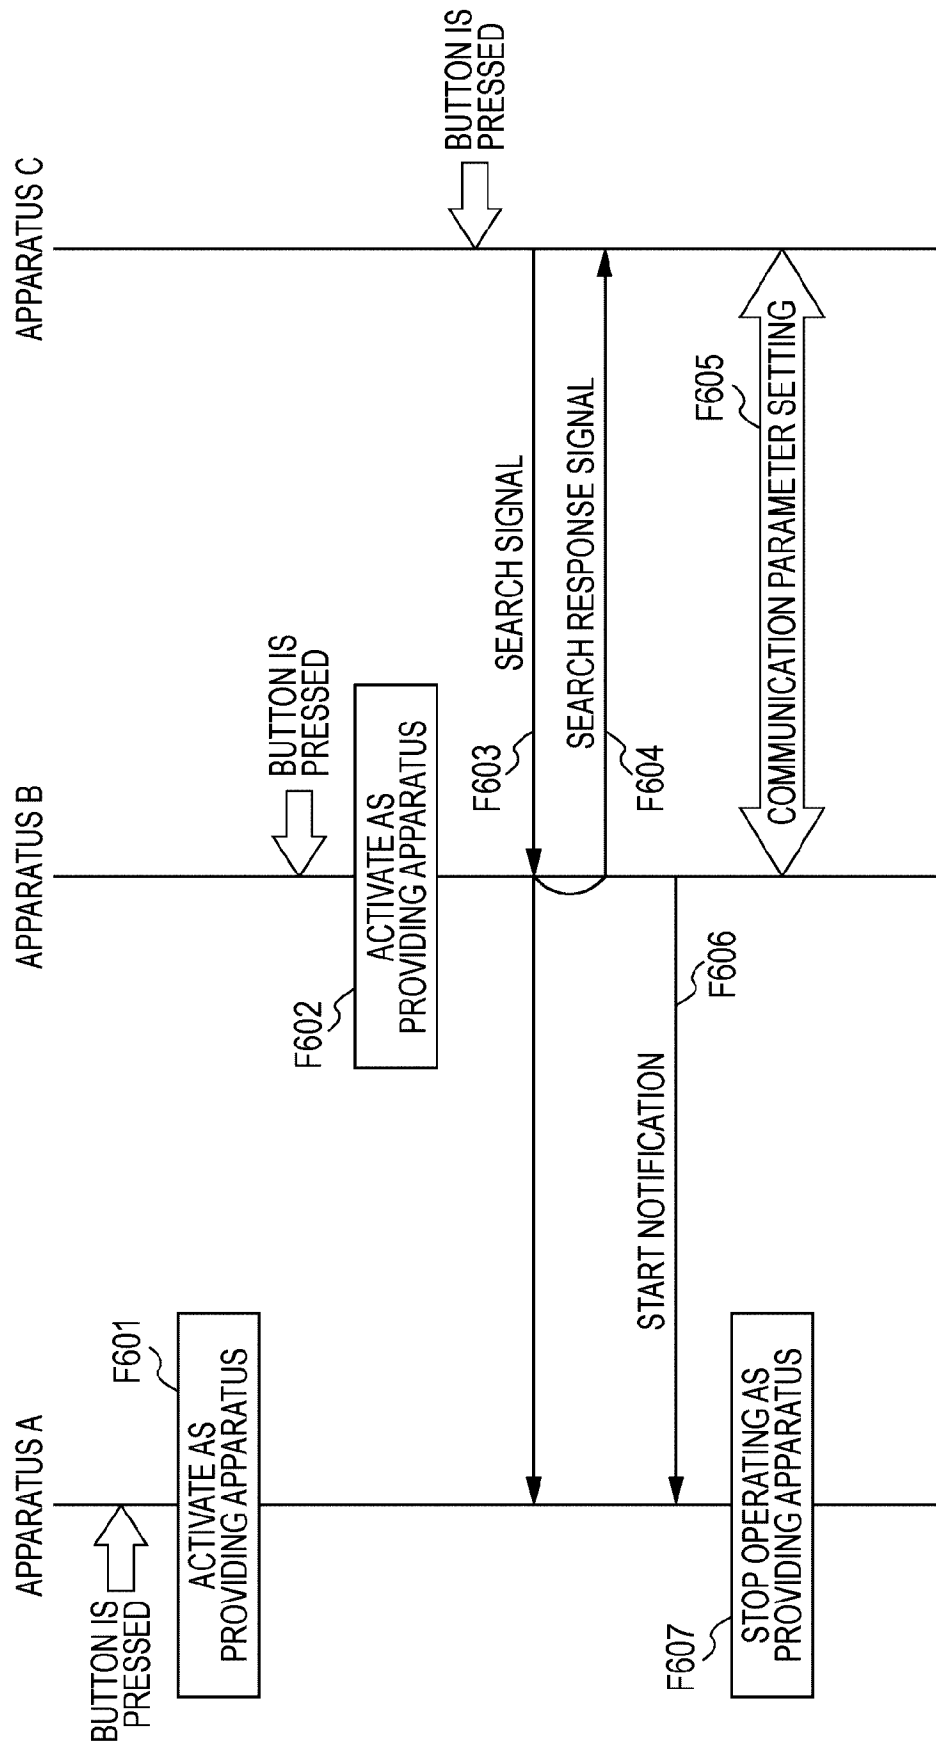


[Fig. 7]

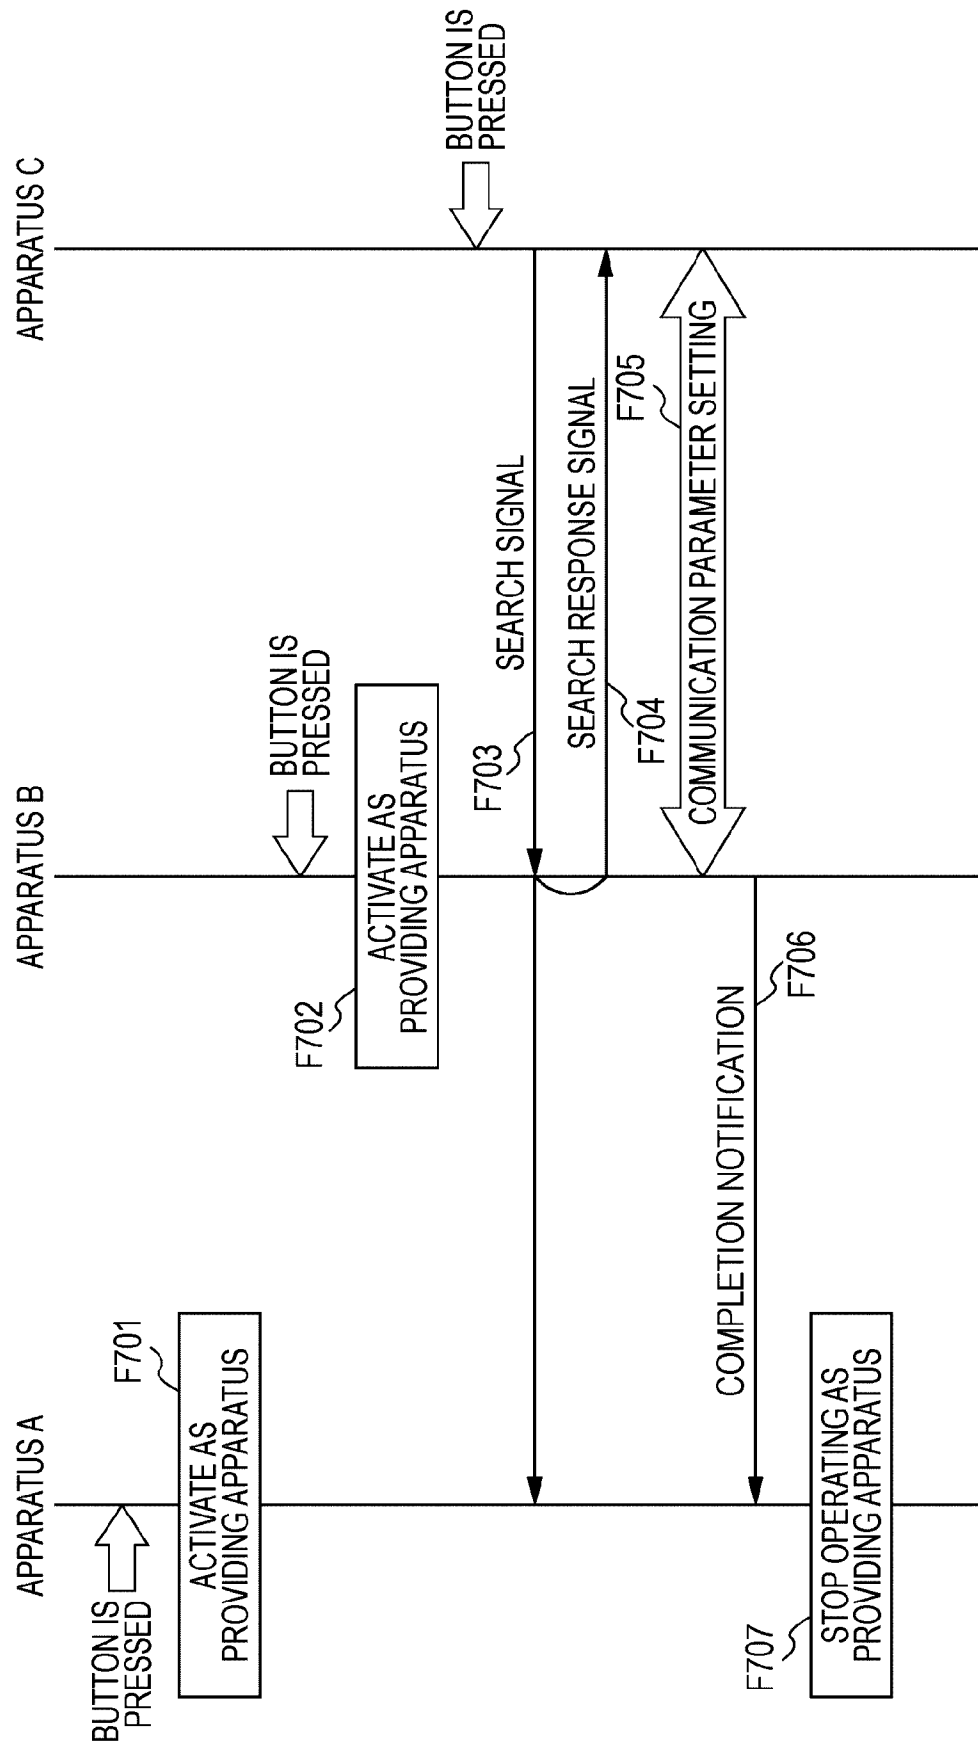


[Fig. 8]

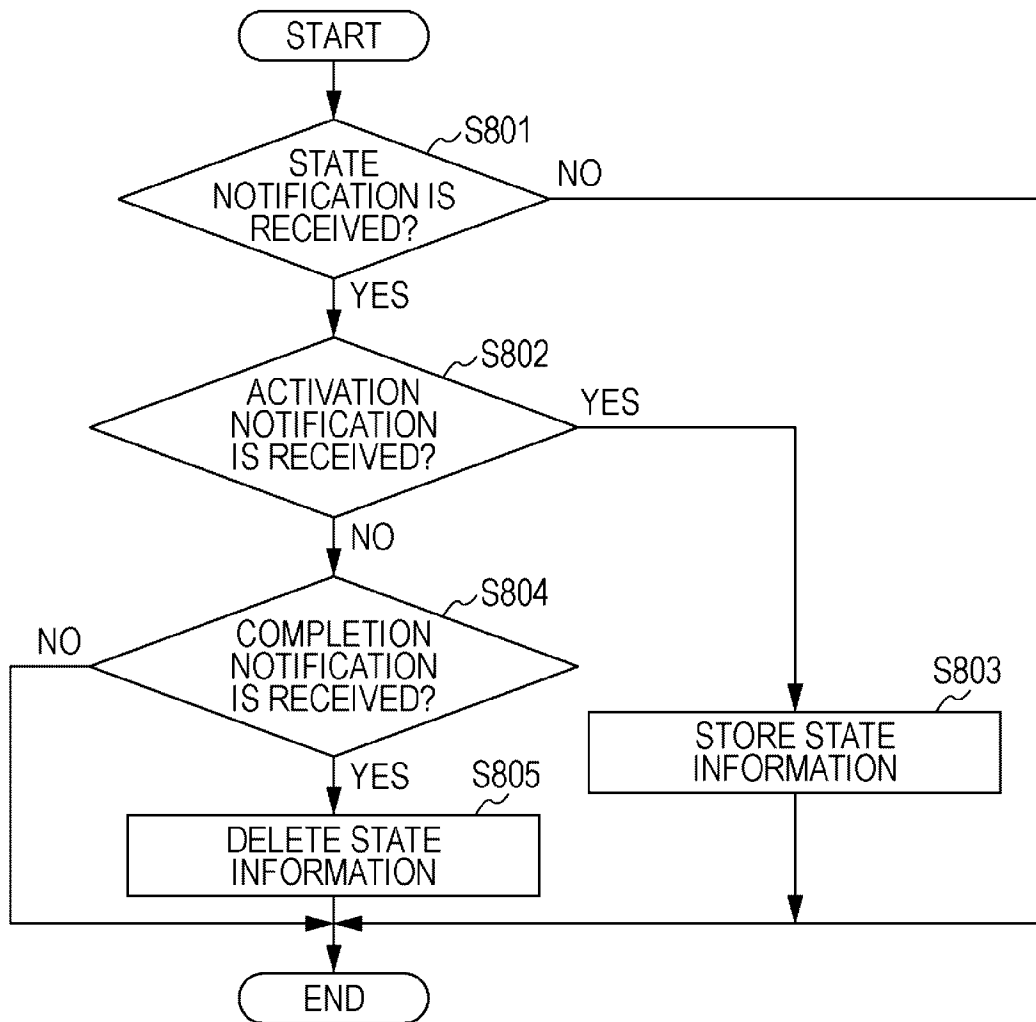

[Fig. 9]

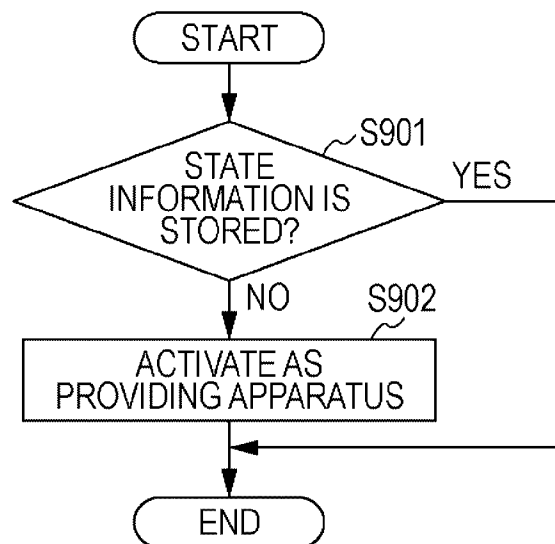

[Fig. 10]

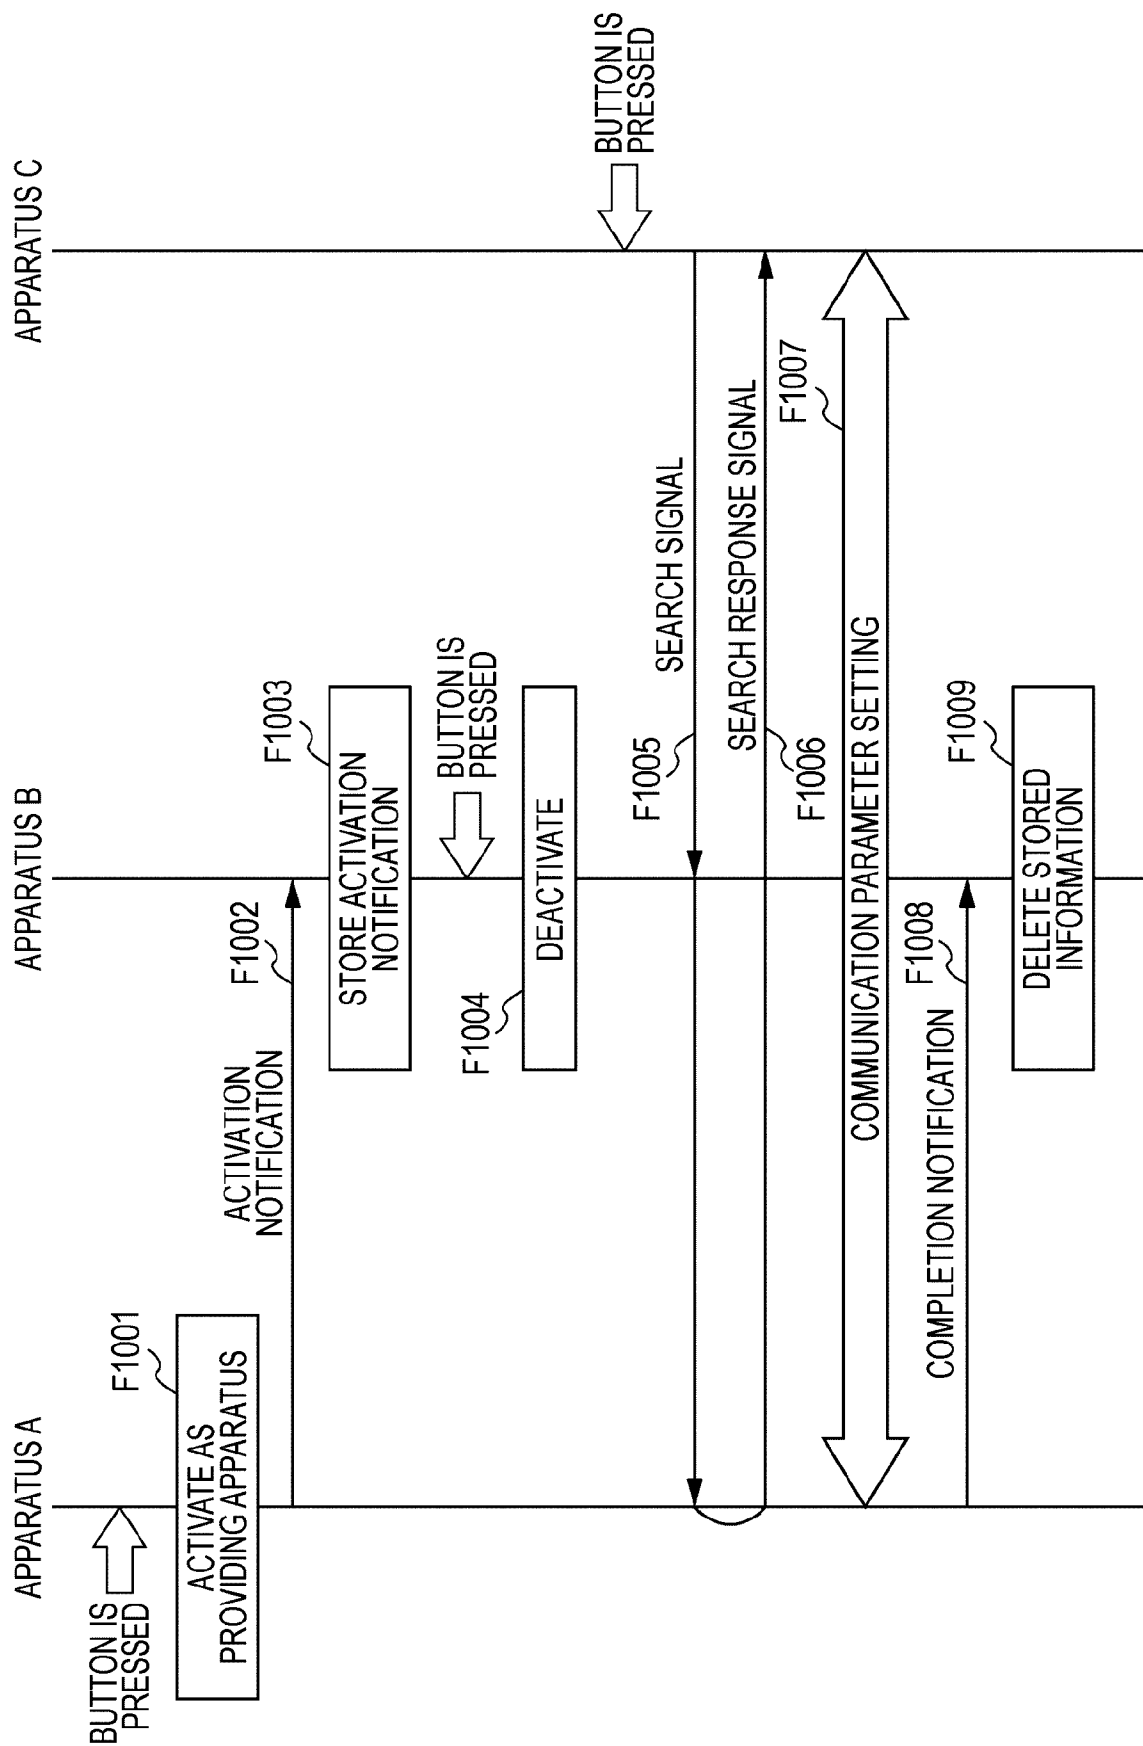

INTERNATIONAL SEARCH REPORT

International application No

PCT/JP2009/006912

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04W8/24 H04W84/18

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/050622 A1 (CANON KK [JP]; FUJII KEN-ICHI [JP]) 2 May 2008 (2008-05-02) figures 1-2 paragraph [0054] - paragraph [0058] paragraph [0024] - paragraph [0029] paragraph [0040] - paragraph [0064]	1-8
X	US 2008/037444 A1 (CHHABRA KAPIL [US]) 14 February 2008 (2008-02-14) paragraph [0009] paragraph [0014] paragraph [0016] - paragraph [0019] paragraph [0020] paragraph [0021] - paragraph [0022] paragraph [0038] - paragraph [0043] ----- -/--	1-8



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 April 2010

Date of mailing of the international search report

19/04/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Agante da Silva, P

INTERNATIONAL SEARCH REPORT

International application No

PCT/JP2009/006912

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 819 102 A1 (CANON KK [JP]) 15 August 2007 (2007-08-15) paragraph [0002] paragraph [0003] paragraph [0095] - paragraph [0101] paragraph [0109] - paragraph [0116] -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/JP2009/006912

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008050622 A1	02-05-2008	CN 101529818 A EP 2087652 A1 JP 2008109581 A KR 20090082437 A US 2010020706 A1	09-09-2009 12-08-2009 08-05-2008 30-07-2009 28-01-2010
US 2008037444 A1	14-02-2008	EP 2050010 A2 JP 2010500817 T WO 2008021077 A2	22-04-2009 07-01-2010 21-02-2008
EP 1819102 A1	15-08-2007	CN 101026520 A JP 2007215005 A KR 20070081433 A US 2007189322 A1	29-08-2007 23-08-2007 16-08-2007 16-08-2007