




(86) Date de dépôt PCT/PCT Filing Date: 2010/08/04
(87) Date publication PCT/PCT Publication Date: 2011/02/10
(45) Date de délivrance/Issue Date: 2012/07/17
(85) Entrée phase nationale/National Entry: 2011/06/16
(86) N° demande PCT/PCT Application No.: IB 2010/053535
(87) N° publication PCT/PCT Publication No.: 2011/016000
(30) Priorité/Priority: 2009/08/06 (IT VI2009A000211)

(51) Cl.Int./Int.Cl. *E05F 1/12* (2006.01),
E05D 11/10 (2006.01), *E05D 7/08* (2006.01),
E05F 3/10 (2006.01), *E05F 3/20* (2006.01)
(72) Inventeur/Inventor:
BACCHETTI, LUCIANO, IT
(73) Propriétaire/Owner:
GOSIO, DIANORA, IT
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : CHARNIERE POUR CHAMBRES FROIDES, BARRIERES PIVOTANTES OU SIMILAIRES
(54) Title: HINGE FOR COLD ROOMS, SWING GATES OR THE LIKE

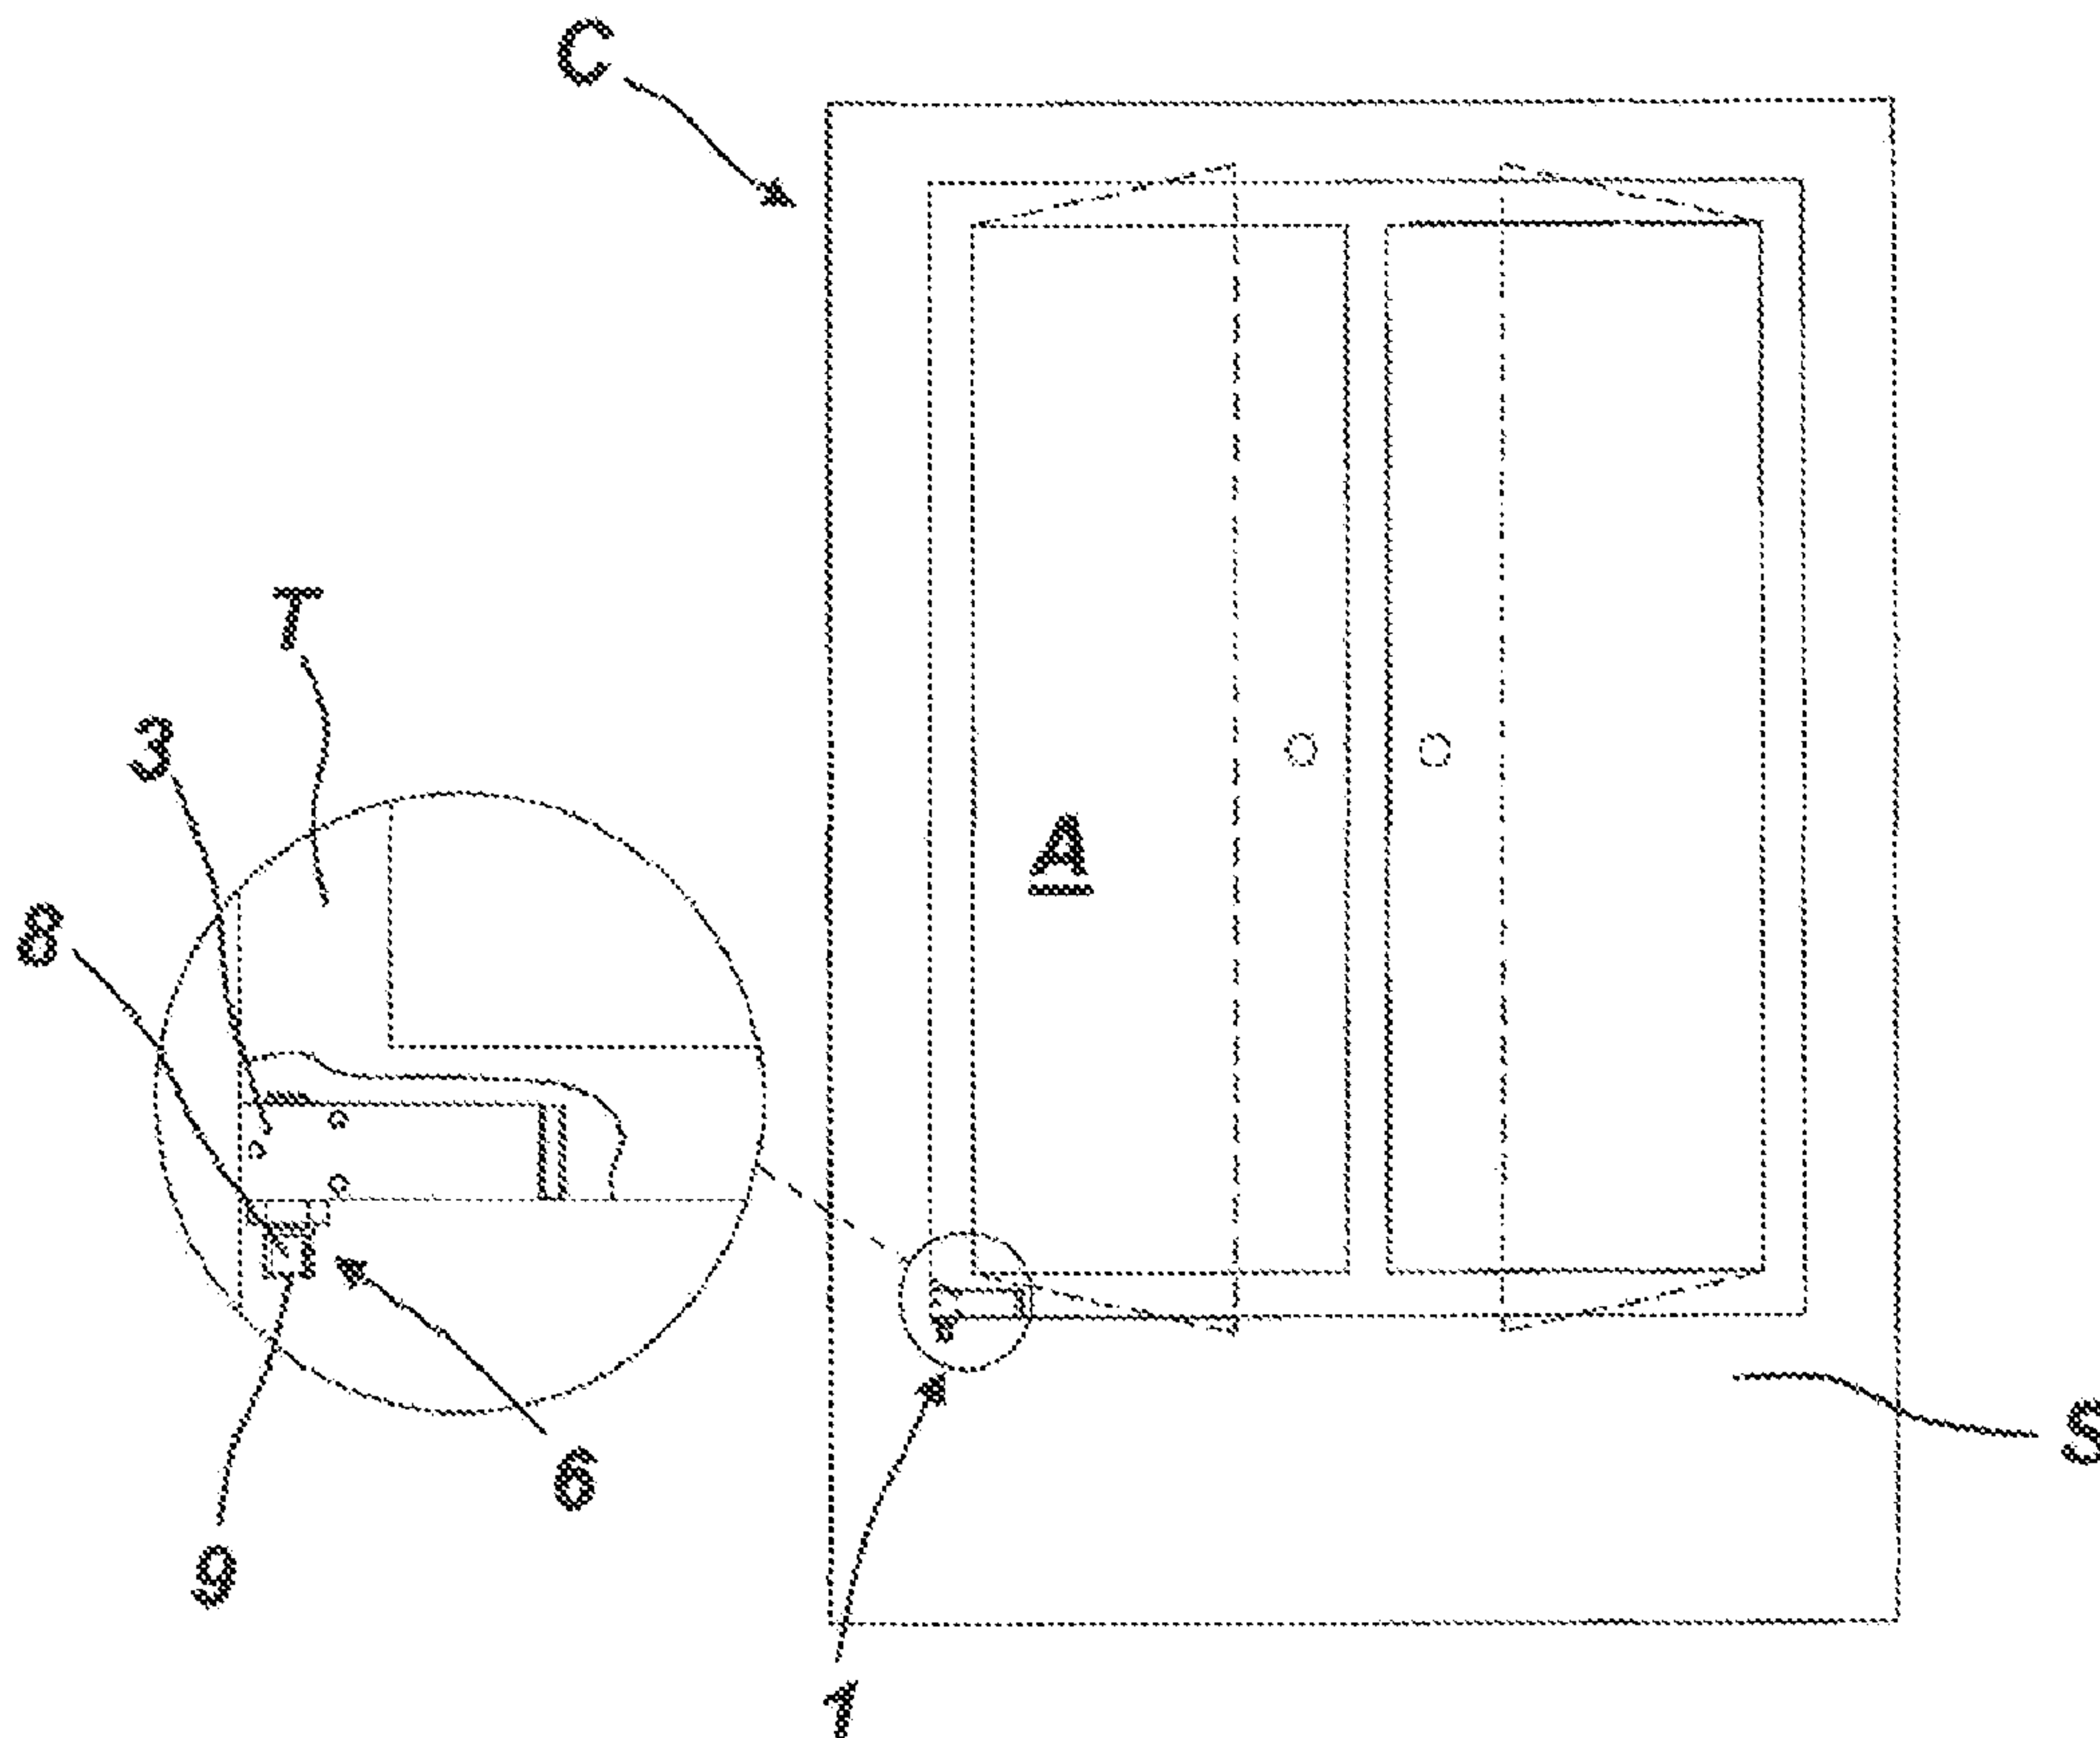

(57) Abrégé/Abstract:

A hinge for cold rooms, swing gates or the like, which comprise a stationary support structure (S) and at least a door (A) movable between an open door position and a closed door position. The hinge comprises a box-like hinge body (3) and a pin (5) reciprocally

(57) Abrégé(suite)/Abstract(continued):

rotatably coupled to rotate about a first axis (X) between the open door position and the closed door position. Closing means are provided (10) for automatically returning the door (A), as well as a working fluid acting thereon to hydraulically contrast their action. The closing means (10) comprise a cam element (11) unitary with said pin (5) interacting with a plunger element (12) housed in an operating chamber (25) defined within the box-like hinge body (3). The box-like hinge body (3) has an elongated shape to define a second axis (Y) perpendicular to the first one (X).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
10 February 2011 (10.02.2011)(10) International Publication Number
WO 2011/016000 A4

(51) International Patent Classification:

E05F 1/12 (2006.01) *E05D 7/08* (2006.01)
E05F 3/20 (2006.01) *E05F 3/10* (2006.01)
E05D 11/10 (2006.01)

(21) International Application Number:

PCT/IB2010/053535

(22) International Filing Date:

4 August 2010 (04.08.2010)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

VI2009A000211 6 August 2009 (06.08.2009) IT

(71) Applicant (for all designated States except US): **DIANO-
RA GOSIO** [IT/IT]; Via della Fonte, 9/C, I-25075 Nave
(BS) (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BACCHETTI, Lu-
ciano** [IT/IT]; Via della fonte, 9/C, I-25075 Nave (BS)
(IT).(74) Agents: **AUTUORI, Angelo** et al.; c/o Eureka IP Con-
sulting, Borgo Santa Lucia 31, I-36100 Vicenza (IT).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

Date of publication of the amended claims: 7 April 2011

(54) Title: HINGE FOR COLD ROOMS, SWING GATES OR THE LIKE

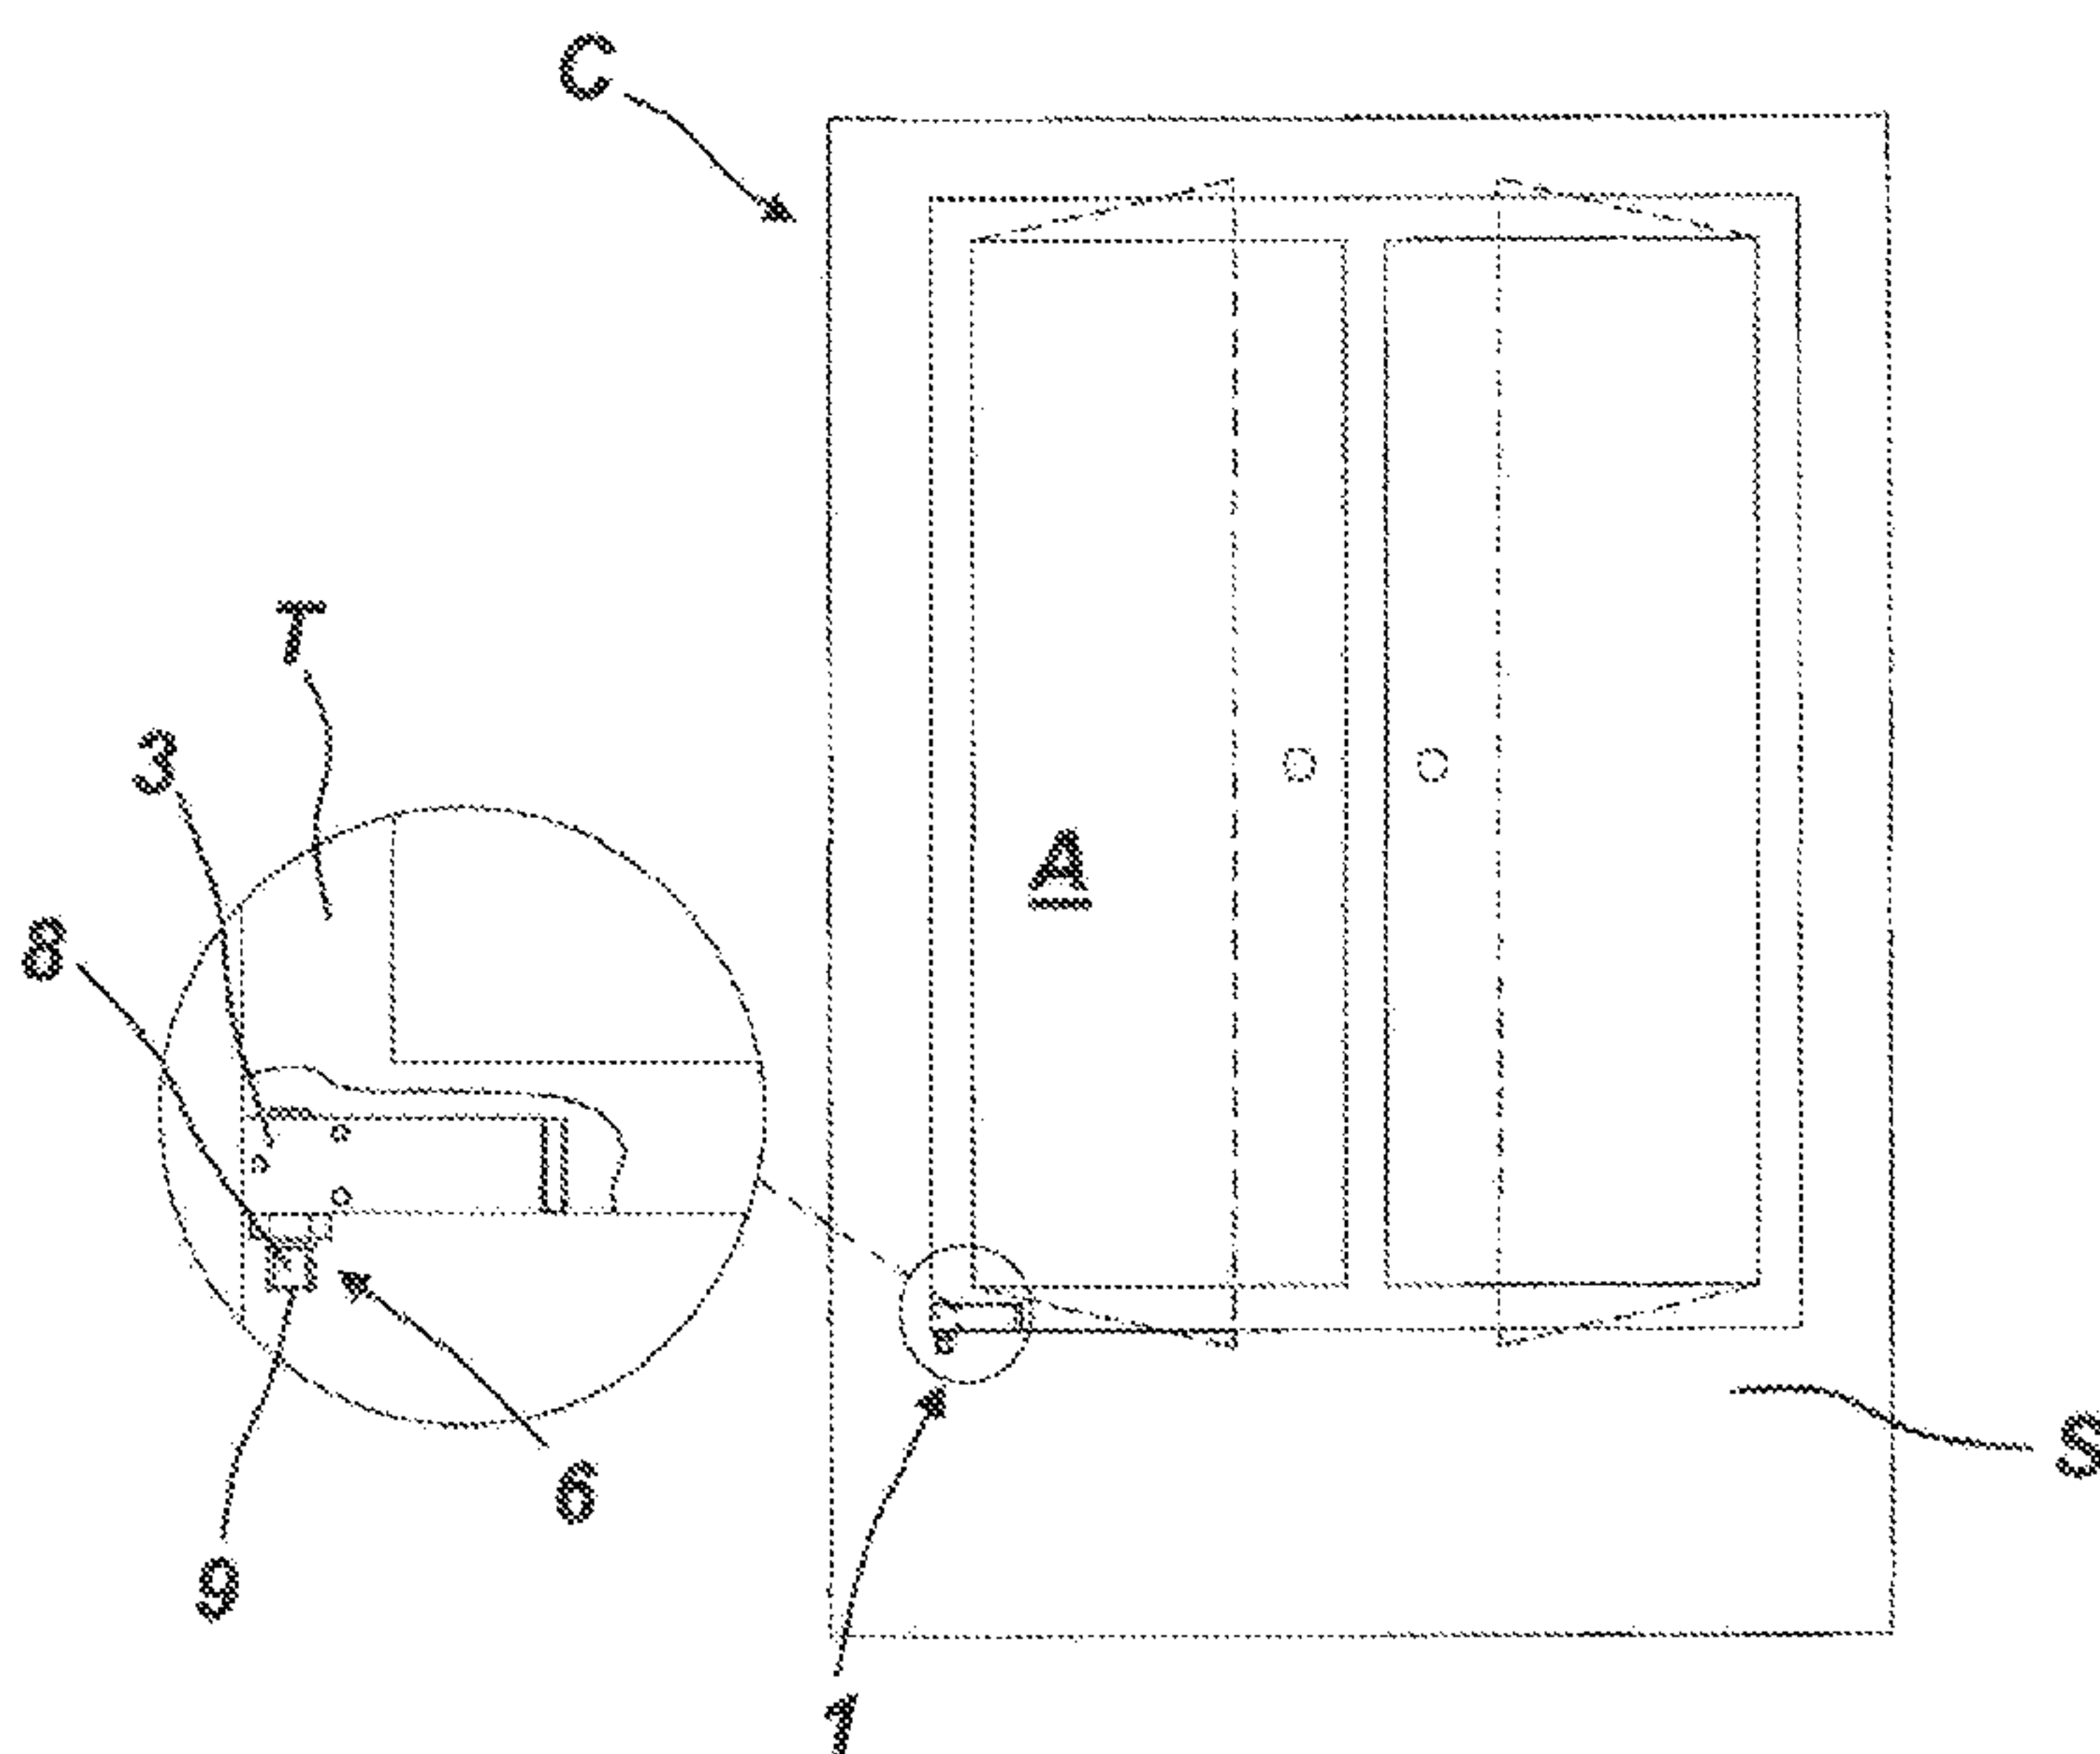


FIG. 1

(57) Abstract: A hinge for cold rooms, swing
gates or the like, which comprise a stationary sup-
port structure (S) and at least a door (A) movable
between an open door position and a closed door
position. The hinge comprises a box-like hinge
body (3) and a pin (5) reciprocally rotatably cou-
pled to rotate about a first axis (X) between the
open door position and the closed door position.
Closing means are provided (10) for automatically
returning the door (A), as well as a working fluid
acting thereon to hydraulically contrast their ac-
tion. The closing means (10) comprise a cam ele-
ment (11) unitary with said pin (5) interacting
with a plunger element (12) housed in an operat-
ing chamber (25) defined within the box-like
hinge body (3). The box-like hinge body (3) has
an elongated shape to define a second axis (Y)
perpendicular to the first one (X).

WO 2011/016000 A4

HINGE FOR COLD ROOMS, SWING GATES OR THE LIKE

Field of the invention

The present invention is generally applicable in the technical field of the closing hinges, and particularly relates to a hinge for cold
5 rooms, swing gates or the like.

Background of the invention

As known, closing hinges generally comprise a movable element, usually fixed to a door or the like, pivoted on a fix element, usually fixed to the support frame thereof.

10 Moreover, closing means acting on the movable element to automatically return the door or the like to the closed position are provided.

In the case of cold rooms, swing gates or the like, which comprise a stationary support structure and at least one door which
15 includes a substantially tubular frame to which a double-glazing unit is fixed, the hinges have both the movable and the fix elements visible from outside, external to both the door and the support structure. Such solution is uncomfortable, bulking, unaesthetic and not very effective.

Furthermore, the external position of such known hinges make
20 them extremely exposed to risks of damages and wear.

From the documents US7305797, US2004/206007 and EP1997994 hinges are known, in which the action of the closing means which ensure the return of the door to the closed position is not counteracted. Consequently the risk exists that the door strongly
25 impacts against the support frame, damaging itself.

From the document EP0407150 a door closer is known, which includes hydraulic damping means to counteract the action of the closing means. Such known device has extremely high bulking, therefore it has necessarily to be mounted on the floor.

30 The installation of such a device thus requires expensive and difficult break-in works of the floor, which have to be made by qualified operators.

Summary of the invention

A hinge for cold rooms or swing gates is provided. The hinge includes a stationary support structure and at least one door moveable between an open position and a closed position. The hinge includes a box-like hinge body anchorable to one between the stationary support structure and the door and a pin defining a first longitudinal axis anchorable to the other between the stationary support structure and the door. The pin and the box-like hinge body are reciprocally rotatably coupled to rotate around the first axis between the open door position and the closed door position. The hinge also includes closing means for the automatic return of the door from the open to the closed position. The hinge also includes a working fluid acting on the closing means to hydraulically counteract the action thereof, thus controlling the door rotation from the open position to the closed position. The closing means includes a cam element unitary with the pin interacting with a plunger element slidably moveable in an operating chamber within the box-like hinge body along a second axis substantially perpendicular to the first axis between a compressed end position corresponding to the open door position and an extended end position corresponding to the closed door position. The plunger element has a pushing head interacting with a substantially countershaped seat of the cam element. The closing means and the working fluid are both entirely housed in the operating chamber. The box-like hinge body has an elongated shape to define the second axis. The pushing head has a generally plate-like shape to define a plane substantially perpendicular to the first axis.

In a further embodiment, the plate-like pushing head has a first two substantially flat upper and lower walls. The countershaped seat includes a second two substantially flat upper and lower walls. The upper and lower walls of the first two substantially flat upper and lower walls face the corresponding upper and lower walls of the second two substantially flat upper and lower walls.

In a further embodiment, the upper and lower flat walls of the first two upper and lower flat walls and of the second two upper and lower flat walls are all substantially parallel to the second axis.

In a further embodiment, the pushing head has a front face have a predetermined height which is substantially equal to the distance between the upper and lower flat walls of the countershaped seat.

In a further embodiment, the front face is substantially flat and parallel to the first longitudinal axis and is susceptible to engage with a contact surface of the countershaped seat which is substantially flat and parallel to the first longitudinal axis.

In a further embodiment, the front face and the contact surface are substantially parallel to each other in the closed door position and are substantially perpendicular to each other in the open door position.

In a further embodiment, the closing means includes counteracting elastic means acting on the plunger element to promote the reciprocal interaction of the pushing head and countershaped seat. The operating chamber includes a first generally cylindrical portion having an axis coinciding with the second axis which houses the counteracting elastic means. The operating member also includes a second generally cylindrical portion having an axis coinciding with the first axis which houses the countershaped seat and a third generally parallelepiped-like shaped portion interposed between the first two portions, which houses the pushing head.

In a further embodiment of the invention, the parallelepiped-like shaped portion has a height lower than the inner diameter of the first cylindrical portion.

In a further embodiment of the invention, the pin is partially inserted in the box-like hinge body with a first portion outcoming from the box-like hinge body for the anchorage to the stationary support structure or to the door and a second portion within the box-like hinge body which includes the cam element.

In a further embodiment of the invention, the contact surface of the cam element is offset with respect to the first longitudinal axis of a predetermined distance so that the front face of the plunger element in the extended end position is located beyond the first longitudinal axis.

In a further embodiment, the contact surface has a distance from the first longitudinal axis comprised between 1 mm and 6 mm, preferably comprised between 1 mm and 3 mm and even more preferably close to 2 mm.

In a further embodiment of the invention, a mechanical blocking means is included, which mechanical blocking means acts on the closing means to counteract the action thereof so as to block the door in the open position when the plunger element is in the compressed end position.

In a further embodiment of the invention, the plunger element includes a substantially cylindrical back portion and a front portion defining the pushing head. The back portion is designed to separate the operating chamber into a first and second adjacent variable volume compartments in reciprocal fluidic communication.

In a further embodiment of the invention, the first and second variable volume compartments are designed to have in correspondence with the closed door position respectively the maximum and minimum volume. The counteracting elastic means are located in the first compartment.

In a further embodiment of the invention, the operating chamber includes control means for controlling the flow of the working fluid designed to allow the flow thereof from the first compartment to the second compartment upon the opening of the door and to allow the backflow from the second compartment to the first compartment upon the closing of the door.

In a further embodiment of the invention, the control means includes a hole passing through the pushing head so as to put into fluidic communication the first compartment and the second compartment and a check valve interacting with the passing through hole so as to allow the flow of the working fluid from the first compartment to the second compartment upon the opening of the door and to prevent the backflow thereof upon the closing of the door.

In a further embodiment, control means include at least one first hydraulic circuit interposed between the outer surface of the cylindrical back portion of the plunger element and the inner surface of the operating chamber for the control backflow of the working fluid from the second compartment to the first variable compartment upon the closing of the door.

In a further embodiment of the invention, the control means further includes first means for adjusting the flow of the working fluid in the at least one first hydraulic circuit in such a manner to adjust the rotation speed of the door from the open to the closed position.

In a further embodiment of the invention, the plunger element is housed with a predetermined clearance in the operating chamber. The at least one first hydraulic circuit includes the tubular interspaced between the outer surface of the cylindrical back portion of the plunger element and the inner surface of the operating chamber.

In a further embodiment of the invention, the control means further includes a tubular element interposed between the inner surface of the operating chamber and the cylindrical back portion of the plunger element. The plunger element is tightly housed in the tubular element and the tubular element is tightly housed in the operating chamber.

In a further embodiment of the invention, the tubular element has an outer lateral surface which includes a first substantially flat portion. The at least one first hydraulic circuit includes a first channel defined by the interspace between the inner surface of the operating chamber the first substantially flat portion.

In a further embodiment of the invention, the first substantially flat portion extends for the whole length of the outer lateral surface of the tubular element so that the at least one first channel is in fluidic communication with the first variable volume compartment.

In a further embodiment of the invention, the first means for adjusting the flow in the at least one first hydraulic circuit includes at least one second operating chamber internal to the box-like hinge body which has an inlet fluidically connected with the second variable compartment and an outlet fluidically connected with the at least one first channel. The at least one second operating chamber includes a first adjusting screw inserted in the second operating chamber to obstruct the passing section of the inlet and/or outlet, thus adjusting the rotation speed of the door from the open to the closed position.

In a further embodiment of the invention, the control means includes a second hydraulic circuit interposed between the outer surface of the cylindrical back portion of the plunger element and inner surface of the operating chamber for the control backflow of the working fluid from the second compartment to the first variable volume compartment upon the closing of the door. The control means further includes second means for adjusting the flow of the working fluid in the second hydraulic circuit so as to adjust the force by which the door reaches the closed position.

In a further embodiment of the invention, the outer lateral surface of the tubular element includes a second substantially flat portion. The second hydraulic circuit includes a second channel interposed between the inner surface of the operating chamber and the second substantially flat portion.

In a further embodiment of the invention, the first substantially flat portion and the second substantially flat portion of the outer lateral surface of the tubular element, respectively of the first channel and the second channel, are reciprocally opposite with respect to a plane passing through the first axis and second axis.

In a further embodiment of the invention, the second substantially flat portion extends only for a part of the length of the outer lateral surface of the tubular element. The tubular element includes a first passing through hole in proximity of an end of the second substantially flat portion facing the outer surface of the cylindrical back portion of the plunger element.

In a further embodiment of the invention, the second adjusting means in the second hydraulic circuit is designed to impart a latch action on the door towards the close position when the plunger element is in proximity to the extended end position.

In a further embodiment of the invention, the cylindrical back portion of the plunger element has a second passing through hole. The first and second passing through holes are reciprocally uncoupled when the plunger element is in proximity to the compressed end position and reciprocally coupled when the plunger element is in proximity to the extended end position to selectively put into fluidic communication the second channel with the first variable volume compartment so as to impart the latch action on to the door.

In a further embodiment of the invention, the second adjusting means in the second hydraulic circuit includes at least one third operating chamber internal to the box-like hinge body which has an inlet fluidically connected with the second variable volume compartment and a outlet fluidically connected with the at least one second channel. The second adjusting means includes a second adjusting screw housed in the third operating chamber so as to obstruct the passing section of the inlet and/or the outlet in such a manner to adjust the force by which the latch action is imparted to the door.

In a further embodiment of the invention, the box-like hinge body comprises a third channel for the fluidic connection of the second operating chamber and the third operating chamber.

Such objects, as well as others which will appear more clearly hereinafter, are fulfilled by a hinge according to claim 1.

The hinge according to the invention comprises a fix element, suitable to be anchored to a stationary support structure of a swing gate, a cold room or the like, and a movable element, suitable to be anchored to the movable door of the swing gate, cold room or the like.

The movable element is rotatably coupled to the fix one to rotate

on a longitudinal axis between an open door position and a closed door position.

The hinge comprises closing means acting on the movable element to automatically return the door to the closed position.

5 Furthermore, the hinge comprises a working fluid, generally oil, acting on the closing means to hydraulically counteract the action thereof, adjusting the rotation of the door from the open to the closed door position. The movable element, respectively the fix element, may comprise a box-like hinge body defining a operating chamber and
10 which may have elongated shape along an axis.

Thanks to such combination of features, the hinge may be hidden to the sight by inserting it within the tubular profile defining the frame of the door

of a cold room, a swing gate or the like, or within the stationary
15 support structure of the door.

The closing means and the hydraulically counteracting means are entirely housed in one single operating chamber, internal to the movable or to the fix element.

Thanks to such features, the hinge will be very compact and
20 effective, and with a strong aesthetic impact.

The closing means comprise a cam element, unitary with one between the fix and the movable element, which interacts with a plunger element, movable within the other of the fix and the movable elements and movable along an axis substantially perpendicular to the
25 rotation axis between the fix and movable element.

Thanks to such features, the hinge will have a minimum number of constituent parts, with great advantage of the bulkiness of the hinge.

Furthermore, by shaping the hinge in this manner, it can
30 maintain the exact closing position with time, by being also safe.

Such embodiment will allow to obtain a hinge which ensures the controlled movement of the door upon the opening, thus being greatly

safe and practical.

Due to bulkiness reasons, the operating chamber defined by the box-like hinge body may include the cam element as well as the plunger element.

5 In order to minimize the vertical bulkiness, the plunger element may have a generally plate-like shaped pushing head for defining a plane substantially perpendicular to the rotation axis of the fix and the movable element.

10 Appropriately, and independently from the shape of the pushing head of the plunger element, the latter may be configured so as to separate the operating chamber into a first and a second adjacent variable volume compartments in reciprocal fluidic communication, which may be designed to have in correspondence with the closed door position respectively the maximum and the minimum volume and
15 vice versa in the open door position the minimum and the maximum volume.

Advantageously, and independently from the shape of the pushing head of the plunger element, the operating chamber may comprise control means to control the flow of the working fluid to allow the flow
20 thereof from the first to the second compartment upon the opening of the door and from the second to the first compartment upon the closing of the door.

Thanks to such features, the hinge according to the invention will allow to hydraulically control the rotation upon the closing of very
25 heavy doors, by also minimizing the bulking.

Advantageously, and independently from the shape of the pushing head of the plunger element, the control means to control the flow of the working fluid may comprise an hydraulic circuit within the box-like hinge body for the controlled backflow of the working fluid from the
30 second to the first variable volume compartment upon the closing of the door.

Thanks to such features, the hinge according to the invention

will be extremely safe, because the reciprocal rotating movement of the fix and of the movable element is free upon closing. In fact, during the closing phase the control means will adjust the backflow of the working fluid from the second to the first variable volume compartment
5 independently from the reciprocal rotation of the fix and of the movable element, so that an user will be free to close the door with any speed without any danger of breaking the hinge and/or the door.

Appropriately, and independently from the shape of the pushing head of the plunger element, the control means to control the flow of
10 the working fluid may furthermore comprise first means for adjusting the flow of the working fluid in the hydraulic circuit, in such a manner to adjust the rotation speed of the door from the open to the closed position.

On the other side, independently from the shape of the pushing
15 head of the plunger element and from the presence – or the absence – of the first adjusting means, the control means to control the flow of the working fluid may comprise second means for adjusting the flow of the working fluid in the hydraulic circuit, in such a manner to adjust the torque with which the door reaches the closed position.

20 Appropriately, such second adjusting means may be designed to impart to the door a latch action towards the closed position when the plunger element is in proximity of the extended end position.

In a preferred but not exclusive embodiment, independently from the shape of the pushing head of the plunger element, the hinge may
25 comprise a first and a second hydraulic circuit.

In such embodiment the first hydraulic circuit may comprise first means for adjusting the flow of the working fluid, in such a manner to adjust the rotation speed of the door from the open to the closed position, whereas the second hydraulic circuit may comprise second
30 means for adjusting the flow of the working fluid in the hydraulic circuit, in such a manner to adjust the torque with which the door reaches the closed position, preferably designed to impart to the door a latch

action when the plunger element is in proximity of the extended end position.

Appropriately, a fluidic connection between the two circuits may be provided, so that the hinge has the same characteristics in both
5 opening senses of the door.

Advantageous embodiments of the invention are defined according to the dependent claims.

Brief description of the drawings

Further features and advantages of the invention will appear
10 more evident upon reading the detailed description of a few preferred, non-exclusive embodiments of a hinge according to the invention, which are described as non-limiting examples with the help of the annexed drawings, in which:

FIG. 1 is a schematic view of an embodiment of the hinge **1**
15 mounted within the tubular frame **T** of a door **A** of a cold room;

FIG. 2 is a schematic view of an embodiment of the hinge **1** mounted within the tubular frame **T** of the stationary support structure **S** of a swing gate **P**, having a movable door **A**;

FIG. 3 is an exploded view of a first embodiment of the hinge **1**;

20 **FIG. 4** is a sectional, partially exploded view of a few details of the hinge of FIG. 3;

FIG. 5A is a sectional view of the hinge of FIG. 2 in the closed door position;

25 **FIG. 5B** is a sectional view of the hinge of FIG. 2 in the open door position, taken along a plane **VB – VB** in FIG. 5A;

FIG. 6 is an exploded view of a second embodiment of the hinge **1**;

FIG. 7 is a sectional, partially exploded view of a few details of the hinge of FIG. 6;

30 **FIG. 8** is a sectional view of the hinge body **3** of the second embodiment of the hinge of FIG. 6, taken along a plane **VIII – VIII** in FIG. 7;

FIG. 9 is a sectional view of the hinge body **3** of the second embodiment of the hinge of FIG. 6, taken along a plane $IX - IX$ in FIG. 8;

FIGS. 10A, 10B and 10C are views of the tubular element **55** belonging to the second embodiment of the hinge shown in FIG. 6, respectively in axonometric projection, in section along a plane $XB - XB$ and in section along a plane $XC - XC$;

FIGS. 11A, 11B and 11C are views of the plunger element **12** belonging to the second embodiment of the hinge shown in FIG. 6, respectively in axonometric projection, in section along a plane $XI B - XI B$ and in section along a plane $XI C - XI C$;

FIG. 12A is a sectional view of the embodiment of the hinge of FIG. 6, in open door position, wherein the corresponding passing through holes **59** and **22'** of the tubular element **55** and of the plunger element **12** are reciprocally uncoupled;

FIG. 12B is a sectional view of the embodiment of the hinge of FIG. 6, in an intermediate position between the open and the closed door position, wherein the corresponding passing through holes **59** and **22'** of the tubular element **55** and of the plunger element **12** are reciprocally coupled, this latter position corresponding to the position wherein the door **A** latches towards the closed position in proximity of the extended end position;

FIG. 12C is a sectional view of the embodiment of the hinge of FIG. 6, in the closed door position.

Detailed description of a preferred embodiment

Referring to the above mentioned figures, the hinge according to the invention, generally indicated by numeral **1**, is advantageously applicable to cold rooms, outer swing gates or similar applications, which comprise a stationary support structure **S** and a door **A**, movable between an open door position and a closed door position.

Preferably, as visible in FIGS. 1 and 2, the hinge **1** may be partially or totally inserted in the tubular frame **T** of the door **A** or of the

support structure **S**. In this manner, it will be possible to install the hinge **1** easily and smoothly, avoiding for instance the break-in works which are necessary with the known solutions.

5 The hinge **1** may be used individually, with a simple hinge on the other end of the door **A**, or in a combination of two or more of said hinges.

FIG 1 shows, as a mere non-limiting example of the invention, an embodiment of the hinge **1**, which is hidden to the sight by inserting in the tubular frame **T** of the door **A** of cold room **C**, which has a support structure **S**.
10

FIG 2 shows, as a mere non-limiting example of the invention, a further embodiment of the hinge **1**, which is partially hidden to the sight by inserting within the tubular frame **T** of the stationary support structure **S** of a swing gate **P**, having a movable door **A**.

15 Although in such embodiments the hinge **1** is horizontally inserted in the frame **T**, it is understood that such hinge can be also vertically inserted in the frame **T**.

FIGS. from 3 to 5B show a first embodiment of the hinge according to the invention, particularly but non-exclusively suitable for cold rooms, whereas FIGS from 6 to 13C show a second embodiment of the hinge according to the invention, particularly but non-exclusively suitable for swing gates.
20

Where not differently specified, in the description below technical features common to both embodiments will be indicated.
25 Such common features may be for convenience designated by a single reference numeral.

In particular, the hinge **1** will comprise a box-like hinge body **3** rotatably coupled to a pin **5**, in such a manner to rotate about a first longitudinal axis **X**, which may be substantially vertical.

30 In the embodiment of FIG. 1 the box-like body **3** is anchored to the door **A** of the cold room **C** to define the movable element of the hinge **1**, whereas the pin **5** is anchored to the stationary support

structure **S** of the id hinge to define the fix element thereof.

Vice versa, in the embodiment of FIG. 2 the box-like body **3** is anchored to the stationary support structure **S** of the swing gate **P** to define the fix element of the hinge **1**, whereas the pin **5** is anchored to the door **A** of the fix element to define the movable element.

The pin **5**, which may have elongated shape to define the axis **X**, may be partially inserted in the box-like hinge body **3**, so as to have a first portion **6** outcoming from said box-like hinge body and a second portion **7** internal to the body **3**. The first and the second portion may be monolithic, as they are both part of the same pin **5**.

The first portion **6** may have a fastener **8** insertable in a countershaped housing **9**, realized in the stationary support structure **S** in the example of FIG. 1 and in the door **A** in the example of FIG. 2.

In this manner an user, opening the door **A** of the cold room **C** or of the swing gate **P**, will cause the reciprocal rotation of the box-like hinge body **3** and of the pin **5** around the axis **X**.

In order to ensure the automatic closing of the door **A** once opened, closing means may be provided, generally indicated with **10**, acting on the movable element of the hinge **1** to automatically return the door **A** to the closed position.

A working fluid, generally oil, acting on the closing means **10** to hydraulically counteract the action thereof, may be furthermore provided.

By suitably controlling the action of the working fluid, it will be possible to control the rotation of the door **A** from the open to the closed position. This will allow, for example, to prevent the door **A** from strongly impact with the frame.

More generally, the hinge according to the invention ensures a controlled movement of the door upon the opening as well as upon the closing thereof.

In fact, upon the opening, the controlled movement will prevent the door from suddenly opening, so as to protect both the door itself

and a possible user who is in the corresponding action area. Appropriately, the closing means **10** may comprise a cam element, generally designed by numeral **11**, unitary with the pin **5**, and more precisely made in correspondence with the inner portion **7** of the pin **5**.

5 As used herein, the term "cam" means a mechanical part, having any configuration, suitable to change a circular motion into a rectilinear motion.

10 The cam element **11** will interact with a plunger element, designated by the numeral **12**, slidably movable within the box-like hinge body **3**.

15 More precisely, the plunger element **12** may slide along a second axis **Y**, which may be substantially perpendicular to the first axis **X**, horizontal in the present example, between a compressed end position, corresponding to the open door position, shown in FIGS. 5B and 12A, and an extended end position, corresponding to the closed door position, shown in FIGS 5A and 12C.

20 The plunger element **12** may have a substantially plate-like shaped pushing head **13**, interacting with a substantially counter-shaped seat **14** of the cam element **11**. Appropriately, the counter-shaped seat **14** may be made in the inner portion **7** of the pin **5**.

Advantageously, the pushing head **13** of the plunger element **12** may define a plane π , substantially perpendicular to the first axis **X**.

25 Thanks to such configuration, the bulk of the hinge body, in particular the vertical one, will be extremely minimized. This will simplify the insertion thereof in the frame **T** of the door **A** or of the stationary support structure **S** to hidden it to the sight.

In particular, the plate-like shaped pushing head **13** of the plunger element **12** may have a flat upper wall **15**, a flat lower wall **15'** and, possibly, a substantially flat front face **16**.

30 In particular, the flat upper and lower walls **15**, **15'** may be substantially parallel to the second axis **Y**, whereas the front face **16** may be parallel to the first axis, and may have a height **h**.

The countershaped seat **14** may comprise a flat upper wall **17** facing a flat lower wall **17'** and, possibly, a substantially flat front contact surface **18**, suitable to interact and contact engage with the front face **16** of the plunger **12**.

5 It is understood that the pushing head **13** may have any shape, as long as substantially plate-like, without departing from the scope of protection of the invention defined by the terms of the appended claims. For instance, the pushing head **13** may be substantially wedge-shaped, with converging upper and lower walls **15**, **15'**.

10 As visible in FIGS. 5A and 12C, in the closed door position, i.e. when the plunger **12** is in the extended end position, the front contact surface **18** of the countershaped seat **14** of the cam **11** may be in contact and parallel with the front face **16** of the pushing head **13** of the plunger **12**.

15 Vice versa, as visible in FIGS. 5B and 12A, in the open door position, i.e. when the plunger **12** is in the compressed end position, the front contact surface **18** of the countershaped seat **14** of the cam **11** may be perpendicular to the front face **16** of the pushing head **13** of the plunger **12**.

20 The front contact face **18** may be parallel to the first axis **X**, whereas the flat upper and lower walls **17**, **17'** may be substantially parallel to the second axis **Y**, and may have a distance **h'**.

Advantageously, the height **h** of the front face **16** of the pushing head **13** of the plunger element **12** may be substantially coincident
25 with the distance **h'** between the upper and lower flat walls **17**, **17'** of the countershaped seat of the cam **11**, except for the clearance.

Appropriately, the upper and lower flat walls **15**, **15'** of the pushing head **13** of the plunger **12** may face the upper and lower flat walls **17**, **17'** of the countershaped seat **14** of the cam **11**.

30 The cam element **11** as well as the plunger element **12** may be housed in a single cylindrical operating chamber **25**, made within the box-like hinge body **3** and defined thereby.

Further, the box-like hinge body **3** may have an elongated shape along the axis **Y** to allow the insertion thereof in the tubular frame **T** of the door **A** or of the support structure **S** to make it not visible from the outside, as shown, respectively, in FIGS. 1 and 2.

5 In other words, the box-like hinge body **3** may develop mainly in in length along the axis **Y**, with the length dimension higher than the other two dimensions.

To promote the pushing of the head **13** of the plunger **12** against the countershaped seat **14** of the pin **5**, that is to promote the
10 interaction between the front face **16** and the contact surface **18**, counteracting elastic means may be provided, which may comprise, respectively consist of, a spring **19**, acting on the plunger element **12**.

Appropriately, the operating chamber **25** may comprise a first generally cylindrical portion **32** having an axis coincident with the
15 second axis **Y**, a second generally cylindrical portion **33** having an axis coincident with the first axis **X** and a third generally parallelepiped-like portion **34**, interposed between the first two portions.

The first cylindrical portion **32**, having an inner diameter **D**, may house the spring **19**. The second cylindrical portion **33** may house the
20 countershaped seat **14** of the cam element **11**. The third parallelepiped-like **34** may have an height **h''**, substantially coincident with the height **h** of the pushing head **13** of the plunger element **12**, to house the pushing head.

The height **h''** may be remarkably lower, for example about the
25 half, of the inner diameter **D** of the first cylindrical portion **32**, so as to allow to minimize the bulk of the box-like hinge body **3**. This will simply the hiding by insertion thereof in the frame **T** of the door **A** or of the stationary support structure **S**.

Advantageously, the contact surface **18** of the cam element **11**
30 may be offset with respect to the axis **X** of a predetermined distance **d**, such as the front face **16** of the plunger element **12** in its extended end position, illustrated in FIGS. 5A and 12A, is positioned beyond said

axis **X**.

Suitably, the surface **16** may have a distance **d** from the axis **X** which may be comprised between 1 mm and 6 mm, preferably comprised between 1 and 3 mm and even more preferably close to 2
5 mm. Thanks to such feature, the closing movement of the hinge will be completely automatic. In other words, the plunger element **12** will start to work after few rotation degrees, starting from the open position.

Advantageously, the first embodiment of the hinge **1**, illustrated in the FIGS. from 3 to 5B, may comprise mechanical blocking means
10 acting on the closing means **10** to counteract the action thereof, so as to stop the door **A** in the closed door position.

In such preferred but non-exclusive embodiment, such mechanical blocking means may consist of a blocking element **20**, unitary with the pin **5**, interacting with a beating member **21**, vertically
15 housed in the box-like hinge body **3**.

The relative position of the blocking element **20** and of the beating member **21** may be such as the closed door **A** position corresponds to the extended end position of the plunger **12**. Furthermore, by appropriately adjusting the respective position of the
20 blocking element **20** and of the beating member **21** it will be possible to provide a right as well as a left hinge.

Advantageously, in both embodiments illustrated in the annexed figures, the closing means **10** and the hydraulic damping fluid, generally oil, may be both entirely housed in the operating chamber
25 **25**. The plunger element **12** may comprise a substantially cylindrical back portion **22**, and a front portion defining the pushing head **13**.

As particularly visible in FIGS. 5A, 12A, 12B and 12C, the cylindrical back portion **22** is susceptible to separate the operating chamber **25** into a first and a second adjacent variable volume
30 compartment **23**, **24** fluidically connected. The contrasting spring **19** may be housed in the first compartment **23**.

As particularly visible in the figures, the first compartment **23**

may have its maximum volume in correspondence with the closed door position and its minimum volume in correspondence with the open door position, and the opposite for the second compartment **24**.

Advantageously, the operating chamber **25** may comprise
5 control means to control the flow of the working fluid to allow the flow thereof from the first compartment **23** to the second one **24** upon the opening of the door **A** and to allow the flow thereof from the second compartment **24** to the first one **23** upon the closing of the door.

In both embodiments illustrated in the annexed figures, such
10 control means may comprise a check valve **26**, designed so as to allow the flow of the working fluid from the first compartment **23** to the second compartment **24** through the hole **27** passing through the pushing head **13** upon the opening of the door **A**, and to prevent the backflow of the working fluid upon the closing of the door **A**.

15 With this purpose the check valve **26**, interacting with the passing through hole **27**, may be of the butterfly type, with the butterfly **28** housed in the compartment **29** in correspondence with the inlet of the passing through hole **27**.

This way, when the door is opened, that is when it passes from
20 the closed door position illustrated in FIGS. 5A and 12C to the open door position illustrated in FIGS. 5B and 12A, the working fluid flows from the first compartment **23** to the second compartment **24**, by causing the butterfly element **28** axially slide in the compartment **29** and later flows through the hole **27** into the second compartment **24**.

25 Vice versa, when the door is closed, that is when it passes from the open position illustrated in FIGS. 5B and 12A to the closed position illustrated in FIGS. 5A and 12C, the butterfly element **28** will axially slide in the direction opposite to the opening one and will prevent the backflow of the working fluid through the hole **27**.

30 In order to allow the controlled backflow of the working fluid from the second compartment **24** to the first compartment **23** upon the closing of the door **A**, the means for controlling the flow of the working

fluid may comprise at least one first hydraulic circuit **50** interposed between the outer surface **30** of the upper cylindrical portion **22** of the plunger element **12** and the inner surface **31** of the operating chamber **25**.

5 Thanks to such features, the hinge will be extremely safe, because the reciprocal rotating movement of the fix and of the movable element is free upon its closing. In fact, upon the closing phase, the oil will flow from the second compartment **24** to the first one **23** independently from the reciprocal rotation speed of the fix and
10 movable elements.

 In this manner, a user will be free to close the door **A** with any speed without any danger to break the hinge or the door. On the other hand, the speed with which the oil flows back into the compartment **23** will be adjusted by adjusting the passing sections of the first hydraulic
15 circuit **50**.

 In the first embodiment illustrated in the FIGS. from 3 to 5B, the first hydraulic circuit **50** may be defined by the tubular interspace between the outer surface **30** of the cylindrical back portion **22** of the cam element **12** and the inner surface **31** of the operating chamber **25**.

20 To this end, the plunger element **12** may be housed with a predetermined clearance in the operating chamber **25**. The size of the respective clearance between these two elements will substantially adjust the return speed of the door **A** to its closed position. In such embodiment, at least one hole **35** may be provided for the filling of the
25 working fluid.

 In the second embodiment illustrated in the FIGS. from 6 to 12C, the return of the door **A** to its closed position may take place in a substantially different way from the first embodiment.

30 As particularly visible in FIG 6, in fact, in such second embodiment the means for controlling the flow of the working fluid may comprise a tubular element **55**, interposed between the inner surface **31** of the operating chamber **25** and the cylindrical back portion **22** of

the plunger element **12**.

The tubular element **55** may have an external lateral surface **56** which includes a first substantially flat portion **57**, made for example by milling.

5 Appropriately, therefore, the first hydraulic circuit **50** may comprise a first channel **60** which may be defined by the interspace between the inner surface **3** of the operating chamber **25** and the first flat portion **57** of the tubular element **55**.

10 Advantageously, the flat portion **57** may extend for the whole length of the external lateral surface **56** of the tubular element **55**, so that the first channel **60** has an end in fluidic communication with the first variable volume compartment **23**. In order to facilitate the backflow of the working fluid in this latter compartment the flat portion **57** may comprise a cutting **57'**.

15 In order that the oil flows through the channel **60** and not elsewhere upon the closing of the door **A**, the plunger element **12** may be tightly housed within the tubular element **55**, whereas this latter may be tightly housed within the operating chamber **25**. With this purpose, the respective tolerances between such elements will have to
20 be very slight.

 Appropriately, the control means to control the flow of the working fluid within the operating chamber **25** may comprise first adjusting means to adjust the flow of the working fluid in the first hydraulic circuit **50**, so as to adjust the rotation speed of the door **A**
25 from the open to the closed position.

 Advantageously, such first adjusting means in the first hydraulic circuit **50** may comprise at least one second inner operating chamber **65** within the box-like hinge body **3**, which may have an inlet **66** fluidically connected to the second variable volume **24** and an outlet
30 **67** fluidically connected with the first channel **60**, which is in turn fluidically connected with the first variable volume **23**.

 The first hydraulic circuit **50** for the backflow of the working fluid

from the second variable volume compartment **24** to the first variable volume compartment **23** may therefore consist of both of such compartments, as well as of the first channel **60** and of the second operating chamber **65**.

5 Appropriately, this latter may comprise a first adjusting screw **68**, that can be operated by a suitable wrench **69**, housed in the second chamber **65** to obstruct the passing section of the inlet **66** and/or of the outlet **67**, this way adjusting the rotation speed of the door **A**.

10 In the preferred but non-exclusive embodiment illustrated in FIGS. from 6 to 12C, the control means to control the flow of the working fluid may comprise a second hydraulic circuit **70**, interposed between the outer surface **30** of the cylindrical back portion **22** of the plunger element **12** and the inner surface **31** of the operating chamber
15 **25**, such as the first hydraulic circuit **50**.

Suitably, such second hydraulic circuit **70** may comprise a second channel **75**, which may be defined by the interspace between the inner surface **31** of the operating chamber **25** and a second substantially flat portion **58** of the external lateral surface **56** of the
20 tubular element **55**.

The first and the second substantially flat portions **57**, **58** of the outer lateral surface **56** of the tubular element **55** may be reciprocally opposite with respect to a plane π' passing through the first and second axis **X**, **Y**, such as the first and second channel **60**, **75**.

25 The means for controlling the flow of the working fluid may further comprise second means for adjusting the flow of the working fluid in the second hydraulic circuit **70**, so as to adjust the force by which the door **A** reaches its closed position.

Preferably, such second adjusting means may be designed to
30 impart a latch action to the door **A** towards the closed position when the plunger element is in proximity of the extended end position, as illustrated in FIG. 12B.

With this aim, the second substantially flat portion **58** may extend for a part of the length of the outer lateral surface **56** of the tubular element **55**.

Advantageously the second substantially flat **58** may furthermore
5 comprise, in proximity of one of its ends, a single passing through hole or port **59** facing the outer surface **30** of the cylindrical back portion **22** of the plunger element **12**.

On the other hand, the cylindrical back portion **22** of the plunger element **12** may have a second passing through hole or port **22'**,
10 movable between a first position, illustrated in FIG. 12A and corresponding to the open door position (wherein the plunger element **12** is in proximity of its extended end position), wherein the hole **22'** is uncoupled from the first passing through hole **59** of the tubular element **55**, and a second position, illustrated in FIG. 12B and in
15 proximity of the closed door position (wherein the plunger element **12** is in proximity of its compressed end position), wherein the hole **22'** is coupled with the first passing through hole **59** to selectively put into fluidic communication the second channel **75** with the first variable volume compartment **23**, this way imparting the latch action to the door
20 **A** towards the closed position.

In other words, the reciprocal positions of the passing through holes **59** and **22'**, respectively made in the tubular element **55** and in the cylindrical portion **22** of the plunger element **12**, have to be such that the passing through holes are coupled when the plunger element
25 **12**, during its alternative movement along the axis **Y**, is in the proximity of the extended end position, as visible in FIG. 12B.

In fact, when the plunger element **12** is in its compressed end position, corresponding to the open door position, the two holes **59** and **22'** are reciprocally far and uncoupled so that the working fluid
30 flowing in the second channel **75** in its backflow cycle towards the first compartment **23** is hindered by of the outer surface **30** of the cylindrical back portion **22** of the plunger element **12**.

As soon as the two holes **5** and **22'** are reciprocally coupled, as visible in FIG. 12B, such obstacle is removed, so that the fluid can suddenly fill the compartment **23** causing the impulsive push of the pushing head **13** towards the countershaped seat **14**, which imparts
5 the latch action to the door towards the closed position.

In order to adjust the impulsive force which causes the latch action, the second hydraulic circuit **70** may comprise a third operating chamber **80** within the box-like hinge body **3**.

Such third chamber **80** may have an inlet **81** fluidically
10 connected with the second variable volume compartment **24** and an outlet **82** fluidically connected with the second channel **75**, which is in turn selectively put in fluidic communication by the coupling of the holes **59** and **22'** of the tubular element **55** and of the cylindrical portion of the plunger element **12**.

15 The second hydraulic circuit **70** for the return of the working fluid from the second variable volume compartment to the first compartment **23** may therefore consist of both of these compartments, as well as of the second channel **75** and of the third operating chamber.

Appropriately, this latter chamber may comprise a second
20 adjusting screw **83**, which may be operated by the same wrench **69** which operates the first adjusting screw **68**.

The second adjusting screw **83** may be housed in the third operating chamber **80** to obstruct the passing section of the inlet **81** and/or of the outlet **82**, so as to adjust the force by which the door **A**
25 latches to its closed position.

Appropriately, as visible in FIG. 8, the box-like hinge body **3** may comprise a third channel **90** for the fluidic connection of the second operating chamber **65** and of the third operating chamber **80**. In particular, the third channel **90** may put into fluidic communication the
30 inlet **66** of the second chamber **65** with the inlet **81** of the third chamber **80**.

Thanks to such feature, the hinge **1** will compensate possible

lacks of balance in the oil circulation, so that the hinge 1 works in the same way in both opening directions of the door A.

From the above description, it is apparent that the hinge according to the invention fulfils the intended objects.

5 The hinge according to the invention is susceptible to many changes and variants, all falling within the inventive concept expressed in the annexed claims. All particulars may be replaced by other technically equivalent elements, and the materials may be different according to the needs, without departing from the scope of
10 of the invention.

Although the hinge has been particularly described referring to the annexed figures, the reference numbers used in the description and claims are used to improve the intelligence of the invention and do not constitute any limit to the claimed scope.

CLAIMS

1. A hinge for cold rooms or swing gates, which comprises a stationary support structure and at least one door movable between an open position and a closed position, the hinge comprising:

- a box-like hinge body anchorable to one between the stationary support structure and the door and a pin defining a first longitudinal axis anchorable to the other between the stationary support structure and the door, said pin and said box-like hinge body being reciprocally rotatably coupled to rotate around said first axis between the open door position and the closed door position;
- closing means for the automatic return of the door from the open to the closed position;
- a working fluid acting on said closing means to hydraulically counteract the action thereof, thus controlling the door rotation from the open position to the closed position;

wherein said closing means comprise a cam element unitary with said pin interacting with a plunger element slidably movable in an operating chamber within said box-like hinge body along a second axis substantially perpendicular to said first axis between a compressed end position, corresponding to the open door position and an extended end position, corresponding to the closed door position, said plunger element having a pushing head interacting with a substantially countershaped seat of said cam element;

wherein said closing means and said working fluid are both entirely housed in said operating chamber;

wherein said box-like hinge body has elongated shape to define said second axis, said pushing head having a generally plate-like shape to define a plane substantially perpendicular to said first axis.

2. Hinge according to claim 1, wherein said plate-like pushing head has a first two substantially flat upper and lower walls, said countershaped seat comprising a second two substantially flat upper and lower walls, the upper and lower walls of said first two substantially flat upper and lower walls facing the corresponding upper and lower walls of said second two substantially flat upper and lower walls.

3. Hinge according to claim 2, wherein the upper and lower flat walls of said first two upper and lower flat walls and said second two upper and lower flat walls are all substantially parallel to said second axis.

4. Hinge according to claim 3, wherein said pushing head has a front face having a predetermined height which is substantially equal to the distance between said upper and lower flat walls of said countershaped seat.

5. Hinge according to claim 4, wherein said front face is substantially flat and parallel to said first longitudinal axis and is susceptible to engage with a contact surface of said countershaped seat which is substantially flat and parallel to said first longitudinal axis.

6. Hinge according to claim 5, wherein said front face and said contact surface are substantially parallel to each other in said closed door position and are substantially perpendicular to each other in said open door position.

7. Hinge according to any one the claims 1 to 6, wherein said closing means comprise counteracting elastic means acting on said plunger element to promote the reciprocal interaction of said pushing head and said countershaped seat, said operating chamber comprising a first generally cylindrical portion having an axis coinciding with said second axis which houses said counteracting elastic means, a second generally cylindrical portion having axis coinciding with said first axis which houses said countershaped seat, and a third generally parallelepiped-like shaped portion, interposed between the first two portions, which houses said pushing head.

8. Hinge according to claim 7, wherein said third parallelepiped-like shaped portion has a height lower than the inner diameter of said first cylindrical portion.

9. Hinge according to any one the claims 1 to 8, wherein said pin is partially inserted in said box-like hinge body with a first portion outcoming from said box-like hinge body for the anchorage to the stationary support structure or to the door and a second portion within said box-like hinge body which comprises said cam element.

10. Hinge according to any one the claims 1 to 9, wherein said contact surface of said cam element is offset with respect to said first longitudinal axis of a predetermined distance so that the front face of said plunger element in the extended end position is located beyond said first longitudinal axis.

11. Hinge according to claim 10, wherein said contact surface has a distance from said first longitudinal axis comprised between 1 mm and 6 mm, preferably comprised between 1 mm and 3 mm and even more preferably close to 2 mm.

12. Hinge according to any one the claims 1 to 11, comprising mechanical blocking means acting on said closing means to counteract the action thereof so as to block the door in said open position when said plunger element is in said compressed end position.

13. Hinge according to any one the claims 1 to 12, wherein said plunger element comprises a substantially cylindrical back portion and a front portion defining said pushing head, said back portion being designed to separate said operating chamber into a first and a second adjacent variable volume compartments in reciprocal fluidic communication.

14. Hinge according to claim 13, wherein said first and second variable volume compartments are designed to have in correspondence with said closed door position respectively the maximum and minimum volume, said counteracting elastic means being located in said first compartment.

15. Hinge according to claim 13 or 14, wherein said operating chamber comprises control means for controlling the flow of the working fluid designed to allow the flow thereof from said first compartment to said second compartment upon the opening of the door and to allow the backflow thereof from said second compartment to said first compartment upon the closing of the door.

16. Hinge according to claim 15, wherein said control means comprise a hole passing through said pushing head so as to put into fluidic communication said first compartment and said second compartment and a check valve interacting with said passing through hole so as to allow the flow of the working fluid from said first compartment to said second compartment upon the opening of the door and to prevent the backflow thereof upon the closing of the door.

17. Hinge according to claim 15 or 16, wherein said control means comprise at least one first hydraulic circuit interposed between the outer surface of said cylindrical back portion of said plunger element and said inner surface of said operating chamber for the controlled backflow of said working fluid from said second compartment to said first variable volume compartment upon the closing of the door.

18. Hinge according to claim 17, wherein said control means further comprise first means for adjusting the flow of the working fluid in said at least one first hydraulic circuit, in such a manner to adjust the rotation speed of the door from the open to the closed position.

19. Hinge according to claim 17 or 18, wherein said plunger element is housed with a predetermined clearance in said operating chamber, said at least one first hydraulic circuit comprising the tubular interspace between the outer surface of said cylindrical back portion of said plunger element and the inner surface of said operating chamber.

20. Hinge according to claim 17 or 18, wherein said control means further comprise a tubular element interposed between the inner surface of said operating chamber and said cylindrical back portion of said plunger element, said plunger element being tightly housed in said tubular element, said tubular element being tightly housed in said operating chamber.

21. Hinge according to claim 20, wherein said tubular element has an outer lateral surface which includes a first substantially flat portion, said at least one first hydraulic circuit including a first channel defined by the interspace between the inner surface of said operating chamber and said first substantially flat portion.

22. Hinge according to claim 21, wherein said first substantially flat portion extends for the whole length of said outer lateral surface of said tubular element so that said at least one first channel is in fluidic communication with said first variable volume compartment.

23. Hinge according to claims 18 and 22, wherein said first means for adjusting the flow in said at least one first hydraulic circuit include at least one second operating chamber internal to said box-like hinge body which has an inlet fluidically connected with said second variable volume compartment and an outlet fluidically connected with said at least one first channel, said at least one second operating chamber comprising a first adjusting screw inserted in said second operating chamber to obstruct the passing section of said inlet and/or said outlet, thus adjusting the rotation speed of the door from the open to the closed position.

24. Hinge according to claims 15 or 16, wherein said control means comprise a second hydraulic circuit interposed between the outer surface of said cylindrical back portion of said plunger element and the inner surface of said operating chamber for the controlled backflow of said working fluid from said second compartment to said first variable volume compartment upon the closing of the door, said control means further comprising second means for adjusting the flow of the working fluid in said second hydraulic circuit, so as to adjust the force by which the door reaches the closed position.

25. Hinge according to any one of claims 20 to 24, wherein the outer lateral surface of said tubular element includes a second substantially flat portion, said second hydraulic circuit comprising a second channel interposed between the inner surface of said operating chamber and said second substantially flat portion.

26. Hinge according to claim 25, wherein said first substantially flat portion and second substantially flat portion of said outer lateral surface of said tubular element, respectively said first channel and second channel, are reciprocally opposite with respect to a plane passing through said first axis and second axis.

27. Hinge according to claim 25 or 26, wherein said second substantially flat portion extends only for a part of the length of said outer lateral surface of said tubular element, the latter including a first passing through hole in proximity of an end of said second substantially flat portion facing said outer surface of said cylindrical back portion of said plunger element.

28. Hinge according to claim 24, wherein said second adjusting means in said second hydraulic circuit are designed to impart a latch action to the door towards the closed position when the plunger element is in proximity to the extended end position.

29. Hinge according to claims 27 and 28, wherein said cylindrical back portion of said plunger element has a second passing through hole, said first and second passing through holes being reciprocally uncoupled when said plunger element is in proximity of the compressed end position and reciprocally coupled when said plunger element is in proximity of the extended end position to selectively put into fluidic communication said second channel with said first variable volume compartment, so as to impart the latch action to the door.

30. Hinge according to claim 29, wherein said second adjusting means in said second hydraulic circuit comprise at least one third operating chamber internal to said box-like hinge body which has an inlet fluidically connected with said second variable volume compartment and an outlet fluidically connected with said at least one second channel, said second adjusting means comprising a second adjusting screw housed in said third operating chamber so as to obstruct the passing section of said inlet and/or said outlet, in such a manner to adjust the force by which the latch action is imparted to the door.

31. Hinge according to claims 18 to 30, wherein said box-like hinge body comprises a third channel for the fluidic connection of said second operating chamber and said third operating chamber.

1/8

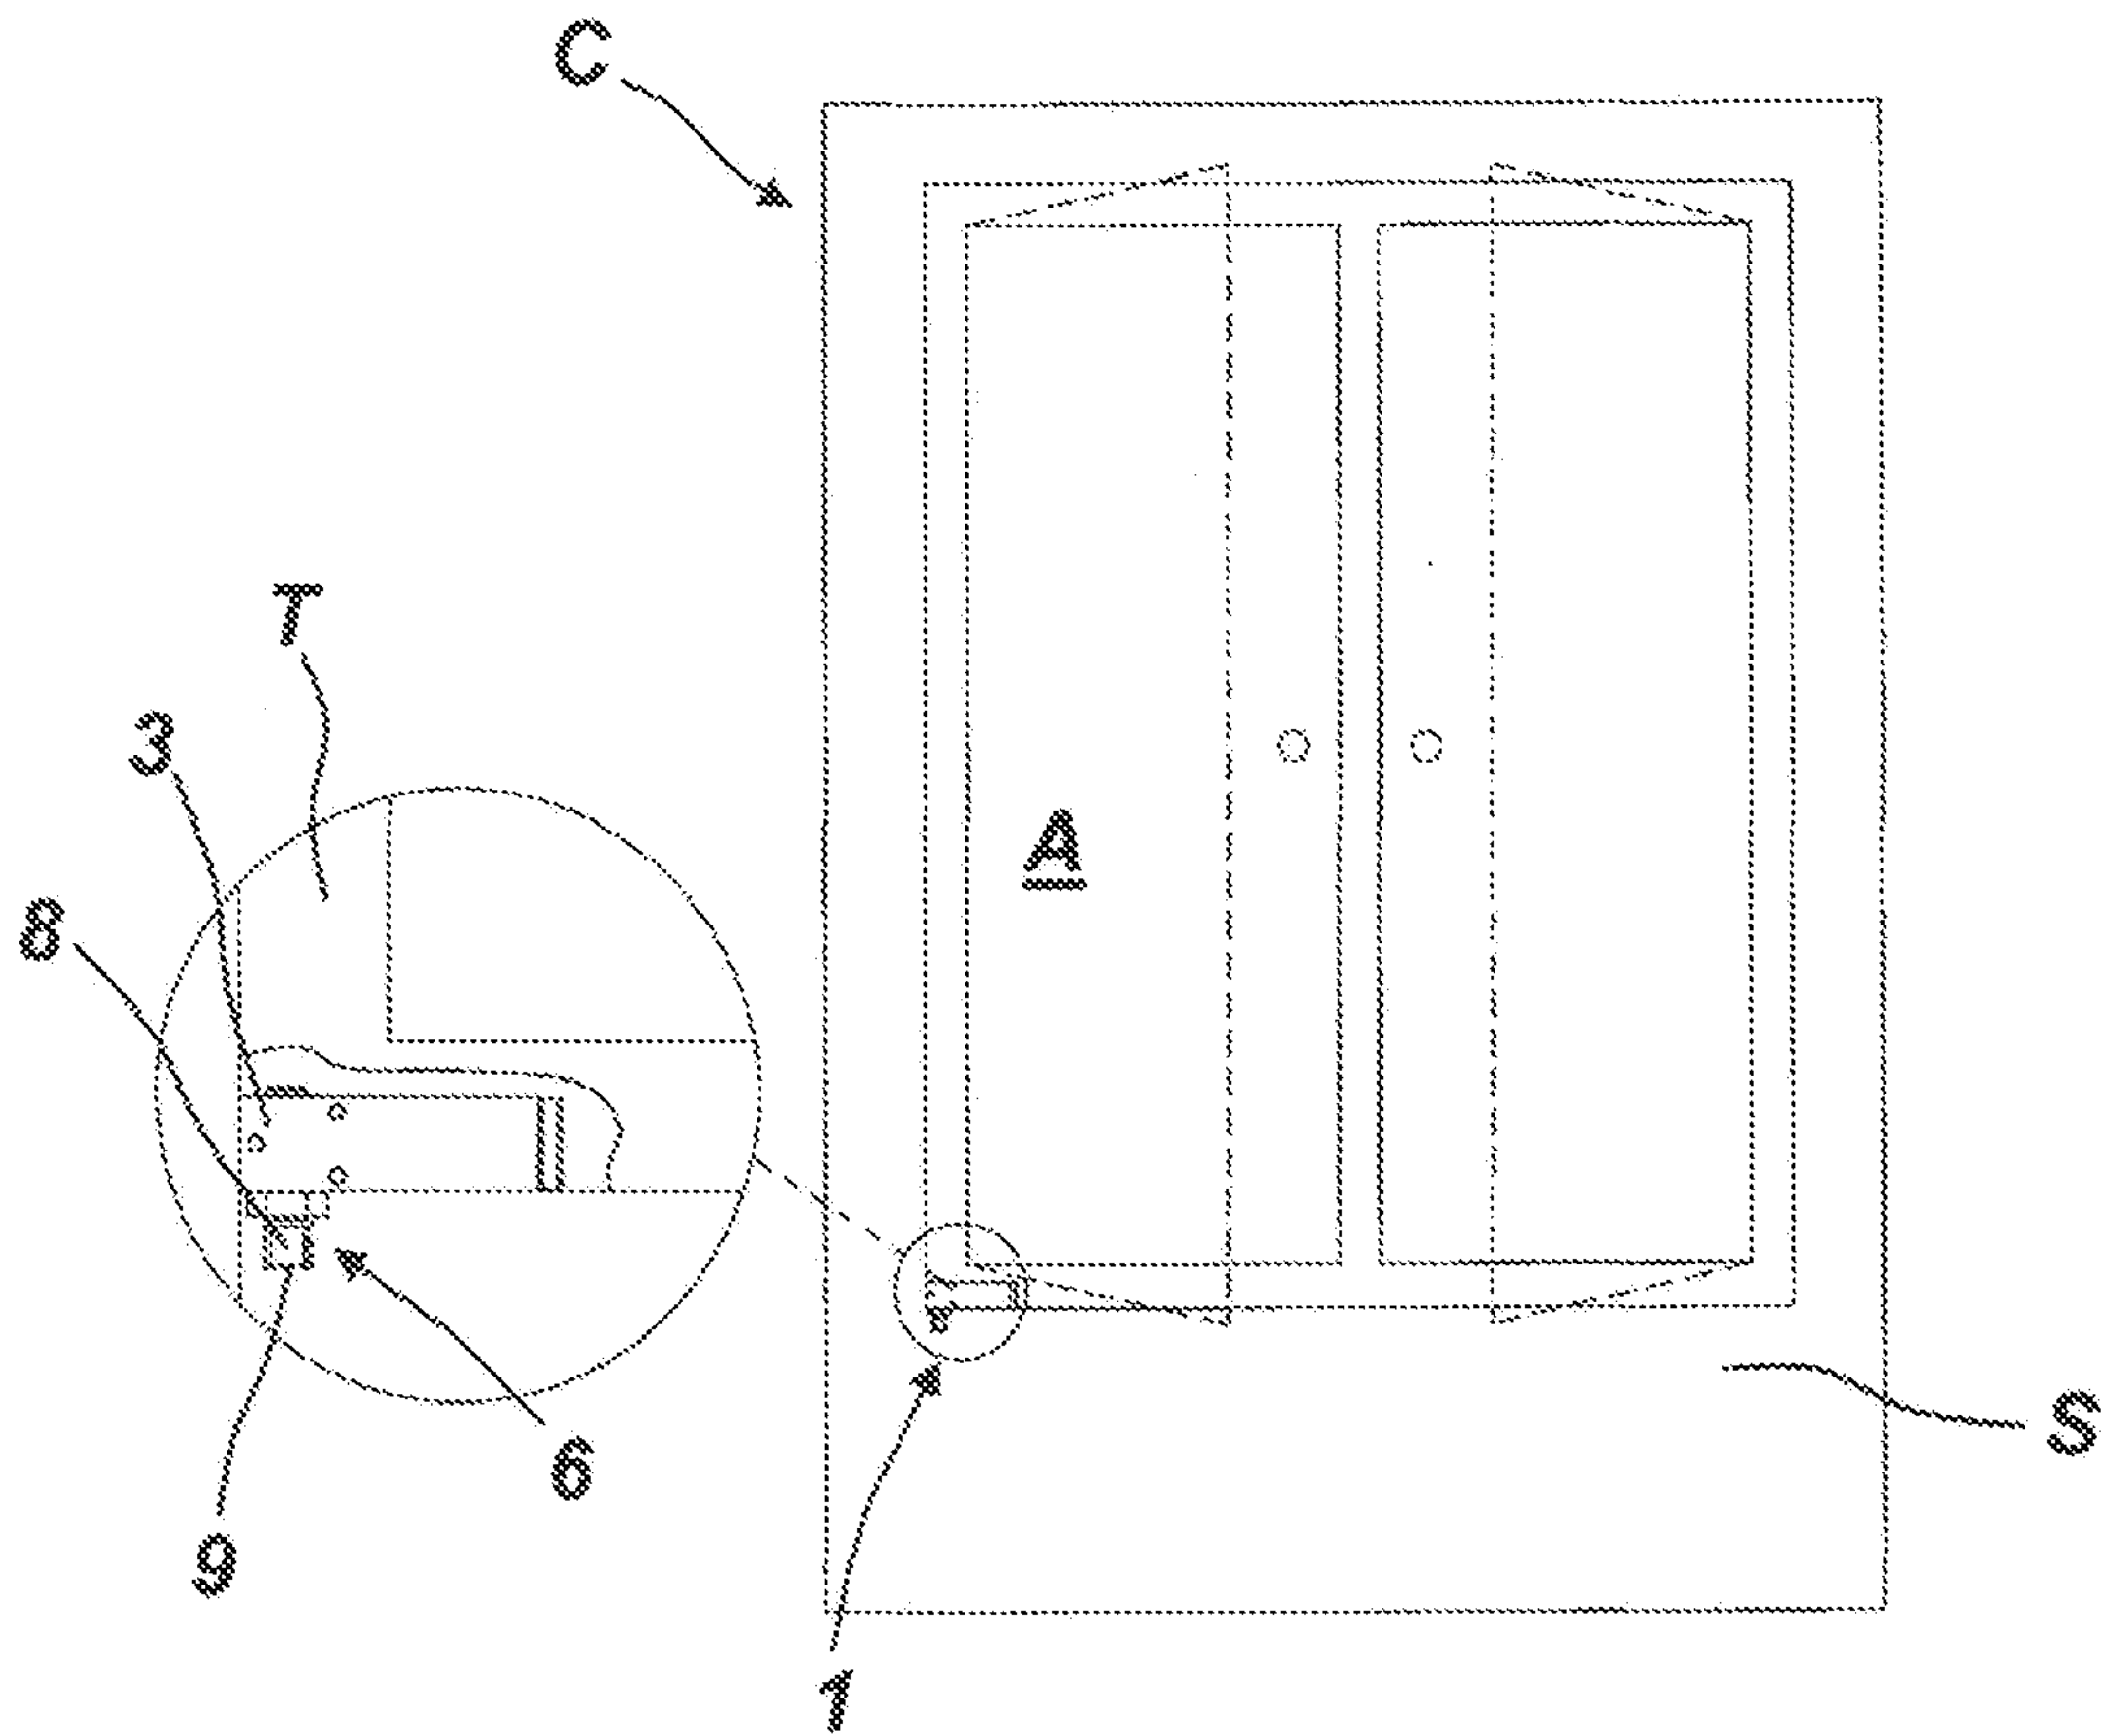


FIG. 1

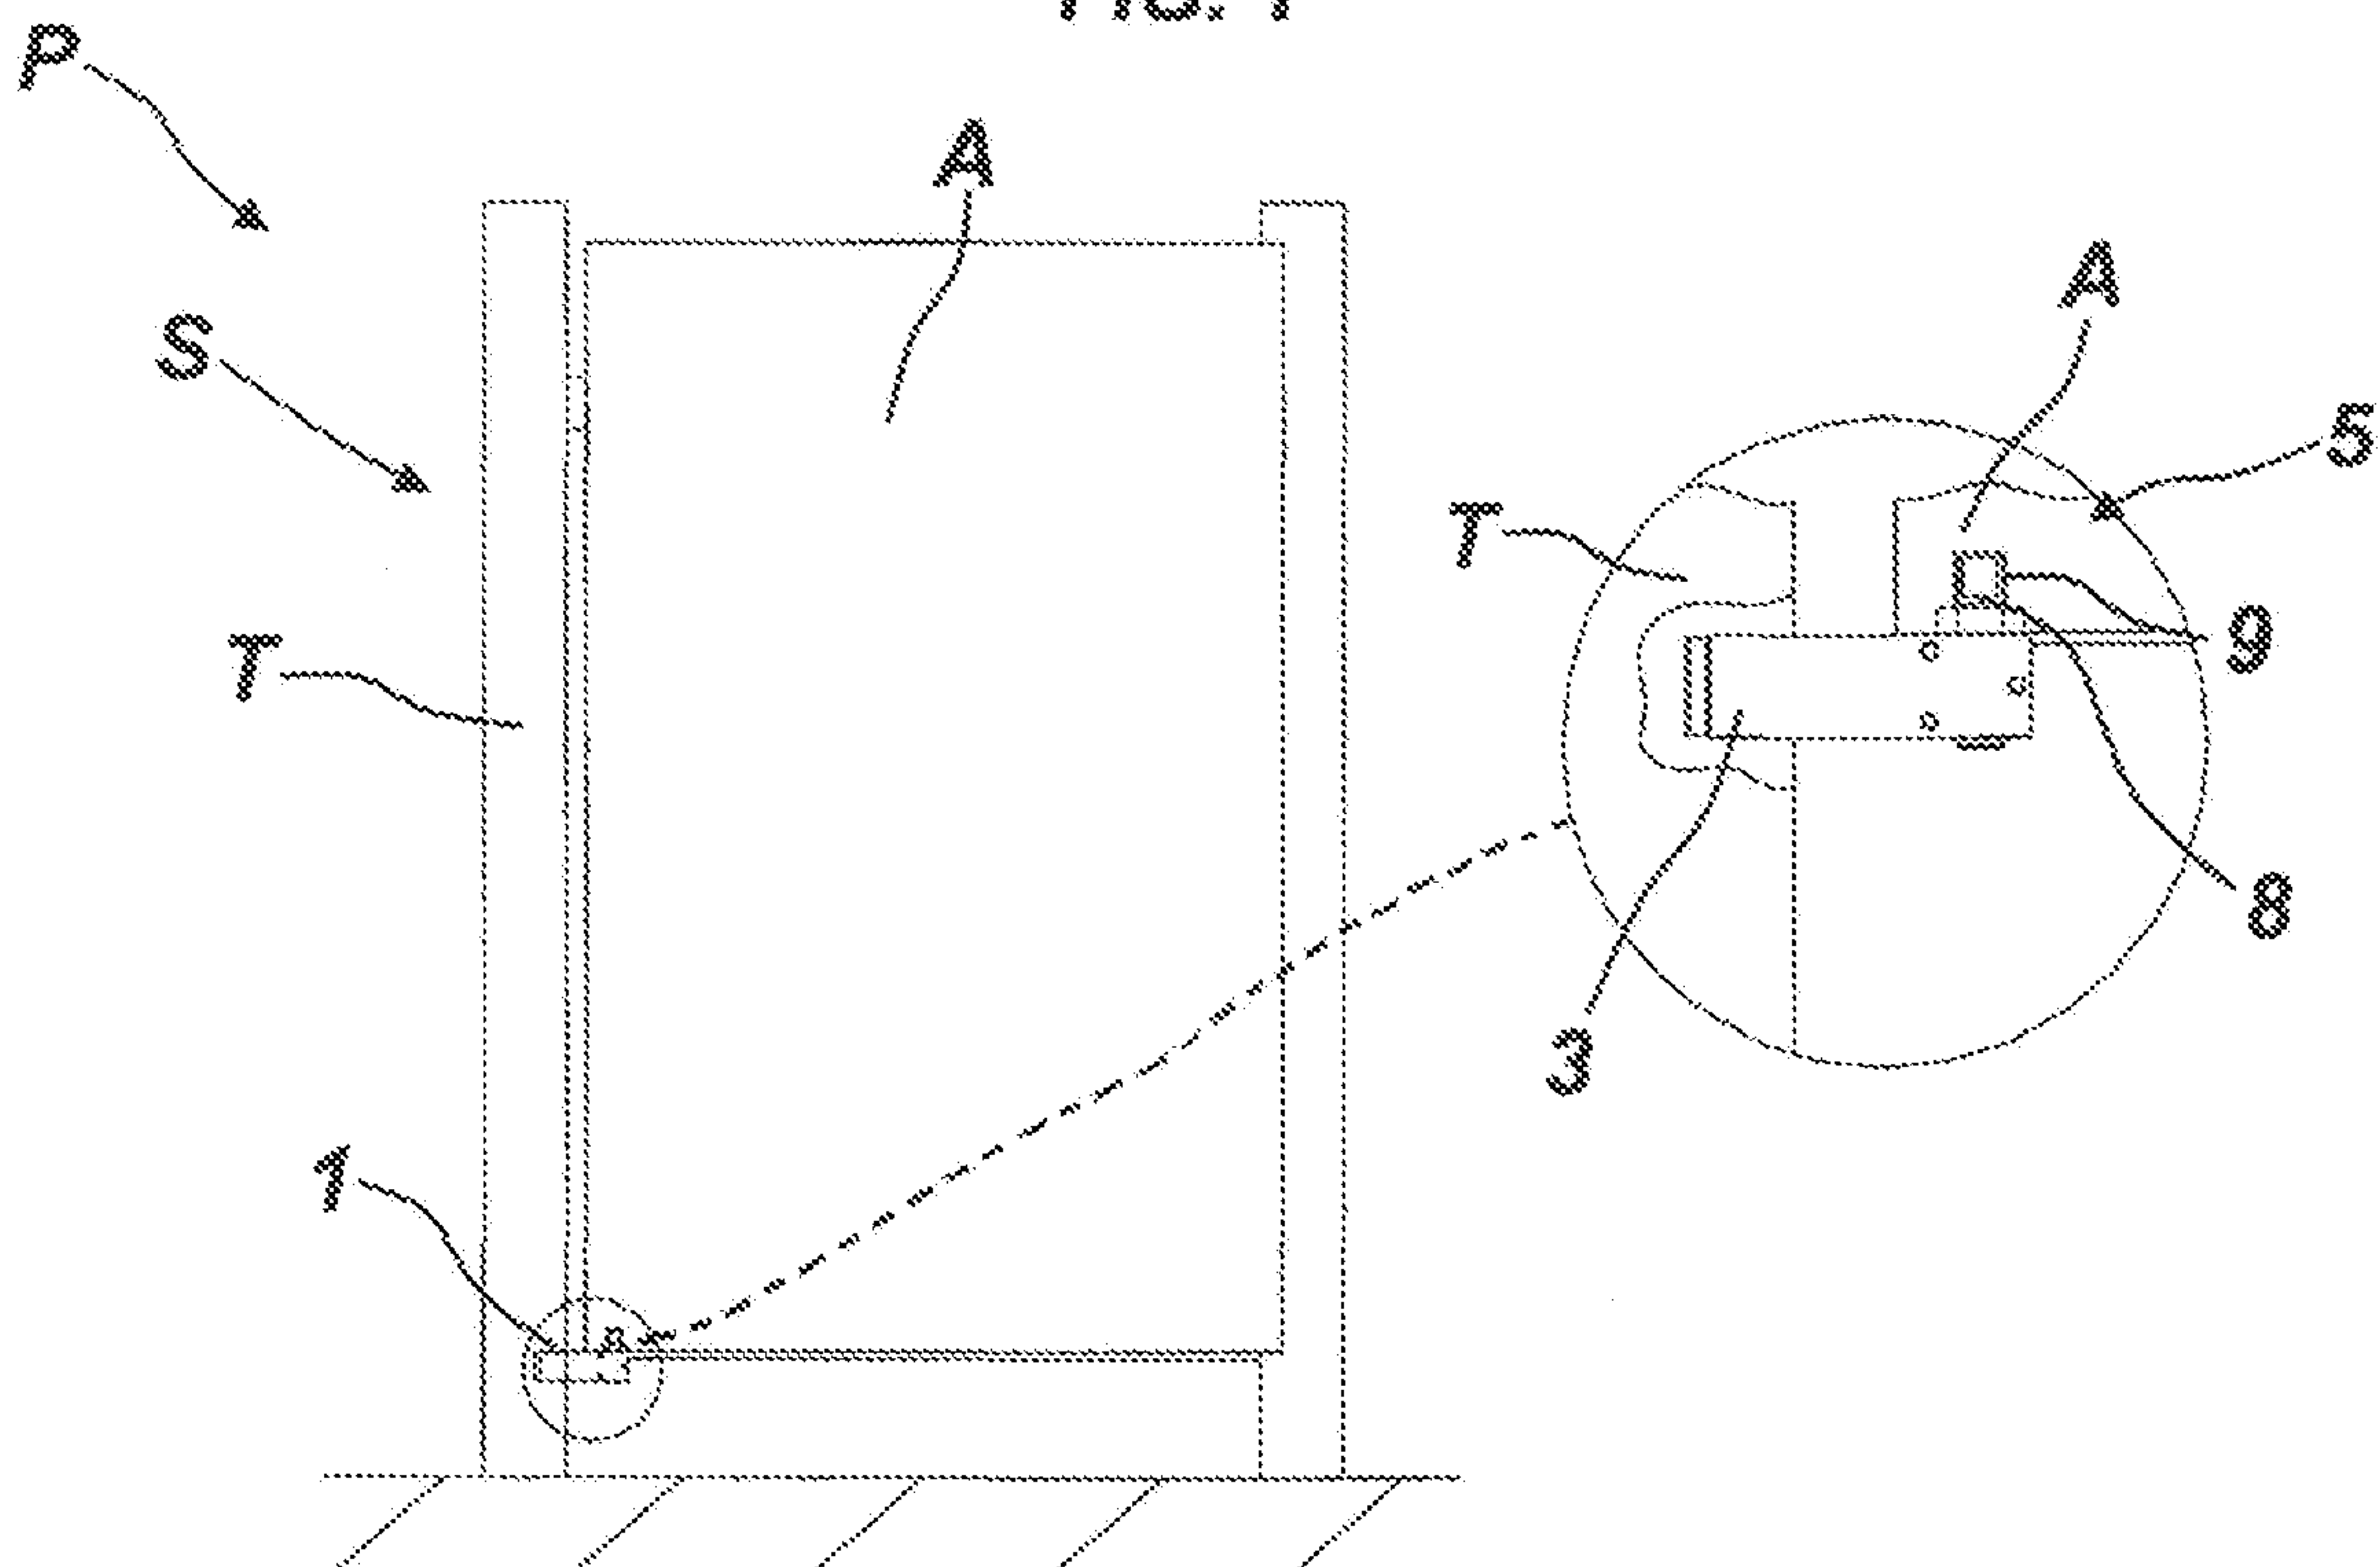


FIG. 2

2 / 8

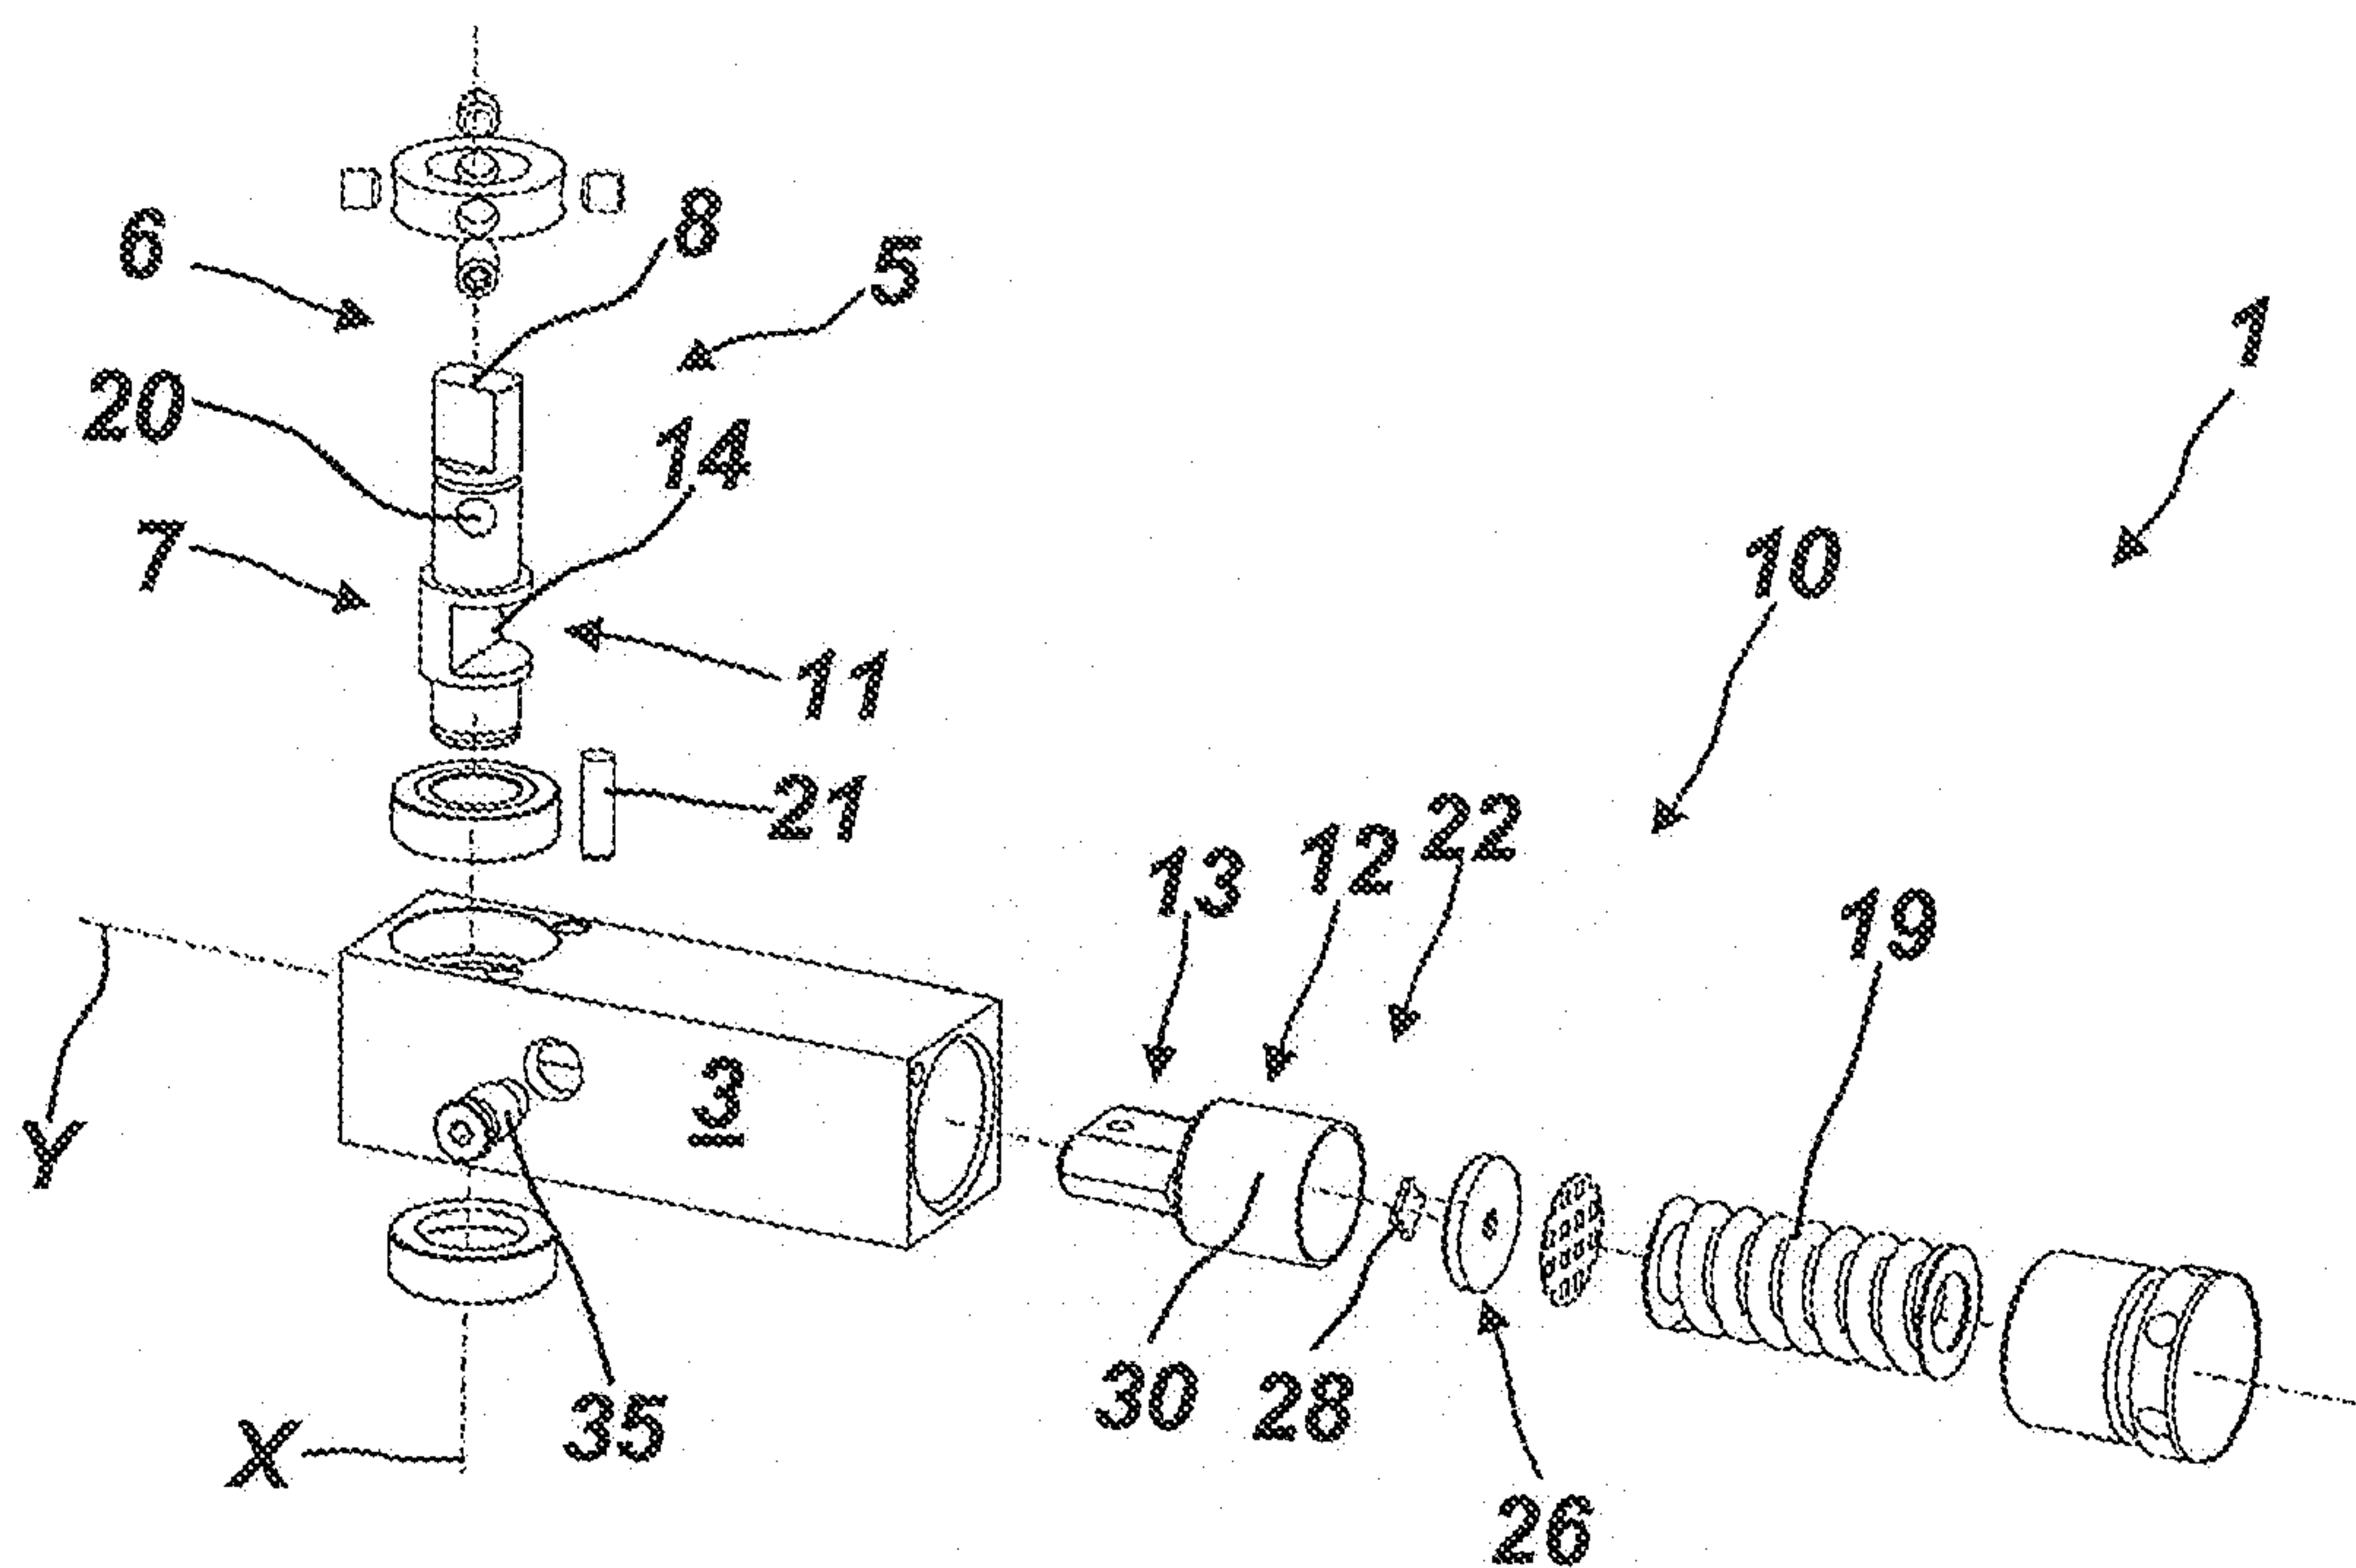


FIG. 3

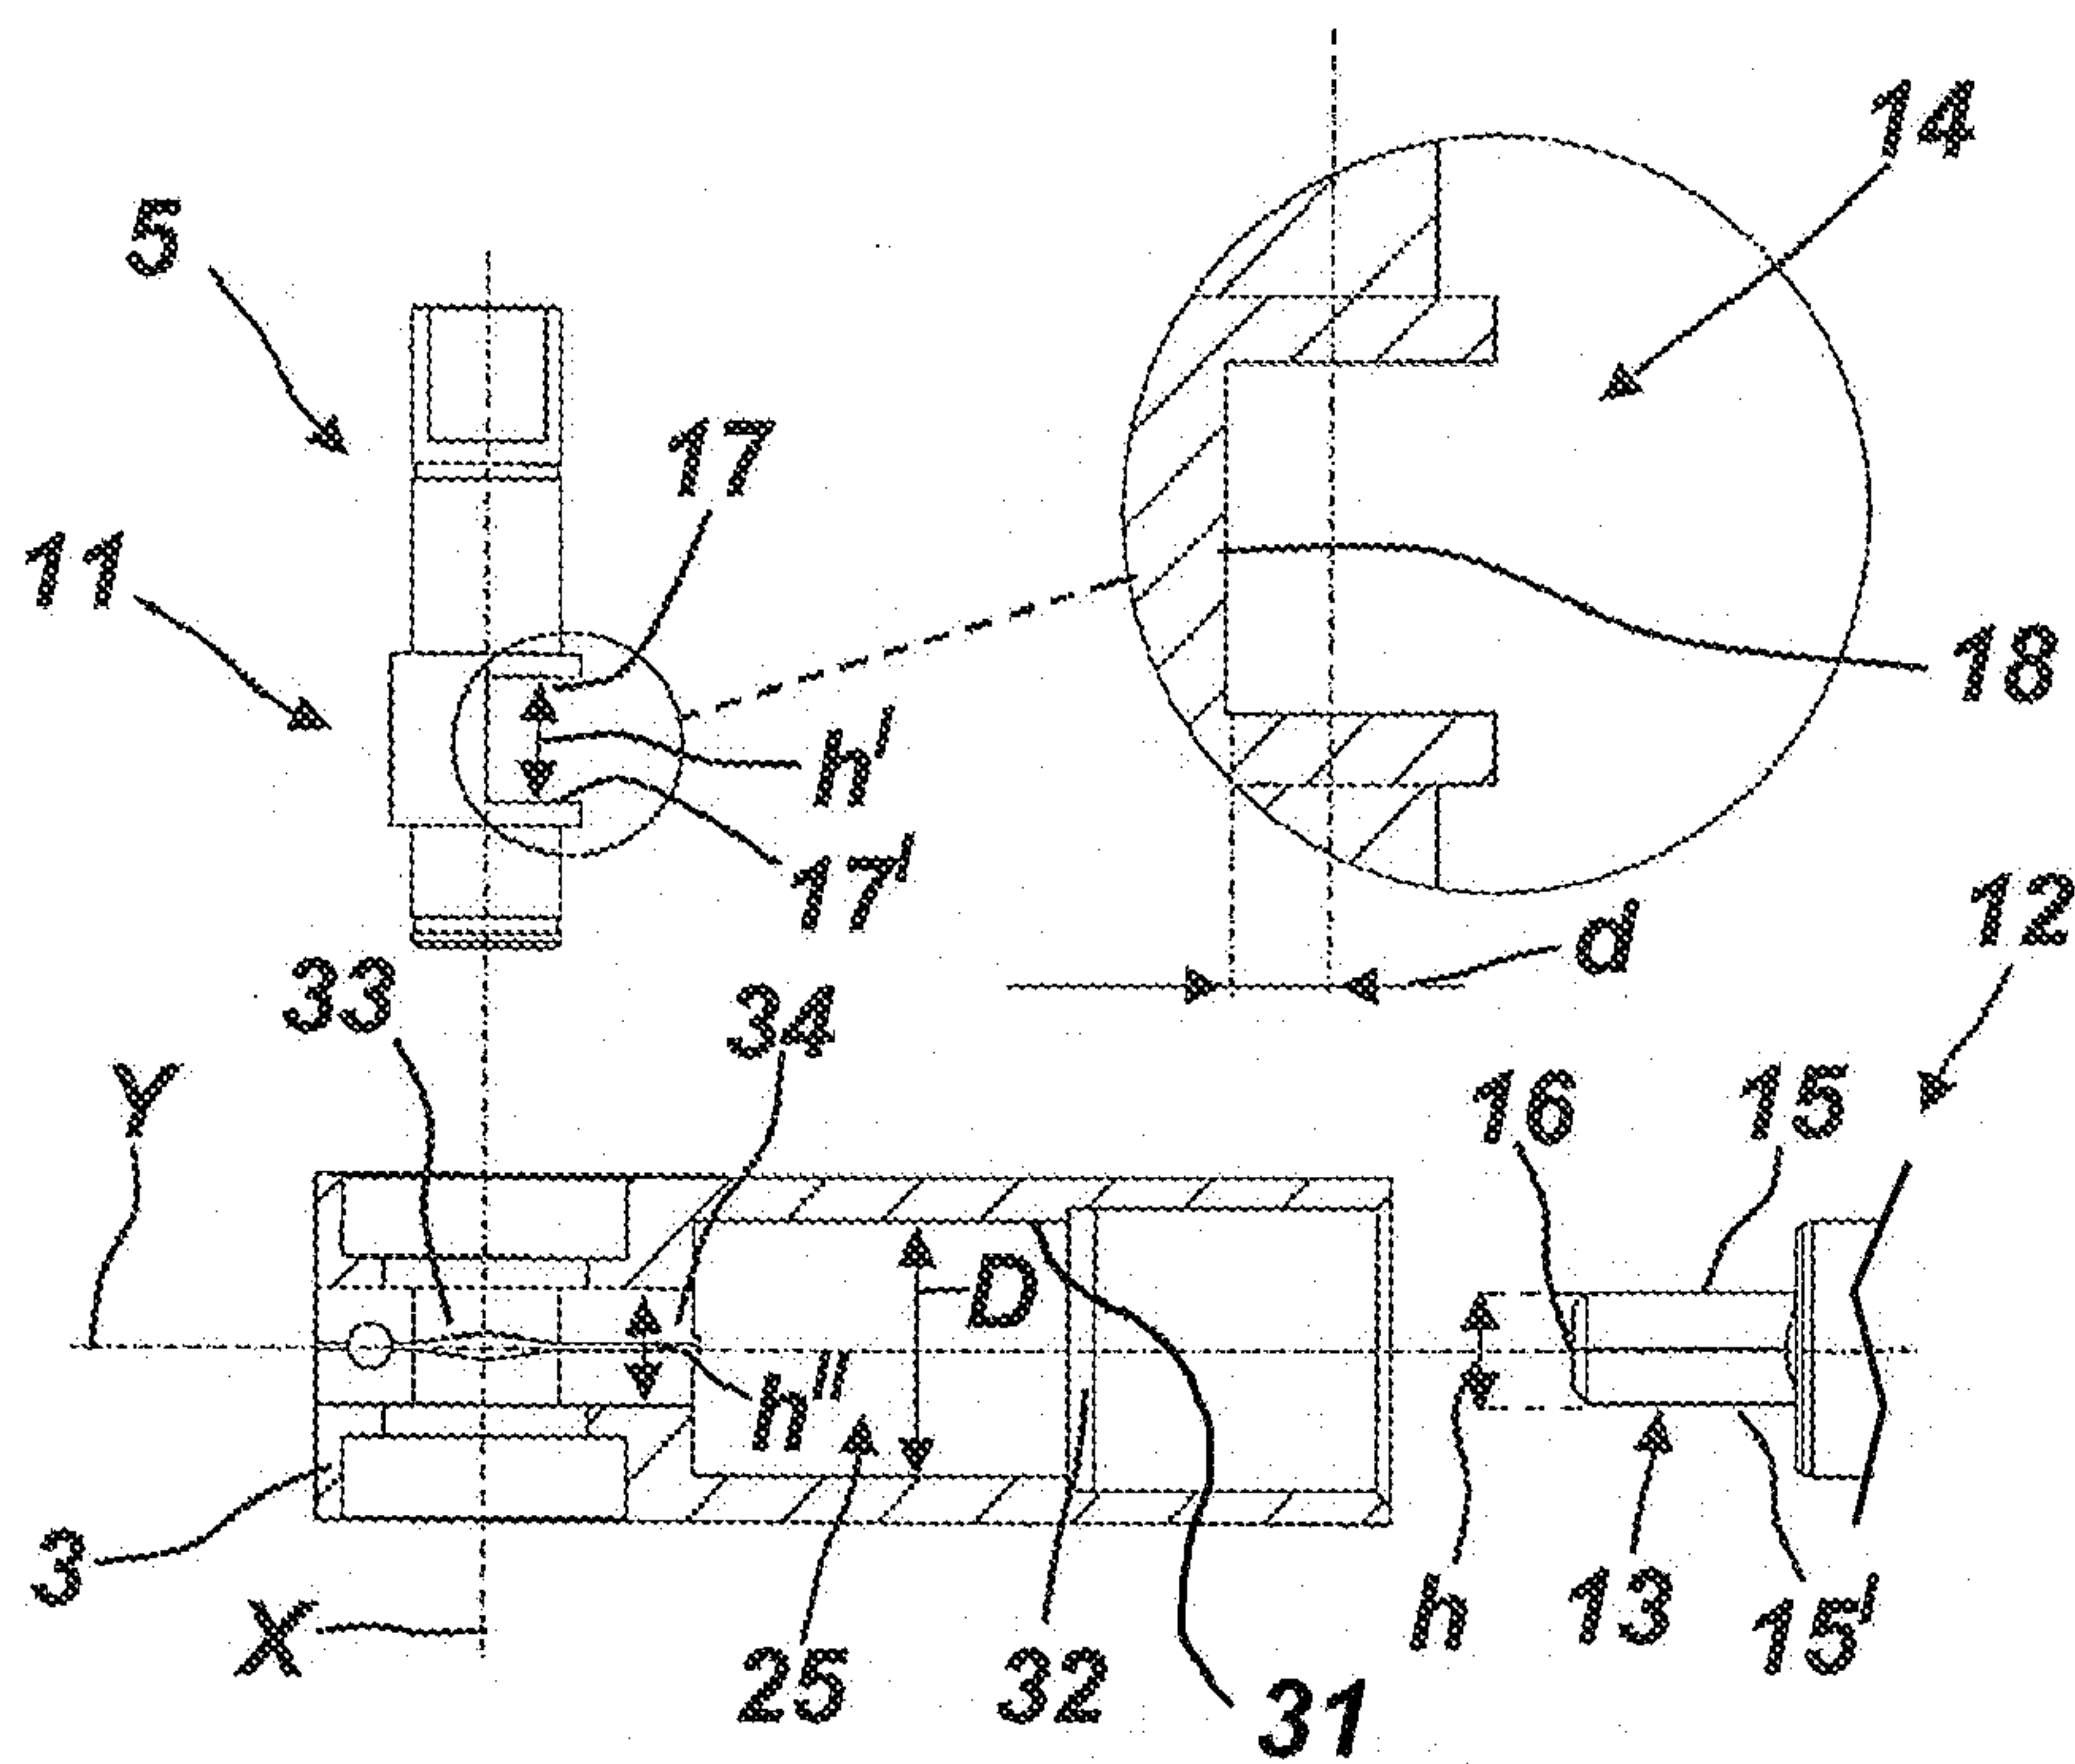
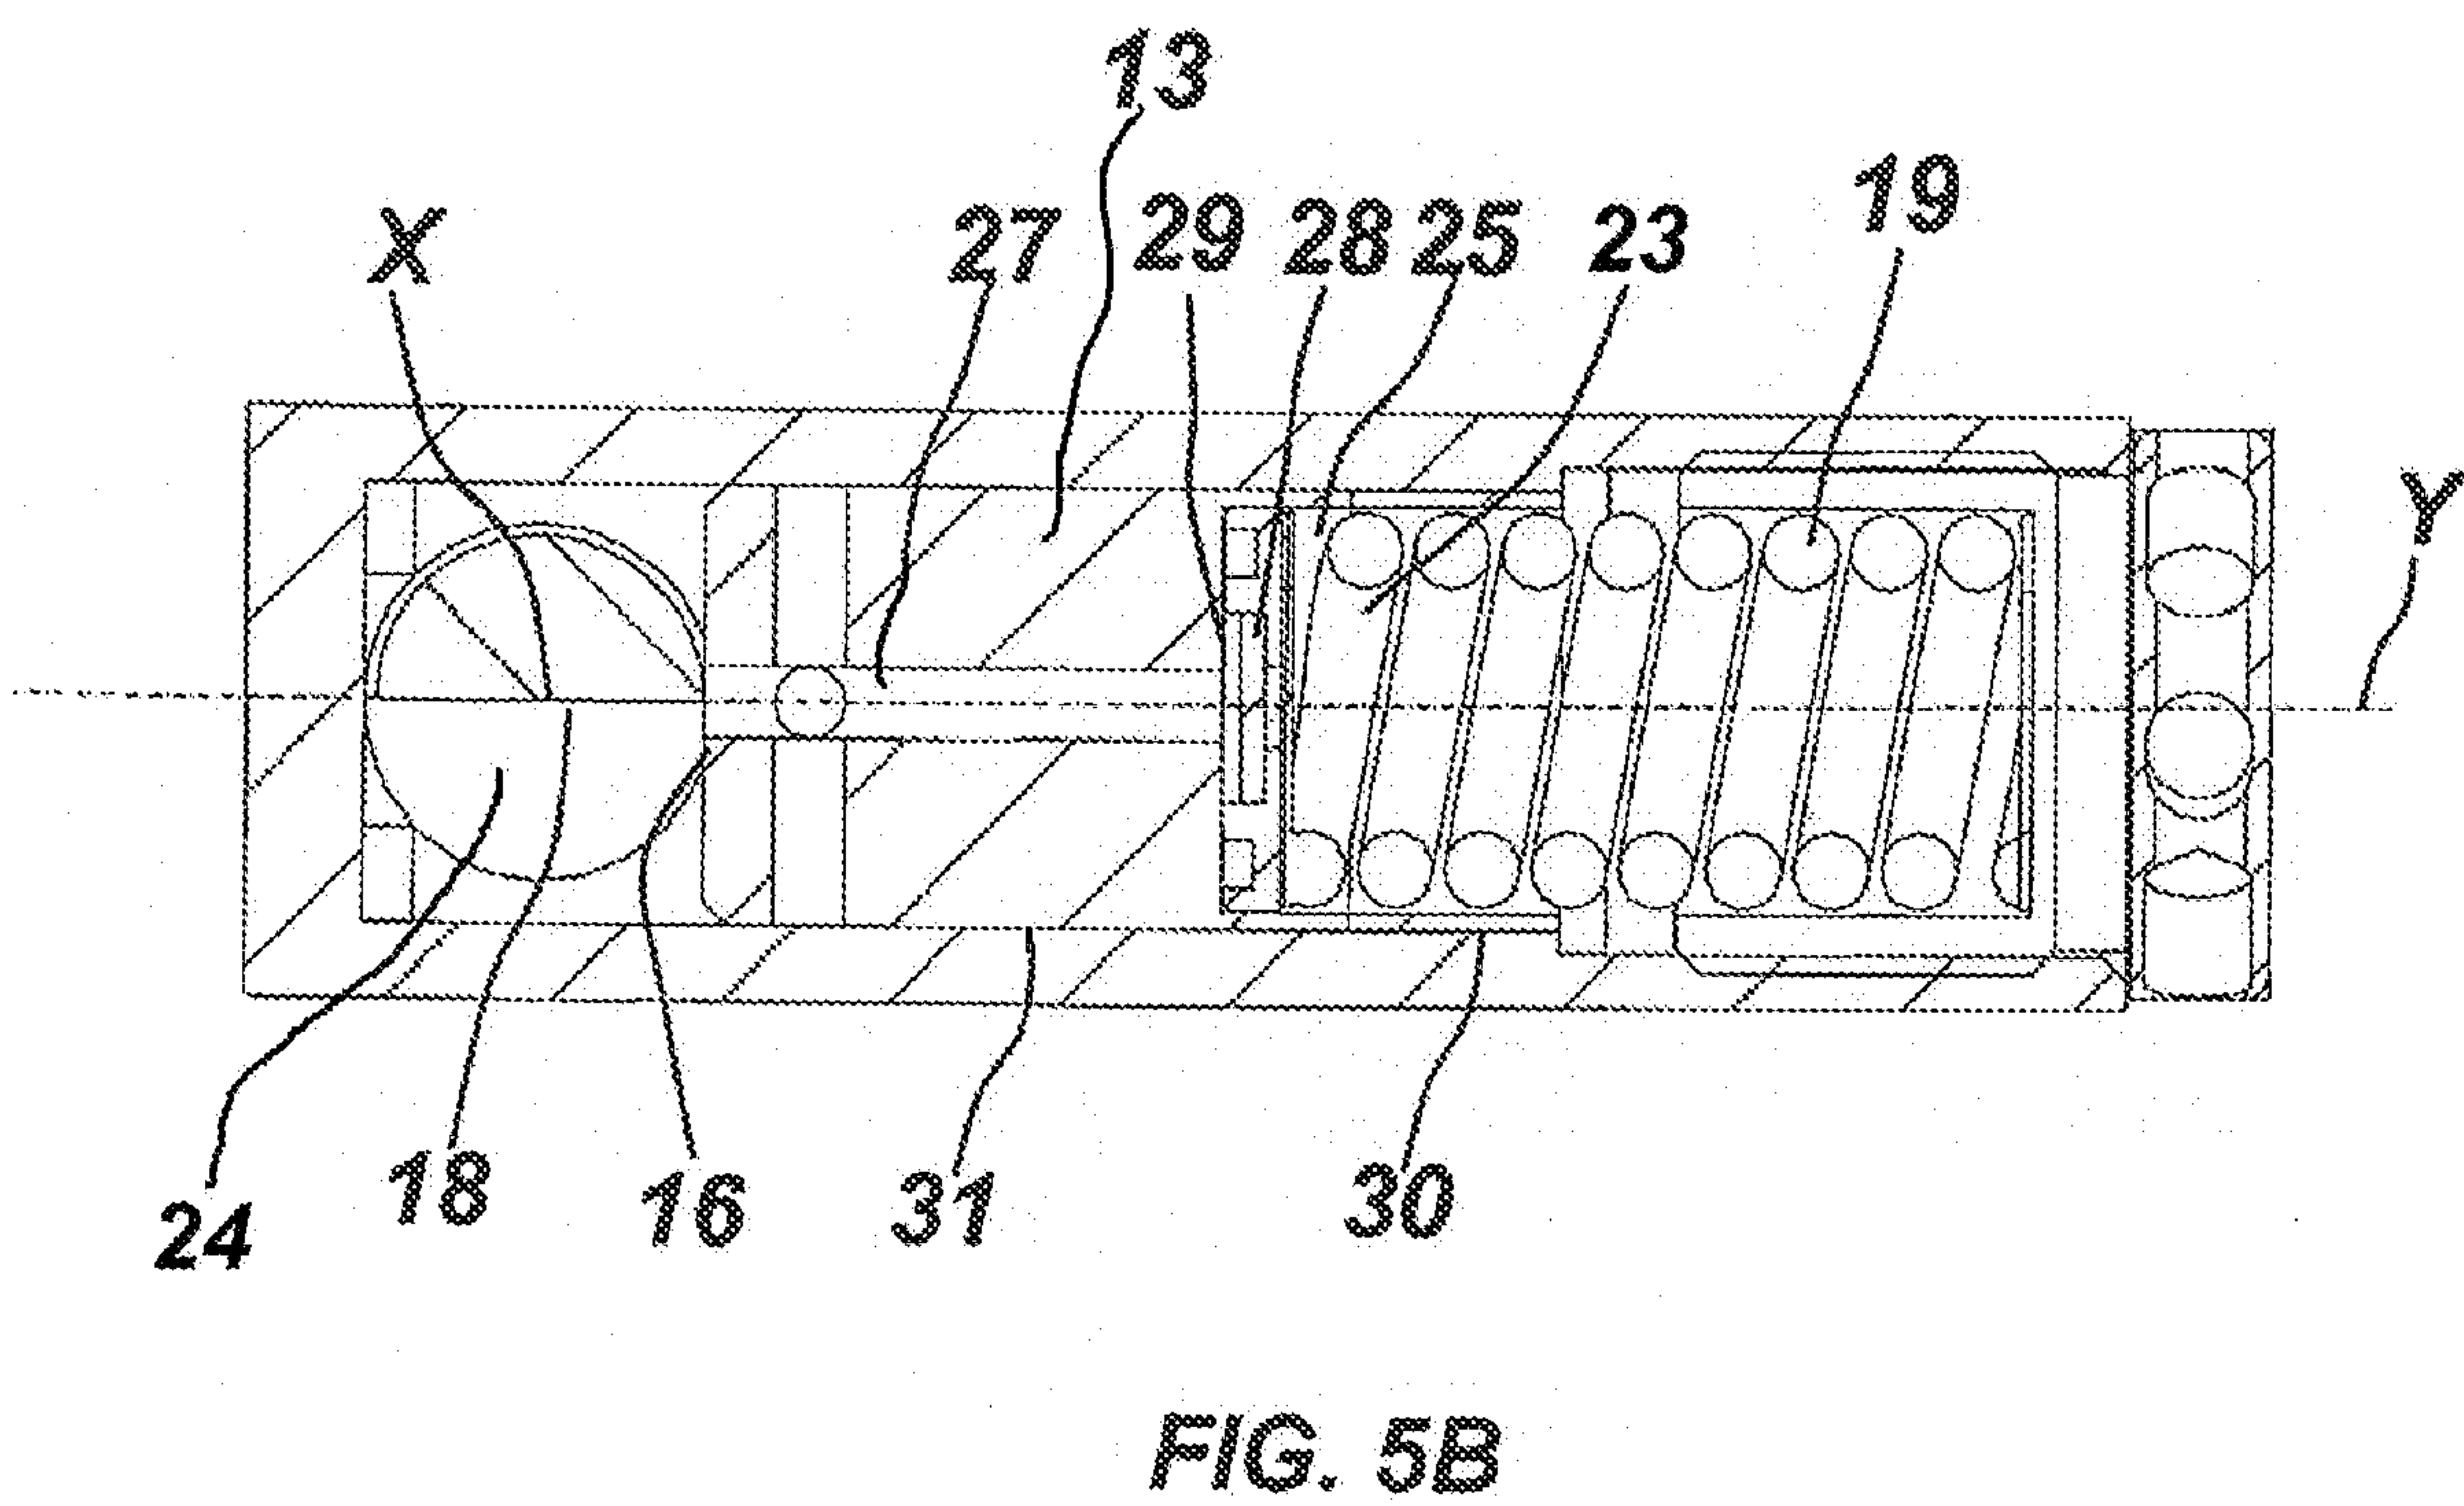
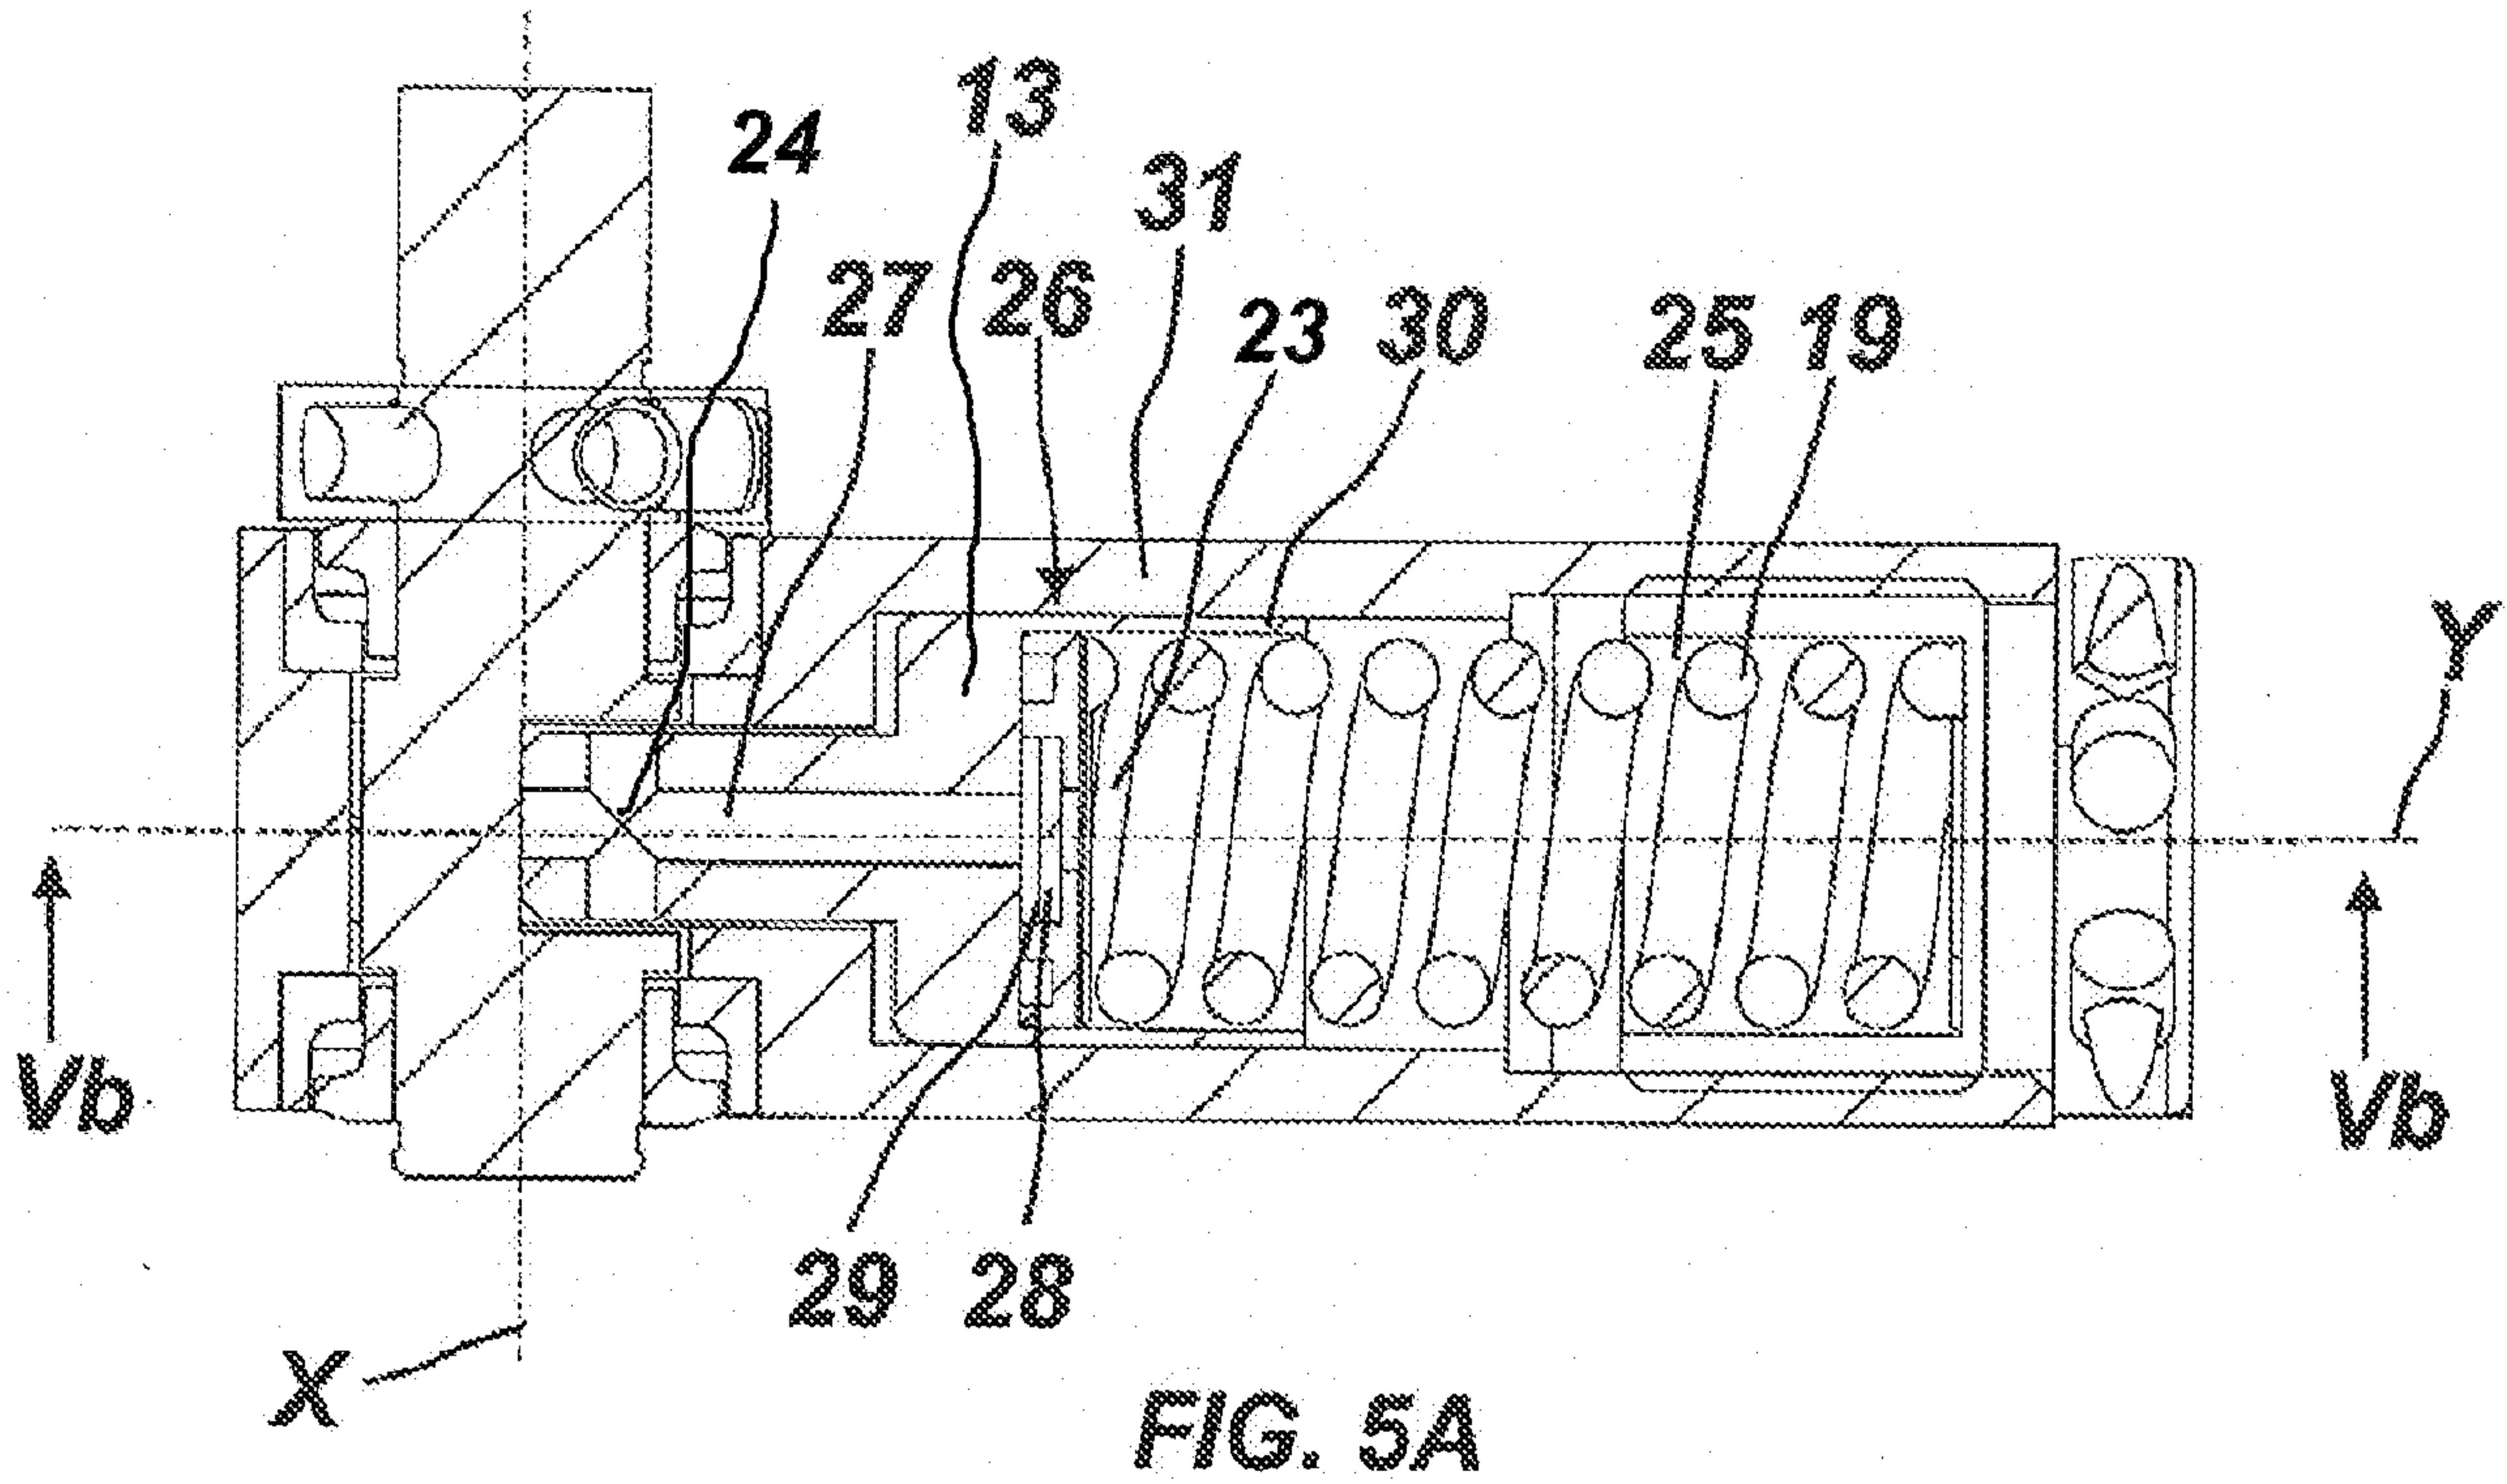
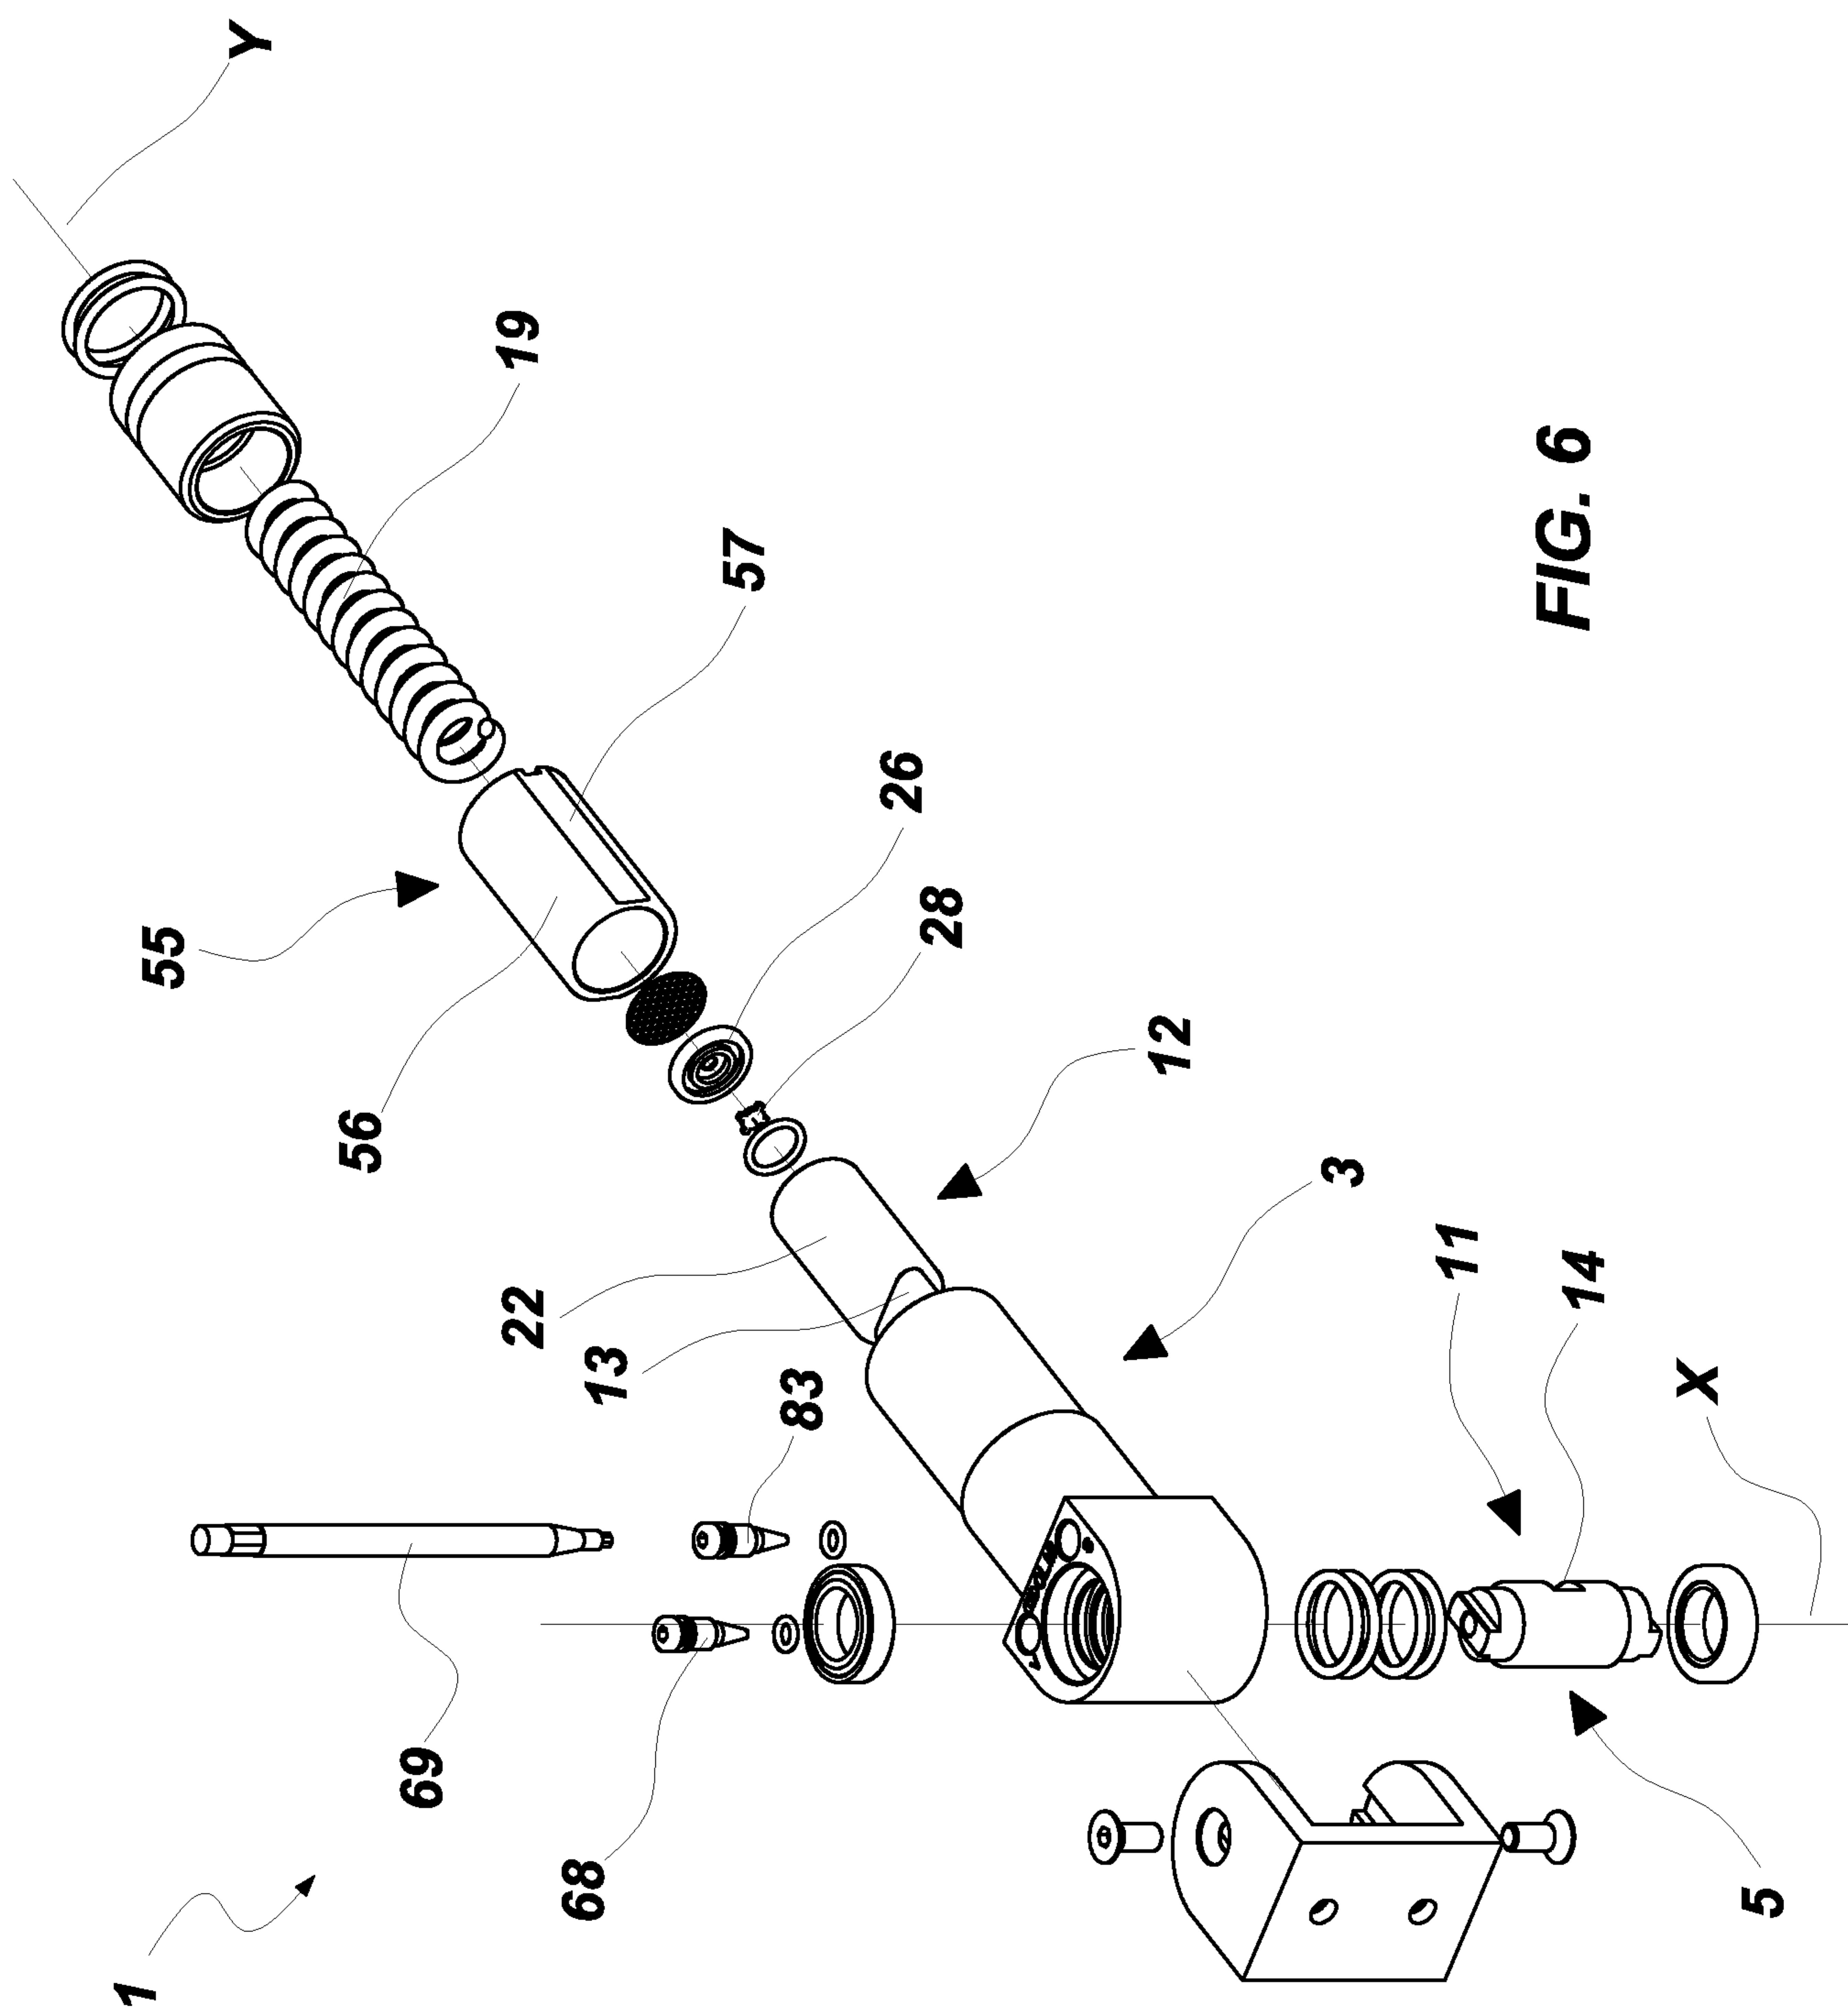


FIG. 4





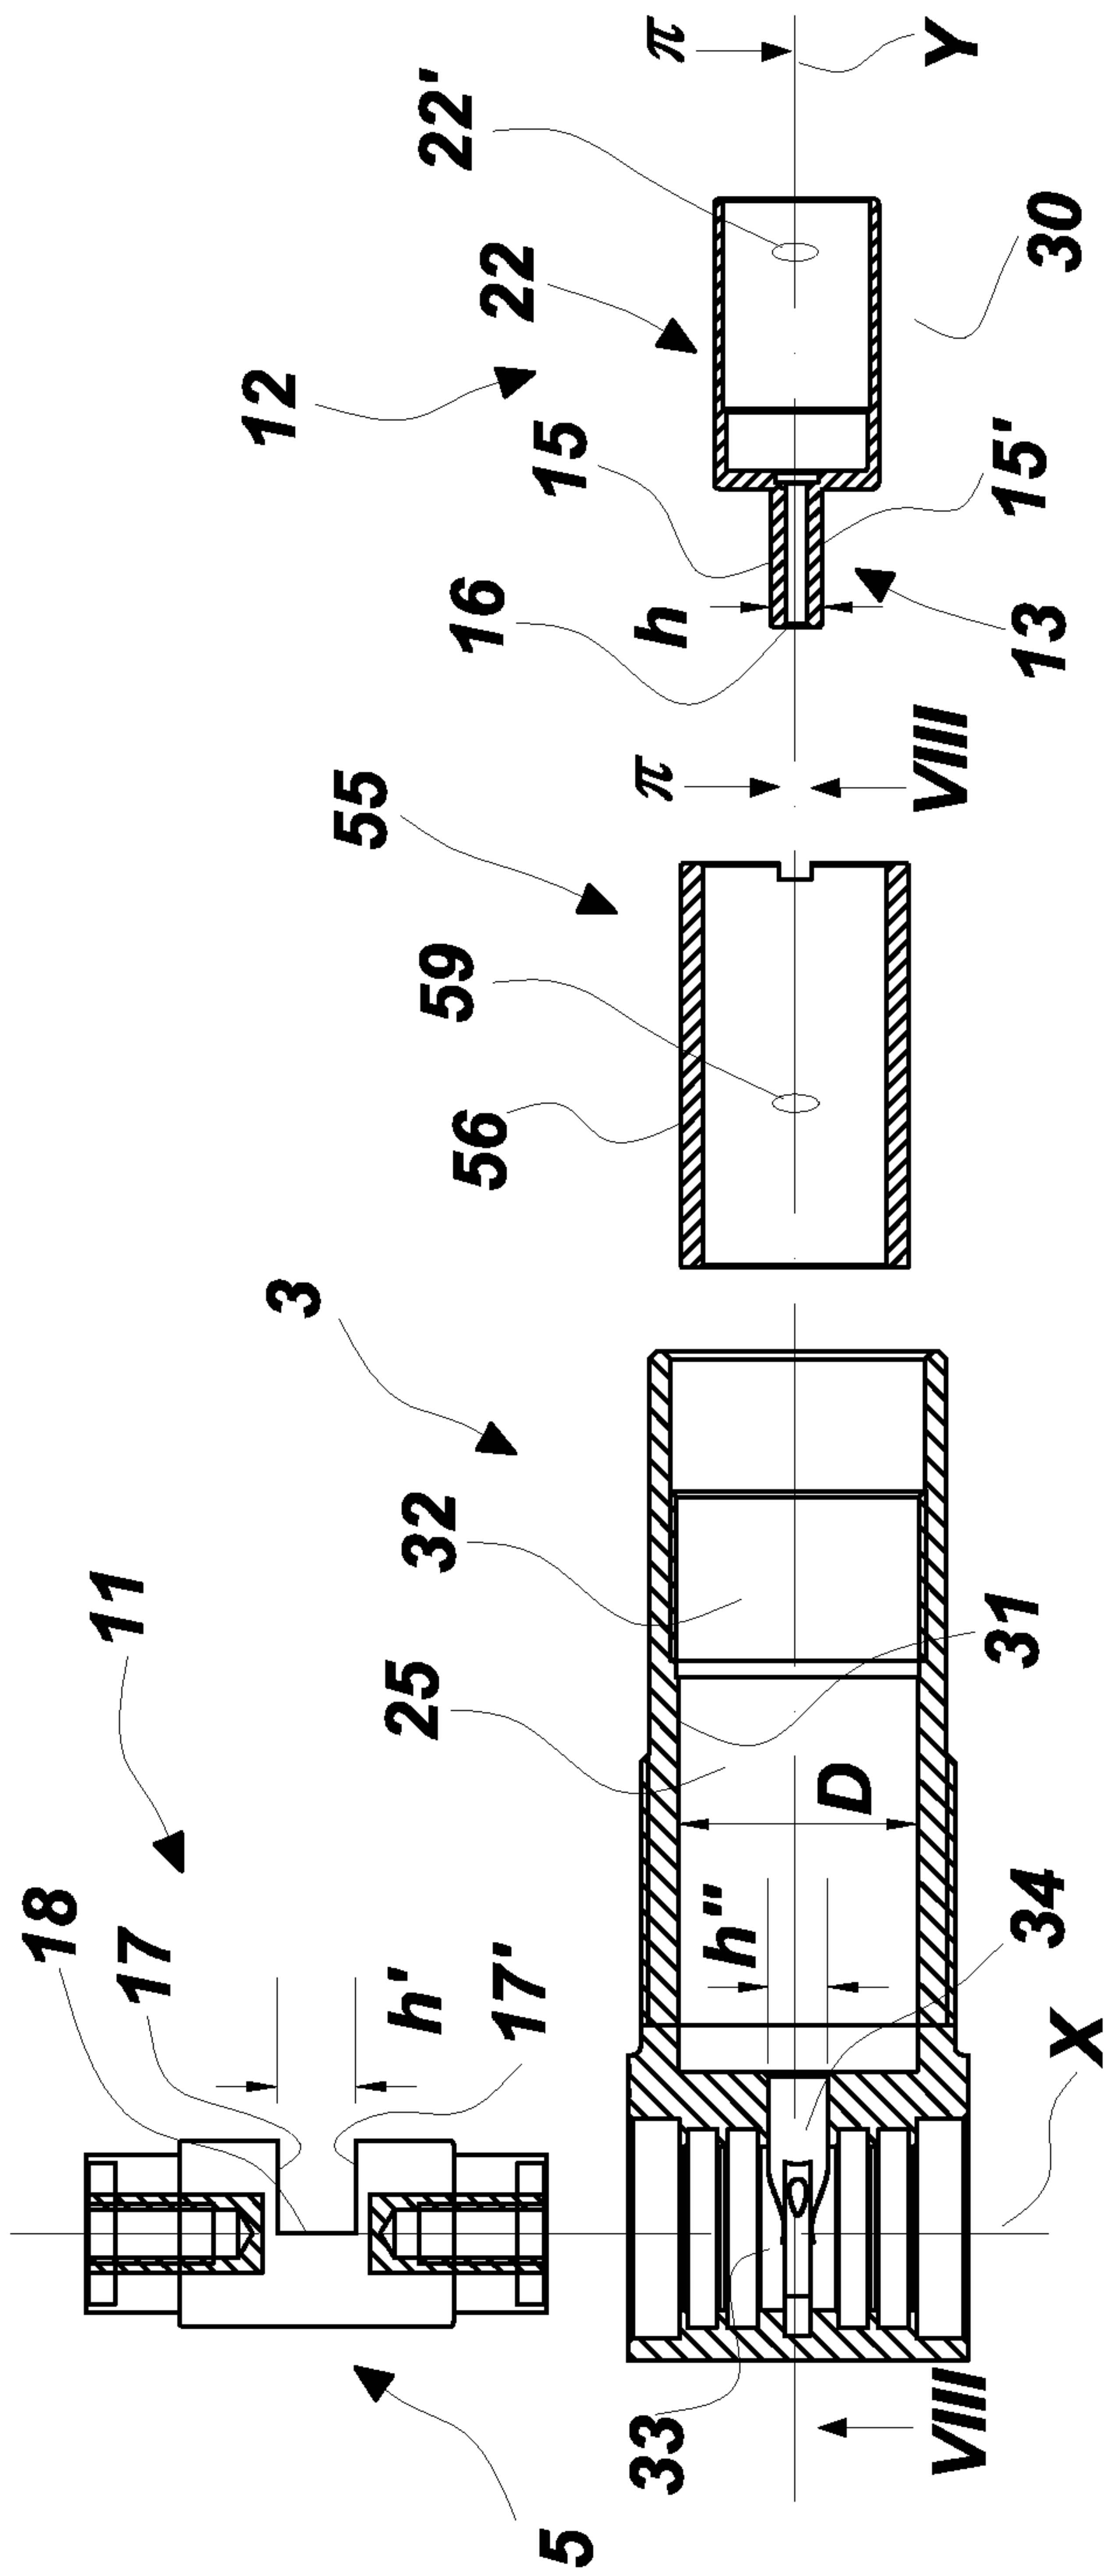


FIG. 7

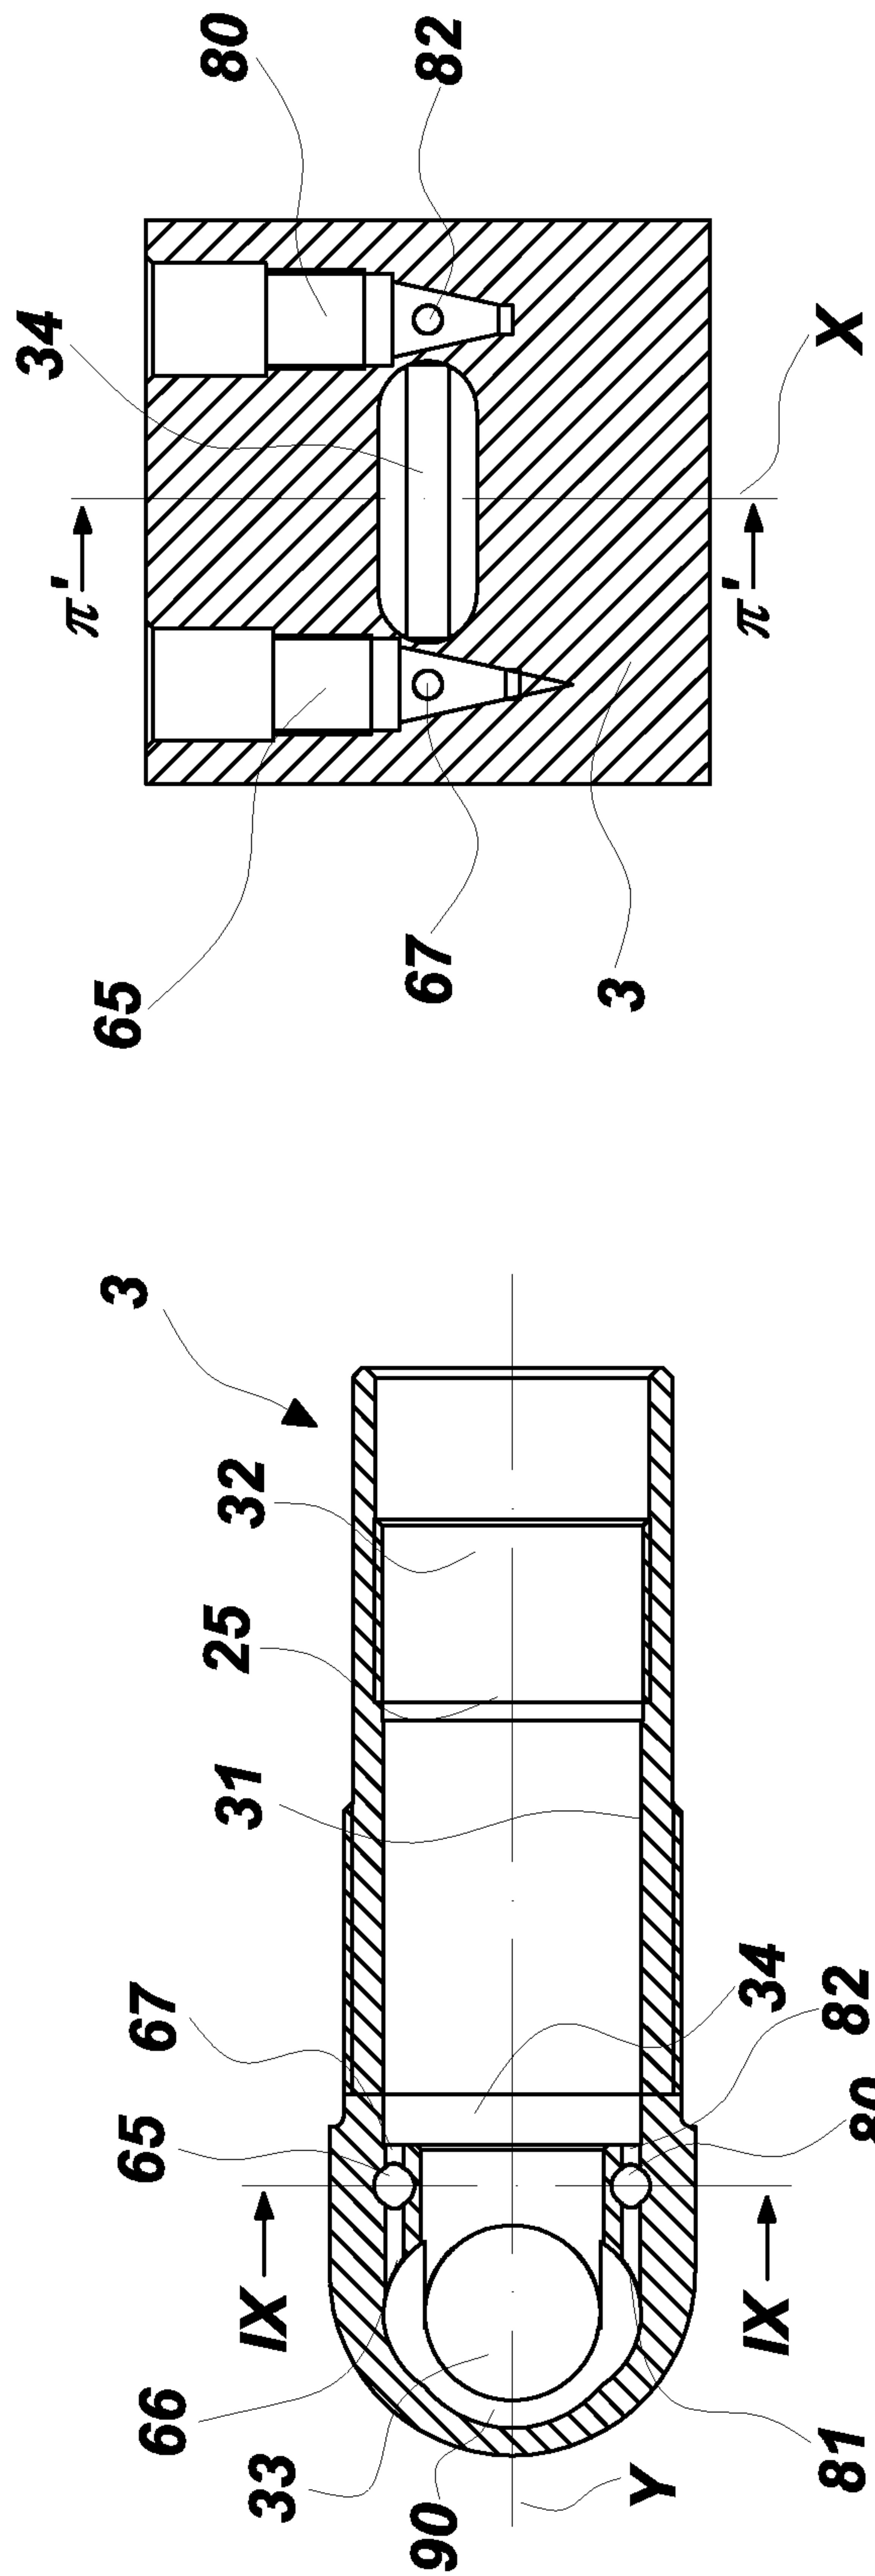
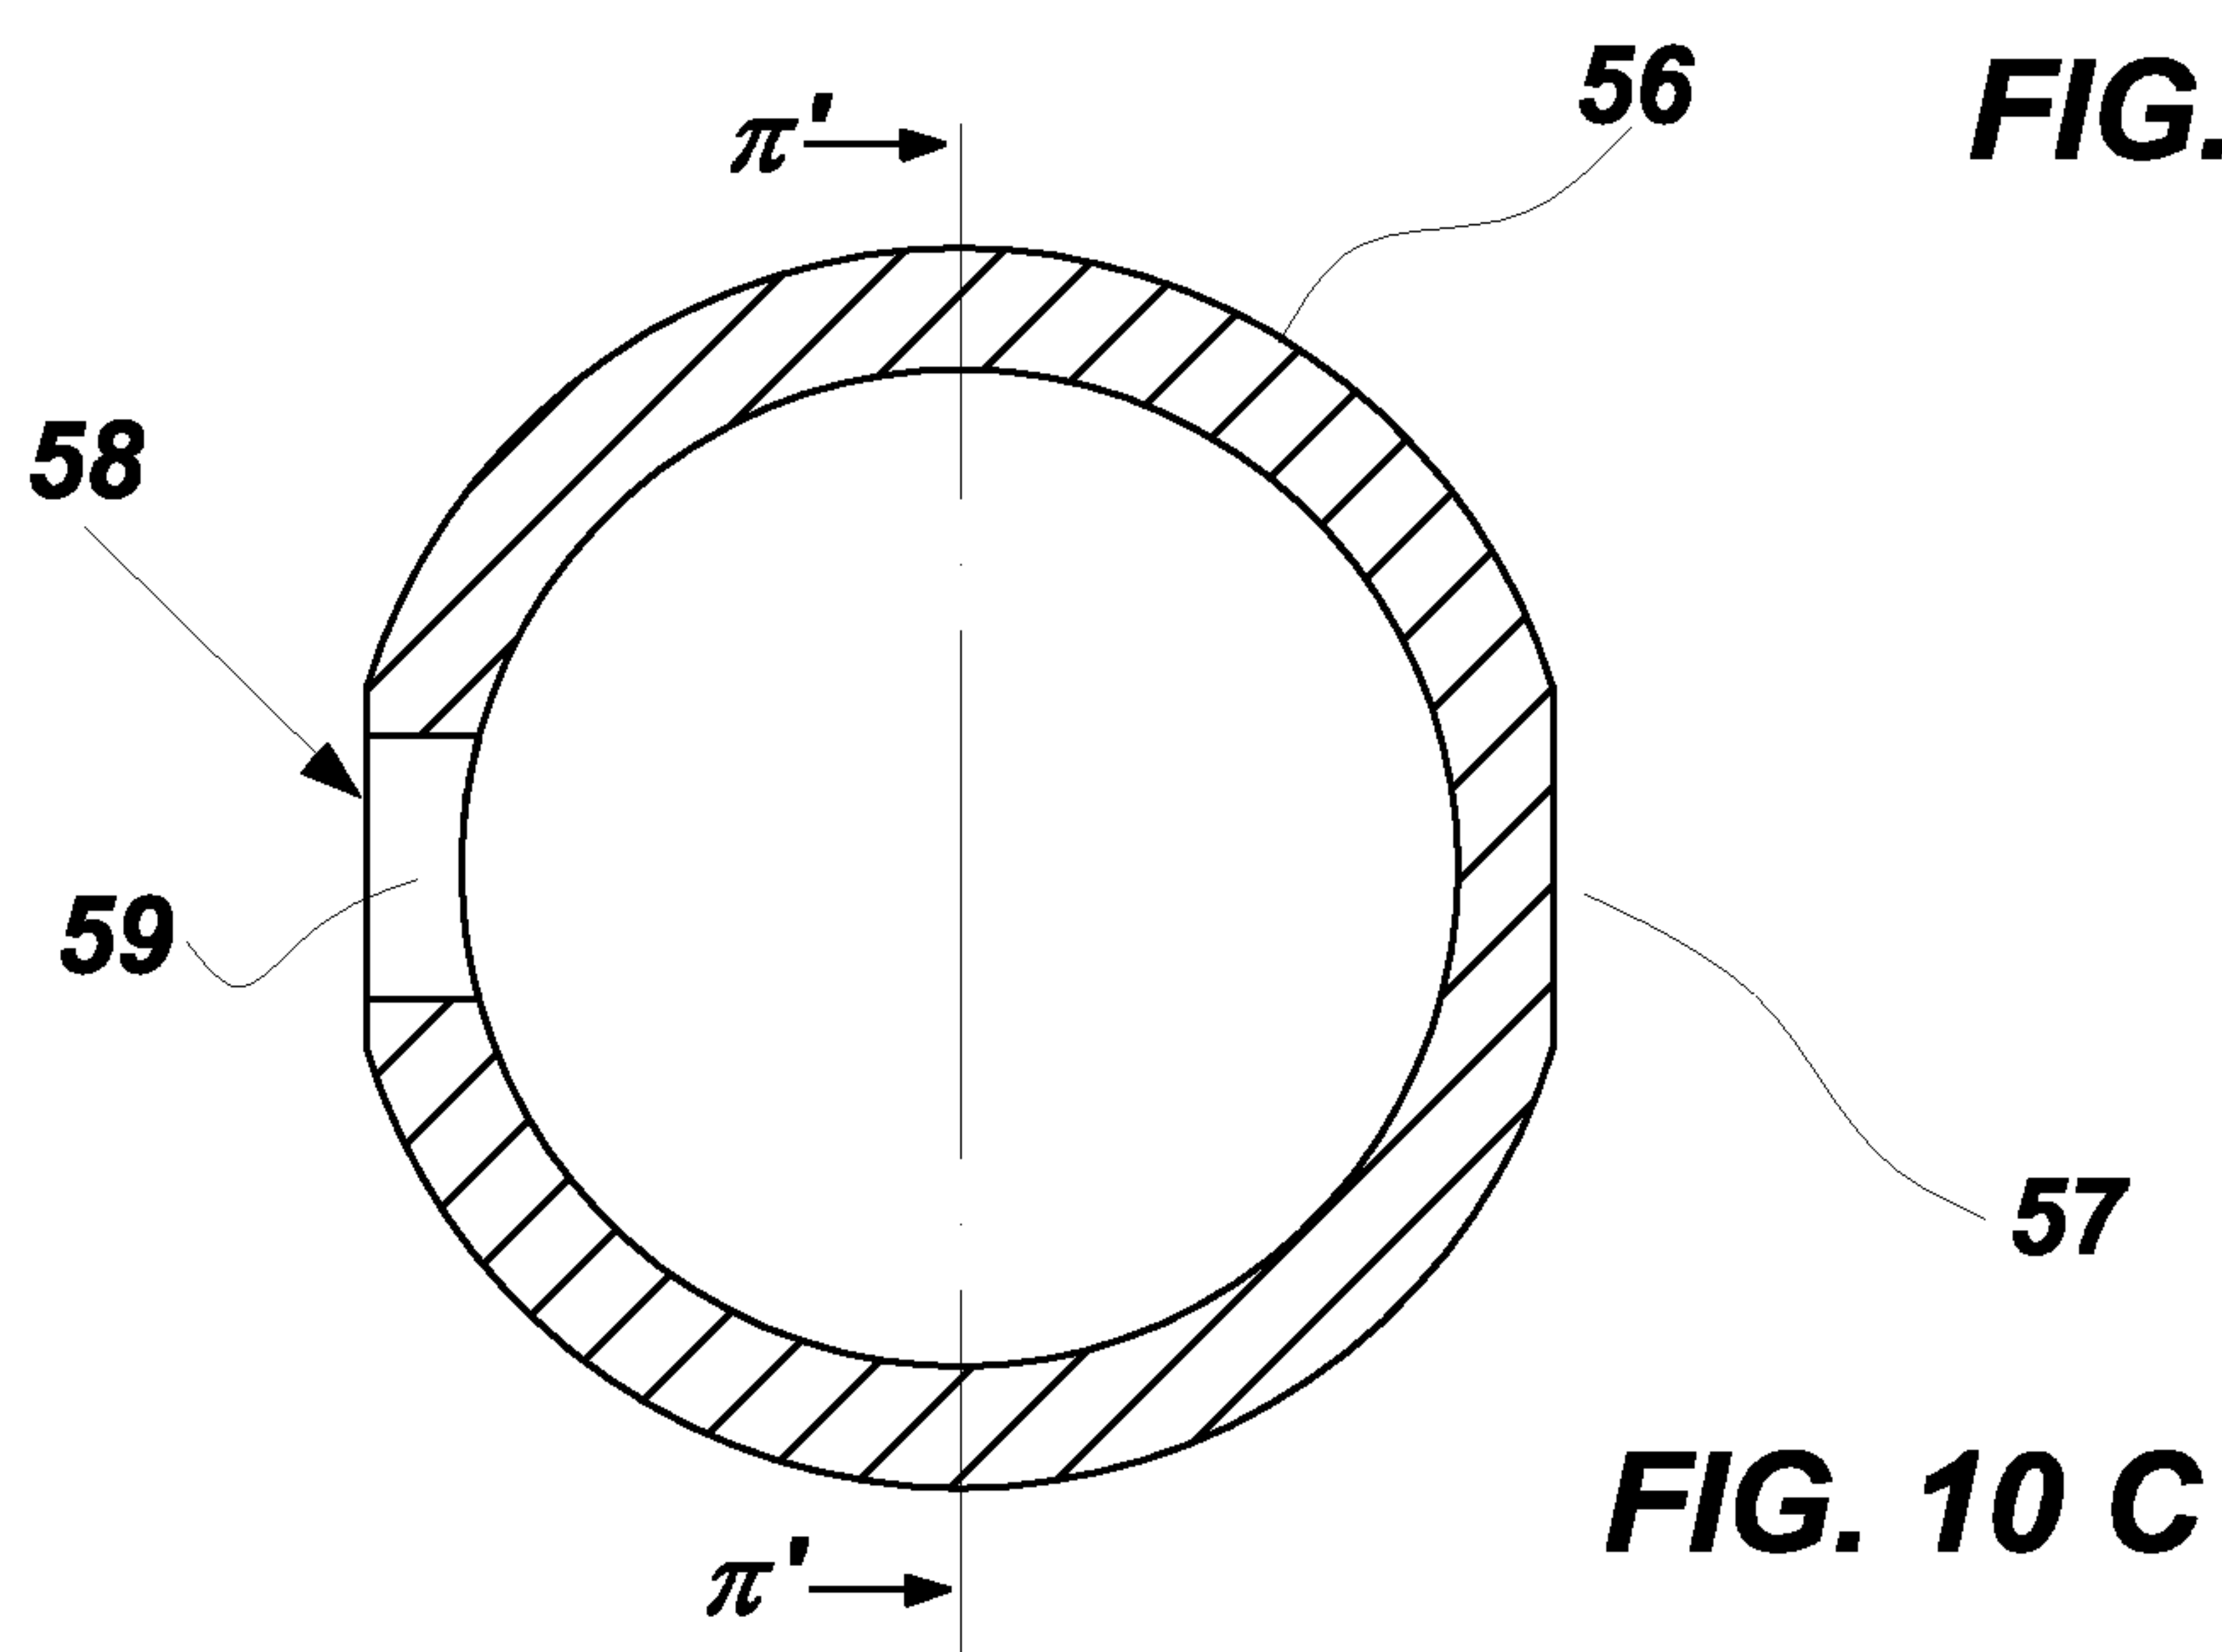
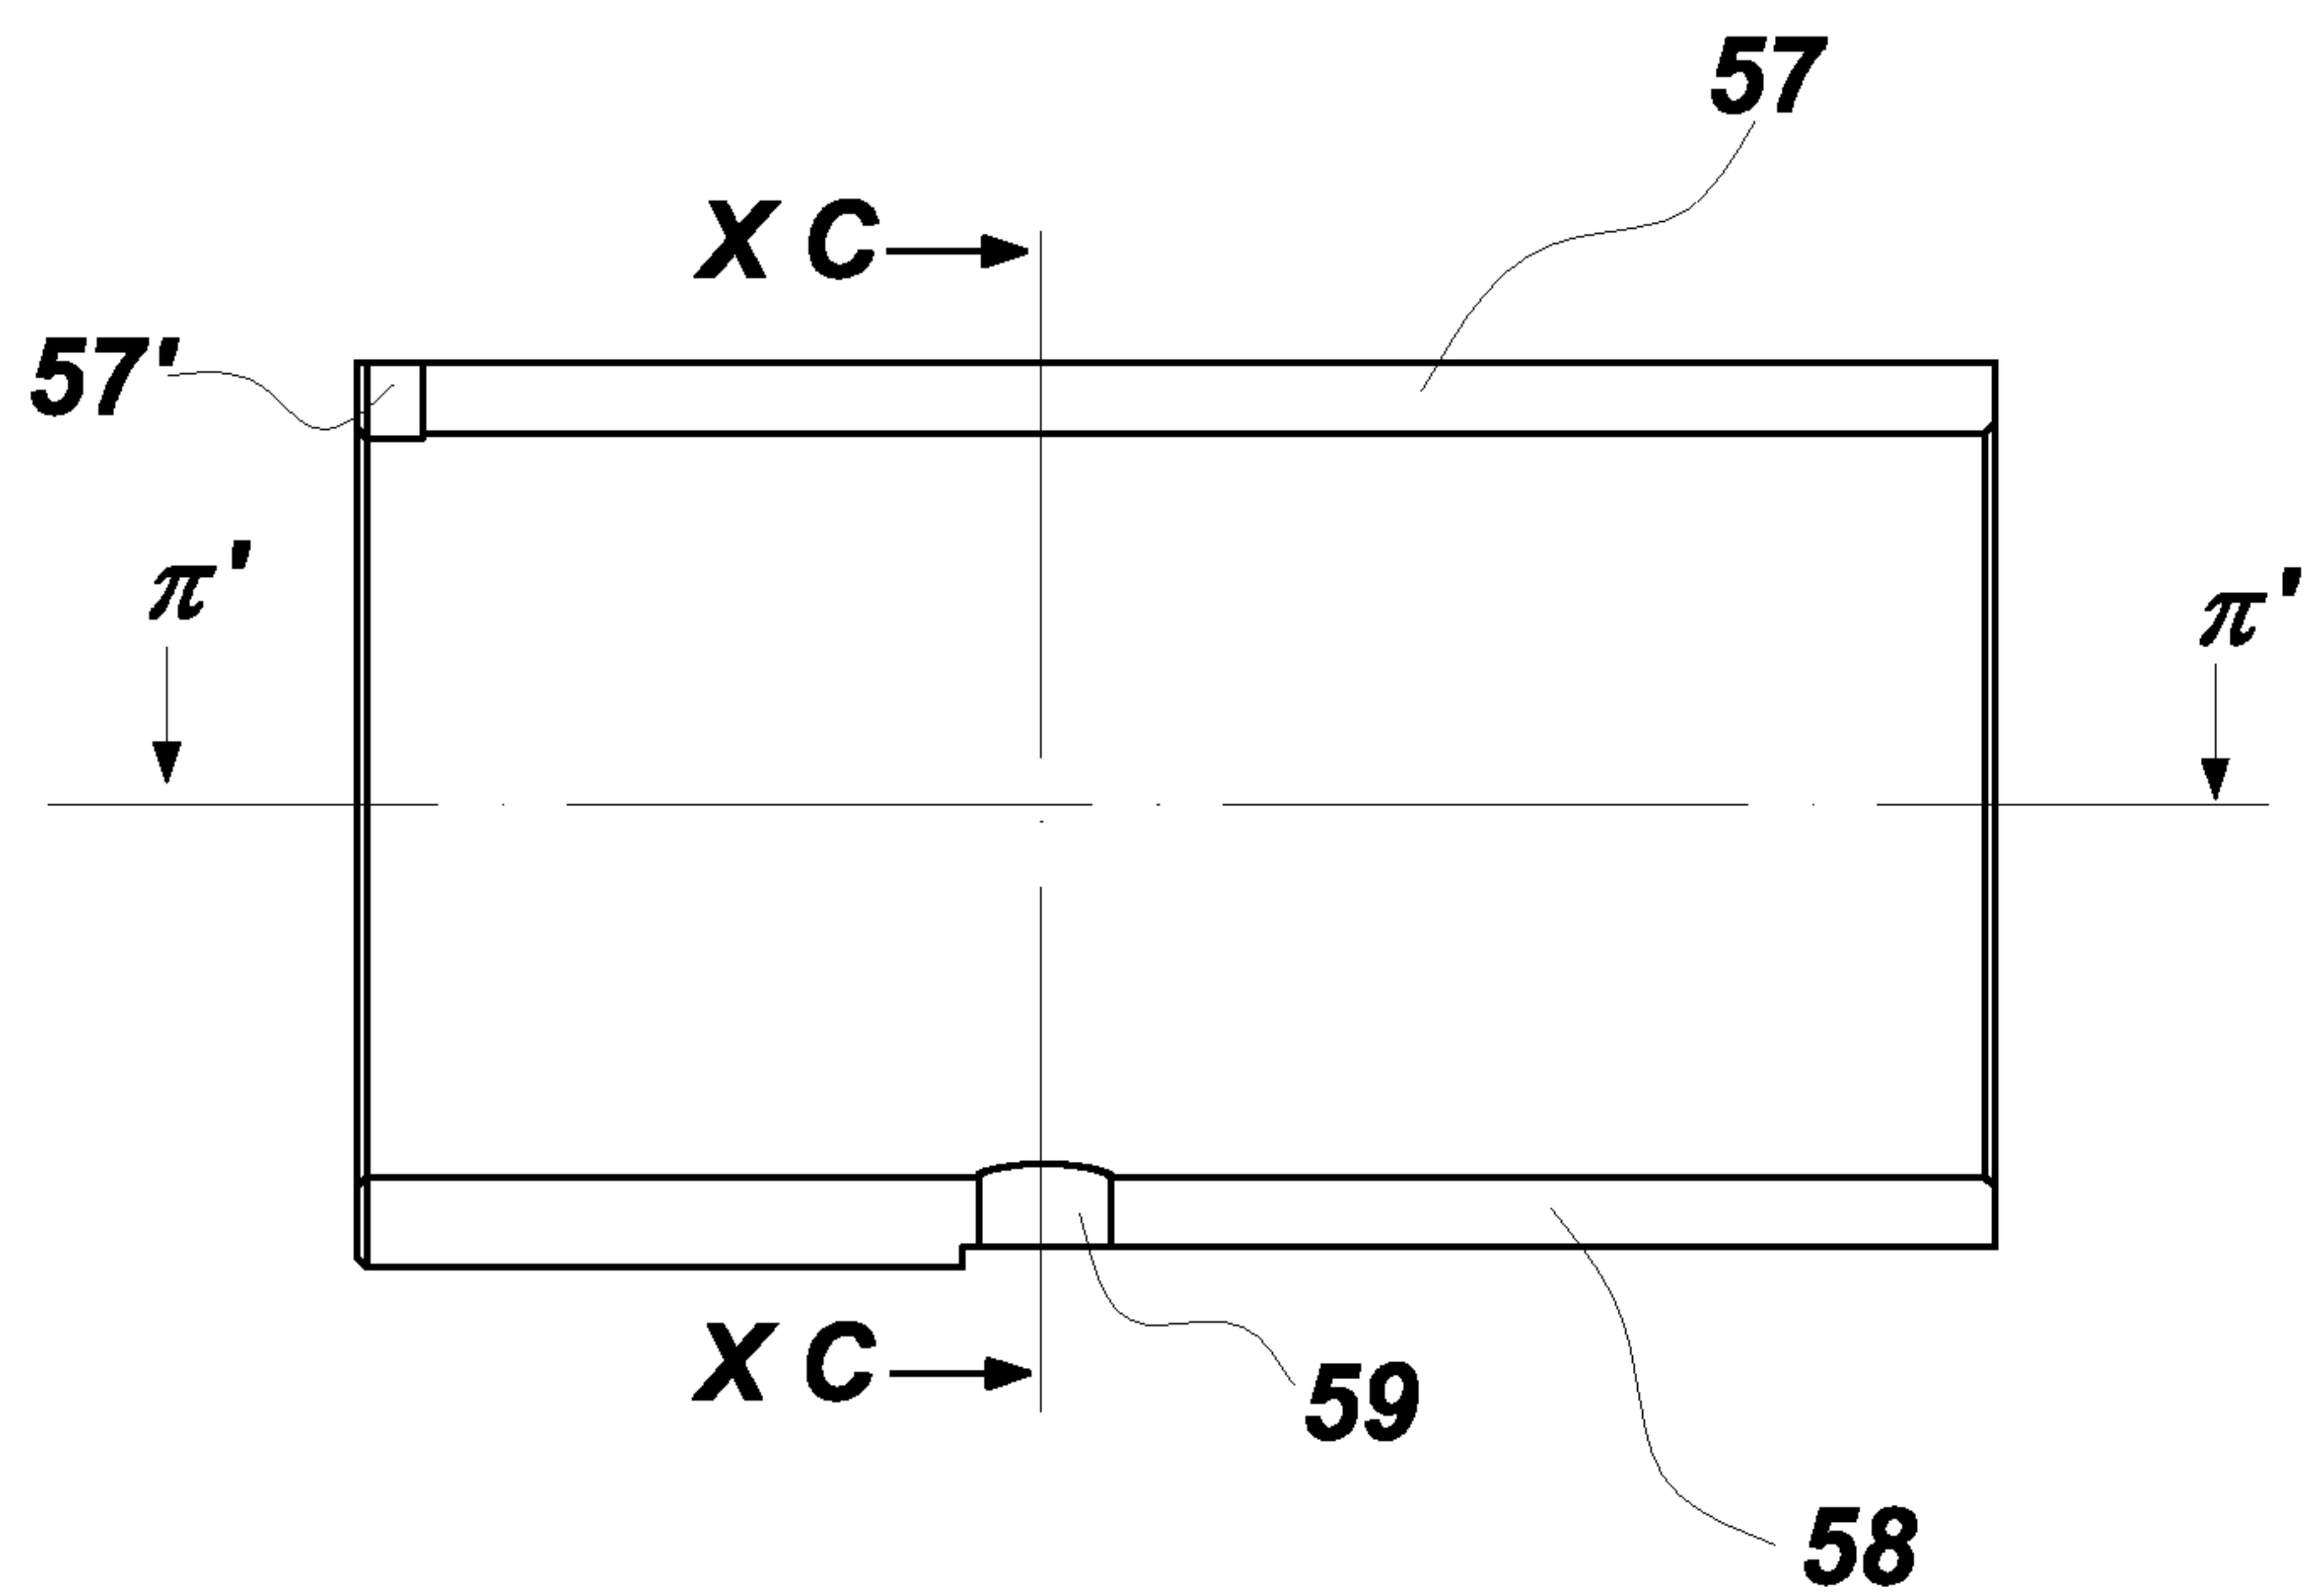
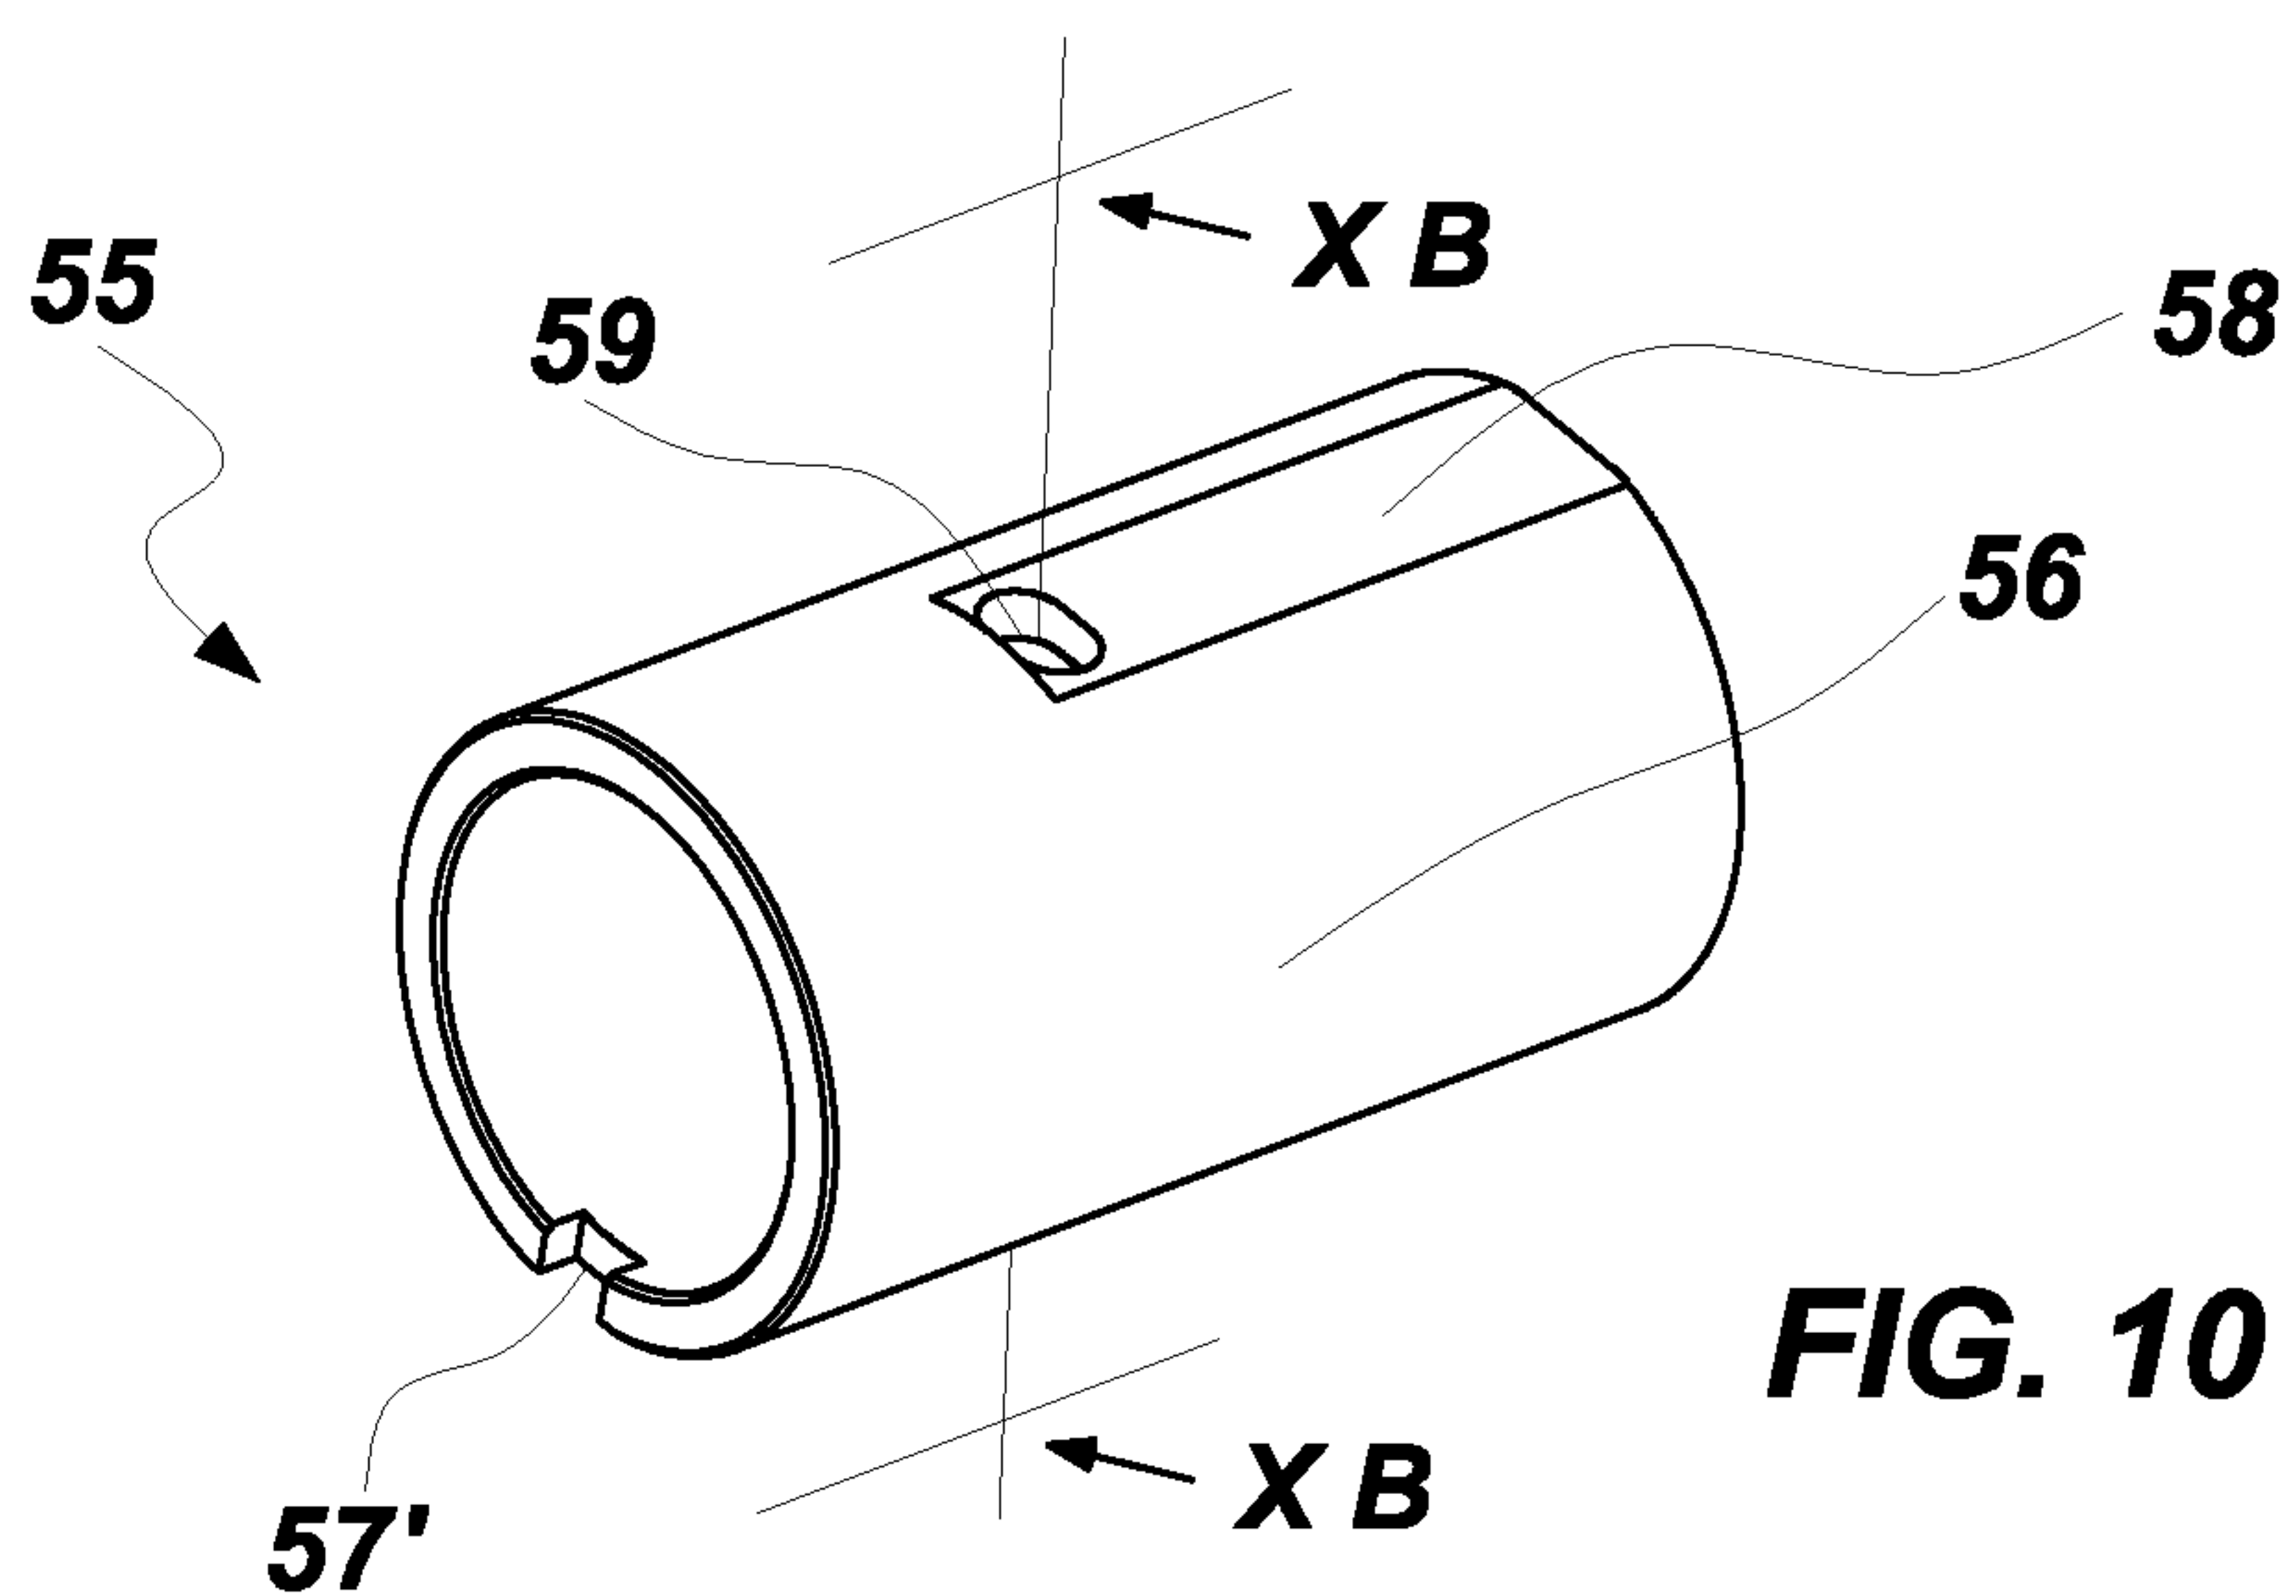
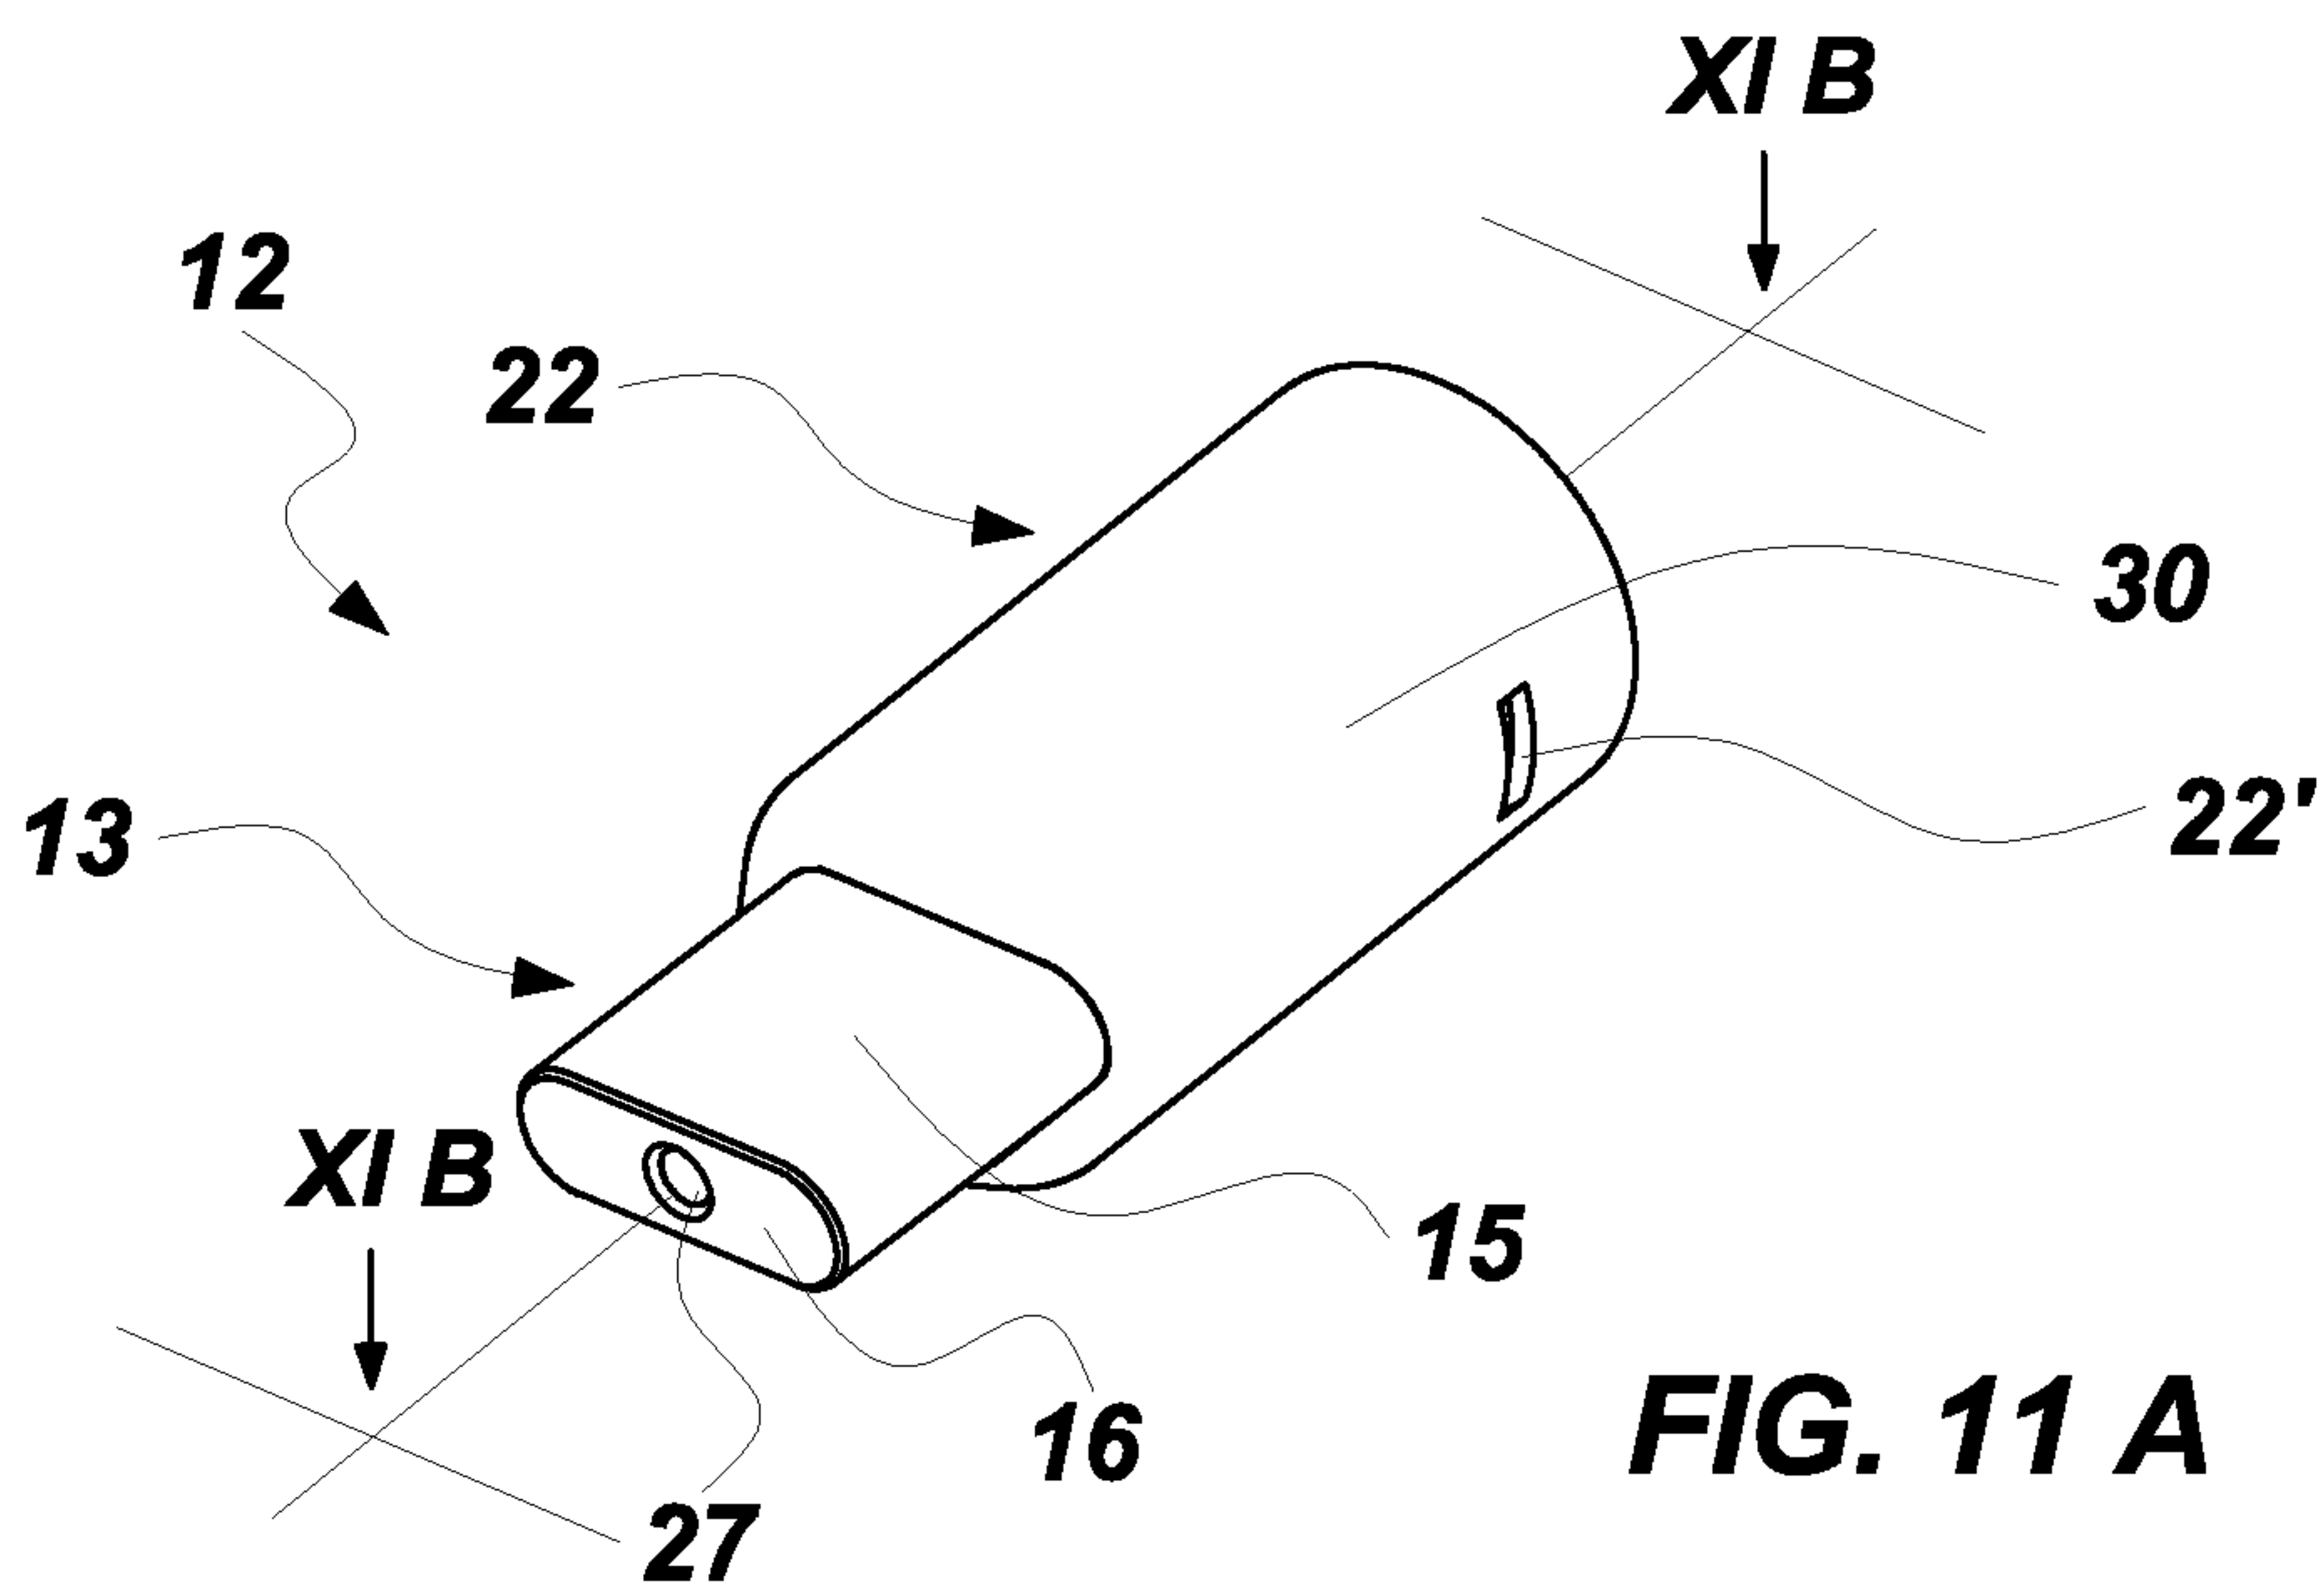
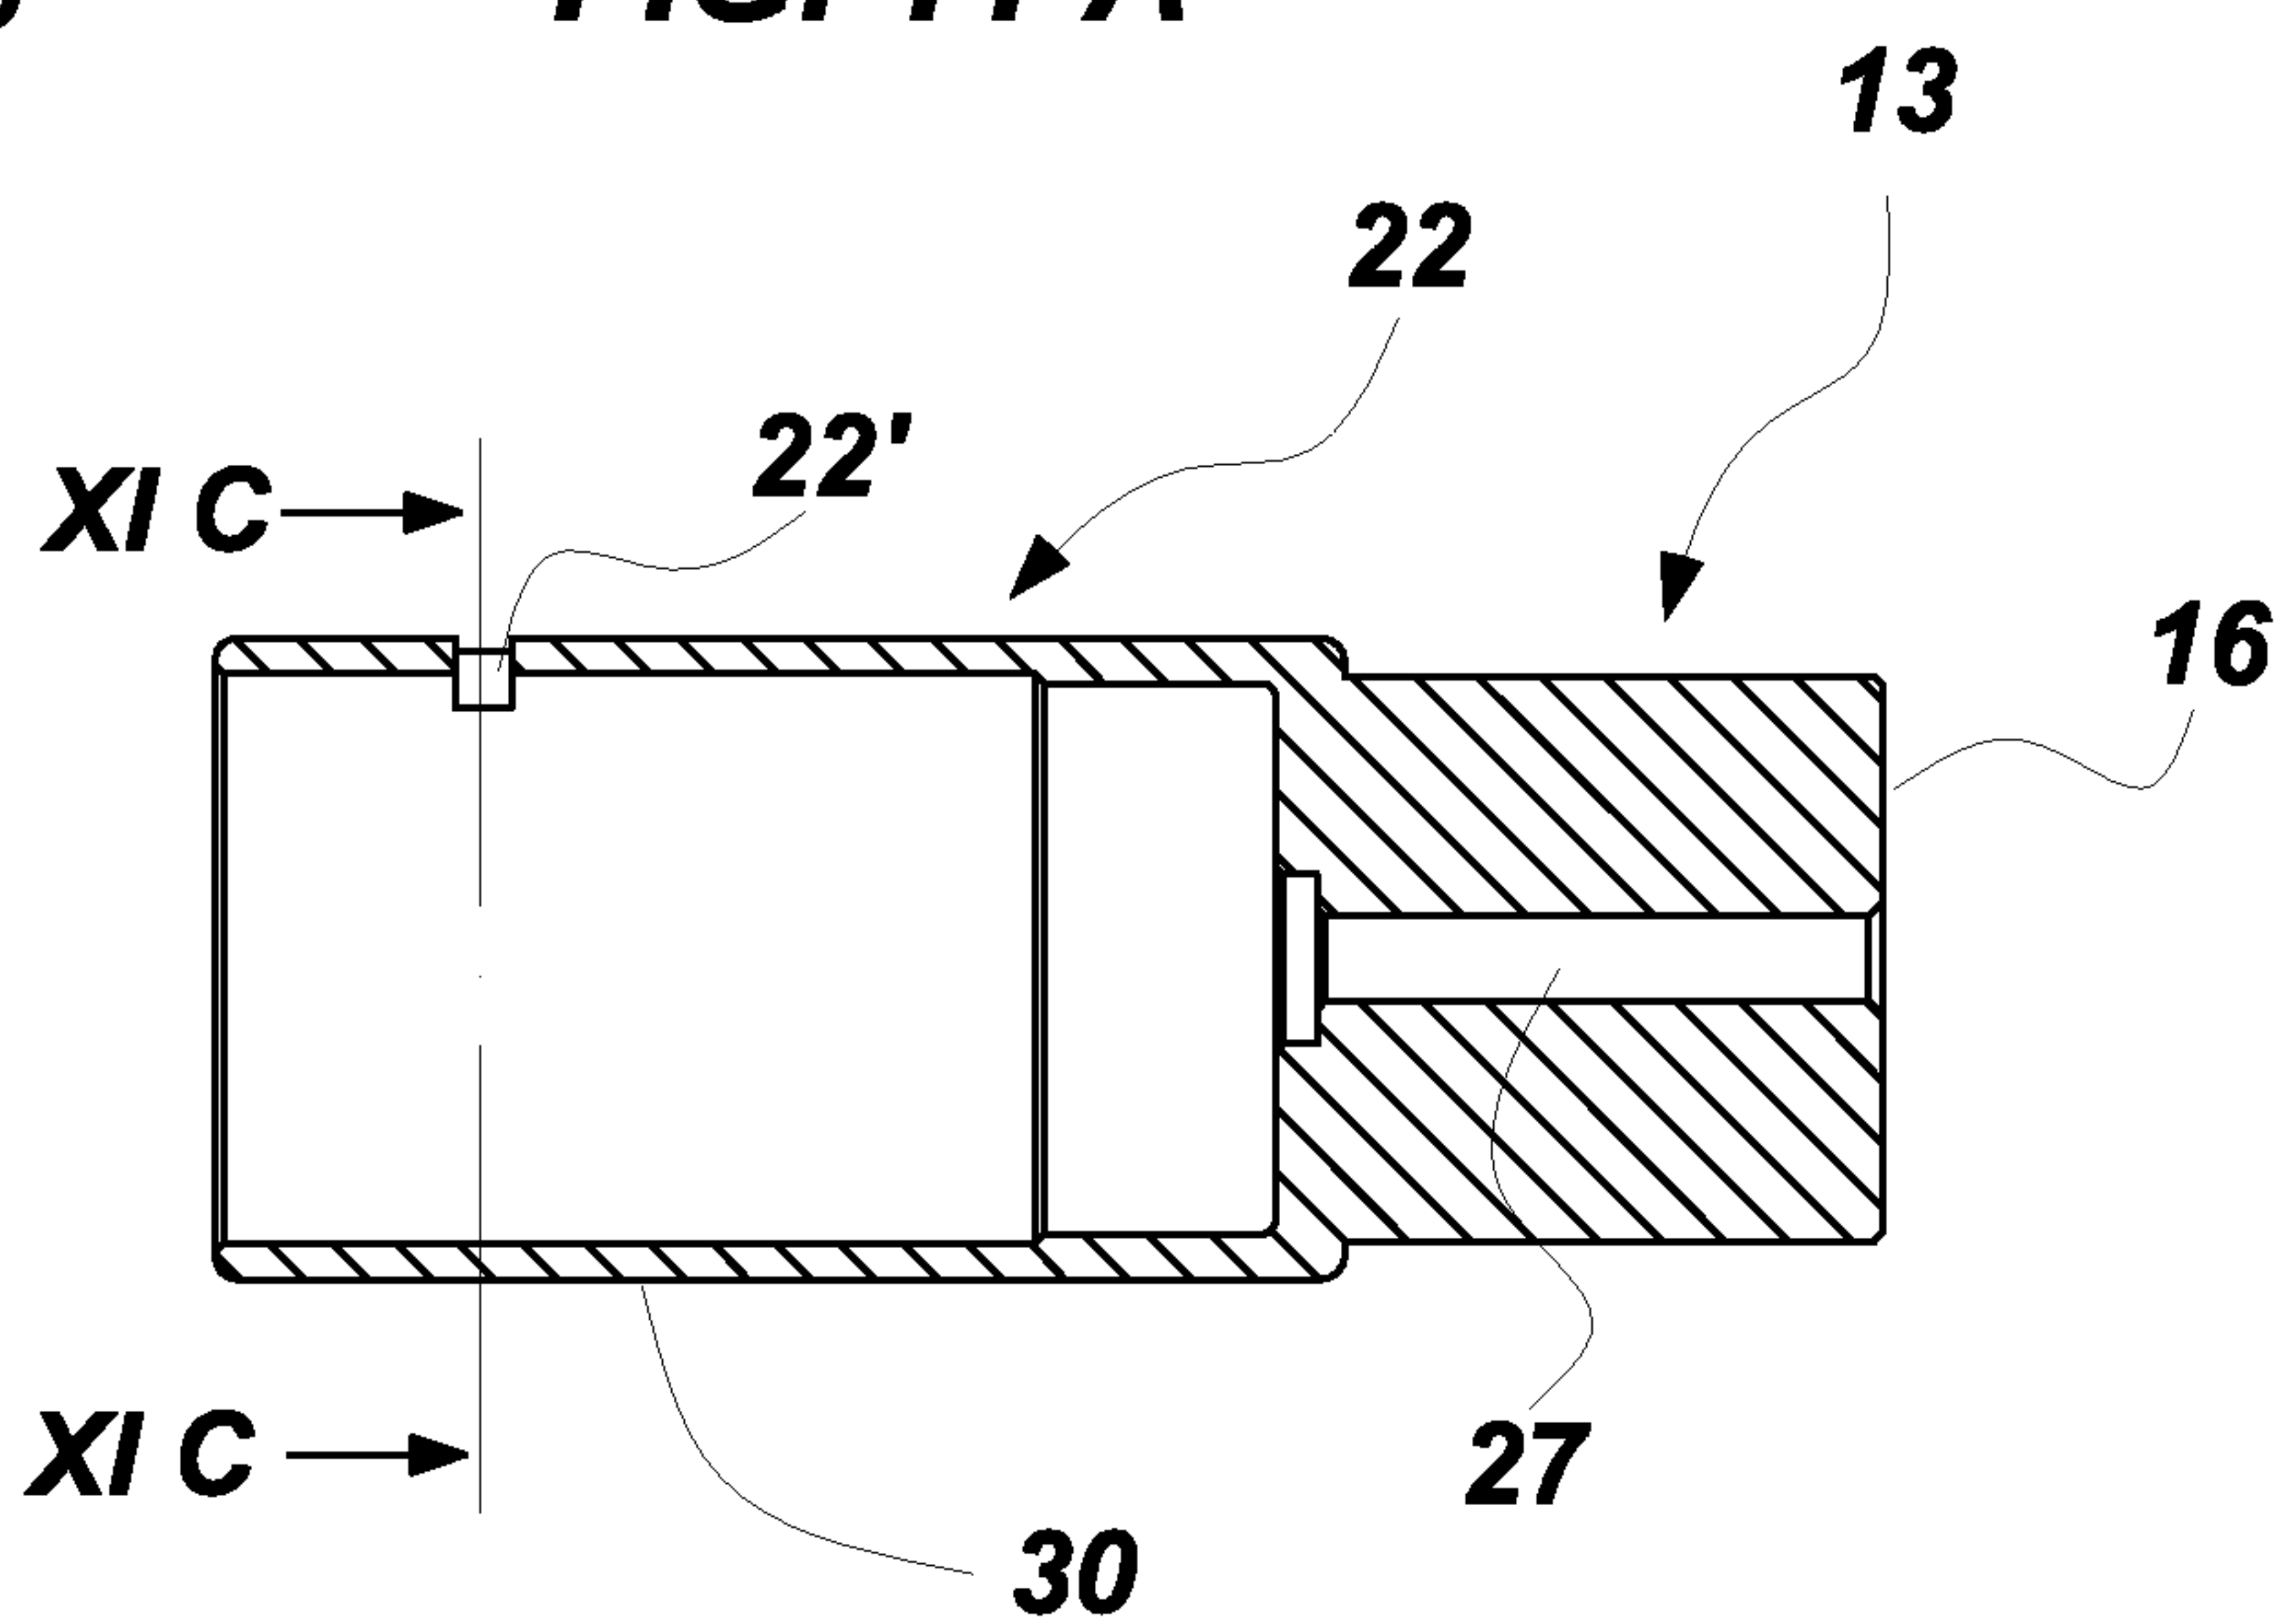
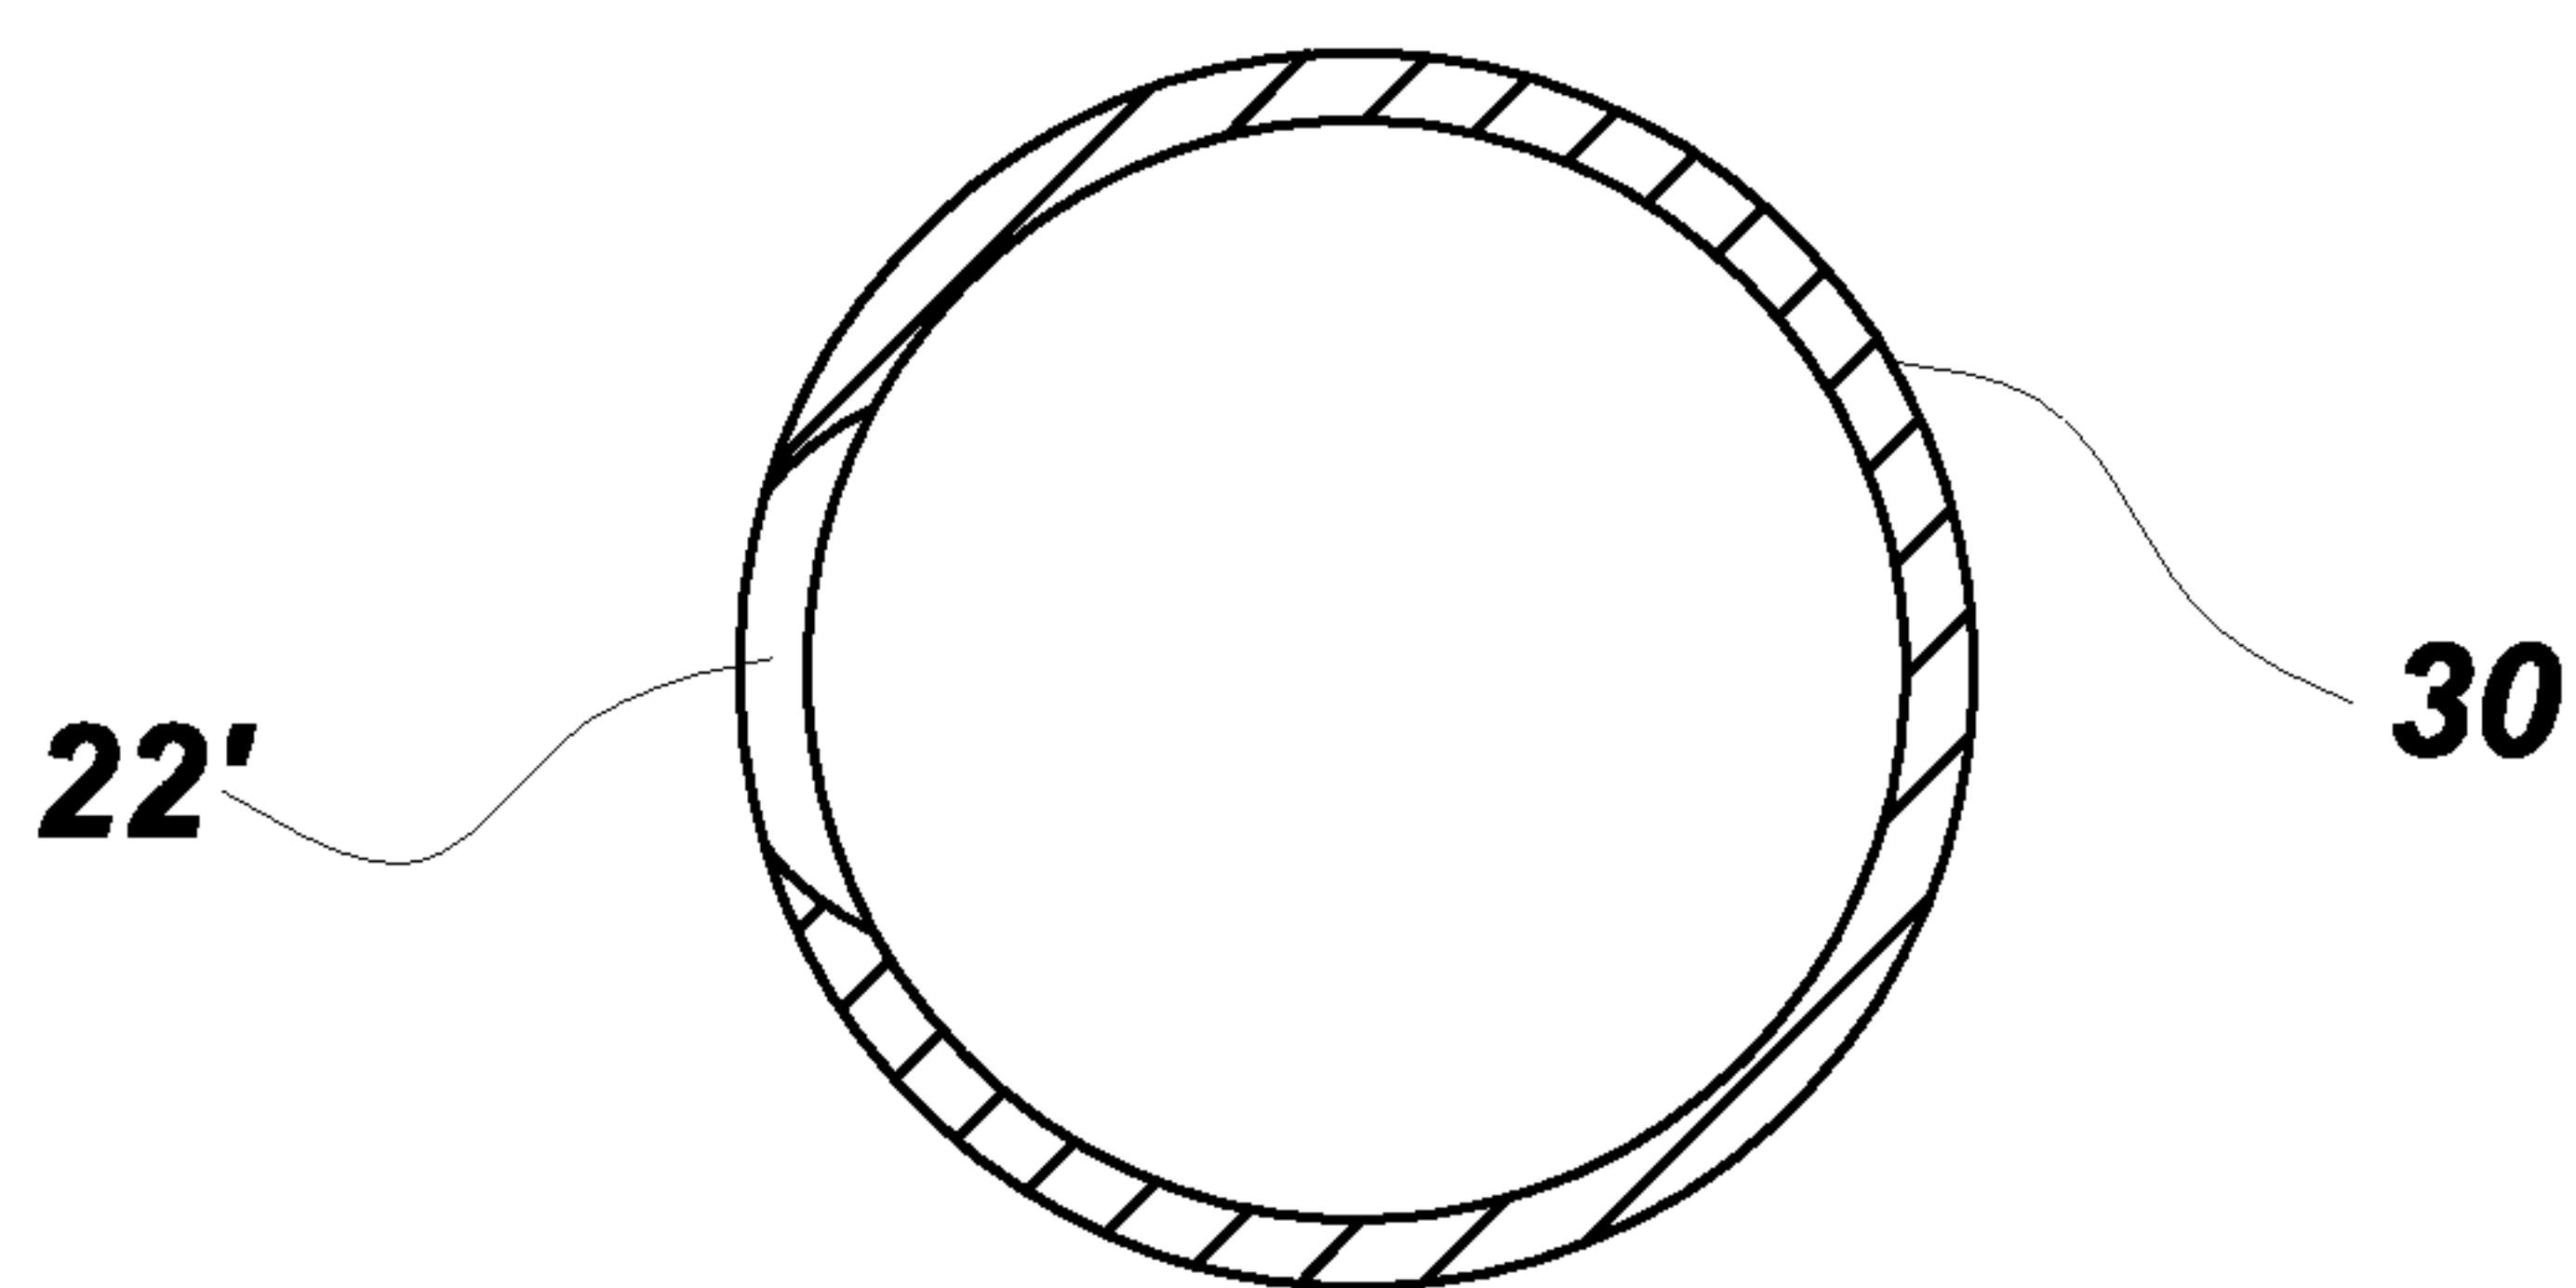


FIG. 8

FIG. 9

6 / 8

7 / 8**FIG. 11 A****FIG. 11 B****FIG. 11 C**

8 / 8

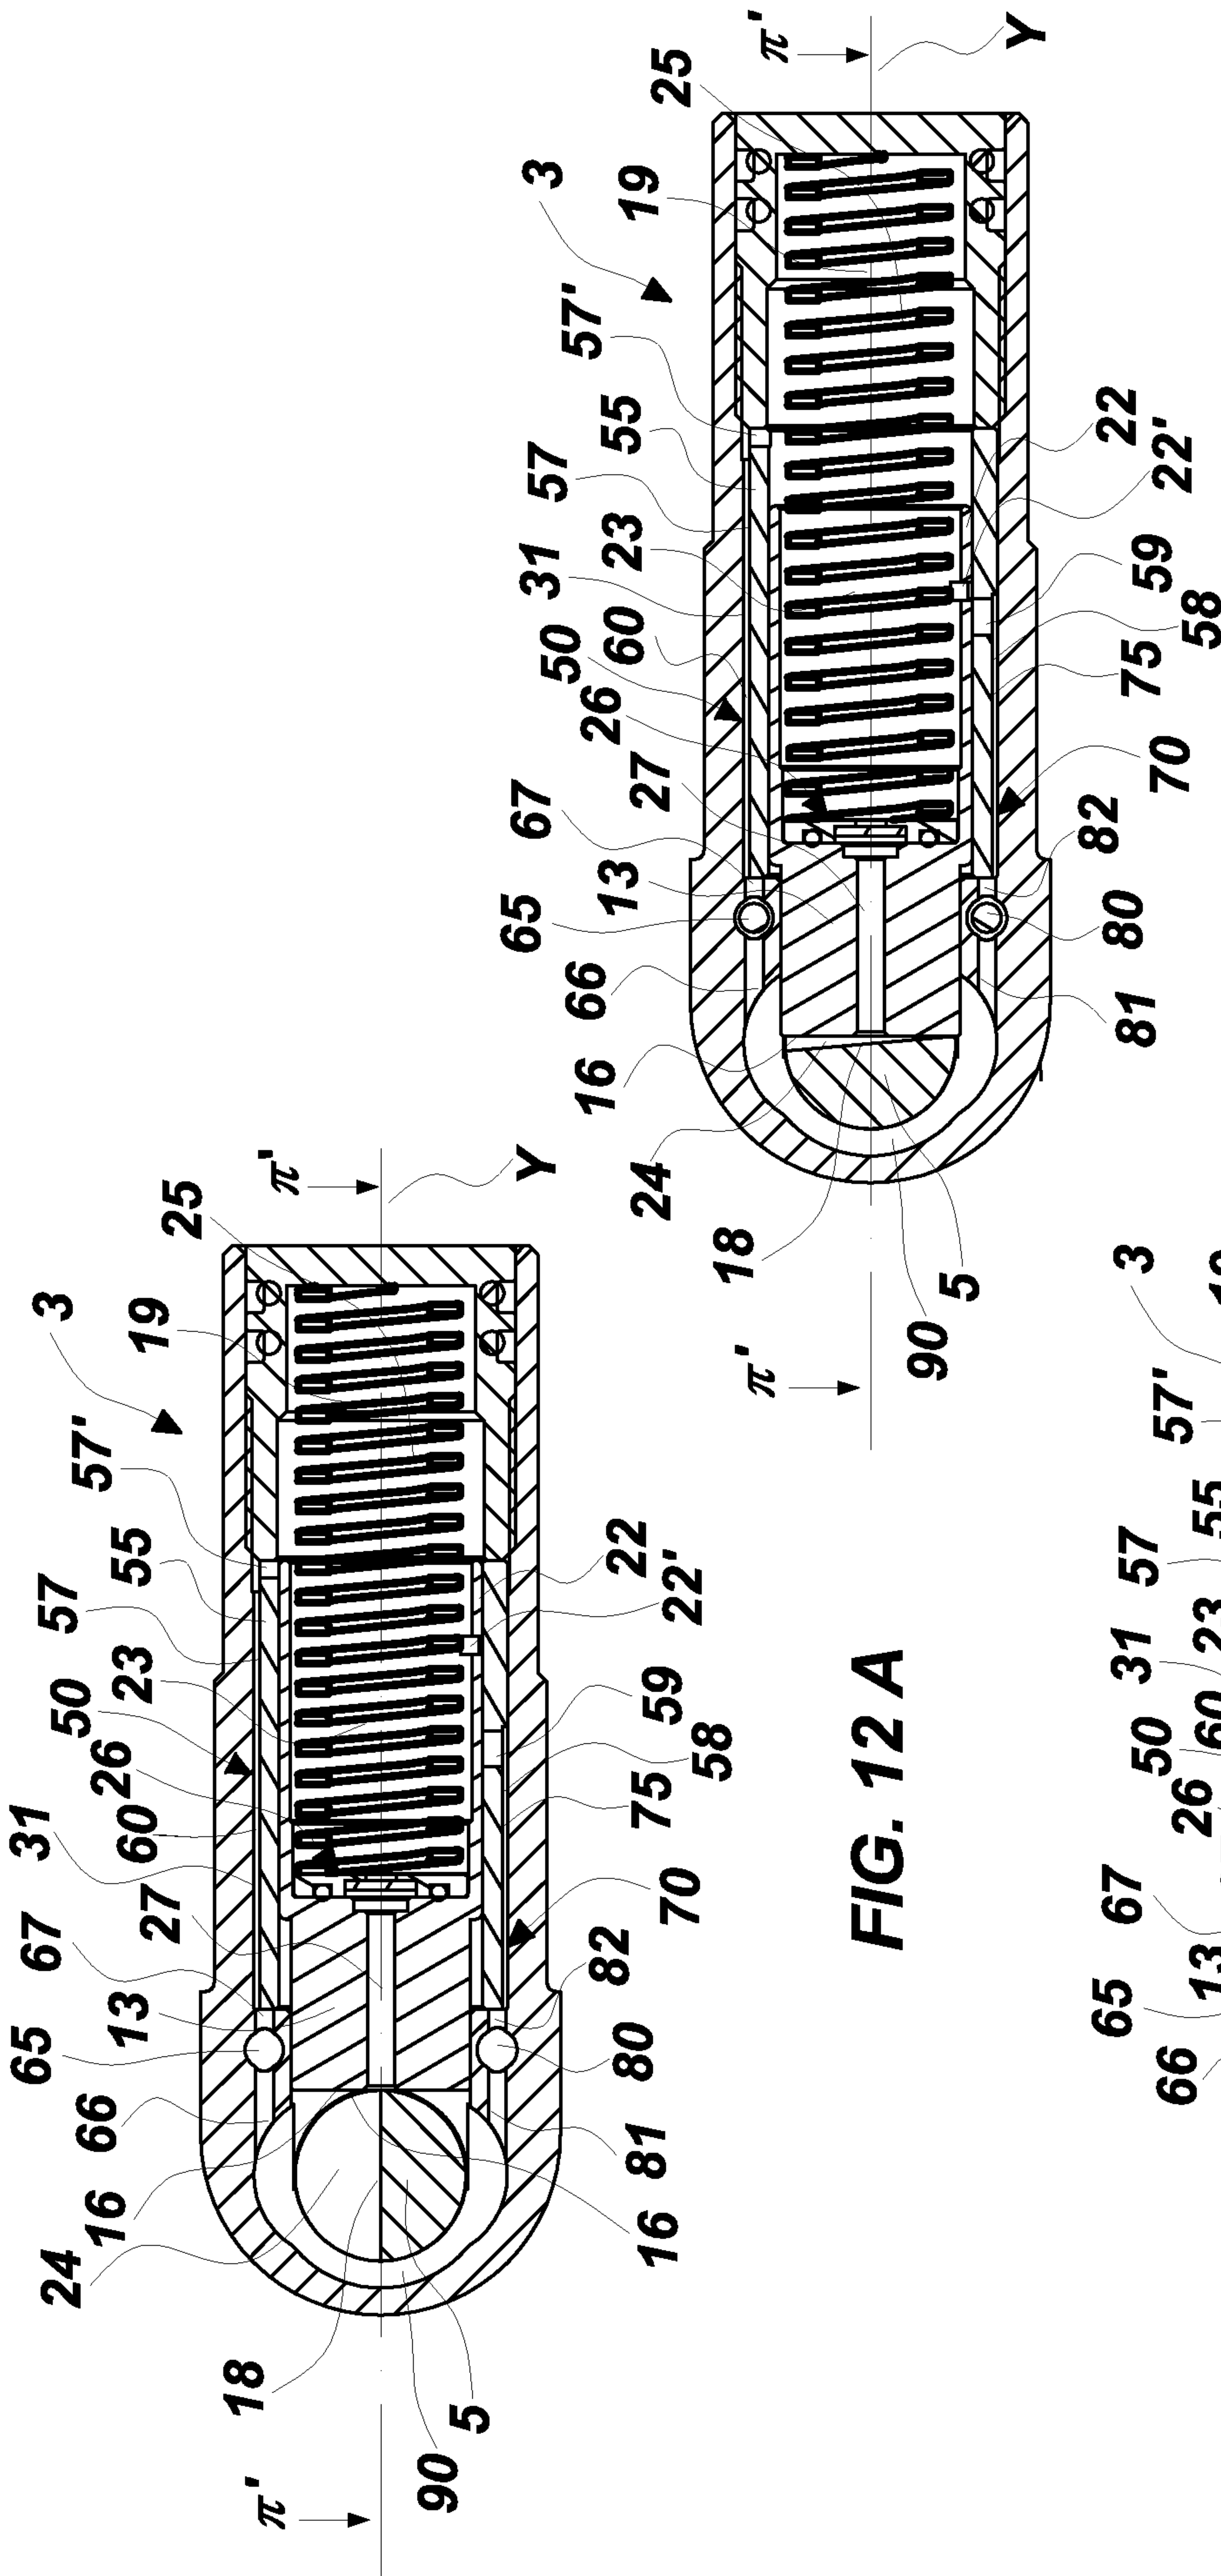


FIG. 12 B

