

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 June 2007 (21.06.2007)

PCT

(10) International Publication Number
WO 2007/069967 A1

(51) International Patent Classification:
A61F 13/15 (2006.01)

(21) International Application Number:
PCT/SE2005/001967

(22) International Filing Date:
16 December 2005 (16.12.2005)

(25) Filing Language: Swedish

(26) Publication Language: English

(71) Applicant (for all designated States except US): **SCA HYGIENE PRODUCTS AB** [SE/SE]; S-405 03 Göteborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HÅKANSSON, Carin** [SE/SE]; Byggens väg 29, S-427 38 Billdal (SE). **WAHLSTRÖM, Johan** [SE/SE]; Trädgårdsvägen 3C, S-560 27 Tenhult (SE).

(74) Agent: **ALBIHNS GÖTEBORG AB**; Box 142, S-401 22 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ABSORBENT ARTICLE AND METHOD FOR MANUFACTURING AN ABSORBENT ARTICLE

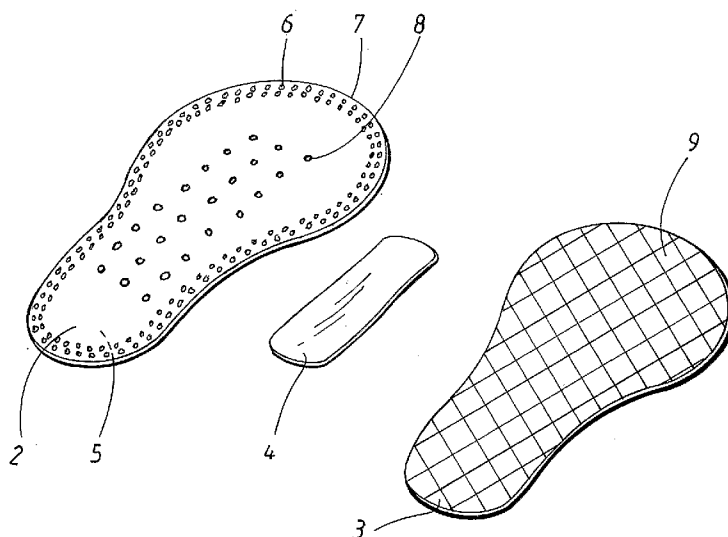

(57) Abstract: The invention relates to an absorbent product (1), such as an incontinence pad, a sanitary towel, a panty liner or the like, comprising a liquid-permeable top layer (2), a preferably liquid-impermeable bottom layer (3) and an absorbent core (4) arranged between the top layer (2) and the bottom layer (3). In accordance with the invention, the top layer (2) is joined together with a subjacent admission material (5) by means of ultrasonic processing, in conjunction with which the laminate that is defined by the top layer (2) and the admission material (5) when these are joined together includes a reinforcement (6) executed with ultrasonic processing essentially along its peripheral edge (7). The invention also relates to a method for manufacturing the aforementioned products (1).

WO 2007/069967 A1

TITLE:

Absorbent *article* and method for *manufacturing* of an absorbent *article*.

TECHNICAL FIELD:

- 5 The present invention relates to an absorbent product such as an incontinence pad, a sanitary towel, a panty liner or the like, comprising a liquid-permeable top layer, a preferably liquid-impermeable bottom layer and an absorbent core arranged between the top layer and the bottom layer.
- 10 The invention also relates to a method for the manufacture of an absorbent product such as an incontinence pad, a sanitary towel, a panty liner or the like, in conjunction with which the product is executed with a liquid-permeable top layer, a preferably liquid-impermeable bottom layer and an absorbent core arranged between the top layer and the bottom layer.

15

BACKGROUND ART:

- In conjunction with the manufacture of absorbent products such as sanitary towels, panty liners and incontinence pads, processes relating to the joining together of materials of various kinds are usually performed. For example,
- 20 this may involve the manufacture of a liquid-permeable surface layer, which can consist of a laminate with a nonwoven layer comprising synthetic or natural fibres, which must be joined together with a wadding material. An absorbent core is usually arranged under this laminate. A liquid-proof bottom layer is then arranged under the absorbent core in a previously disclosed
- 25 manner.

- Depending on what type of absorbent product is to be manufactured, the various layers of material can be treated in various ways. For example, the upper nonwoven layer may be perforated. The absorbent core can also be
- 30 provided, if required, with a superabsorbent material.

In conjunction with the manufacture of the absorbent product, it is also

possible, in accordance with the prior art, to glue the surface layer and the bottom layer together. This means that the absorbent core and the wadding material are then placed between the surface layer and the bottom layer before this gluing process is carried out.

5

Ultrasound technology is used in addition in certain processes that are arranged for the processing of absorbent products, for example in conjunction with the joining together of two or more layers of material. This technology is also previously disclosed and is suitable, for example, for joining together the type of relatively thin material layers that are used in absorbent products. In the case of such joining together, which is also referred to as ultrasonic welding, a laminate can be formed by the actual layers of material.

15 In conjunction with the manufacture of an absorbent product, a particular requirement may be to join together a perforated nonwoven layer with a wadding material so that a laminate of the aforementioned kind is formed. A process of this kind can then be performed by means of ultrasonic welding, that is to say without gluing. In order to complete the product, the absorbent
20 core must then be placed between the above-mentioned surface laminate and the bottom layer, after which the bottom layer is glued securely to the surface laminate.

Disclosed in patent document WO 99/49825 is a material laminate which
25 comprises a first material layer of a nonwoven material and a second layer of material which consists of a wadding material. These two layers of material are joined together by means of ultrasonic welding.

In those cases in which the absorbent core and the wadding material are of a
30 size that is significantly smaller than that of the surface layer and the bottom layer, an absorbent product is then formed with a core that is relatively rigid, but in which the parts of the surface layer and the bottom layer that are

situated to the side of the rigid core can be perceived as weak and loose. A further problem associated with such a product is that the seal along the edges of the surface laminate is not always perfect unless a gluing operation is carried out in this area. On the whole, the finished product may be perceived as less attractive by the wearer. Against the background of the foregoing, it can be established that the need exists for improved absorbent products in which the above-mentioned problems can be eliminated.

DISCLOSURE OF INVENTION:

A principal object of the present invention is thus to solve the above-mentioned problems and to make available an improved absorbent product and an improved method for the manufacture of absorbent products.

The above object is achieved with a product of the kind referred to by way of introduction, in which the top layer is joined together with a subjacent admission material by means of ultrasonic processing, and the laminate that is defined by the top layer and the admission material when these are joined together includes a reinforcement executed by ultrasonic processing essentially along its peripheral edge.

The object is also achieved by means of a method of the kind referred to by way of introduction, which comprises: the joining together of the top layer and a subjacent admission material by means of ultrasonic processing, and the forming by means of ultrasonic processing of a reinforcement running essentially along the peripheral edge of the laminate that is defined by the top layer and the admission material when these are joined together.

Certain advantages are achieved through the invention. Firstly, it can be noted that an attractive product is obtained without the weak and loose edges, that is to say in the area outside the absorbent core. In addition, a highly effective edge seal of the laminates is achieved, which are defined by the top layer and the admission material when these are joined together,

where the risk of any leakage and spread of liquid via their peripheral edge can be minimized or eliminated. The invention is also capable, in the case in which the joining together of the top layer and the admission material and the sealing of the edges takes place in a single stage, of providing major advantages of a process engineering nature, where in particular the welding pattern for the admission material and the edge seal is "synchronized" in an optimal fashion. In other words, the finished product will exhibit a high degree of concordance with regard to the pattern of welding for the lamination and the pattern of welding for the edge seal. This in turn provides additional advantages in that the surface welding pattern and the edge seal can be designed as a continuous pattern, which not least may be visually appealing. The invention also provides simpler contour cutting of the finished product without any loose fibres.

The invention also provides an advantage in relation to the prior art, in which any seal between a surface material and an admission material - which can be executed by means of a gluing procedure in a previously disclosed fashion - can be less effective in respect of the admission characteristics of the product.

It can be stated as a general rule that the invention provides advantages from a combined process and design perspective, because it can be used to form welded patterns and embossed areas that are both technically optimal with regard to, for example, strength, and visually attractive. At the same time, the invention permits a very effective manufacturing process in view of the ability to perform two process stages simultaneously.

BRIEF DESCRIPTION OF DRAWINGS:

The invention is described below in conjunction with a preferred illustrative embodiment and the accompanying drawings, in which

Figure 1 is a perspective view of an absorbent product in accordance

with the present invention in a separated state;

Figure 2 is a perspective view of the absorbent product in a partially assembled state; and

5

Figure 3 shows a view from above of the aforementioned product in the completed state.

MODE(S) FOR CARRYING OUT THE INVENTION:

10 Figure 1 is a perspective view of an absorbent product 1 in accordance with the present invention, viewed in its separated state. The product 1 comprises a first covering layer in the form of a liquid-permeable top layer 2, which is arranged on the side of the product 1 which, during use, is intended to face towards the wearer. The product 1 also comprises a second covering layer in
15 the form of a liquid-impermeable bottom layer 3, which is arranged on the side of the product 1 which, during use, is intended to face away from the wearer. The product 1 also comprises an absorbent core 4 arranged between the top layer 2 and the bottom layer 3.

20 The absorbent core 4 is appropriately manufactured from a suitable fibre material in the form of natural or synthetic fibres with absorbent characteristics, or a mixture of natural fibres and synthetic fibres or other absorbent materials of a previously disclosed kind that are suitable for use in, for example, sanitary towels, incontinence pads and panty liners. The
25 absorbent core 4 can also comprise a predetermined proportion, for example 40-60%, of superabsorbent material, that is to say polymer materials in the form of particles, fibres, flakes or the like, which possess the ability to absorb and chemically bind liquid equivalent to several times their own weight to form an aqueous gel. This imparts a very high liquid-absorbent capacity to
30 the finished product 1.

It must also be noted that the absorbent core 4 can exhibit different forms,

for example an essentially elongated and rectangular form, as can be appreciated from Figure 1, or alternatively an even more irregular form. The absorbent core 4 also preferably has rounded edges.

- 5 The liquid-permeable top layer 2 in accordance with Figure 1 preferably consists of a fibrous material, for example a soft nonwoven material, although alternatively it can consist of other materials or material laminates. The top layer 2 is preferably fully or partially perforated, although alternatively it can be entirely imperforate. The top layer 2 can appropriately
10 consist of a perforated plastic film, for example a thermoplastic plastic material such as polyethylene or polypropylene, or a mesh-like layer of synthetic or textile material. Synthetic fibres, such as polyethylene, polypropylene, polyester, nylon or the like are preferably used as nonwoven material. Mixtures of different types of fibres can also be used for the
15 aforementioned nonwoven material. The invention is not, however, restricted in principle to use only for top layers which consist of nonwoven material, but can also be applied in conjunction with the processing of other materials, for example films of thermoplastics such as polyethylene or polypropylene.
- 20 The invention can also be implemented with a top layer which consists of different types of laminates or combinations of laminates. For example, the top layer may consist of only a single laminate extending along the entire surface of the product 1, or alternatively of a plurality of different laminates which cover parts of the product 1. In the event that the product 1 consists of
25 a plurality of laminates, for example divided up into a plurality of longitudinal parts having different laminate sections, these different laminate sections can consist of different materials and can have different characteristics. For example, each laminate section can then have different types of perforation, hole positioning, dimensions, hydrophobicity, etc. The different laminate
30 sections can then be joined together by means of ultrasonic welding in a previously disclosed fashion that is not described here in greater detail.

The liquid-permeable top layer is preferably manufactured from a material that exhibits characteristics such as dryness and softness during the time when the absorbent product 1 is being worn, because this top layer is in contact with the wearer's body. It is also desirable for the top layer to have a soft and textile-like surface which remains dry, even in the event of repeated wetting. The top layer can consist of a nonwoven material, for example, with a soft and smooth surface, such as a spunbond material made from polypropylene fibres. A perforated, hydrophobic nonwoven material may be used in order to permit the surface that is closest to the wearer's body to be kept dry, in conjunction with which openings are formed in the material that are larger than the holes between the fibres in the material. In this way, liquid can be led down through the perforated openings in the top layer to the subjacent absorbent core. Other examples of materials for the top layer are perforated plastic films such as a perforated polyester film. The top layer can be joined together with the subjacent bottom layer and the absorbent core, for example by means of adhesive, ultrasonic jointing or by means of some form of thermal bonding. The top layer is preferably a perforated nonwoven material with an opening density of 3-15, preferably 6-12 and most preferred of all 7-9 openings/cm².

In accordance with one preferred embodiment, the top layer contains small perforations which surround the openings in the top layer for the purpose of further increasing the intake of liquid and the acquisition characteristics. The perforations in the top layer normally have a density in the range from 20-500, preferably 70-250, and most preferred of all 120-170 perforations/cm².

It is desirable for the thickness of the top layer to be as large as possible, because a large thickness has a positive effect on the acquisition. A balance is required, however, in order not to influence the softness of the material, and for this reason a thickness in the range from 1.3 to 1.7 mm, and preferably ca. 1.5 mm, has been found to be appropriate.

The top layer can also be a three-dimensional laminate of nonwoven and plastic film with a base weight of 42.5 gsm. The nonwoven material can be a carded, thermally bonded material based 100% on polypropylene, with a base weight of 18 gsm. The plastic film can be hydrophilic, pre-perforated (with small holes) and manufactured from a mixture of polyethylene and polypropylene, with a base weight of 22.5 gsm.

The nonwoven part of the top layer can also be a spunbond nonwoven material, an air-thru nonwoven material, a spunlace nonwoven (hydroentangled) material, a meltblown nonwoven material, or a combination of these. The raw material can be polypropylene (PP), polyethylene (PE) polyester (PET), polyamide (PA), or a combination of these. If a combination is used, this can be a mixture of fibres from different polymers, although each fibre can also include different polymers (e.g. PP/PE bi-component fibres or PP/PE copolymers). Where appropriate, the plastic film can consist of PE or PP, PET, PLA or amyli (or, for that matter, any other thermoplastic polymer), or a mixture or copolymers of the aforementioned polymers.

The perforated top layer can also be manufactured from a single layer of material, such as a nonwoven material or a film (as described above).

The top layer can have an opening size of 1.6 to 3.2 mm in the direction of the machine (longitudinal) and 0.9 to 2.3 mm in the transverse direction. The opening size can be between 0.1 and 6.0 mm in diameter.

The openings in the top layer can be oval and slightly elongated in the direction of the machine. The openings can be round/circular or oval in the direction of the machine or the transverse direction.

The open surface in the top layer can lie in the interval between 2 and 60%, preferably between 5 and 30%, and particularly preferred ca. 14%.

The bottom layer 3 is preferably liquid-impermeable (or should at least possess high resistance to penetration by liquid) and is thus so arranged as to prevent any leakage of excreted fluid from the product 1. The bottom layer 3, on the other hand, may be executed so that it is vapour-permeable. For this purpose, the bottom layer 3 may be manufactured from a liquid-impermeable material which consists appropriately of a thin and liquid-proof plastic film. For example, plastic films of polyethylene, polypropylene or polyester can be used for this purpose. Alternatively, a laminate of nonwoven and plastic film or other suitable material layers can be used as a liquid-proof bottom layer 3. In a previously disclosed fashion, the under side of the bottom layer 3 can be provided with beads of adhesive (not illustrated) or some other previously disclosed fastening means, which can then be utilized for the attachment of the product 1 to an item of clothing. The product 1 can also be provided with wings, that is to say folding flaps which, in a previously disclosed fashion, are arranged along the sides of the product 1 and can be utilized in conjunction with the attachment of the product 1.

The product 1 also includes a further layer of material in the form of an admission material 5 (also referred to as an acquisition material) in accordance with the embodiment in the form of a wadding material having an appropriately selected thickness and elasticity, which is intended to be positioned in this case between the absorbent core 4 and the top layer 2. The admission material 5 possesses essentially the same dimensions as the top layer 2, with the exception of its thickness, however, which can deviate from the thickness of the top layer 2. It is also possible to establish that the admission material 5 can consist of materials other than wadding materials. For example, it may consist of a so-called airlaid material, which is usually based on cellulose fibres. The admission material 5 can also incorporate fibrous materials in order to impart a suitable, balanced rigidity to it. The admission material 5 can also incorporate an appropriate quantity of thermoplastic fibres in order to permit ultrasonic welding.

The admission material can appropriately be a porous, elastic, relatively thick layer of material, for example in the form of a fibrous wadding material, a carded fibre wadding, a tow material, or some other kind of bulky and/or resilient fibre material with a high instantaneous liquid intake capacity that is capable temporarily of storing liquid before it is absorbed by the subjacent absorbent core. The admission material can also be in the form of a porous foam material. It can also consist of two or more layers of material. In accordance with a preferred embodiment, the admission material can extend towards the lateral edges of the product, that is to say it possesses essentially the same form as the top layer. In this way, advantages can be achieved in respect of liquid distribution, edge sealing, etc.

The product 1 is so arranged that the top layer 2 and the admission material 5 must be joined together to form a laminate in conjunction with the manufacture of the finished product 1. The principles for joining together the absorbent layer 1 will now be described, initially with reference to Figure 2. The invention is based on the fact that processing by means of ultrasound technology is utilized in conjunction with the manufacture of the product 1. Such ultrasound devices are previously disclosed and are therefore not described in detail here. Ultrasound devices can be arranged for processing by means of ultrasound technology, for example in the form of welding, embossing, cutting, perforating, or some other type of ultrasound processing. In the embodiment that will now be described below, the ultrasound processing that is utilized is of the type ultrasonic welding, that is to say the joining together of two or more layers of material.

In the embodiment of the invention described here, an ultrasound device (not illustrated) is used for the purpose of initially joining together, that is to say laminating, the top layer 2 and the admission material 5. This joined laminate consisting of the top layer 2 and the admission material 5 is indicated in schematic fashion in Figure 2. The bottom layer 3 must also be joined to the underside of the laminate, which consists of the top layer 2 and the

admission material 5, in conjunction with which the absorbent core 4 must be placed in the correct position on top of the bottom layer 3. Before this is done, however, an operation is performed which represents a significant part of the present invention, namely that the laminate which has just been
5 formed, that is to say consisting of the top layer 2 and the admission material 5, is also provided with an edge reinforcement 6, which preferably runs around the periphery 7 of the top layer 2 in accordance with what is indicated schematically with broken lines in Figure 2. This edge reinforcement 6, which also performs the function of a seal along the periphery 7 that is formed by
10 the top layer 2 and the inlet material 5, is executed with the help of the aforementioned ultrasound device. The edge reinforcement 6 is appropriately formed as a number of discrete welded points that are manufactured in a previously disclosed fashion with the help of the aforementioned ultrasound device and extends from the periphery 7 and
15 towards the inside of the product for a certain distance, for example in the order of 2-6 mm.

It must be noted that the edge reinforcement 6 is preferably executed at the same time as the top layer 2 and the admission material 5 are laminated
20 together. In other words, the ultrasound device is used preferably in such a way that the lamination of the top layer 2 and the admission material 5 takes place in the same process stage as the forming of the edge reinforcement 6. On the one hand, a welded pattern 8 which preferably extends over at least that part of the top layer 2 of the product 1 that is intended to cover the
25 absorbent core 4 and, on the other hand, the welded pattern 6 which runs along the peripheral edge 7 of the top layer 2, are thus generated in this process. The edge reinforcement 6 is also utilized during the process as a seal in the form of an ultrasonic weld which bonds together fibres in the admission material 5. This provides the invention with an advantage, in that
30 the material in these areas is more rigid.

The invention can be utilized during processes for the manufacture of

absorbent products, both when the admission material 5 consists of a material that is broader than the final form of the product 1 (which accordingly requires that the laminate consisting of the top layer and the admission material must be contour-cut along the lamination), and when the
5 admission material has the same form as the top layer (which is equivalent to the top layer and the admission material having been formed in advance to essentially the same outer form).

The edge reinforcement 6, that is to say the pattern of welded points that is
10 formed along the peripheral edge 7 of the product 1, can be uniform insofar as the same width and characteristics in the welded joint in other respects are applicable around the whole of the periphery 7. Alternatively, different parts of the periphery 7 can be given different types of welded joints, for example a more widely diffused welded joint at certain points around the
15 periphery 7 than at other points around the periphery 7. Similarly, for example, different welded patterns and welding depths can be applied around different sections of the periphery 7.

The invention is not restricted to the execution of the lamination of the top
20 layer 2 and the admission material 5 in a single process stage, but can also be implemented in such a way that this takes place in the form of two or more consecutive process stages.

As a final stage in the manufacture of the product 1, the bottom layer 3 is
25 glued to the top layer 2 and the admission material 5, in conjunction with which a layer of adhesive 9 is first applied to the top side of the bottom layer 3. The product 1 as a whole is then pressed together, in conjunction with which precautions are taken to ensure that the absorbent core 4 has been positioned in the correct way. Figure 3 shows a finished product 1 that has
30 been manufactured in accordance with the underlying principles of the present invention. It can be appreciated from Figure 3 that the bottom layer 3 has then been joined together with the laminate, which in turn comprises the

top layer 2 and the admission material 5, in conjunction with which the absorbent core 4 is positioned between the admission material 5 and the bottom layer 3. Other joining techniques can be used as an alternative instead of the above-mentioned adhesive procedure, for example different
5 types of mechanical jointing.

The product 1 is specially designed in accordance with this embodiment for use as an incontinence pad, although, as mentioned above, the principles of the invention are not restricted to only this type of product. For example, the
10 invention is also suitable for use in the manufacture of products in the form of sanitary towels and panty liners. As far as the physical design of the product 1 in accordance with the invention is concerned, it can be stated that it preferably exhibits a form that is asymmetrical in relation to an imaginary centre line that runs across the longitudinal direction of the product 1. This is
15 equivalent to the central part of the product 1 having a smaller width than its rear part 1a (see Figure 3) and its front part 1b, and to its rear part 1a having a smaller width than its front part 1b.

This asymmetrical form can be clearly appreciated from Figure 3.
20 Alternatively, the product 1 in accordance with the invention can have a form resembling an hourglass, that is to say with a smaller width in its central area than in its front and rear parts respectively, or an essentially T-shaped form. The product 1 can also be given a physical form that is adapted to the use of a thong by the wearer.

25

The invention offers advantages in particular in the case of an asymmetrical form, in the sense that the edge along the front part 1b of the product 1 is given reinforcing characteristics, since the front part 1b in fact has a width that exceeds the width of the rear part 1a and can exhibit a tendency to
30 become loose and weak. This can lead in turn to the disadvantages mentioned by way of introduction.

- As far as the dimensions of the product 1 are concerned, it is also true that a relatively small absorbent product usually has a length of less than 22 cm and a width of these than 8.5 cm. The invention is not restricted to any specific dimensions, however, but can be adapted with regard to its dimensioning to the application in question. In one appropriate embodiment as a panty liner, the length of the product 1 is in the order of 13-20 cm, and its width (at its central part) is in the order of 4-6 cm. The product 1 can have larger dimensions, for example, in an embodiment as an incontinence pad.
- 10 In summary, the invention is based on the formation of a surface laminate by joining together the perforated nonwoven layer which forms the top layer 2 and the admission material 5 by means of ultrasonic welding. This surface laminate is also provided with an edge reinforcement 6. It must be noted in this case that the top layer 2 can consist of one or more layers of material and must be capable of being welded by means of ultrasonic welding. This in turn calls for a certain minimum quantity of thermoplastic material in order to permit the welding procedure. The bottom layer 3 is then glued in place, in conjunction with which the absorbent core 4 is positioned in the correct manner.
- 20 As mentioned above, the laminate that is formed by the top layer 2 and the admission material 5 must include thermoplastic material in order to permit ultrasonic welding. Furthermore, the welding of the laminate that is formed by the top layer 2 and the admission material 5 offers an advantage in the sense that the risk of unsealed edge parts and delamination can be minimized.
- 25 The invention is not restricted to what is indicated above, but different embodiments are possible within the scope of the Patent Claims. For example, the invention is not restricted to being utilized with any particular type of absorbent product. Moreover, the invention can also be realized with many types of material and material combinations. For example, the top
- 30

layer 2 can consist of nonwoven material or a film material.

CLAIMS:

1. Absorbent product (1), such as an incontinence pad, a sanitary towel,
5 a panty liner or the like, comprising a liquid-permeable top layer (2), a preferably liquid-impermeable bottom layer (3) and an absorbent core (4) arranged between the top layer (2) and the bottom layer (3), *characterized in that* the top layer (2) is joined together with a subjacent admission material (5) by means of ultrasonic processing, and in that the laminate that is defined
10 by the top layer (2) and the admission material (5) when these are joined together includes a reinforcement (6) executed with ultrasonic processing essentially along its peripheral edge (7).
2. Absorbent product (1) according to Claim 1, *characterized in that* the
15 top layer (2) consists at least partially of a perforated nonwoven material.
3. Absorbent product (1) according to Claims 1 or 2, *characterized in that* the aforementioned absorbent core (4) comprises a superabsorbent material.
- 20 4. Absorbent product (1) according to one or other of Claims 1-3, *characterized in that* the aforementioned admission material (5) consists of a wadding material.
5. Absorbent product (1) according to one or other of Claims 1-4,
25 *characterized in that* it is designed with an asymmetrical, or alternatively an essentially hourglass-shaped contour.
6. Method for manufacturing absorbent products (1) such as an incontinence pad, a sanitary towel, a panty liner or the like, in conjunction
30 with which the product (1) is executed with a liquid-permeable top layer (2), a preferably liquid-impermeable bottom layer (3) and an absorbent core (4) arranged between the top layer (2) and the bottom layer (3), *characterized in*

that the method comprises:

joining together of the top layer (2) and a subjacent admission material (5) by means of ultrasonic processing, and

5 forming, by means of ultrasonic processing, of a reinforcement (6) essentially along the peripheral edge (7) of the laminate that is defined by the top layer (2) and the admission material (5) when these are joined together.

7. Method according to Claim 6, *characterized in that* it comprises gluing
10 the aforementioned bottom layer (3) to the laminate that is defined by the top layer (2) and the admission material (5) when these are joined together, in conjunction with which the aforementioned absorbent core (4) is positioned above the bottom layer (3).

15 8. Method according to Claims 6 or 7, *characterized in that* the aforementioned joining together of the top layer (2) and the admission material (5) takes place in the same process stage as the aforementioned forming of the seal (6).

20 9. Method according to Claims 6 or 7, *characterized in that* the aforementioned joining together of the top layer (2) and the admission material (5) and the aforementioned forming of the seal (6) take place in two consecutive process stages.

1/2

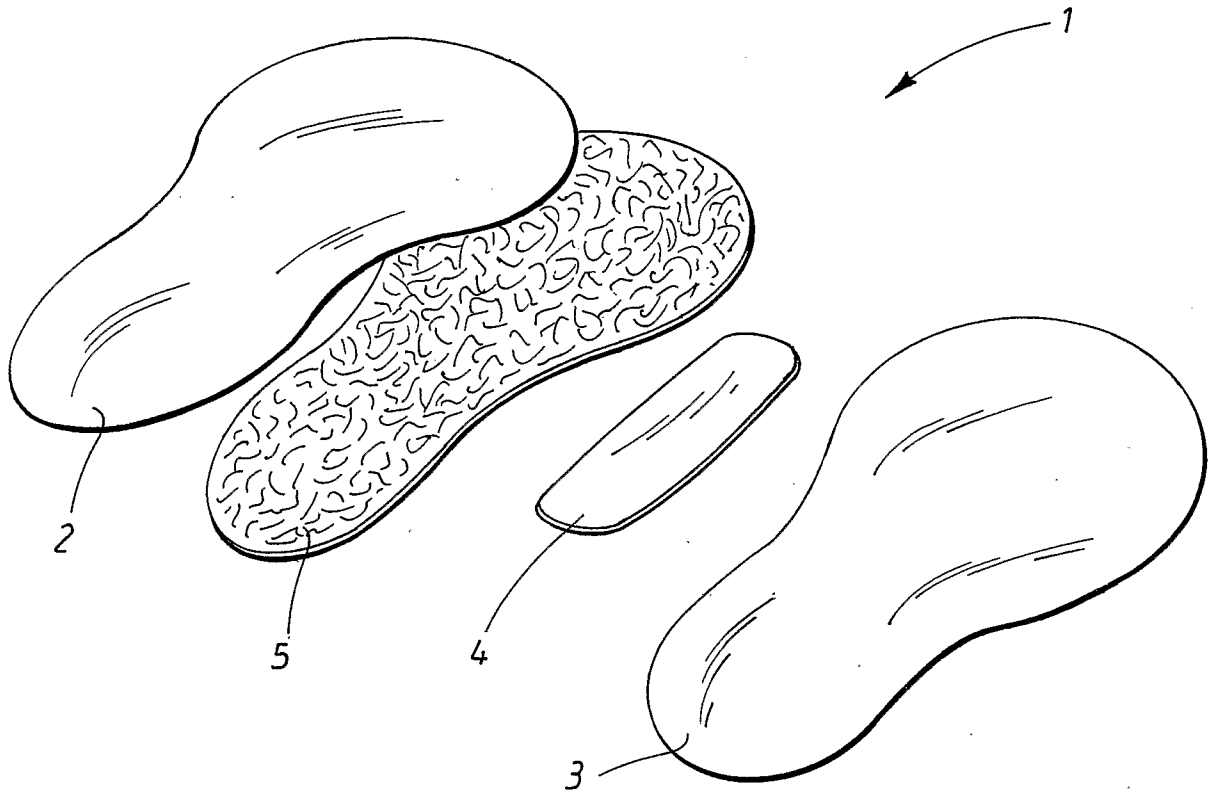


FIG. 1

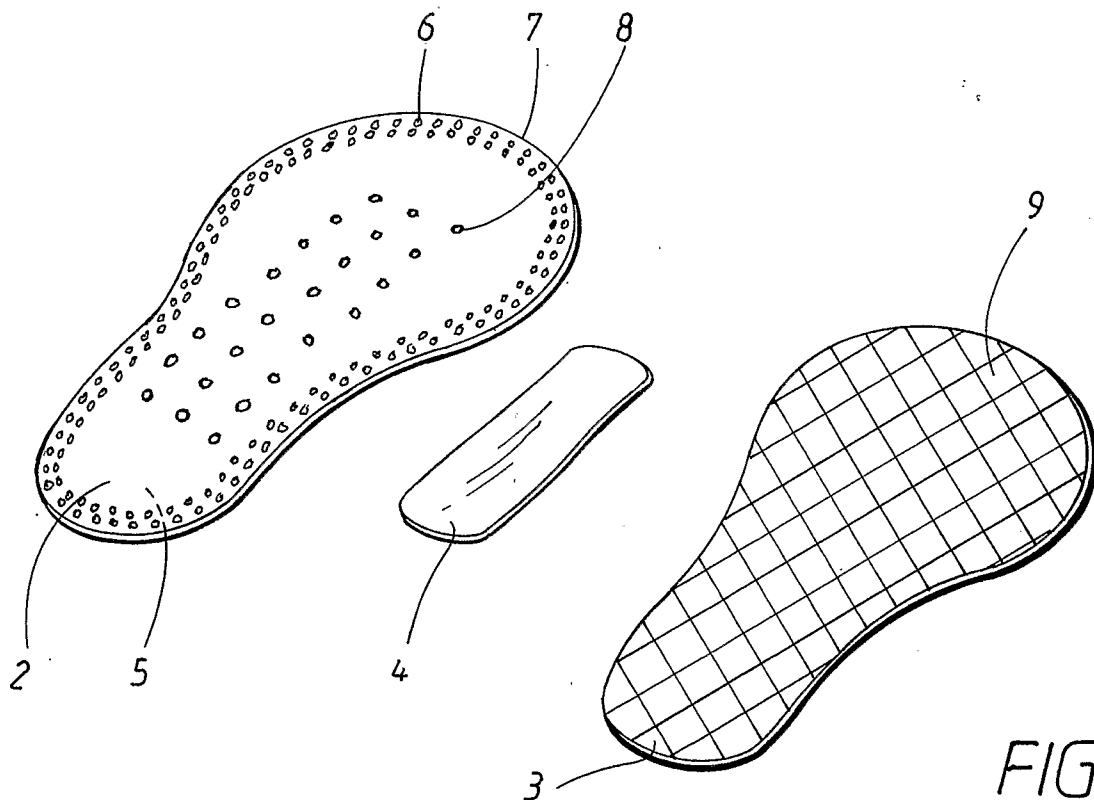


FIG. 2

2/2

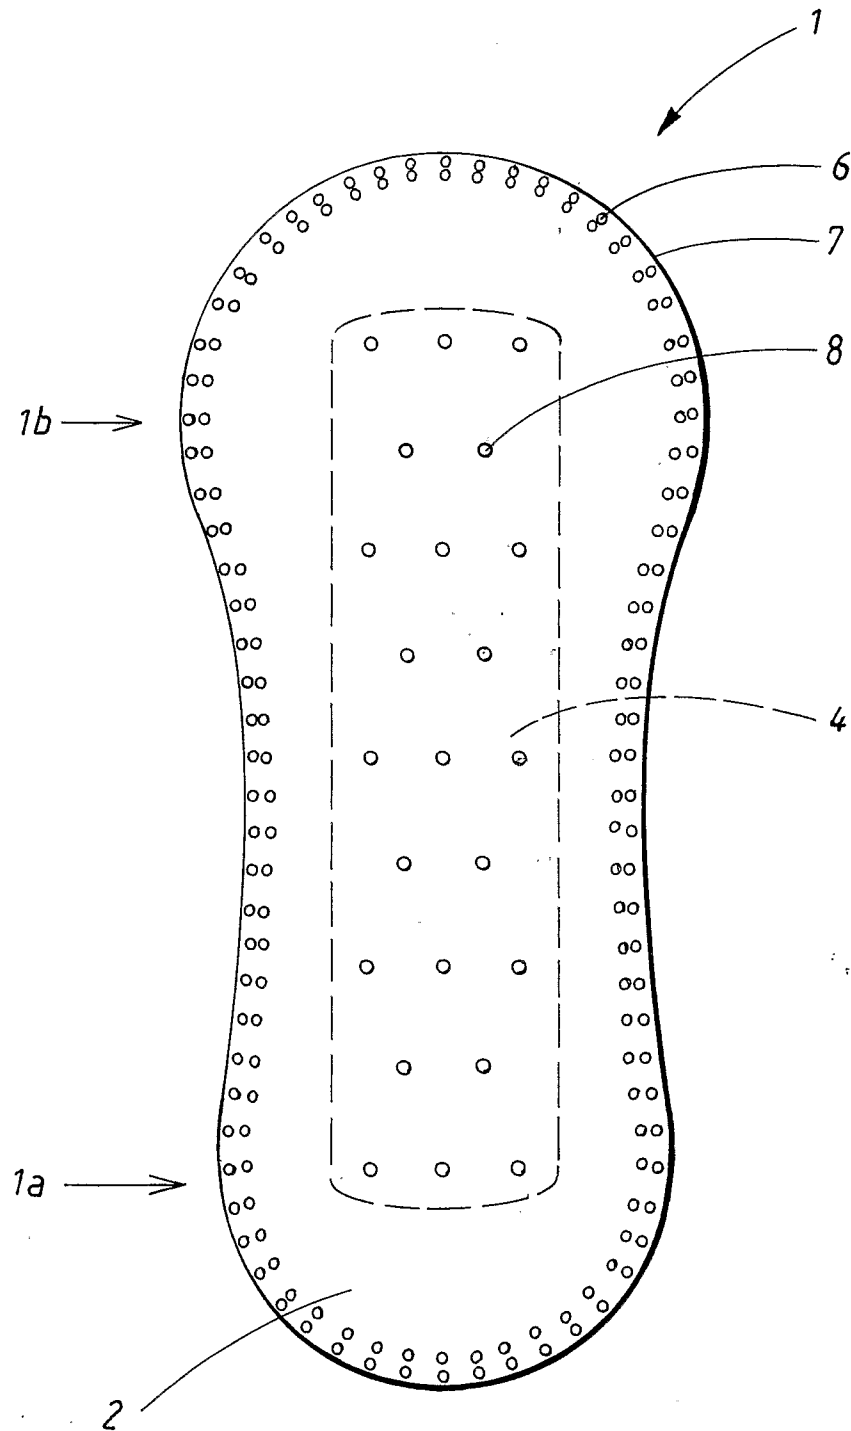


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2005/001967

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0103626 A1 (SCA HYGIENE PRODUCTS AB), 18 January 2001 (18.01.2001), page 3, line 3 - line 4; page 3, line 15 - line 17; page 5, line 4 - line 5, page 11, line 12 - line 14; figure 1-4; abstract --	1-9
A	US 5681300 A1 (NICHOLAS ALBERT AHR ET AL), 28 October 1997 (28.10.1997), column 4, line 56 - line 67; column 9, line 30 - column 10, line 3, figures 1-2,8, abstract --	1-9
A	US 20050136224 A1 (DAVID J. NICKEL ET AL), 23 June 2005 (23.06.2005), claims 40,79, abstract, page 2, paragraph (0019)-(0015) -- -----	1-9

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 July 2006

Date of mailing of the international search report

11 -07- 2006

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Beate Słusarczyk/MP

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCTSE2005/001967

International patent classification (IPC)

A61F 13/15 (2006.01)

Download your patent documents at www.prv.se

Cited patent documents can be downloaded at www.prv.se by following the links e-tjänster/anförda dokument. Use the application number as username. The password is **QPWYZQCFUE**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

04/03/2006

International application No.

PCT/SE2005/001967

WO	0103626	A1	18/01/2001	AU	6041200	A	30/01/2001
				EP	1207832	A	29/05/2002
				MX	PA02000013	A	02/07/2002
				PL	352497	A	25/08/2003
				RU	2002103342	A	10/03/2004
				SE	521365	C	28/10/2003
				SE	9902647	A	10/01/2001
				SK	302002	A	09/05/2002
				US	6916969	B	12/07/2005

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/2006

International application No.
PCT/SE2005/001967

US	5681300	A1	28/10/1997	AR	246427 A	31/08/1994
				AT	155999 T	15/08/1997
				AU	668902 B	23/05/1996
				AU	3273193 A	24/05/1994
				BR	9207164 A	12/12/1995
				CA	2129359 A,C	11/05/1994
				CN	1086122 A	04/05/1994
				CN	1140241 C	03/03/2004
				DE	69221333 D,T	20/11/1997
				DK	680302 T	15/09/1997
				EP	0680302 A,B	08/11/1995
				SE	0680302 T3	
				ES	2105209 T	16/10/1997
				GR	3024319 T	31/10/1997
				HK	1001715 A	03/07/1998
				JP	3429760 B	22/07/2003
				JP	8502177 T	12/03/1996
				KR	249604 B	15/03/2000
				MX	9207357 A	29/04/1994
				NZ	246422 A	28/05/1996
				SG	72662 A	23/05/2000
				US	5460622 A	24/10/1995
				US	5486167 A	23/01/1996
				US	6042575 A	28/03/2000
				US	6171291 B	09/01/2001
				WO	9409737 A	11/05/1994
				AT	150636 T	15/04/1997
				AT	169492 T	15/08/1998
				AU	677000 B	10/04/1997
				AU	679433 B	03/07/1997
				AU	709761 B	09/09/1999
				AU	1255297 A	29/05/1997
				AU	2009397 A	03/07/1997
				AU	3074192 A	19/07/1993
				AU	3132593 A	19/07/1993
				BR	9206924 A	14/11/1995
				CA	2124798 A,C	24/06/1993
				CA	2125645 A,C	24/06/1993
				CN	1079382 A	15/12/1993
				CN	1123326 B,C	08/10/2003
				CZ	283960 B	15/07/1998
				CZ	9401424 A	16/11/1994
				DE	69218623 D,T	17/07/1997
				DE	69226651 D,T	18/02/1999
				DK	617602 T	21/04/1997
				EP	0617601 A,B	05/10/1994
				SE	0617601 T3	

INTERNATIONAL SEARCH REPORT

Information on patent family members

04/03/2006

International application No.

PCT/SE2005/001967

EP	0617602 A,B	05/10/1994
SE	0617602 T3	
ES	2099292 T	16/05/1997
ES	2121872 T	16/12/1998
GR	3022956 T	30/06/1997
HK	1006532 A	00/00/0000
HU	70105 A	28/09/1995
HU	217332 B	28/12/1999
HU	9401797 D	00/00/0000
JP	3459251 B	20/10/2003
JP	3532195 B	31/05/2004
JP	7502433 T	16/03/1995
JP	8504607 T	21/05/1996
KR	262839 B	15/07/2000
KR	262840 B	15/07/2000
KR	263225 B	01/09/2000
MX	9206492 A	31/08/1994
NZ	245065 A	28/05/1996
NZ	245066 A	27/07/1997
PT	8638 U	30/09/1993
PT	101473 A	30/11/1994
SG	55052 A	21/12/1998
US	5611790 A	18/03/1997
US	5658269 A	19/08/1997
US	5674212 A	07/10/1997
US	5683375 A	04/11/1997
US	5702382 A	30/12/1997
US	5713884 A	03/02/1998
US	5716349 A	10/02/1998
US	5824004 A	20/10/1998
US	5849003 A	15/12/1998
US	6059764 A	09/05/2000
US	6103953 A	15/08/2000
US	6231556 B	15/05/2001
US	6287288 B	11/09/2001
WO	9311725 A	24/06/1993
WO	9311726 A	24/06/1993
AT	168261 T	15/08/1998
AU	679681 B	10/07/1997
AU	4291093 A	29/11/1993
BR	9306312 A	30/06/1998
CA	2118214 A,C	11/11/1993
CN	1082870 A	02/03/1994
CN	1123331 B,C	08/10/2003
DE	69319726 D,T	21/01/1999
EG	19895 A	30/01/1997
EP	0637950 A,B	15/02/1995
SE	0637950 T3	

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/2006

International application No.
PCT/SE2005/001967

ES	2118960 T	01/10/1998
FI	945062 A	27/10/1994
HK	1012902 A	00/00/0000
JP	3532199 B	31/05/2004
JP	7506034 T	06/07/1995
KR	271177 B	01/12/2000
MA	22884 A	00/00/0000
MX	9302496 A	29/07/1994
NO	944108 A	28/10/1994
SG	54184 A	16/11/1998
TR	27814 A	29/08/1995
US	5569230 A	29/10/1996
WO	9321878 A	11/11/1993
AR	247089 A	30/11/1994
AT	142468 T	15/09/1996
AT	143247 T	15/10/1996
AT	148831 T	15/02/1997
AT	149823 T	15/03/1997
AT	155032 T	15/07/1997
AT	171057 T	15/10/1998
AT	174208 T	15/12/1998
AU	662350 B	31/08/1995
AU	662757 B	14/09/1995
AU	678554 B	05/06/1997
AU	735795 B	12/07/2001
AU	2383092 A	23/02/1993
AU	2383192 A	23/02/1993
AU	2399392 A	23/02/1993
AU	2402592 A	23/02/1993
AU	2420492 A	23/02/1993
AU	2421392 A	23/02/1993
AU	2507595 A	14/09/1995
AU	2507695 A	14/09/1995
AU	4021895 A	29/02/1996
AU	4021995 A	29/02/1996
AU	4291193 A	29/11/1993
AU	5844198 A	04/06/1998
AU	5951498 A	01/10/1998
AU	5954298 A	01/10/1998
AU	8189298 A	15/10/1998
AU	8307898 A	24/12/1998
BR	9205320 A	05/04/1994
BR	9205329 A	05/10/1993
BR	9205330 A	16/11/1993
BR	9306304 A	30/06/1998
CA	2092197 A,C	24/01/1993
CA	2092198 A,C	24/01/1993
CA	2092199 A,C	24/01/1993
CA	2092202 A,C	24/01/1993
CA	2092203 A,C	24/01/1993
CA	2092204 A,C	24/01/1993
CA	2118215 A,C	11/11/1993
CA	2195690 A,C	24/01/1993
CA	2226415 A,C	11/11/1993
CA	2243039 A,C	24/01/1993

INTERNATIONAL SEARCH REPORT

Information on patent family members

04/03/2006

International application No.

PCT/SE2005/001967

US	5681300	A1	28/10/1997	CA	2243049 A,C	24/01/1993
				CA	2243053 A,C	24/01/1993
				CA	2243056 A,C	24/01/1993
				CA	2243106 A,C	24/01/1993
				CA	2243108 A	24/01/1993
				CA	2243115 A	24/01/1993
				CA	2243117 A	24/01/1993
				CA	2243119 A	24/01/1993
				CZ	283897 B	15/07/1998
				CZ	287917 B	14/03/2001
				CZ	288975 B	17/10/2001
				CZ	9300711 A	17/11/1993
				CZ	9300712 A	17/11/1993
				CZ	9300727 A	13/10/1993
				CZ	9300728 A	17/11/1993
				CZ	9300730 A	11/08/1993
				CZ	9300731 A	17/11/1993
				DE	69213701 D,T	06/02/1997
				DE	69214120 D,T	20/03/1997
				DE	69217469 D,T	26/06/1997
				DE	69218164 D,T	26/06/1997
				DE	69220770 D,T	06/11/1997
				DE	69227823 D,T	12/05/1999
				DE	69321115 D,T	04/03/1999
				DK	549784 T	14/07/1997
				DK	549787 T	21/04/1997
				DK	550736 T	25/08/1997
				DK	552339 T	17/03/1997
				DK	552345 T	28/10/1996
				EP	0549784 A,B	07/07/1993
				SE	0549784 T3	
				EP	0549787 A,B	07/07/1993
				SE	0549787 T3	
				EP	0550736 A,B	14/07/1993
				SE	0550736 T3	
				EP	0552339 A,B	28/07/1993
				SE	0552339 T3	
				EP	0552340 A,B	28/07/1993
				SE	0552340 T3	
				EP	0552345 A,B	28/07/1993
				SE	0552345 T3	

INTERNATIONAL SEARCH REPORT

Information on patent family members

04/03/2006

International application No.

PCT/SE2005/001967

EP	0637951 A,B	15/02/1995
SE	0637951 T3	
ES	2091482 T	01/11/1996
ES	2092691 T	01/12/1996
ES	2097343 T	01/04/1997
ES	2098525 T	01/05/1997
ES	2103956 T	01/10/1997
ES	2120502 T	01/11/1998
ES	2124737 T	16/02/1999
FI	931243 A	13/05/1993
FI	931244 A	12/05/1993
FI	931245 A	12/05/1993
FI	931246 A	12/05/1993
FI	931247 A	19/05/1993
FI	931248 A	21/05/1993
FI	945063 A	27/10/1994
GR	3021157 T	31/12/1996
GR	3021613 T	28/02/1997
GR	3022560 T	31/05/1997
GR	3022807 T	30/06/1997
GR	3024081 T	31/10/1997
GR	3034083 T	30/11/2000
GR	3034088 T	30/11/2000
HK	1001247 A	05/06/1998
HK	1006398 A	26/02/1999
HK	1006403 A	26/02/1999
HK	1006531 A	05/03/1999
HK	1006535 A	05/03/1999
HK	1012904 A	00/00/0000
HK	1012948 A	23/06/2000
HU	67714 A	28/04/1995
HU	67730 A	28/04/1995
HU	68629 A	28/07/1995
HU	68656 A	28/07/1995
HU	68928 A	28/08/1995
HU	68930 A	28/08/1995
HU	213520 B	28/07/1997
HU	215632 B	28/01/1999
HU	217376 B	28/01/2000
HU	218624 B	28/10/2000
HU	9300812 D	00/00/0000
HU	9300813 D	00/00/0000
HU	9300814 D	00/00/0000
HU	9300816 D	00/00/0000
HU	9300817 D	00/00/0000
HU	9300818 D	00/00/0000
JP	3347730 B	20/11/2002
JP	3459249 B	20/10/2003
JP	3459250 B	20/10/2003
JP	3504262 B	08/03/2004
JP	3555761 B	18/08/2004
JP	6502104 T	10/03/1994
JP	6502105 T	10/03/1994
JP	6502106 T	10/03/1994
JP	6502107 T	10/03/1994

INTERNATIONAL SEARCH REPORT

Information on patent family members

04/03/2006

International application No.

PCT/SE2005/001967

US	5681300	A1	28/10/1997	JP	6502108	T	10/03/1994
				JP	6502109	T	10/03/1994
				JP	7506035	T	06/07/1995
				JP	2003038574	A	12/02/2003
				KR	244550	B	01/02/2000
				KR	244551	B	01/02/2000
				KR	244558	B	15/03/2000
				KR	244559	B	15/03/2000
				KR	244560	B	15/03/2000
				KR	266195	B	15/09/2000
				MX	9302495	A	31/05/1994
				NO	930961	A	21/05/1993
				NO	930962	A	21/05/1993
				NO	930963	A	21/05/1993
				NO	930964	A	21/05/1993
				NO	930965	A	24/05/1993
				NO	930966	A	24/05/1993
				NO	944067	A	28/12/1994
				NO	984702	A	24/05/1993
				PL	168710	B	29/03/1996
				PL	168760	B	30/04/1996
				PL	169385	B	31/07/1996
				PL	169638	B	30/08/1996
				PL	170459	B	31/12/1996
				PL	170493	B	31/12/1996
				PL	298516	A	07/03/1994
				PL	298517	A	07/03/1994
				PL	298518	A	07/03/1994
				PL	298519	A	07/03/1994
				PL	298941	A	07/03/1994
				PL	298942	A	07/03/1994
				SG	49641	A	15/06/1998
				SG	52311	A	28/09/1998
				SG	70972	A	21/03/2000
				SG	72663	A	23/05/2000
				SG	99305	A	27/10/2003
				SK	37293	A	06/10/1993
				SK	37493	A	06/04/1994
				SK	37593	A	06/10/1993
				SK	37693	A	09/03/1994
				SK	37993	A	06/10/1993
				SK	38093	A	06/10/1993
				WO	9301781	A	04/02/1993
				WO	9301782	A	04/02/1993
				WO	9301783	A	04/02/1993
				WO	9301784	A	04/02/1993
				WO	9301785	A	04/02/1993
				WO	9301786	A	04/02/1993
				WO	9321879	A	11/11/1993
				AT	162068	T	15/01/1998
				AU	680611	B	07/08/1997
				AU	4034893	A	13/12/1993
				CA	2135599	A,C	25/11/1993
				DE	69316356	D,T	30/04/1998
				DK	639964	T	09/03/1998

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/2006

International application No.
PCT/SE2005/001967

US	5681300	A1	28/10/1997	EP	0639964 A,B	01/03/1995
				SE	0639964 T3	
				ES	2111157 T	01/03/1998
				GR	3025990 T	30/04/1998
				HK	1008416 A	00/00/0000
				JP	3429759 B	22/07/2003
				JP	7506750 T	27/07/1995
				MX	9302845 A	28/02/1994
				WO	9322997 A	25/11/1993
				AT	167046 T	15/06/1998
				AT	167050 T	15/06/1998
				AT	173911 T	15/12/1998
				AT	181227 T	15/07/1999
				AU	716591 B	02/03/2000
				AU	4687493 A	14/02/1994
				AU	4687693 A	14/02/1994
				AU	4783193 A	14/02/1994
				AU	4783693 A	14/02/1994
				AU	4992993 A	14/02/1994
				AU	5636198 A	11/06/1998
				AU	5636298 A	11/06/1998
				AU	5844098 A	11/06/1998
				AU	7150900 A	15/02/2001
				BR	9306768 A	08/12/1998
				BR	9306769 A	08/12/1998
				BR	9306770 A	08/12/1998
				CA	2140766 A,C	03/02/1994
				CA	2140767 A,C	03/02/1994
				CA	2140868 A,C	03/02/1994
				CA	2239456 A,C	03/02/1994
				CA	2239464 A,C	03/02/1994
				CN	1082869 A	02/03/1994
				CN	1107683 A	06/09/1995
				CN	1111394 B,C	18/06/2003
				CZ	284027 B	15/07/1998
				CZ	284050 B	15/07/1998
				CZ	9500168 A	17/05/1995
				CZ	9500169 A	14/06/1995
				CZ	9500170 A	17/05/1995
				DE	69319116 D,T	29/10/1998
				DE	69319117 D,T	12/11/1998
				DE	69322390 D,T	24/06/1999
				DE	69325374 D,T	16/12/1999
				DK	651630 T	16/08/1999
				EP	0650349 A	03/05/1995
				EP	0650350 A,B	03/05/1995
				SE	0650350 T3	

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/2006

International application No.
PCT/SE2005/001967

EP	0651629 A,B	10/05/1995
SE	0651629 T3	
EP	0651630 A,B	10/05/1995
SE	0651630 T3	
EP	0651631 A,B	10/05/1995
SE	0651631 T3	
ES	2117137 T	01/08/1998
ES	2117139 T	01/08/1998
ES	2125344 T	01/03/1999
ES	2132252 T	16/08/1999
FI	950255 A	20/01/1995
FI	950256 A	20/01/1995
FI	950257 A	17/03/1995
GR	3030452 T	30/09/1999
HK	1012161 A	00/00/0000
HK	1012907 A	00/00/0000
HK	1012909 A	00/00/0000
HU	69679 A	28/09/1995
HU	70353 A	28/09/1995
HU	72267 A	29/04/1996
HU	217377 B	28/01/2000
HU	9500184 D	00/00/0000
HU	9500186 D	00/00/0000
HU	9500187 D	00/00/0000
JP	3098034 B	10/10/2000
JP	3447288 B	16/09/2003
JP	3534754 B	07/06/2004
JP	3696235 B	14/09/2005
JP	7509162 T	12/10/1995
JP	7509163 T	12/10/1995
JP	7509164 T	12/10/1995
JP	7509384 T	19/10/1995
JP	9502104 T	04/03/1997
MX	9300354 A	31/01/1994
NO	950207 A	02/02/1995
NO	950208 A	20/01/1995
NO	950209 A	14/02/1995
NZ	244958 A	24/03/1997
NZ	254658 A	24/03/1997
NZ	272837 A	22/09/1997
NZ	328135 A	28/01/1999
NZ	328136 A	28/01/1999
NZ	328137 A	28/01/1999
PL	172579 B	31/10/1997
PL	307233 A	15/05/1995
SG	54180 A	16/11/1998
SG	55022 A	21/12/1998
SG	72619 A	23/05/2000
SG	72623 A	23/05/2000
SG	86294 A	19/02/2002
US	5558657 A	24/09/1996
US	5558663 A	24/09/1996
US	5584829 A	17/12/1996
US	5591150 A	07/01/1997
US	5676652 A	14/10/1997

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/2006

International application No.
PCT/SE2005/001967

US	5681300	A1	28/10/1997	US	5755711	A	26/05/1998
				US	5779692	A	14/07/1998
				US	5795349	A	18/08/1998
				US	5827261	A	27/10/1998
				US	5891121	A	06/04/1999
				US	5951536	A	14/09/1999
				WO	9402094	A	03/02/1994
				WO	9402095	A	03/02/1994
				WO	9402096	A	03/02/1994
				WO	9402098	A	03/02/1994
				WO	9402099	A	03/02/1994
				CN	1053566	B,C	21/06/2000
				CN	1081356	A	02/02/1994
				MX	9300357	A	31/01/1994
				NZ	244957	A	24/03/1997
				NZ	272600	A	22/09/1997
				NZ	328147	A	24/10/1997
				US	5662633	A	02/09/1997
				CN	1051696	B,C	26/04/2000
				CN	1081358	A	02/02/1994
				MX	9300356	A	31/01/1994
				NZ	244956	A	24/03/1997
				CN	1064230	B,C	11/04/2001
				CN	1081355	A	02/02/1994
				MX	9300358	A	31/01/1994
				NZ	244955	A	24/03/1997
				US	5578026	A	26/11/1996
				US	5688259	A	18/11/1997
				CN	1081357	A	02/02/1994
				ID	27712	A	00/00/0000
				MX	9300355	A	31/01/1994
				NZ	244954	A	24/03/1997
				NZ	280951	A	19/12/1997
				NZ	280952	A	26/01/1998
				NZ	280953	A	19/12/1997
				NZ	329096	A	19/12/1997
				US	5304161	A	19/04/1994
				US	5439458	A	08/08/1995
				CN	1084054	A	23/03/1994
				CN	1085418	A	20/04/1994
				US	5591149	A	07/01/1997
				US	5300054	A	05/04/1994

US	20050136224	A1	23/06/2005	WO	2005068188	A	28/07/2005
----	-------------	----	------------	----	------------	---	------------
