



- (51) International Patent Classification:
A01K 61/60 (2017.01)
- (21) International Application Number:
PCT/NO2017/050080
- (22) International Filing Date:
4 April 2017 (04.04.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20160587 11 April 2016 (11.04.2016) NO
20161121 5 July 2016 (05.07.2016) NO
- (71) Applicant: SEAFARMING SYSTEMS AS [NO/NO];
Løkkeveien 75, 4008 Stavanger (NO).
- (72) Inventor: SANDSTAD, Alf Reidar; Smågamyrtunet 16,
4034 Stavanger (NO).
- (74) Agent: ZACCO NORWAY AS; P.O.Box 2003 Vika,
Haakon VII's gt. 2, NO-0125 Oslo (NO).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))

(54) Title: A FLOATING FISH FARMING PLANT AND ASSEMBLY OF PLANTS

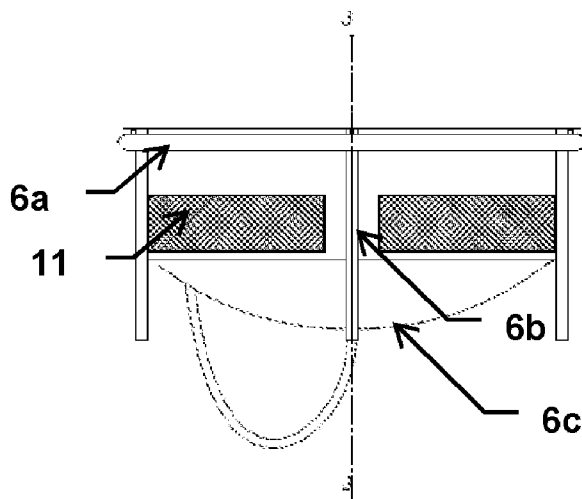


Fig. 48a

(57) Abstract: A floating fish farming plant (1) comprises a cage (6) supported by a buoyant body (2) which is configured for floating in a body of water (W). Lifting means (7) are arranged between the buoyant body and the cage and configured for moving the cage between a position at the level of, or below, the buoyant body and a position in which at least a portion of the cage is above the buoyant body. The cage (6) comprises at least a lower section (6c), forming a bottom portion of the cage, said lower section having a wall comprising an elastic material and/or being elastically connected to the middle section; where by transfer of dynamic forces between the lower section and the adjoining section is reduced. An assembly (18) comprises a plurality of fish farming plants (1).

A floating fish farming plant and assembly of plants

Field of the invention

The invention concerns a floating fish farming plant as defined in the preamble of claim 1, and an assembly of fish farming plants.

5 **Background of the invention**

Floating fish farming plants have been known for a long time. The prior art includes WO 2006/004415 A1 (corresponding to Norwegian patent application No. 20042778), which describes a container for location in the sea for collection of fluids, masses or mixtures of objects and fluids, with a specific weight which is not
10 substantially different from seawater, with a cylindrical shape and arranged for location with the longitudinal axis in vertical direction, and where its sidewalls are assembled of sheet elements which are joined along their side edges forming a shell construction.

Summary of the invention

The invention is defined and characterized in the independent claim, while the
15 dependent claims define other characteristics of the invention.

It is thus provided a floating fish farming plant, comprising a cage supported by a buoyant body which is configured for floating in a body of water; characterized by lifting means arranged between the buoyant body and the cage and configured for moving the cage between a position at the level of, or below, the buoyant body and a
20 position in which at least a portion of the cage is above the buoyant body.

The lifting means may be fixedly connected to the buoyant body and movably connected to the cage, or vice versa.

In one embodiment, the cage comprises at least a lower section, forming a bottom volume of the cage, said lower section at least partially being elastically connected to an
25 adjoining section (6b) of the cage, whereby transfer of dynamic forces between the lower section and the adjoining section is reduced.

In one embodiment, said lower section comprises a wall comprising an elastic material; whereby at least a portion of the lower section may alter its shape under the influence of

external forces. Such external forces may for example be generated by water currents or waves when the plant is installed in a body of water.

In one embodiment, the cage comprises at least an upper section and a middle section, said sections comprising walls of a rigid material, such as metal plates, fibre-glass
5 plates, or polyethylene plates; said walls being impermeable to water.

In one embodiment, the cage comprises at least an upper section and a middle section, said sections comprising walls of a rigid material, such as metal plates of fibre-glass plates; said walls at least partly allowing water through-flow but provides a barrier for the fish inside the cage.

10 In one embodiment, the middle section comprises at least one portion which allows fluid flow but provides a barrier for the fish inside the cage.

The lower section may be movable and selectively lockable inside at least the middle section and the upper section, whereby the lower section may be moved between a bottom position below the middle section, and a top position in which the upper region
15 of the lower section is at the level of the upper region of the upper section, and wherein the lower section may be locked in said top position, said bottom position and in any intermediate position.

In one embodiment, the buoyancy body comprises a buoyancy ring.

The fish farming plant may comprise an elastic connection member between the lower
20 section and the adjoining section. The lower section may be telescopically connected to the adjoining section.

The lower section may comprise a plurality of members interconnected via elastic members. Such members may comprise perforated plates or a steel net.

It is also provided an assembly of a plurality of the invented fish farming plants,
25 characterized in that the buoyant body comprises at least one hull. The assembly may comprise a plurality of hulls, interconnected by structural members; said hulls and structural members supporting said plants.

The plant and the assembly of plants may be moored in a per se known method, for example by means of lines, wires or chains between the buoyancy ring and anchors on the seabed. Mooring may also be accomplished by means of a turret connection, allowing the plant or assembly of plants to weathervane.

5 The plant may comprise a semi-closed, open, or closed steel cage, built according to ship-building principles, i.e.

- Rigid, steel, buoyancy ring,
- Stiff, robust, and stable, structure,
- Closed, stiff, wall in the upper section, which prevents ingress of lice,
- 10 • Stiff walls (preferably made of steel) that are not deformable in the same manner as the walls of a conventional cage,
- Active circulation of water, which is pumped from deeper down in the body of water and into the cage, provides improved water quality and contributes to expelling faeces and other waste products from the cage,
- 15 • An integrated cage purging method; emptying the cage from the bottom, utilising the natural behaviour-pattern for the fish.

The plant may utilize a stiff fish farming cage which is developed to utilize the naturally favourable conditions for fish farming along the coast of Norway. The structure may comprise a circular buoyancy ring of steel, with the stiff cage inside. The upper part
20 may be built of impermeable plates, while the rest of the structure may have perforated, or vented, sections, allowing water flow but retain the fish. The cage is connected to the buoyancy ring via a plurality (preferably at least three) lifting columns which makes it possible to elevate the cage entirely out of the water. The lifting columns may have internal ducts (not shown) whereby clean water from water depths below the column
25 may be fed to the upper section of the cage. The water flow will induce a circular water current in the cage, such that water is expelled from the cage, through the perforated, or vented, sections.

Crowding and emptying of fish from the cage may be effectuated by lifting the cage while the fish is pumped out of the cage via a bottom, emptying, hose. Emptying fish
30 from the cage may also be effectuated by raising the movable lower section inside the

cage. The cage and the movable lower section may be moved (lifted) separately or simultaneously. This operation is performed in a gentle and efficient manner, utilizing the natural behavioural pattern of the fish. For disinfection, the cage may be lifted entirely out of the water, and cleaned and disinfected by means of drying and/or
5 freezing.

Brief description of the drawings

These and other characteristics of the invention will become clear from the following description of embodiments, given as non-restrictive examples, with reference to the attached drawings, wherein:

10 Figure 1 is a side view of an embodiment of the plant according to the invention.

Figure 2 is a perspective drawing of the plant illustrated in figure 1, floating in a body of water and where the cage is elevated above the water surface.

Figure 3 is a part-sectional drawing of the plant as seen from a side, and illustrates an embodiment of a lifting system for the cage.

15 Figure 4 illustrates the cage shown in figure 2, but where the cage is partially lowered into the body of water.

Figure 5 illustrates the cage as shown in figure 4, but where the cage is lowered completely into the body of water.

Figure 6 illustrates a section of the plant as viewed from a side, and illustrates an
20 embodiment in which the lower section is liftable (movable) inside the cage, and an embodiment of a lifting system for the movable lower section.

Figure 7 is a perspective view of an embodiment of the plant according to the invention, lowered into a body of water.

Figure 8 corresponds to figure 7, but the movable lower section of the cage is
25 elevated in the body of water, and the bottom hose is connected to a ship.

Figure 9 corresponds to figure 7 and figure 8, but shows the cage being elevated above the water surface.

Figure 10 is a schematic illustration of how the cage in one embodiment may be emptied from the bottom.

Figure 11 is a schematic illustration of passive water supply to the cage.

Figure 12 is a schematic illustration of how the upper, stiff and closed (i.e. continuous and closed surfaces, without openings) structure prevents ingress of lice.

Figure 13 is a schematic illustration of how the water which is pumped into the cage initiates water circulation inside the cage.

Figure 14 is a schematic illustration of how water fresh water is pumped into the cage's upper portion, from a region of the cage's lower portion.

Figure 15 is a schematic illustration of how multiple plants according to the invention can be placed on existing locations in order to replace the prior art cages.

Figure 16 is a schematic illustration of how the structure is susceptible to little movement (stiff structure) and how the gangway on the buoyant body provides for safe access for personnel.

Figure 17 is a side view of an embodiment of the plant, in a position where the cage is elevated above the buoyant body.

Figure 18 is a perspective view of the embodiment illustrated in figure 17.

Figure 19 is a top view of the embodiment illustrated in figures 17 and 18.

Figure 20 is a side view of the embodiment illustrated in figures 17-19, but where the cage is lowered to the level of the buoyant body.

Figure 21 is a perspective view of the embodiment illustrated in figure 20.

Figure 22 is a side view of another embodiment of the plant, in a position where the cage is at a level of the buoyant body.

Figure 23 is a perspective view of the embodiment illustrated in figure 22.

Figure 24 is a side view of an embodiment of the plant according to the invention, in a position where the cage is lowered below the buoyant body.

Figure 25 is a perspective view of the embodiment shown in figure 24.

Figure 26 is a side view of the embodiment shown in figures 24 and 25, in a position where the cage is elevated above the buoyant body.

Figure 27 is a perspective view of the embodiment illustrated in figure 26.

5 Figure 28 is a side view of another embodiment of the plant, in a position where the cage is elevated above the buoyant body.

Figure 29 is a perspective drawing of the embodiment shown in figure 28.

Figure 30 is a top view of the embodiment illustrated in figures 28 and 29.

10 Figure 31 is a side view of the embodiment illustrated in figures 28-30, in a position where the cage is lowered to a level of the buoyant body.

Figure 32 is a perspective view of the embodiment illustrated in figure 31.

Figure 33a is schematic side view showing an embodiment of the plant where the cage is lowered to a region of the buoyant body, and the movable lower section is elevated a distance inside the cage. Figure 33b shows the section F-F in figure 33a.

15 Figure 33c is a perspective view of the embodiment illustrated in figure 33a.

Figure 34a is a schematic side view showing an embodiment of the plant where the cage is lowered to a region of the buoyancy ring, and the movable lower section is elevated a distance inside the cage. Figure 34b shows the section E-E in figure 34a. Figure 34c is a perspective view of the embodiment illustrated in figure 34a.

20 Figure 35 is a schematic side view of an embodiment of the plant according to the invention, in a position where the cage is lowered to a region of the buoyant body, and where the lower section comprises an elastic wall member, in order to prevent or dampen transfer of dynamic forces from the lower section into the middle and upper sections. Figure 35 shows the elastic lower section in a convex position.

25 Figure 36 is a schematic side view of the embodiment illustrated in figure 35, showing the elastic lower section in a concave position.

Figure 37 illustrates the section G-G in figure 36.

Figure 38 illustrates the section H-H in figure 35.

Figure 39 is a perspective view of an assembly, in which a plurality of plants has been assembled in a structure of three hulls (buoyant bodies). In the figure, the cage of one of the plants 1a has been elevated above the hull/buoyancy element.

5 Figure 40 is a side view of the assembly illustrated in figure 39.

Figure 41 is a top view of the assembly illustrated in figures 39 and 40.

Figures 42 and 43 illustrate the assembly shown in figures 39-41, in an operation mode, in which all of the cages are in a lowered position.

10 Figures 44 and 45 illustrate the assembly shown in figures 39-44, in a transportation mode, in which all of the cages have been elevated above the hulls and the assembly may be transported in the open sea.

Figure 46a is a side view of an embodiment of the plant according to the invention, in a position where the cage is lowered to a region of the buoyant body, and where the lower section comprises an elastic wall member, in order to prevent or dampen transfer of dynamic forces from the lower section into the middle and upper sections. Figure 46a shows the elastic lower section in a concave position.

15

Figure 46b illustrates the section I-I in figure 46a.

Figure 47 is a schematic side view of the embodiment illustrated in figure 46a, in a state where the elastic lower section has been elevated a distance inside the cage.

20 Figure 48a is a schematic side view of the embodiment illustrated in figure 46a, showing the elastic lower section in a convex position.

Figure 48b illustrates the section J-J in figure 48a.

Figure 49 is a schematic side view of the embodiment and state illustrated in figure 48a, in a state where the elastic lower section has been elevated a distance inside the cage.

25

Figure 50a is a schematic illustration of an embodiment having extended lifting columns, and where the cage is lowered a distance below the buoyant body, and where

the lower section comprises an elastic wall member, in order to prevent or dampen transfer of dynamic forces from the lower section into the middle and upper sections. Figure 50a shows the elastic lower section in a concave position.

Figure 50 illustrates the section K-K in figure 50a.

5 Figure 51 is a schematic side view of the embodiment illustrated in figure 50a, in a state where the cage has been raised to a position where the cage upper end is at the level of the buoyant body, and the elastic lower section has been elevated a distance inside the cage.

10 Figures 52a, 52b and 53 correspond to figures 50a, 50b and 51, respectively, but show the elastic lower section in a convex position.

Figure 54 is a schematic drawing of an alternative embodiment of the invented cage, in which the lower section is connected to the middle section via an elastic connection.

15 Figure 55 is a schematic drawing of an alternative embodiment of the invented cage, in which the lower section is telescopically connected to the middle section.

Figure 56 is a schematic drawing of an alternative embodiment of the invented cage, in which the lower section comprises a plurality of elements, interconnected via elastic connections and connected to the middle section via an elastic connection.

Detailed description of embodiments

20 The following description may use terms such as “horizontal”, “vertical”, “lateral”, “back and forth”, “up and down”, “upper”, “lower”, “inner”, “outer”, “forward”, “rearward”, etc. These terms generally refer to the views and orientations as shown in the drawings and that are associated with a normal use of the invention. The terms are used for the reader’s convenience only and shall not be limiting.

25 Referring initially to figure 1 and figure 2, the floating plant 1 comprises in the illustrated embodiment a cylindrical cage 6 which is connected to lifting columns 7, and may be elevated and lowered relative to a buoyancy ring 2. The cage 6 and lifting columns 7 are connected to an upper ring 3 which also serves

as a gangway. The buoyancy ring is furnished with fenders 5, access ladder 4 and handrails. The means for moving (i.e. lowering and raising) the lifting columns 7 (and hence the cage 6) may be a wire-and-winch configuration, a rack-and-pinion assembly, or other suitable devices known in the art.

5 The buoyancy ring 2 is a stiff structure, preferably composed of interconnected (bolted, welded, etc.) watertight sections, whereby it may withstand wave forces and impact forces from ships. Suitable materials for the buoyancy ring comprise steel, aluminium, fibre-glass, polyethylene (for example high-density polyethylene). In the illustrated embodiment, the floating plant has four lifting
10 columns 7, but the invention shall not be limited to this number. At least three lifting columns are considered to be necessary. Each of the vertical lifting columns may be provided with rungs (not shown).

The circular cage 6 is preferably made of a predominantly stiff material (e.g. steel), and comprises three main sections. In the embodiment illustrated in
15 figure 1, the sections are:

- a) An upper section 6a with an impermeable, cylindrical, wall (of e.g. impermeable plates).
- b) A middle section 6b, having a cylindrical wall with "fluid windows" 11; said fluid windows being covered with a structure such as grating, wire
20 screen, perforated plates, etc., or other material that is configured and dimensioned such that water may flow through the window, but prevent the farmed fish from escaping.
- c) A lower section 6c having a funnel-shaped wall which in the illustrated embodiment is open, but it may also be closed or partly closed. The
25 lower section 6c also comprises a connection point 9 for a hose, the purpose of which will be explained below.

It should be understood that the term "open" in the context of the section wall (e.g. as used in item c above), shall mean a wall which comprises a structure that allows water to pass through, but is configured and dimensioned such that the farmed fish may
30 not pass through. Suitable "open-wall" structures comprise grating, wire screen,

nets, and perforated plates. It should also be understood that the term "closed" in the context of the section wall, shall mean a wall which comprises a structure that is impermeable to water, fish and lice. Suitable "closed-wall" structures comprise in the illustrated embodiment plates made of metal (steel, aluminium) or fibre-
5 glass plates. Other, suitable, materials may comprise polyethylene, for example high-density polyethylene. It should also be understood, as will be described below, that the middle and lower sections may have other configurations.

In one embodiment, the upper section 6a vertical dimension may be 5 metres. This will ensure that inflow and outflow of water (natural, passive, water exchange) between the
10 cage and the surrounding sea W takes place below the depth level where lice normally is present (i.e. below a depth of 5 to 6 metres). The vertical dimension of the middle section 6b may also be for example 5 metres, and the vertical dimension of the lower section may be for example 10 metres. However, the three sections may have other dimensions, and the invention shall not be limited to the above mentioned dimensions.

15 In addition to the passive water exchange through the perforated wall and bottom of the cage, the plant comprises in addition devices for mechanical water supply. A submergible pump (not shown) is arranged in the lower end of each of the four vertical lifting columns and connected to water intakes 8, such that internal pipes feed seawater (see figure 1) and convey the water to four directional nozzles which provides water
20 circulation inside the cage. The internal pipes may be supplemented by additional flexible hoses (not shown).

Water intake from greater depths (i.e. the lower ends of the lifting columns) results in a more stable temperature in the cage, and reduces the stress levels for the fish. Temperature fluctuations are somewhat reduced, which to some extent may reduce
25 stress. It provides a possibility for increasing the water temperature in the cage during the winter and to lower it on hot summer days, as needed. This ability to control the cage water temperature, will significant improve the growth and hence reduce the production time.

An improved growth rate is also anticipated, as the temperature is decreased. During
30 normal operations (with the pumps running), there will be a net outflow from the cage,

through the windows 11. When the pumps are not running, the water exchange will be governed by the sea currents.

The plant is modular, which makes fabrication in low-cost countries and assembly at the intended operation site possible, without the need for expensive assembly equipment.

5 The plant in the illustrated embodiment is circular, and may be moored in a manner similar to prior art ring-shaped plants. Additional infrastructure is therefore not required. The invention shall, however, not be limited to these geometries. Therefore, the term "buoyancy ring" shall be understood to mean any buoyancy body which supports the cage 6, irrespective of geometry.

10 In the embodiment illustrated in figure 3, the cage can be moved with respect to the buoyancy ring (and hence lifted out of the water) by means of four synchronized winches. Each winch is connected to a chain (or similar) which runs to the bottom of the lifting columns. Other lifting devices may be used. The cage can also be lifted entirely out of the water W, as illustrated in figure 2. Other lifting means than
15 those described here are conceivable. Power supplies, control systems and other means required to operate the plant, are not illustrated, as these means are considered to be known in the art.

The cage 6 may be moved up or down in the water (by moving/sliding the lifting columns relative to the buoyancy ring), thereby ensuring that the cage is
20 maintained at the desired level in the body of water. This may be performed via manual control and operations, or by means of automated, sensor-based, devices (not shown). The cage 6 may also be fixed in position by means of e.g. a total of eight locking bolts (not shown), two per lifting column, into the buoyancy ring, or any other known locking devices.

25 Figure 4 shows the cage 6 in a partially lowered position, i.e. approximately half-way between fully raised and fully lowered, and figure 5 shows the cage 6 in a fully lowered position, in which only the top ring 3 is above water.

Referring now to figure 6, in one embodiment, the cage lower section 6c' may in one embodiment be configured such that it may be moved (e.g. elevated)
30 inside – and all the way to the top of – the cage 6. The movable (liftable) lower

section 6c' is in the illustrated embodiment connected to a circular ring 14 (of e.g. polyethylene; PE) which in normal operation rests on the stiff transition at the lower region of the middle section 6b. The movable lower section 6c' may be elevated by means of synchronised winches 12 and may be raised all the way
5 to the top of the cage 6, i.e. to the upper edge of the upper section 6a. Other lifting means are conceivable.

In figure 7, the plant is shown in operation in a body of water W. The cage 6 is at its fully lowered position (i.e. with respect to the buoyancy ring2), and the movable lower section 6c' is also at its fully lowered position. Fish F are
10 contained within the cage 6, and a hose 15 is connected between the connection point 9 and a ship 16 (e.g. a wellboat) alongside the plant.

Figure 8 illustrates a situation in which fish is to be transferred (e.g. pumped) from the cage to the wellboat. The movable lower section 6c' has been moved inside the cage middle and upper sections, and raised to the top of the cage,
15 thereby reducing available volume for the fish F, and hence facilitating the process of transferring the fish through the bottom hose 15.

Figure 9 illustrates a disinfection process, in which the entire cage 6 has been elevated above the water surface.

Figures 10-16 are schematic illustrations of how, in various embodiments:

- 20 • The cage may be emptied from the bottom (figure 10), which provides a gentle handling of the fish and takes advantage of the natural behaviour of the fish.
- Water may be supplied passively to the cage (figure 11). Below the cage's upper section 6a (which is closed for horizontal water flow), the cage is open for water flow (but keeps the fish confined inside e.g. in a wire mesh structure). This
25 provides a natural water flow through the lower part of the cage.
- The upper section 6a, which is a stiff and closed (i.e. continuous and closed surfaces, without openings) structure prevents ingress of lice (figure 12).
- The water which is pumped into the cage initiates water circulation inside the cage (figure 13). This provides a rotary current which will serve to exercise the
30 fish.

- Seawater from outside the cage is pumped into the cage's upper portion (figure 14), from a region of the cage's lower portion (through the lifting columns) or below the cage. This results in a steady water temperature in the cage.
- Multiple plants according to the invention can be placed on existing locations in order to replace the prior art cages (figure 15).
- The structure is susceptible to little movement (because of its stiff structure) and how the gangway on the buoyancy ring provides for safe access for personnel (figure 16).

Figures 17-21 are illustrations of an embodiment of the floating plant in which the entire cage 6 is of a "closed-wall" configuration, and thus impermeable to water, fish and lice. The upper ring 3, which is connected to the upper section of the cage, is at least partially supported on the lifting columns 7 which terminate on the underside of the upper ring. The upper 6a, middle 6b and lower 6c sections are made of an impermeable and rigid material, such as metal plates. Beams 17 span the cage diameter and are connected to the upper ring 3, thus adding stiffness to the structure. The beams 17 may also form foundations for gangways and access platforms for personnel. The beams 17 may also form a support structure for covering elements (not shown), for example tarpaulins or nets. In figure 17 and 18, the cage 6 is elevated above the buoyancy ring, and in figures 20 and 21, the cage is lowered into the buoyancy ring 2. Although not illustrated in figures 17-21, it should be understood that this embodiment may comprise a movable (liftable) lower section, as described above.

Figures 22-27 are illustrations of embodiments of the floating plant in which the entire cage 6 is of an "open-wall" configuration, i.e. in which the walls comprise a rigid structure that allows water to pass through, but is configured and dimensioned such that the farmed fish may not pass through. Suitable structures comprise grating, wire screen and perforated plates. Beams 17 span the cage diameter, thus adding stiffness to the structure. The beams 17 may also form foundations for gangways and access platforms for personnel.

In the embodiment illustrated in figures 24-27, the beams 17 form a support structure for a top cover 20, which in the illustrated embodiment is of a

material similar to that of the cage walls. In this embodiment, the lifting columns 7 extend above the top of the cage 6 – and hence also above the upper ring 3, whereby the entire cage may be lowered a distance below the buoyancy ring 2 (see figures 24 and 25) and hence be submerged a distance below the water surface when the plant is installed in the water. Although not illustrated in figures 22-27, it should be understood that this embodiment may comprise a movable (liftable) lower section, as described above.

Figures 28-32 are illustrations of an embodiment of the floating plant in which the cage 6 is of a "semi-open" configuration, similar to the embodiment described above with reference to figures 1 and 2. The upper section 6a comprises an impermeable, cylindrical, wall (of e.g. impermeable plates). The middle section 6b comprises a cylindrical wall with fluid windows 11 which are covered with a stiff structure (e.g. grating, wire screen, perforated plates) that is configured and dimensioned such that water may flow through the window, but prevent the fish from escaping. The lower section 6c comprises a material similar to that of the material in the above-mentioned fluid windows. Although not illustrated in figures 28-32, it should be understood that this embodiment may comprise a movable (liftable) lower section, as described above.

Figures 33a-34c illustrate an embodiment of the plant where the movable lower section 6c' is elevated a distance inside the cage 6.

Figures 35-38 illustrate an embodiment in which the lower section 6c comprises a suitable elastic material. The upper and middle sections 6a, 6b comprise a "closed-wall" structure. The elastic lower section material may be an "open-wall" structure or a "closed-wall" structure. As discussed above, the term "open" in the context of the section wall, shall mean a wall which comprises a structure that allows water to pass through, but is configured and dimensioned such that the farmed fish may not pass through. Also, the term "closed" in the context of the section wall, shall mean a wall which comprises a structure that is impermeable to water, fish and lice.

Figures 35 and 38 illustrate a state where the lower section 6c is biased downwards, assuming a convex shape, and figures 36 and 38 illustrate a state in which the lower

section is biased upwards. The elastic, or resilient, lower section is able to accommodate for wave motions and water currents, and thus enhance the dynamic stability of the plant.

Figures 46a – 53 also illustrate embodiments in which the cage lower section 6c
5 comprises an elastic material, corresponding to the embodiment described above with reference to figures 35 – 38. The upper section 6a comprises a "closed-wall" structure, while the middle section 6b comprises fluid windows 11, as described above. Referring to figures 47, 49, 51 and 53, the lower section 6c – which in the illustrated embodiment comprises a "closed-wall" structure – is movable as described above with reference to
10 figures 6-9 and may be raised to a position approximately halfway up the cage, such that the top of the lower section is between the middle section and the and the upper section. In this position, lower section 6c and the upper section 6a together define a closed volume, and fish inside this closed volume is hence not exposed to lice in the surrounding seawater. This configuration is useful for temporary storage of fish, for
15 example prior to harvesting. This configuration is also useful when administering aquaculture drugs to fish in the cage. One advantage of this cage configuration is that the enclosed cage volume is known, which provides the operator with a good basis for determining a correct drug dosage. As the skilled person will know, a controlled and correct dosage is crucial, for example when administering hydrogen peroxide to combat
20 fish lice, and in general for obtaining the desired health effects. Being able to control the drug dosage is also advantageous from an economical point of view. It should be understood that the lower section may also be elevated all the way to the top of the cage, as described above with reference to figures 6-9.

The elastic material in the lower section prevents, or at least significantly reduces,
25 vertical forces acting on the lower section from being transferred into the middle and upper sections of the cage. It should be understood, therefore, that other cage configurations are conceivable within the ambit of the invention.

For example, referring to figure 54, the lower section 6c may be connected to the middle section 6b via an elastic connection 22, for example a resilient ring member. The
30 arrow M indicate vertical movement of the lower cage, independently of the middle and upper sections 6b, 6a. In figure 55, the lower section 6c is telescopically connected to the

middle section 6b, whereby the lower section may move up and down with respect to the middle section 6b.

Figure 56 illustrates yet another embodiment, in which the lower section 6c comprises a plurality of elements 24 which in themselves may not be elastic, but where the elements
5 24 are interconnected via elastic connection members 23. The elements 24 may for example be stiff, perforated, plates, or a combined solution with steel nets and a more rigid support at the bottom. This embodiment allows both vertical and horizontal movements of the lower section 6c, as indicated by arrows M, H, relative to the middle and upper sections 6b, 6a.

10 Thus, it is possible to obtain an elastic (or resilient) connection between the lower section and the rest of the cage, whereby vertical dynamic forces (caused e.g. by waves or currents) acting on the lower section are not transferred into the main structure.

Referring now to figures 39 – 45 a plurality the invented plant 1, in any one of the embodiments described above, may be combined into an assembly 18. In the illustrated
15 embodiment, the assembly 18 comprises a structure of three hulls (buoyant bodies) 19, interconnected via transverse braces 21. In figures 39 and 40, the cage 6 of one of the plants 1a has been elevated above the hulls 19. In figures 42 and 43, the assembly 18 is in an operation mode, in which all of the cages 6 are in a lowered position, into the water. Figures 44 and 45 illustrate the assembly 18 in a transportation mode, in which
20 all of the cages 6 have been elevated above the hulls 19 and the assembly may be transported (e.g. towed) in the open sea.

Claims

1. A floating fish farming plant (1), comprising a cage (6) supported by a buoyant body (2) which is configured for floating in a body of water (W); **characterized by** lifting means (7) arranged between the buoyant body and the cage and configured for
5 moving the cage between a position at the level of, or below, the buoyant body and a position in which at least a portion of the cage is above the buoyant body.
2. The fish farming plant of claim 1, wherein the lifting means are fixedly connected to the buoyant body and movably connected to the cage, or vice versa.
3. The fish farming plant of claim 1 or claim 2, wherein the cage (6) comprises at
10 least a lower section (6c; 6c') forming a bottom volume of the cage, said lower section (6c; 6c') at least partially being elastically connected to an adjoining section (6b) of the cage, whereby transfer of dynamic forces between the lower section and the adjoining section is reduced.
4. The fish farming plant of any one of claim 3, said lower section (6c) having a
15 wall comprising an elastic material; whereby at least a portion of the lower section may alter its shape under the influence of external forces.
5. The fish farming plant of any one of claims 1-4, wherein the cage (6) comprises at least an upper section (6a) and a middle section (6b), said sections comprising walls of a rigid material, such as metal plates or fibre-glass plates; said walls being
20 impermeable to water.
6. The fish farming plant of any one of claims 1-4, wherein the cage (6) comprises at least an upper section (6a) and a middle section (6b), said sections comprising walls of a rigid material, such as metal plates, fibre-glass plates, or polyethylene plates; said walls at least partly allowing water through-flow but provides a barrier for the fish
25 inside the cage.
7. The fish farming plant of any one of claims 1-6, wherein the middle section comprises at least one portion (11) which allows fluid flow but provides a barrier for the fish inside the cage.

8. The fish farming plant of any one of claims 5-7, wherein the lower section (6c) is movable and selectively lockable inside at least the middle section (6b) and the upper section (6a), whereby the lower section (6c) may be moved between a bottom position below the middle section (6b), and a top position in which the upper region of the lower section (6c) is at the level of the upper region of the upper section, and wherein the lower section may be locked in said top position, said bottom position and in any intermediate position.
9. The fish-farming plant of any one of claims 1-8, wherein the buoyancy body (2) comprises a buoyancy ring.
10. The fish farming plant of any one of claims 3-9, further comprising an elastic connection member (22) between the lower section (6c) and the adjoining section (6b).
11. The fish farming plant of any one of claims 3-9, wherein the lower section (6c) is telescopically connected to the adjoining section (6b).
12. The fish farming plant of any one of claims 3-11, wherein the lower section (6c) comprises a plurality of members (24) interconnected via elastic members (23).
13. The fish farming plant of claim 12, wherein the members (24) comprise perforated plates, or a steel net.
14. An assembly (18) of a plurality of fish farming plants (1) as defined by any one of claims 1-13, **characterized in** that the buoyant body comprises at least one hull (19).
15. The assembly of claim 14, further comprising a plurality of hulls (19), interconnected by structural members (21); said hulls and structural members supporting said plants.

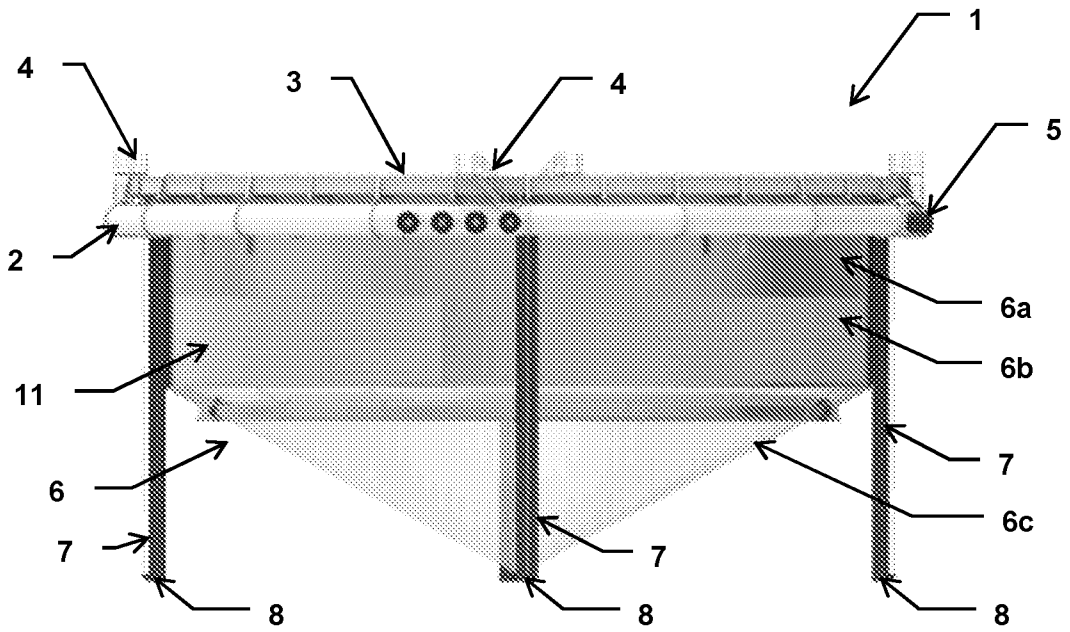


Fig. 1

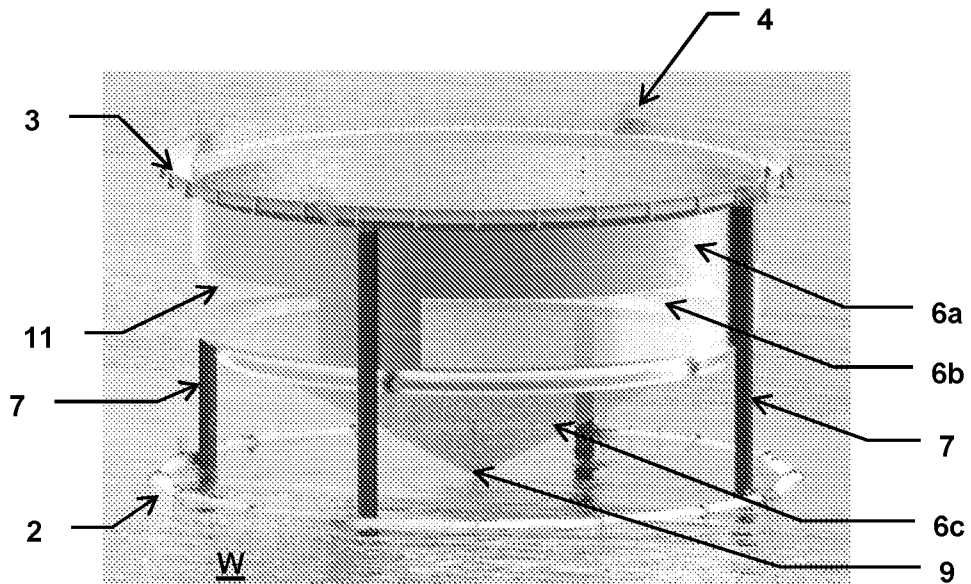


Fig. 2

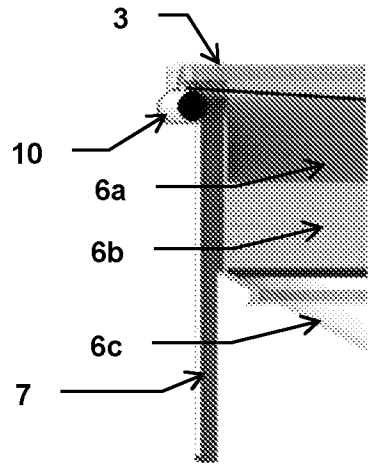


Fig. 3

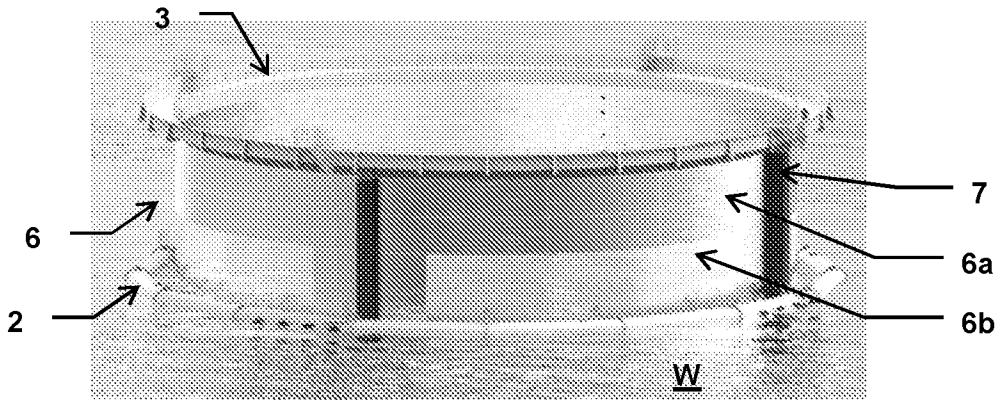


Fig. 4

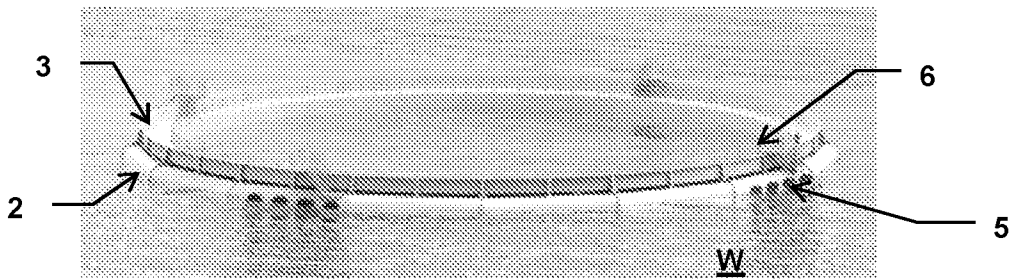


Fig. 5

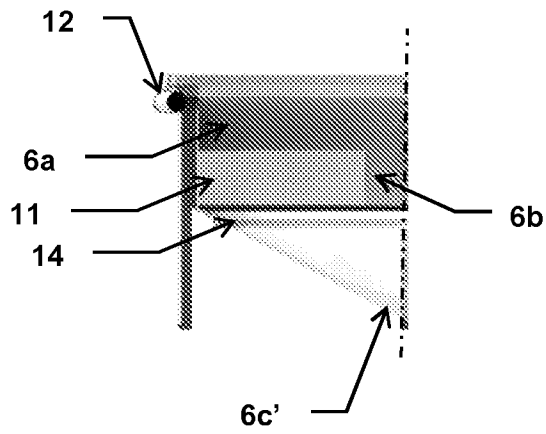


Fig. 6

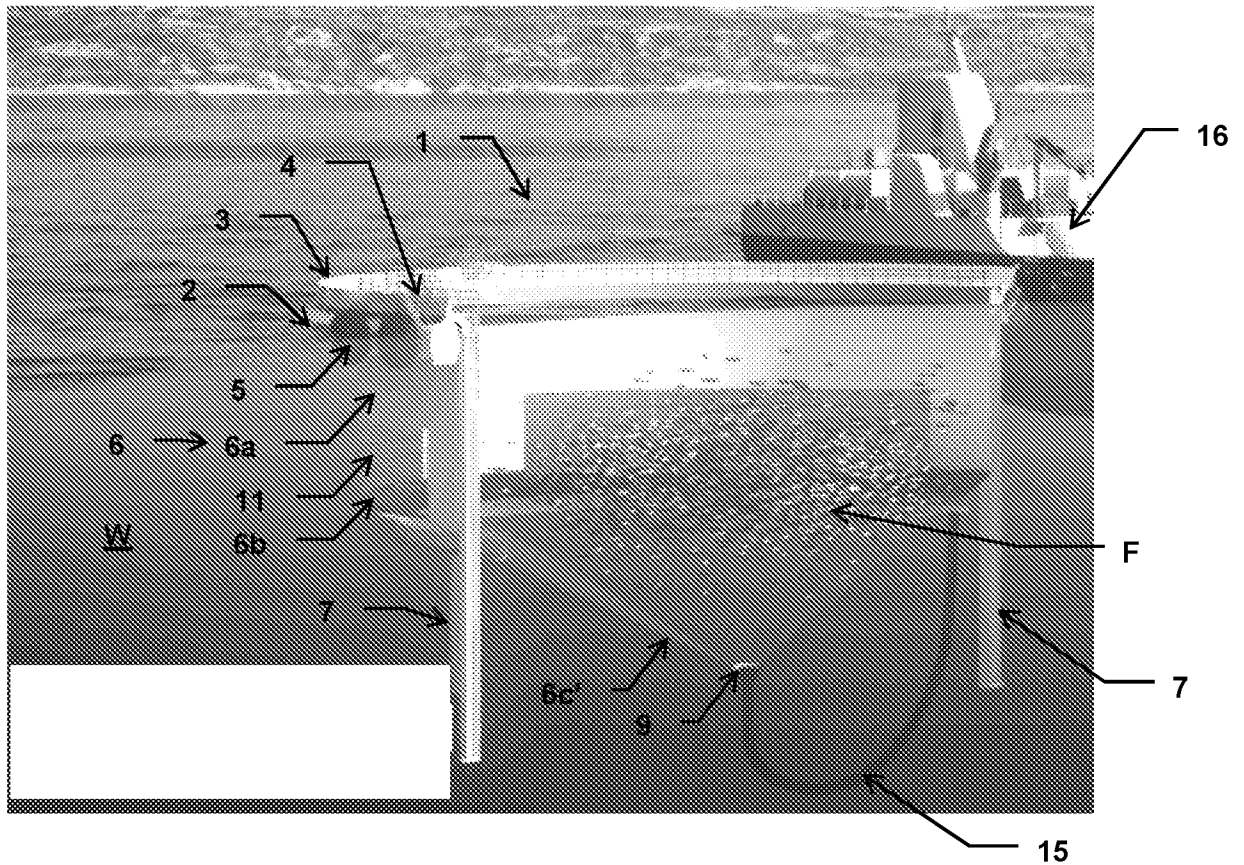


Fig. 7

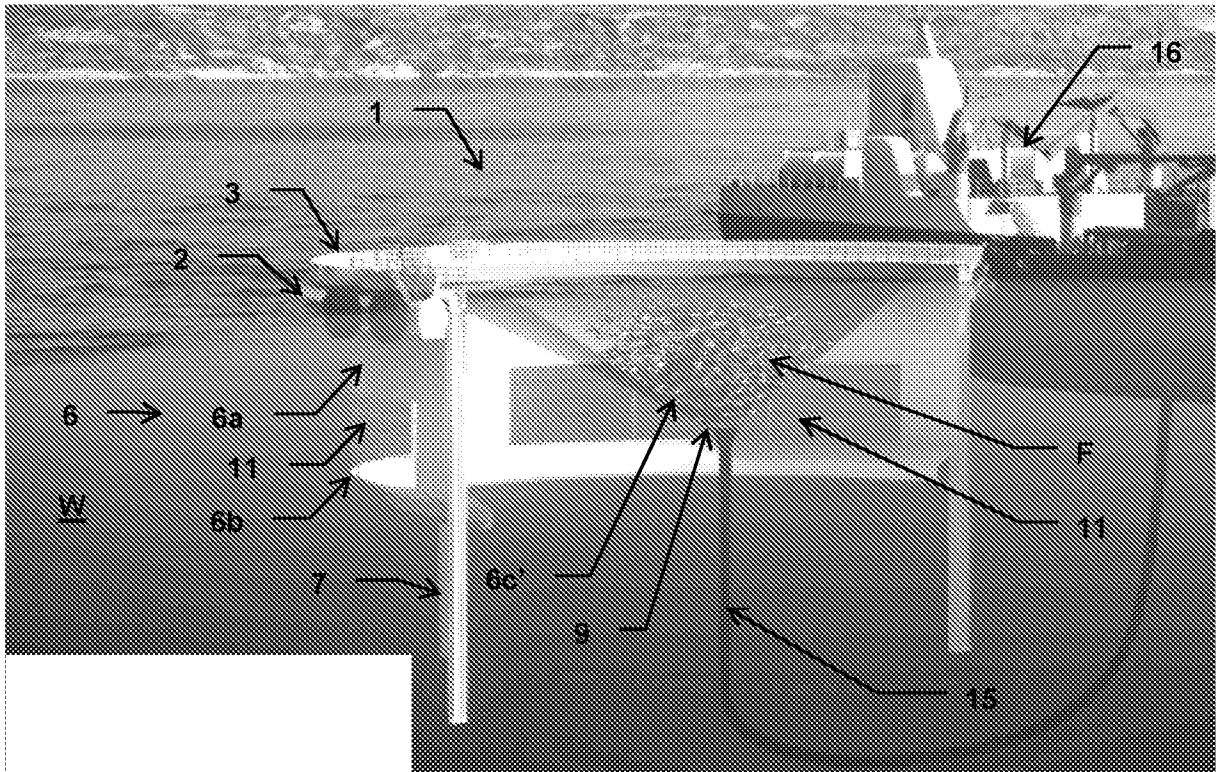


Fig. 8

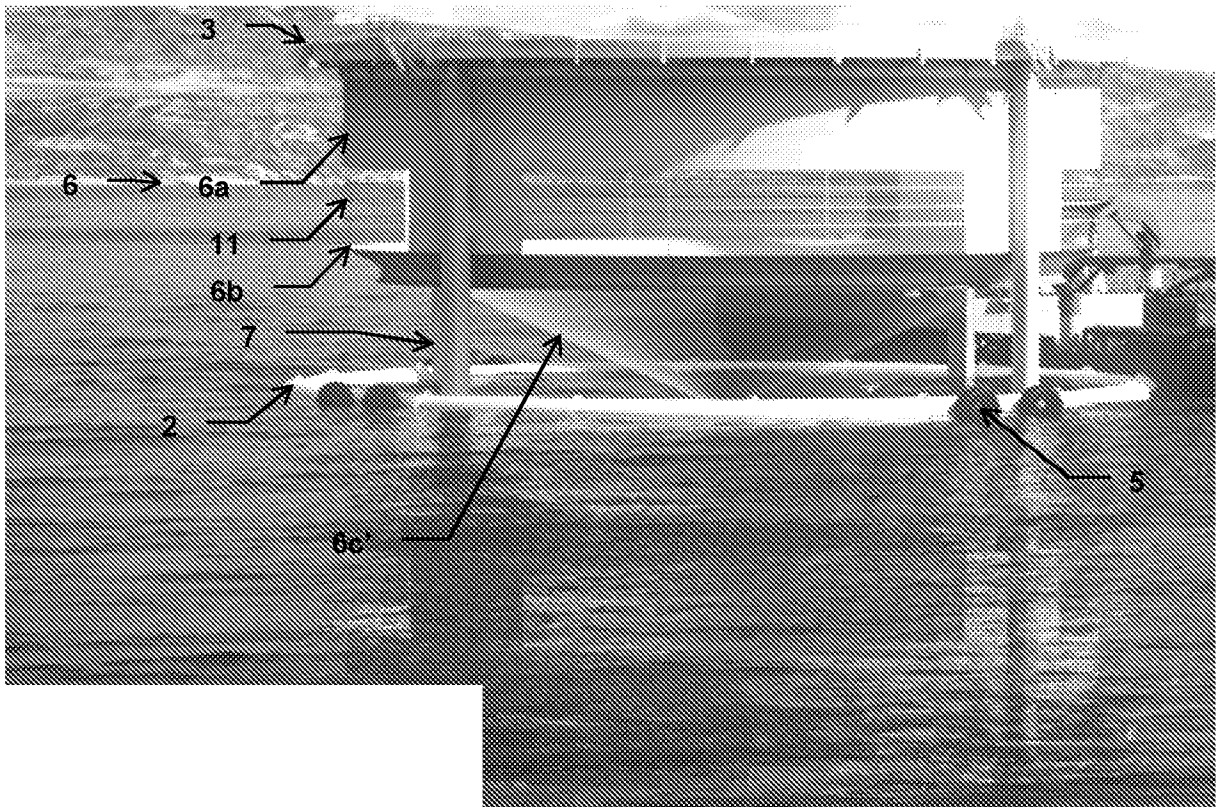


Fig. 9

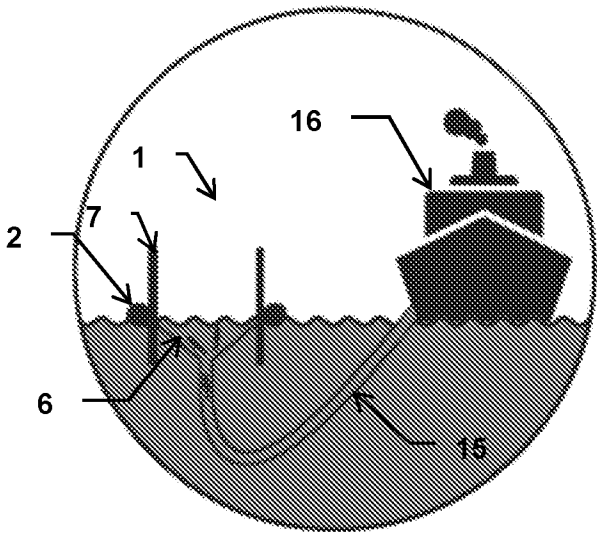


Fig. 10

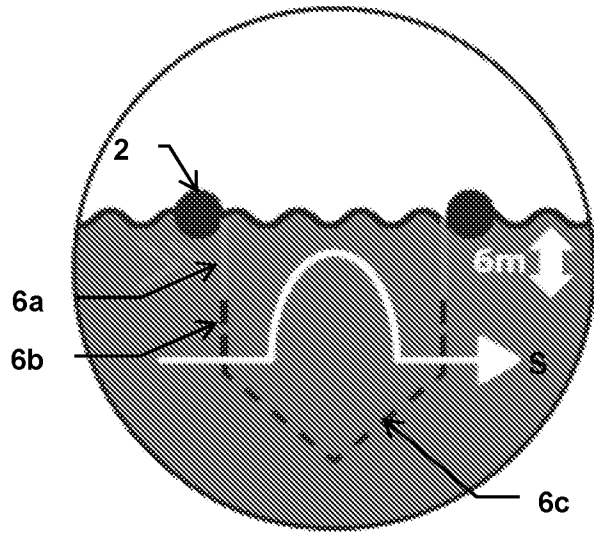


Fig. 11

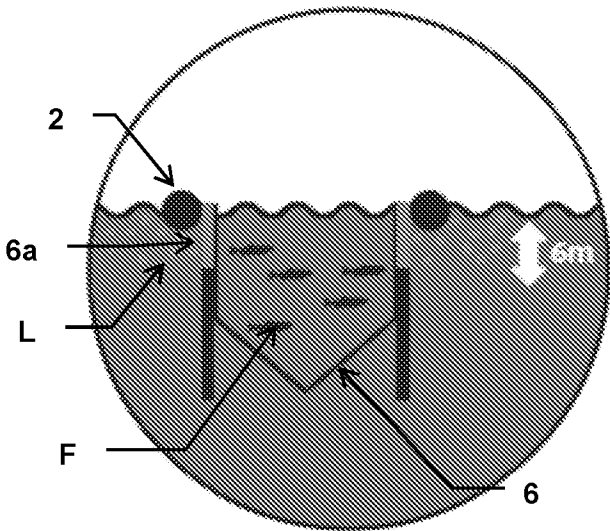


Fig.12

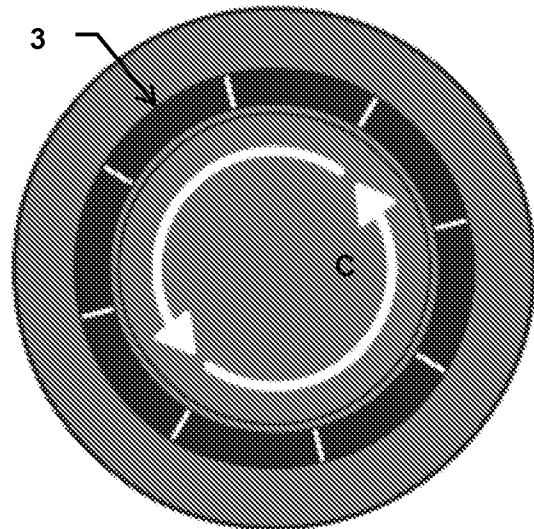


Fig. 13

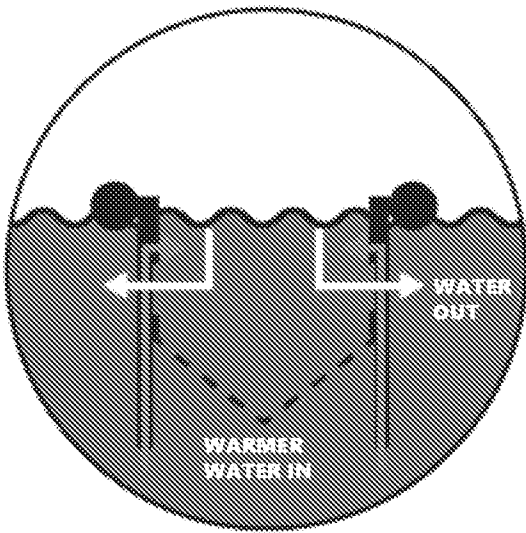


Fig. 14

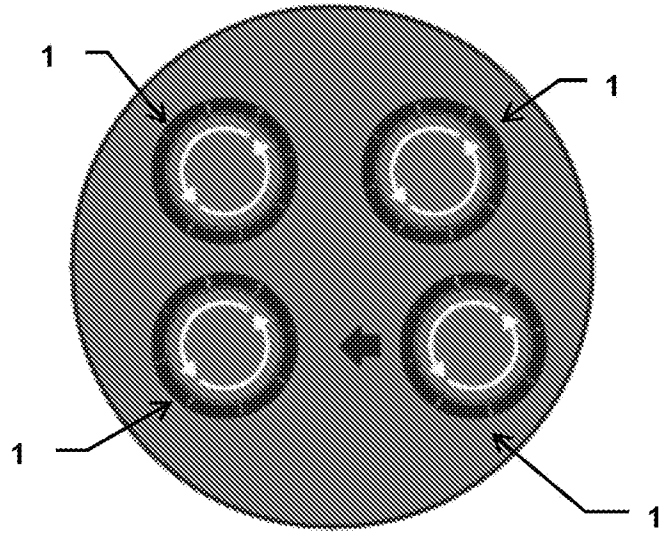


Fig. 15

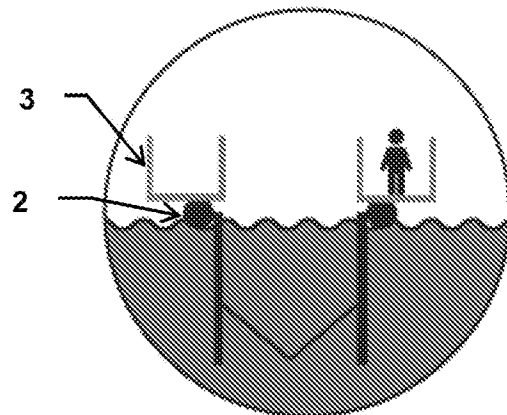


Fig. 16

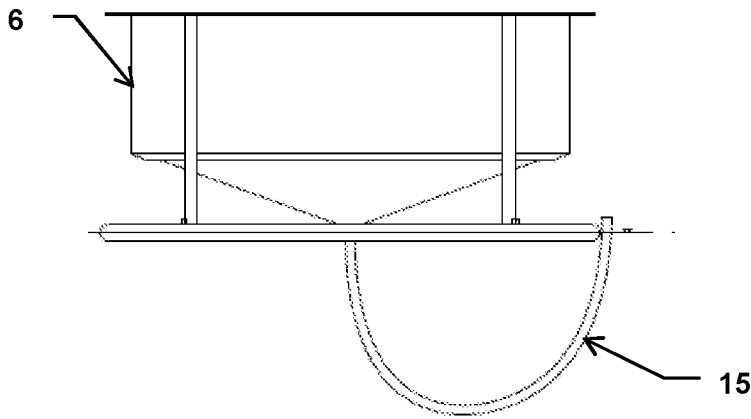


Fig. 17

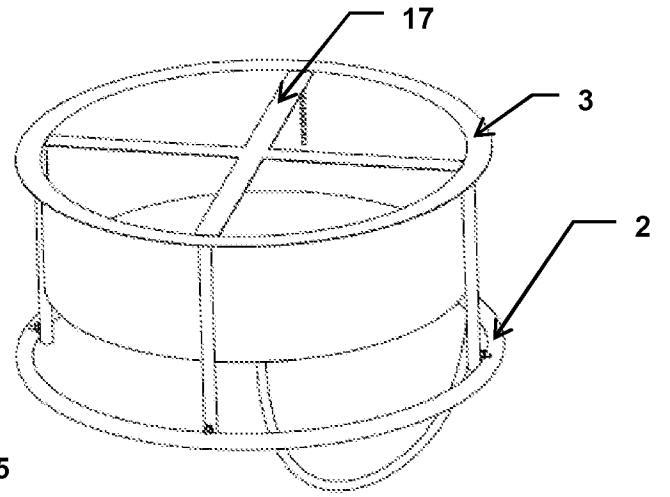


Fig. 18

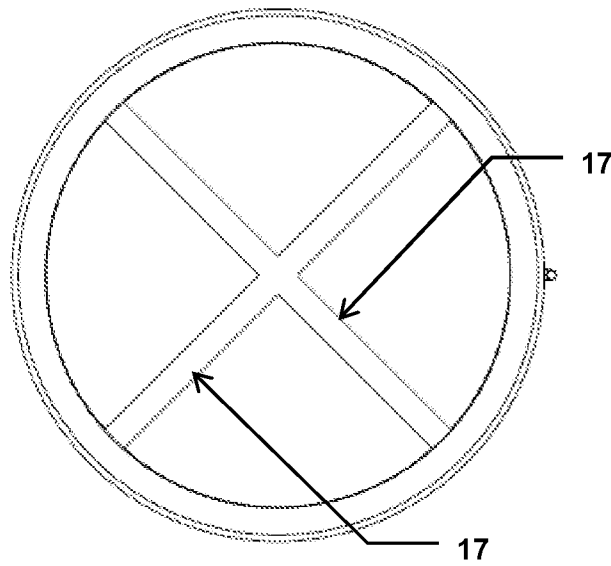


Fig. 19

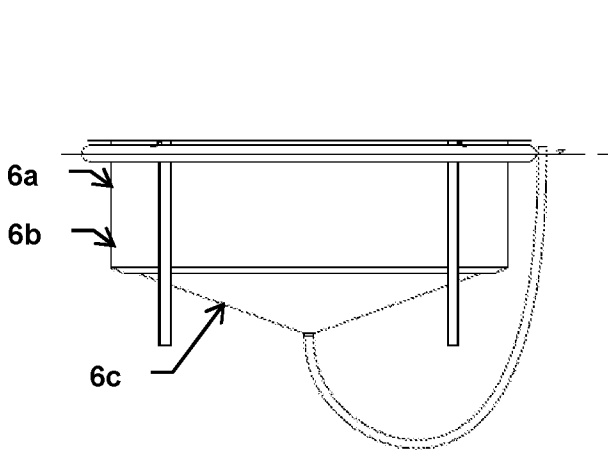


Fig. 20

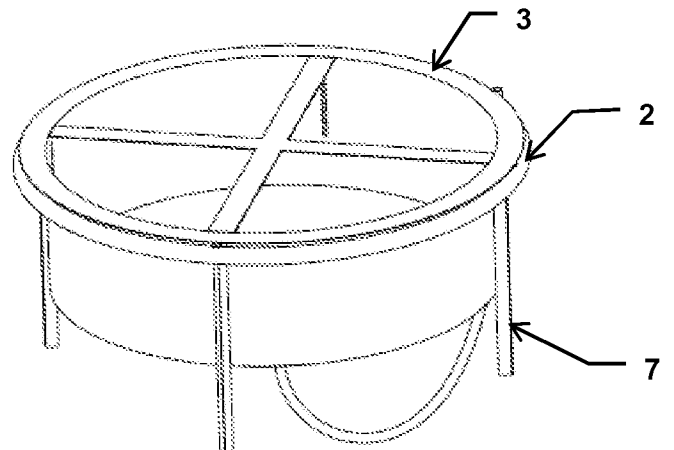


Fig. 21

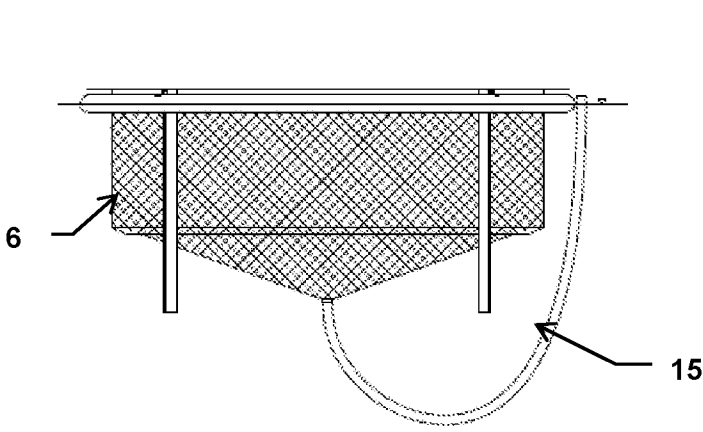


Fig. 22

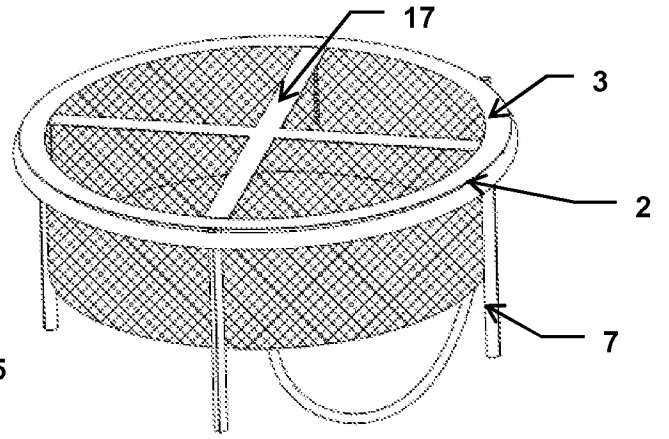


Fig. 23

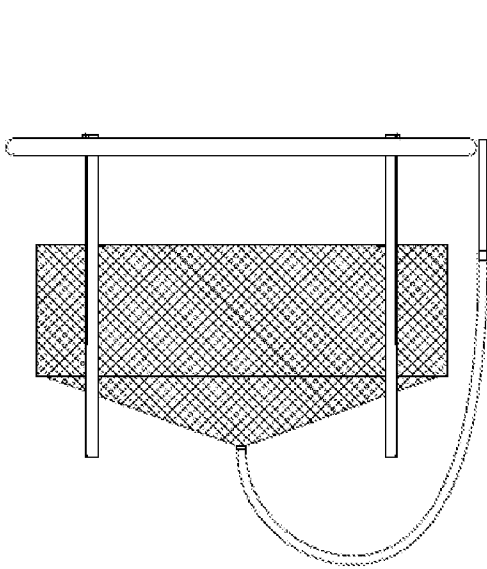


Fig. 24

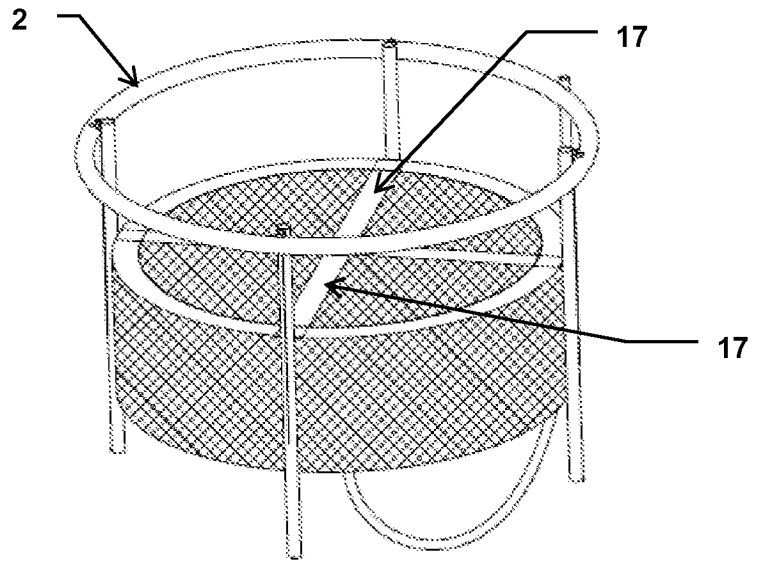


Fig. 25

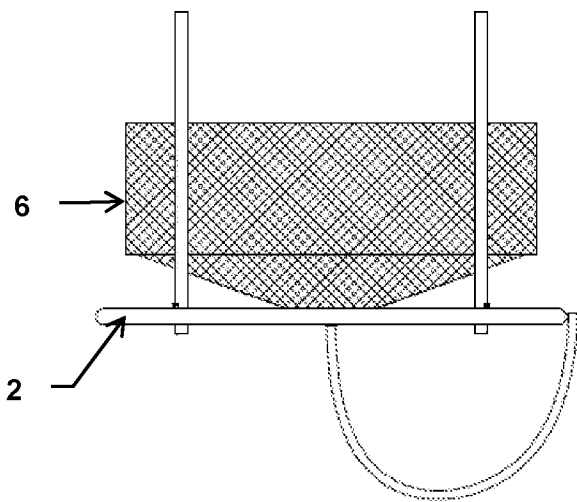


Fig. 26

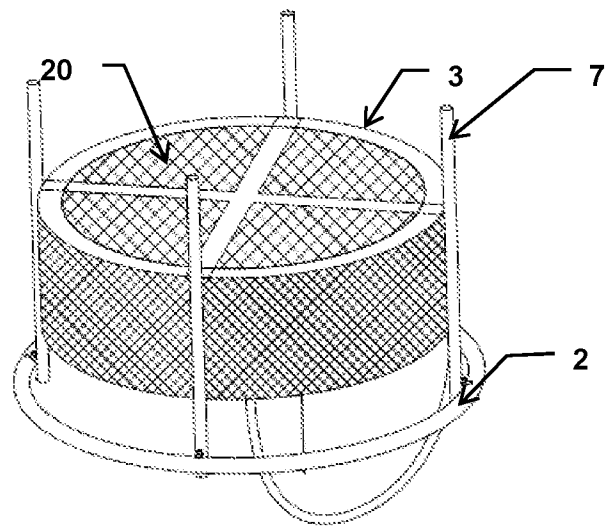


Fig. 27

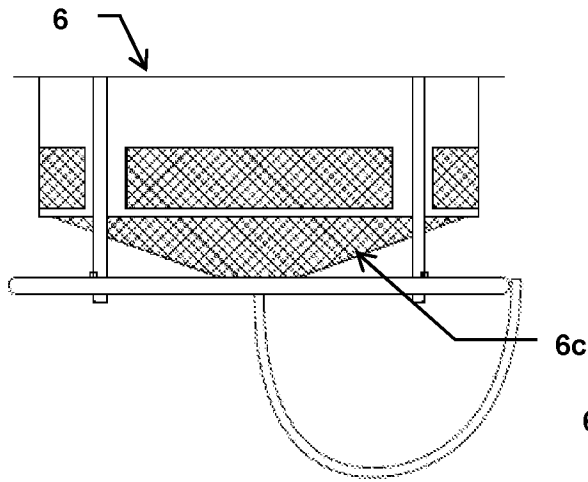


Fig. 28

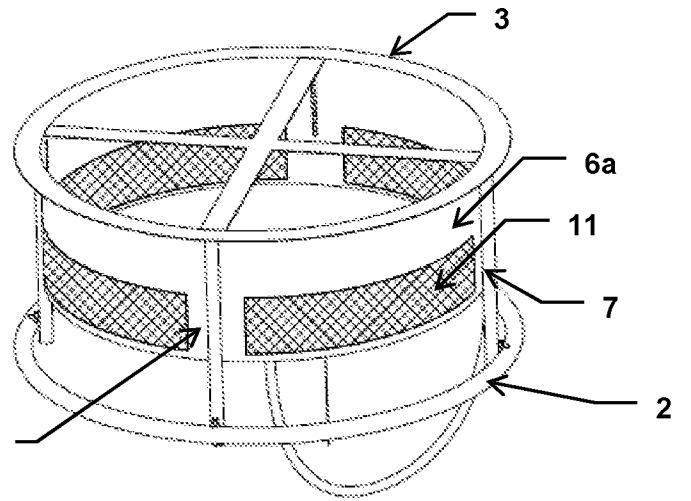


Fig. 29

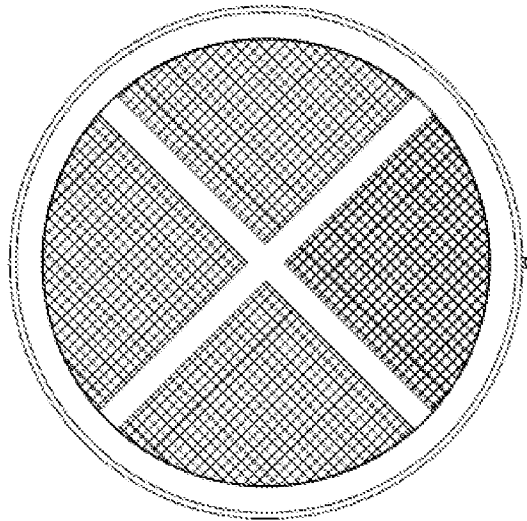


Fig. 30

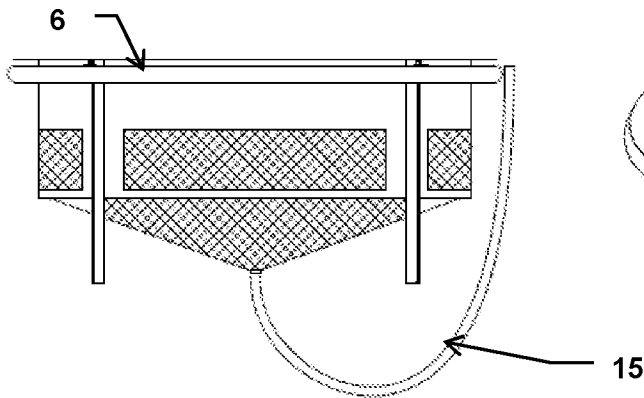


Fig. 31

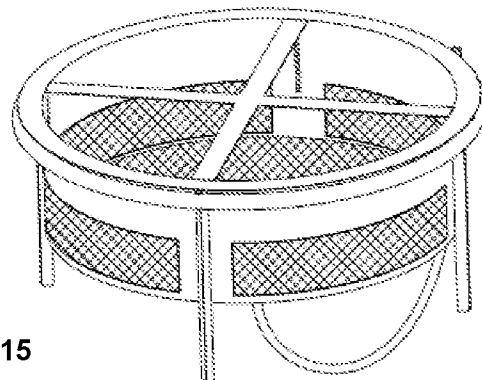


Fig. 32

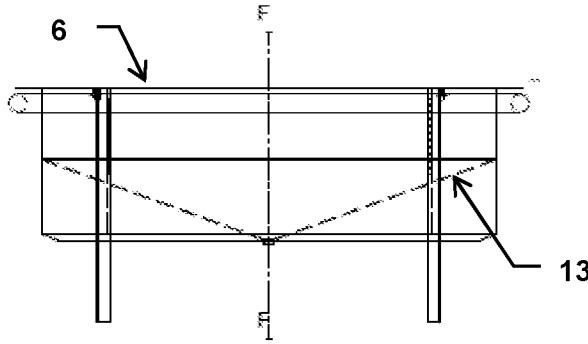


Fig. 33a

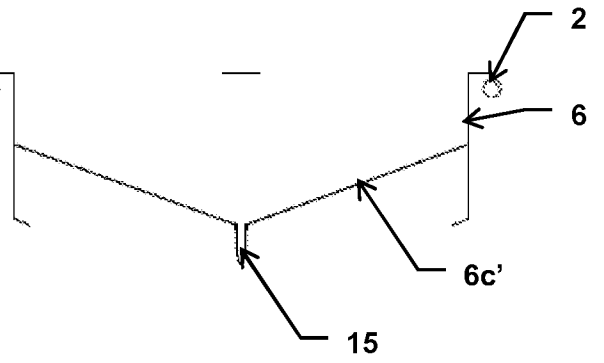


Fig. 33b

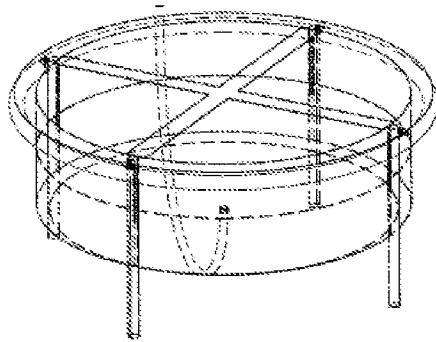


Fig. 33c

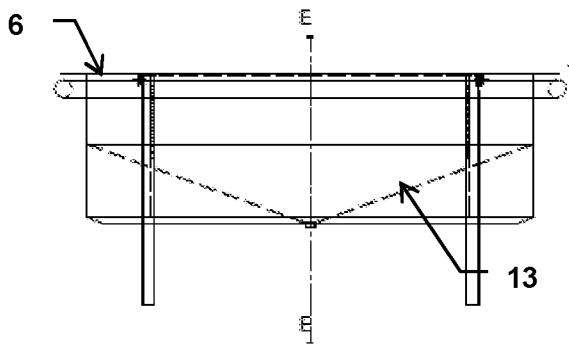


Fig. 34a

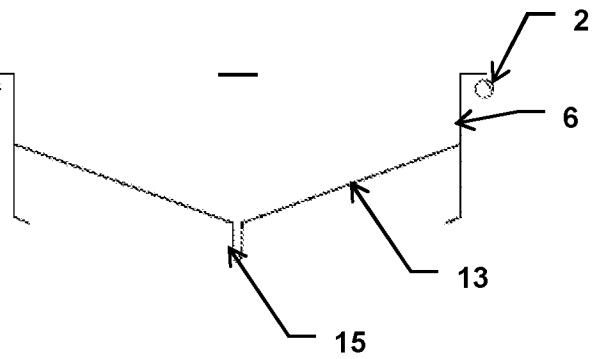


Fig. 34b

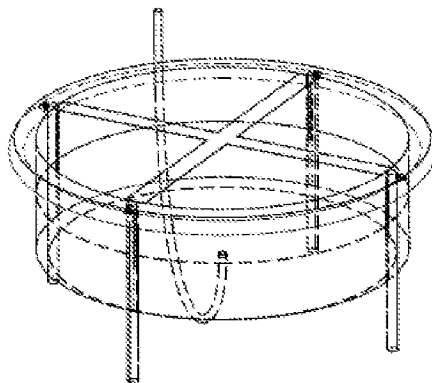


Fig. 34c

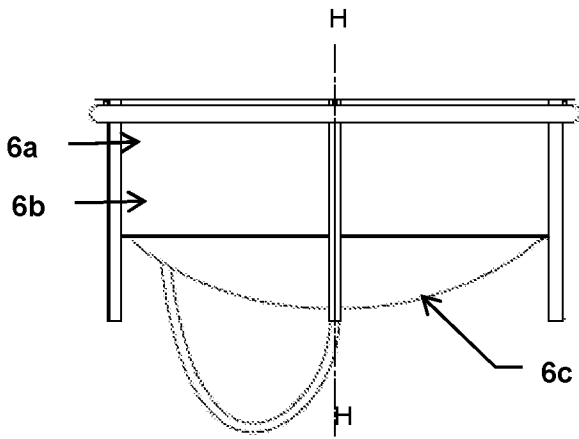


Fig. 35

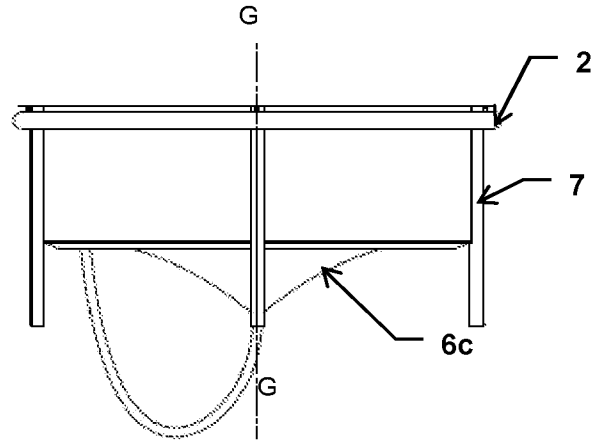


Fig. 36

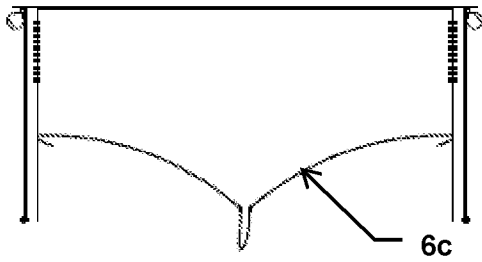


Fig. 37

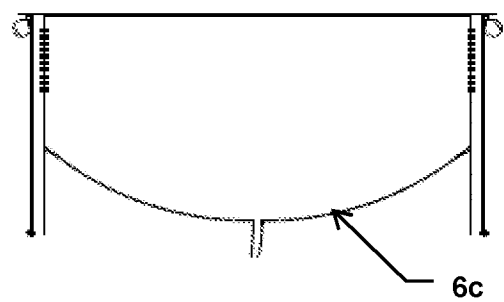


Fig. 38

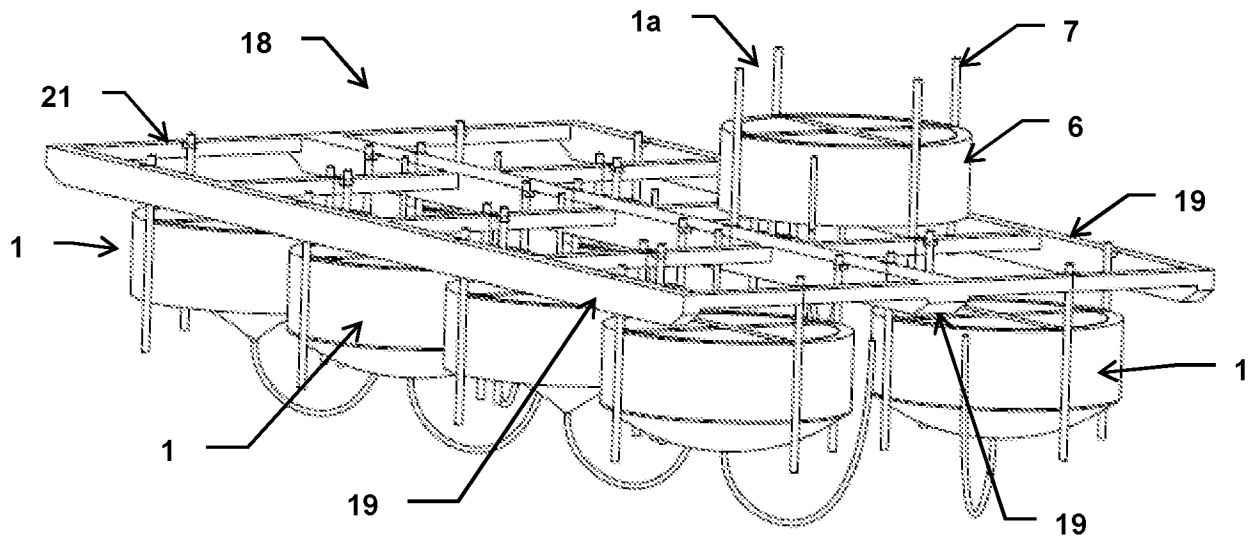


Fig. 39

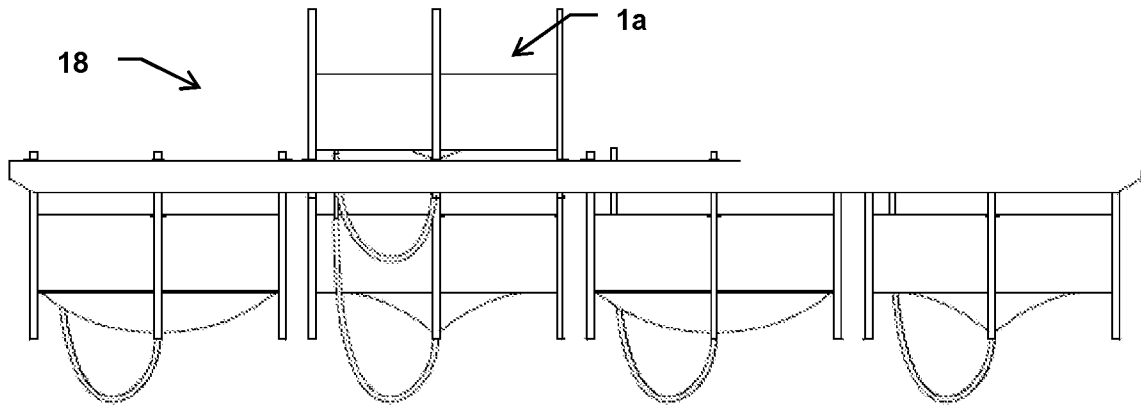


Fig. 40

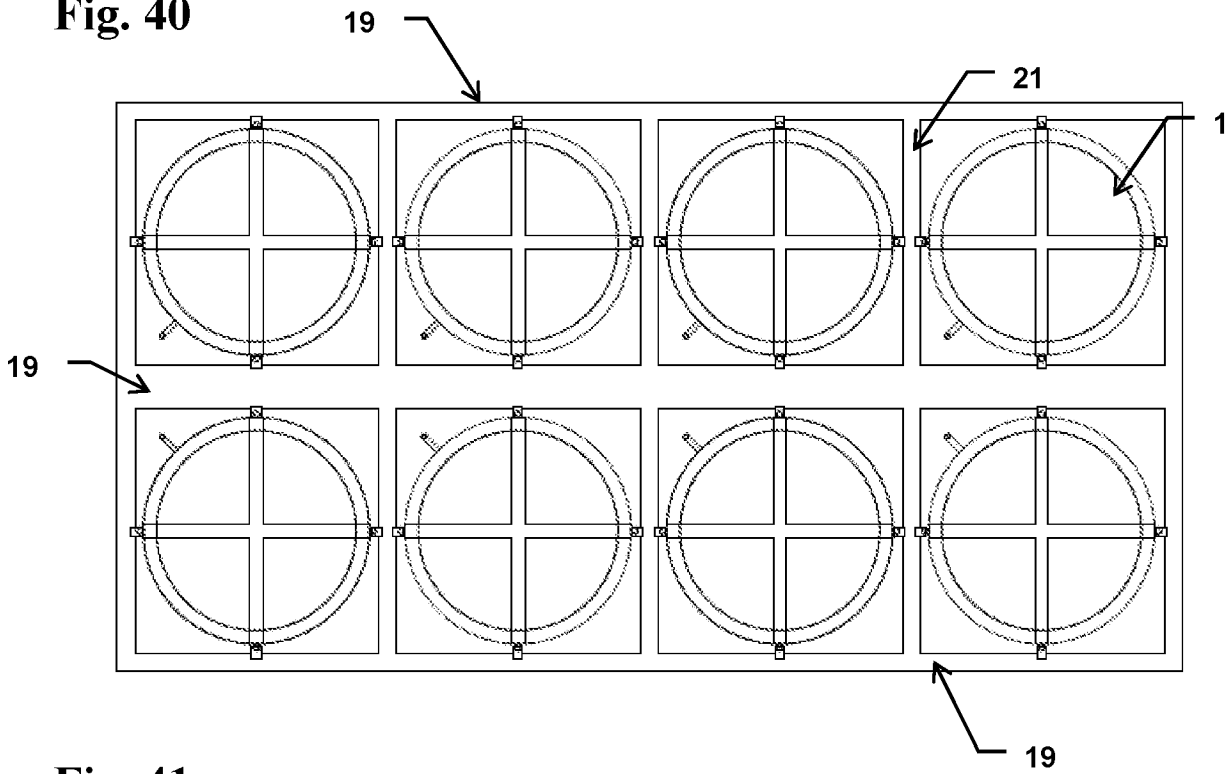


Fig. 41

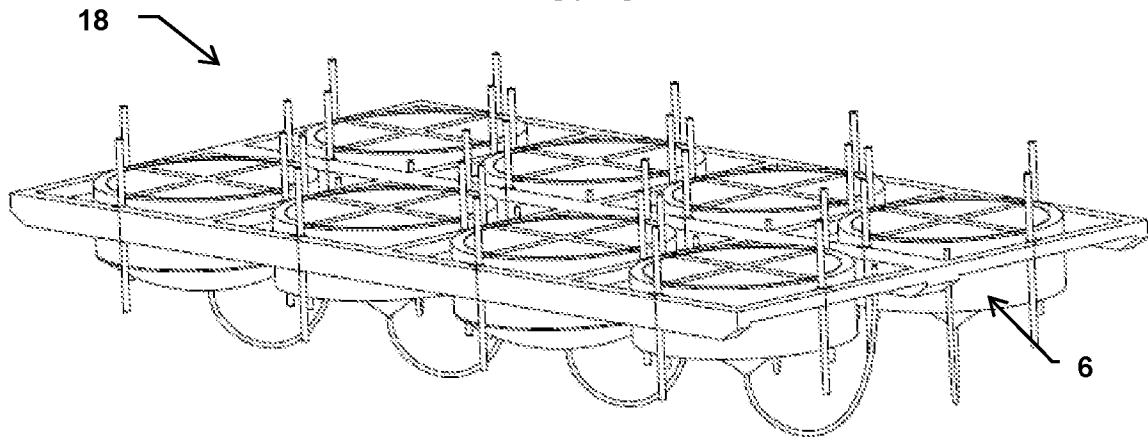


Fig. 42

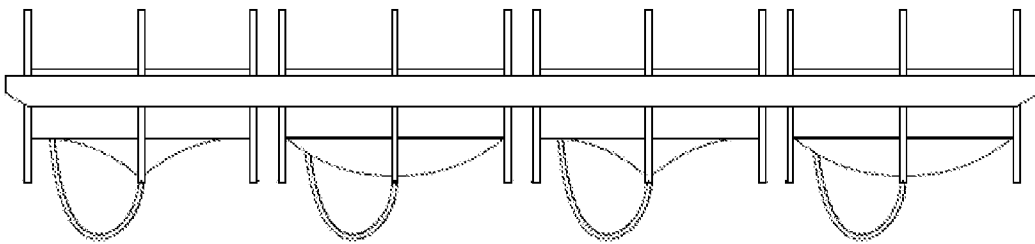


Fig. 43

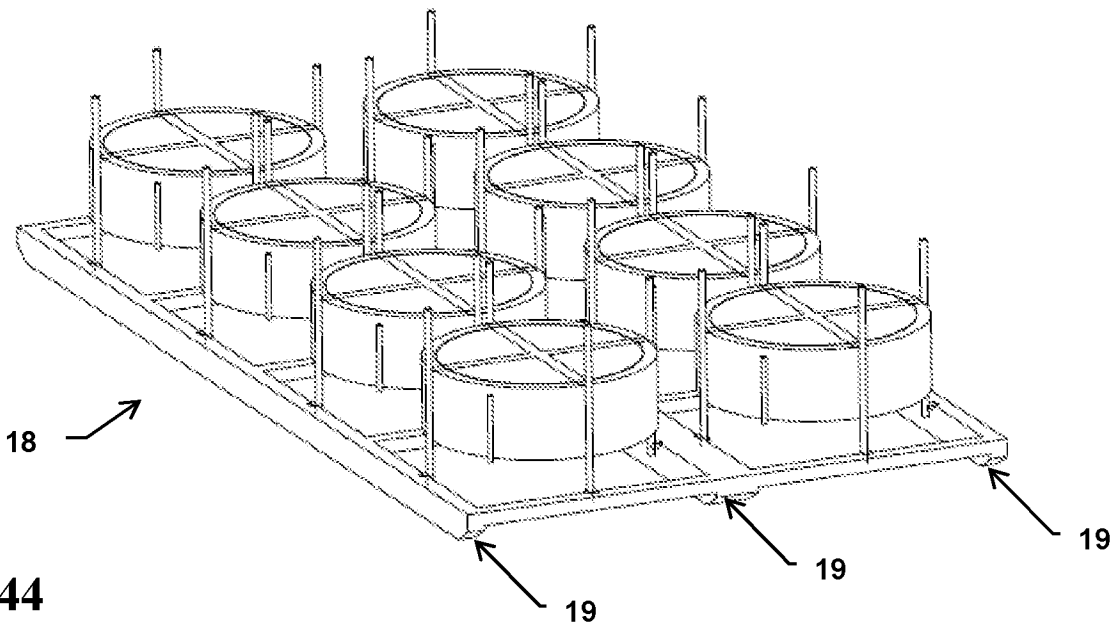


Fig. 44

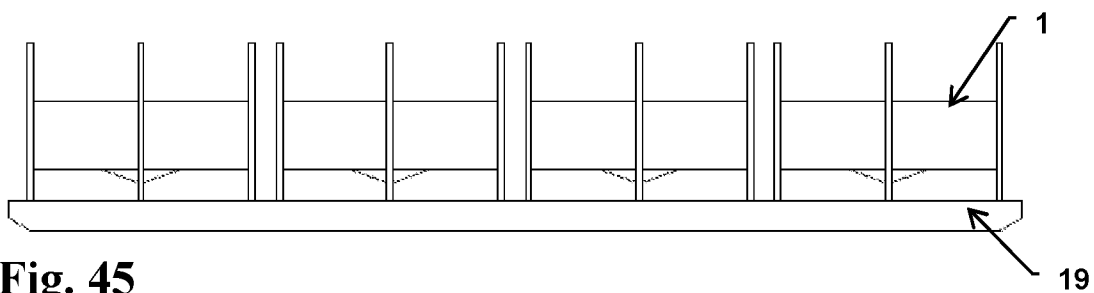


Fig. 45

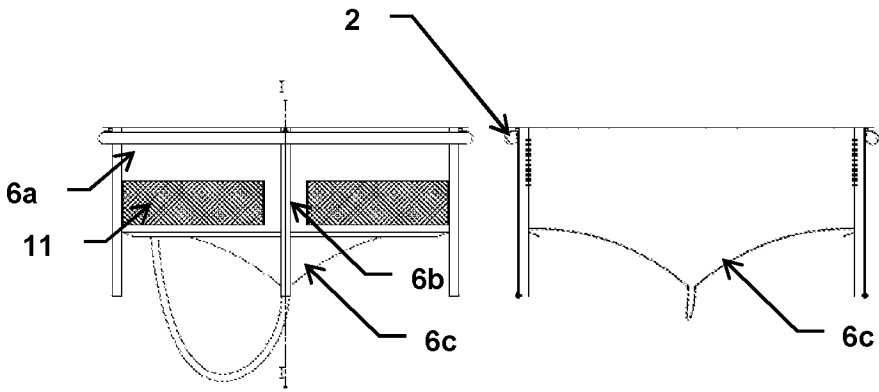


Fig. 46a

Fig. 46b

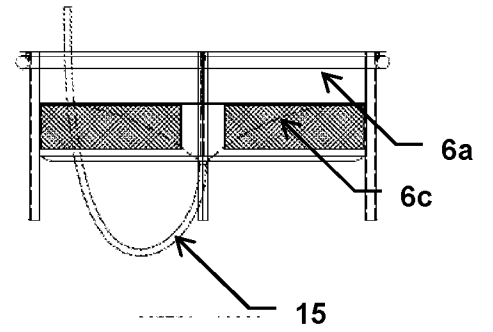


Fig. 47

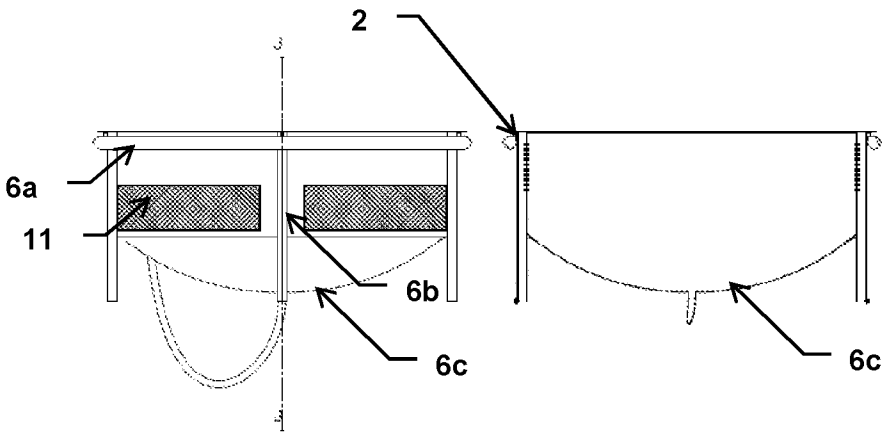


Fig. 48a

Fig. 48b

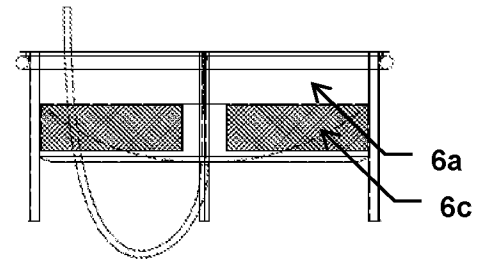


Fig. 49

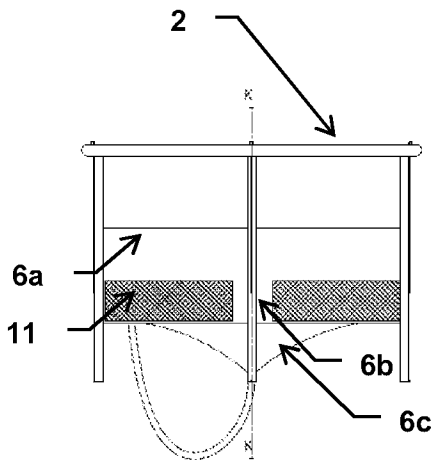


Fig. 50a

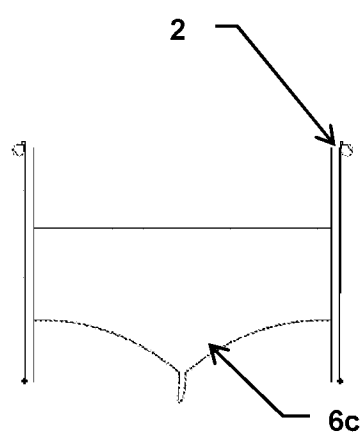


Fig. 50b

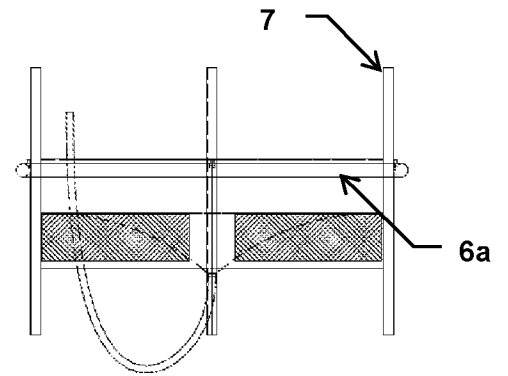


Fig. 51

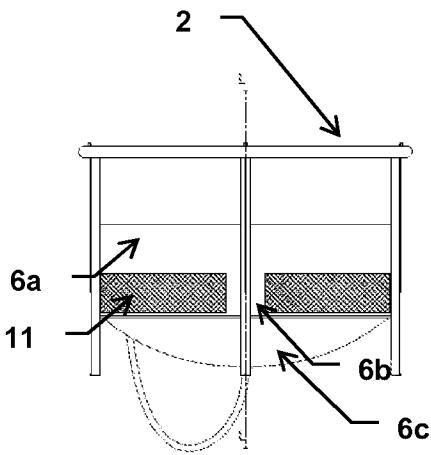


Fig. 52a

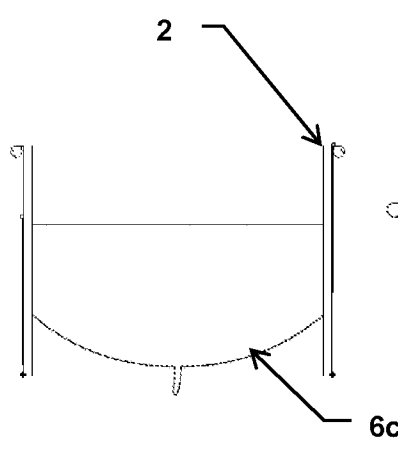


Fig. 52b

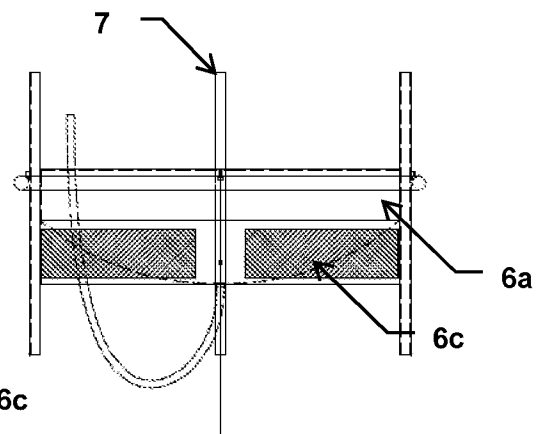


Fig. 53

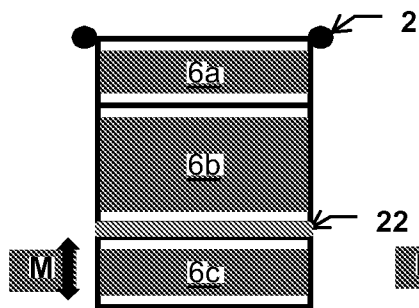


Fig. 54

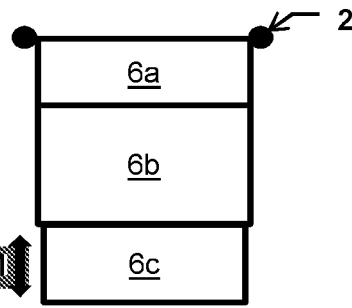


Fig. 55

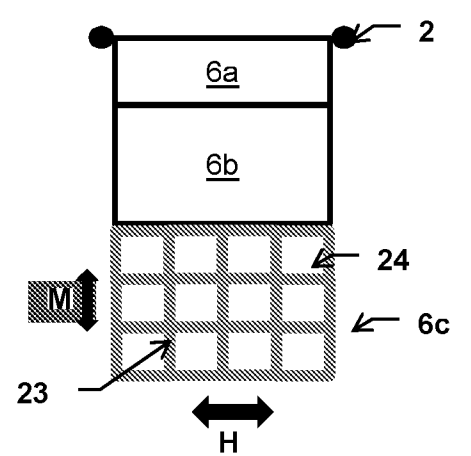


Fig. 56

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2017/050080

A. CLASSIFICATION OF SUBJECT MATTER A01K 61/60 (2017.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) A01K		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched DK, NO, SE, FI: Classes as above.		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPODOC, WPI, FULL TEXT: ENGLISH, GERMAN, FRENCH INSPEC, XPESP, COMPDX, XPTK, XPRD, XPIBE, XPAIP, XPIOP		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	NO 336739 B1 (NOFI TROMSØ AS) 2015.09.28 Whole document	1-15
A	WO 87/04319 A1 (FLØLO W.A. et.al) 1987.07.30 Whole document	1-15
P,X	BERGE A., MNH - Produksjon søker om åtte utviklingskonsesjoner, iLaks, 2016.04.12 [http://ilaks.no/mnh-produksjon-soker-om-atte-utviklingskonsesjoner/] Whole document	1, 6, 7, 9
A	WO 2014/189383 A1 (AQUALINE AS) 2014.11.27 Abstract, figure 1	1-4, 9
A	WO 2016/039632 A1 (AKVADESIGN AS) 2016.03.17 Abstract, figure 7, 8	14, 15
A	EP 0347489 A2 (LANGLIE C.) 1989.12.27 Abstract, figure 1	14, 15
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search	Date of mailing of the international search report	
14/06/2017	16/06/2017	
Name and mailing address of the ISA Nordic Patent Institute Helgeshøj Allé 81 DK - 2630 Taastrup, Denmark. Facsimile No. + 45 43 50 80 08	Authorized officer Marianne Skånseng Telephone No. +47 22 38 75 16	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/NO2017/050080

Patent document cited in search report / Publication date		Patent family member(s) / Publication date	
NO 336739B B1	2015.10.26	NONE	
WO 8704319 A1	1987.07.30	NO 860243 A	1987.07.24
		EP 0260272 A1	1988.03.23
WO 2014189383 A1	2014.11.27	NO 334957B B1	2014.08.04
		CA 2913123 A1	2014.11.27
		AU 2014269197 A1	2015.11.26
		EP 2999331 A1	2016.03.30
WO 2016039632 A1	2016.03.17	NO 20141089 A1	2016.03.09
		CA 2959778 A1	2016.03.17
EP 0347489 A2	1989.12.27	NO 882985 A	1989.12.27
		DE 3821327 A1	1989.12.28
		ES 2030480T T3	1992.11.01
		GR 3004528T T3	1993.04.28
		CA 1337894 C	1996.01.09