

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2006 (28.12.2006)

PCT

(10) International Publication Number
WO 2006/137902 A2

(51) International Patent Classification:
G02F 3/00 (2006.01)

(21) International Application Number:
PCT/US2005/035617

(22) International Filing Date: 4 October 2005 (04.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/615,808 4 October 2004 (04.10.2004) US

(71) Applicant (for all designated States except US): **UNIVERSITY OF SOUTH CAROLINA** [US/US]; 901 Sumter Street, 5th Floor, Columbia, SC 29208 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MYRICK, Michael, L.** [US/US]; 5 Castlevale Circle, Irmo, SC 29063 (US). **PERKINS, David, L.** [US/US]; 301 River Song, Irmo, SC 29063 (US). **PRIORE, Ryan, J.** [US/US]; 213 Hamilton Place Road, Columbia, SC 29229 (US).

(74) Agent: **DORITY & MANNING, P.A.**; DORITY & MANNING, P.A., 55 Beattie Place, Suite 1600, Greenville, SC 29601 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: THERMAL SELECTIVITY MULTIVARIATE OPTICAL COMPUTING

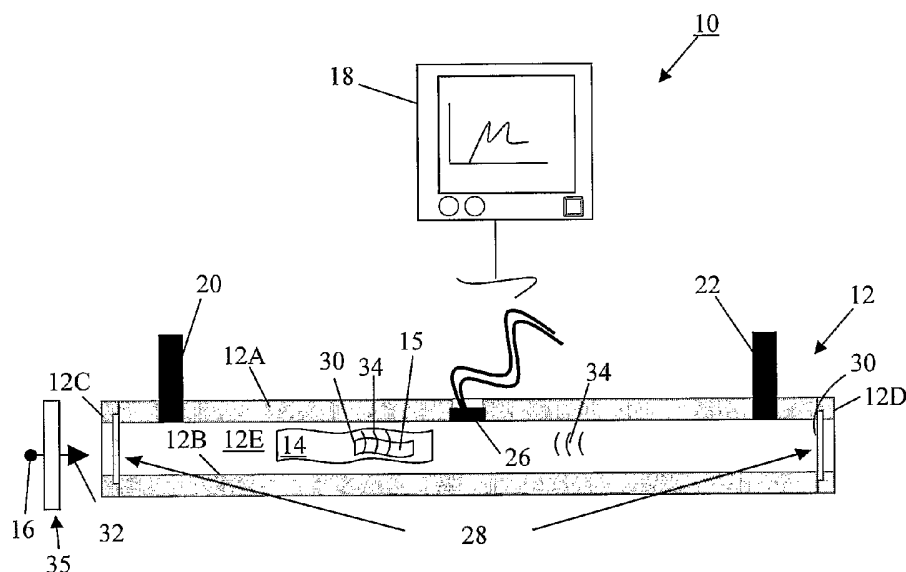

(57) Abstract: A method of using photoacoustic spectroscopy to determine chemical information about an analyte includes the steps of emitting a light ray for interaction with a sample of an analyte; transmitting the light ray through a fill fluid disposed in a detection cell, the fill fluid having molecules substantially similar to molecules of the analyte to absorb the light ray; producing a thermal wave and oscillation in the fill fluid proportional to an intensity of the light ray; including a pressure oscillation in the fill fluid by the thermal wave; and detecting the pressure oscillation by a microphone to determine information about the analyte sample

TITLE OF INVENTION**THERMAL SELECTIVITY MULTIVARIATE OPTICAL COMPUTING****CROSS-REFERENCE TO RELATED APPLICATIONS**

[0001] This application claims benefit of U.S. Provisional Patent Application, Serial Number 60/615,808, entitled "Thermal Selectivity Multivariate Optical Computing," filed October 4, 2004.

STATEMENT OF FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] Research described in this application was sponsored by the United States Air Force Research Laboratory grant number F33615-00-2-6059.

FIELD OF THE INVENTION

[0003] The present invention relates to filters that improve the precision of multivariate optical computing in spectroscopic analysis.

BACKGROUND OF THE INVENTION

[0004] Multivariate optical computing (MOC) is a predictive spectroscopy technique that incorporates a multi-wavelength spectral weighting directly into analytical instrumentation. The measurement precision of MOC has been studied for various techniques, several of which involve the use of an interference filter described as a multivariate optical element (MOE). Since MOE-based MOC uses detectors that see all wavelengths simultaneously - including wavelengths that carry no information - measurement noise is reduced and measurement precision is increased if the system can be made sensitive primarily to wavelengths carrying information.

[0005] In absorption/transmission/reflection measurements, the best measurement precision occurs when the detector responds only to those wavelengths where the sample analyte

exhibits absorption. Thus, the ideal detector response would be one that only accumulates a signal where variance related to the analyte occurs in a data set. Such detection schemes are possible with thermal measurements as compared to purely optoelectronic detectors.

BRIEF SUMMARY OF INVENTION

[0006] The present invention is generally directed to thermal-based detectors that improve the precision of multivariate optical computing for spectroscopic analysis.

[0007] One type of thermal detection according to an aspect of the invention is based on photoacoustic spectroscopy. Photoacoustic detection offers a highly sensitive measurement scheme in the mid-infrared (MIR) for liquids, solids and gases by observing the thermal-wave decay of absorption-induced heating via a pressure oscillation in a sample cell. A photoacoustic detector using a fill gas (or liquid) composed of the analyte alone (or with a non-absorbing filler) will provide a detector that is sensitive primarily to the wavelengths absorbed by the analyte. The effective wavelength range utilized in a measurement using such a detector will only be of those wavelengths where the sample exhibits absorption-induced heating. Effectively, the analyte becomes the detector, and the multivariate optical element is designed to correlate the spectral variance in the photoacoustic signal with the analyte concentration. The photoacoustic cell can be filled with analyte to a concentration that provides optimal signal to noise, since the analyte filling the cell is not the sample being measured. Instead, the photoacoustic-analyte cell is used only as a detector for light passing through, emitted by, scattered from, or reflecting from the sample.

[0008] Among the additional types of detectors made for thermal selectivity are pyroelectric detectors, thermoelectric or thermopile detectors, bolometers. In each case, a reflective coating (for example, a gold metal film) on the original detector can be used to

eliminate the broad wavelength sensitivity of the detector, while a polymer or liquid coating can be applied in a thin film atop the reflector to give sensitivity to analyte absorption bands.

[0009] In one aspect of the invention, a method of using photoacoustic spectroscopy to determine chemical information about an analyte includes the steps of emitting a light ray for interaction with a sample of an analyte; transmitting the light ray through a fill fluid disposed in a detection cell, the fill fluid having molecules substantially similar to molecules of the analyte to absorb the light ray; producing a thermal wave and oscillation in the fill fluid proportional to an intensity of the light ray; the thermal wave inducing a pressure oscillation in the fill fluid; and detecting the pressure oscillation by a microphone to determine information about the analyte sample. In this aspect, the analyte can be a gaseous analyte, a liquid analyte, a solid analyte, a dissolved analyte, a powdered analyte, an emulsified analyte, or combinations of these analytes. The analyte molecules can also be the same as the fill fluid molecules in this aspect.

[0010] Also in this aspect of the invention, the analyte can include a non-absorbing carrier fluid to absorb the light ray, which can be emitted from a broadband light source. The light ray interacts with the analyte in this aspect by being emitted through, emitted by, scattered from, or reflecting from the analyte.

[0011] Further in this aspect of the invention, the method can include the step of modulating an intensity of the light ray at a fixed frequency. A further step according to the method is to read a detector response at the fixed frequency. A wavelength of the light ray in this aspect can include a non-zero spectral weighting. Also in this aspect, the microphone records only the pressure oscillation induced by an absorbed wavelength of the light ray.

[0012] According to another aspect of the invention, a photoacoustic detection system includes a detection cell having a chamber and a port defined therein. The chamber is

configured to hold a fill fluid and analyte, and a microphone detector is located in the port, the microphone detector being configured to record a pressure oscillation in the fill fluid induced by the wavelengths of a light ray absorbed by the fill fluid such that information about the analyte can be determined. The pressure oscillation detected by the microphone detector provides information about the analyte.

[0013] The detection cell in this aspect of the invention includes an inlet for injecting the fill fluid and the analyte into the chamber. Further, the detection cell includes an outlet for releasing the fill fluid and the analyte from the chamber.

[0014] Also in this aspect of the invention, the photoacoustic detection system can include a light source being configured to emit the light ray in a direction of the chamber. The light source can be a broadband light source. The light source can be configured to modulate an intensity of the light ray at a fixed frequency.

[0015] Further in this aspect of the invention, the photoacoustic detection system can include an oscilloscope in communication with the microphone detector, the oscilloscope being configured to present a system response based on the pressure oscillation. The system response is produced by a wavelength of the light ray with a non-zero spectral weighting.

[0016] Other aspects and advantages of the invention will be apparent from the following description and the attached drawings, or can be learned through practice of the invention.

BRIEF DESCRIPTION OF DRAWINGS

[0017] A full and enabling disclosure of the present invention, including the best mode thereof to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures in which:

[0018] FIGURE 1 is a schematic view of a photoacoustic infrared cell in a Fourier Transform instrument for measuring calibration spectra and collecting a photoacoustic signal according to an aspect of the invention;

[0019] FIGURE 2A is a graph comparing a system response to a regression vector of a multivariate optical element that would produce measurements with poor precision because the spectral sensitivity overlaps the spectral details poorly;

[0020] FIGURE 2B is a graph similar to FIGURE 2A showing a better detector response that would produce modest precision because, while sensitive to the important spectral window, the system also accumulates signal from wavelengths outside the important region;

[0021] FIGURE 2C is a graph similar to FIGURE 2A showing an ideal system response where only the wavelengths with a non-zero spectral weighting produce the system response according to another aspect of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0022] Detailed reference will now be made to the drawings in which examples embodying the present invention are shown. Repeat use of reference characters in the drawings and detailed description is intended to represent like or analogous features or elements of the present invention.

[0023] The drawings and detailed description provide a full and detailed written description of the invention and the manner and process of making and using it, so as to enable one skilled in the pertinent art to make and use it. The drawings and detailed description also provide the best mode of carrying out the invention. However, the examples set forth herein are provided by way of explanation of the invention and are not meant as limitations of the invention. The present invention thus includes modifications and variations of the following examples as come within the scope of the appended claims and their equivalents.

[0024] Multivariate optical computing (MOC) according to some aspects of the present invention simplifies instrumentation and data analysis requirements of multivariate calibration. As the figures generally show, a multivariate optical element (MOE) utilizes a thin film interference filter to sense a magnitude of a spectral pattern. A no-moving-parts spectrometer, which is highly selective to a particular analyte, can be constructed by designing simple calculations based on the filter transmission and reflection spectra. A high throughput measurement can also be made since a broadband light source is used and many wavelengths are seen simultaneously at the detector.

[0025] Turning now to FIGURE 1, a photoacoustic detection system is designated in general by the element number 10. The photoacoustic detection system 10 broadly includes a dual function, infrared gas cell or photoacoustic detection cell 12, a carrier fluid such as a gas 14, an analyte such as a vapor 15, a light source 16 and an oscilloscope 18. As described in detail below, the photoacoustic detection cell 12 may be used for measuring calibration spectra in a Fourier Transform instrument as well as for collecting a final photoacoustic signal regarding the vapor 15. Although the analyte 15 is a vapor in this example, this embodiment of the invention is not limited to a gaseous analyte. The analyte 15 can be a liquid analyte, a solid analyte, a dissolved analyte, a powdered analyte, or an emulsified analyte, or combinations of these.

[0026] More particularly, the photoacoustic detection cell 12 of FIGURE 1 includes a plurality of surfaces and walls 12A-D that form an interior or chamber 12E. As shown, a carrier gas & vapor inlet port 20, a carrier gas and vapor outlet port 22 and a central port 24 are formed in the surface 12A. The skilled artisan will appreciate that the number and shape of the surfaces and walls 12A-D and the locations of the ports 20, 22 and 24 can be modified

to suit various applications and are not limited to the example shown, and that detection can be performed with other tools than the oscilloscope 18.

[0027] FIGURE 1 further shows that a microphone detector 26 is arranged in the central port 24, and one or more glass plates 28 are located in and help form the end walls 12C, 12D. As shown, the carrier gas 14 and the analyte vapor 15 are introduced into the chamber 12E via the carrier gas & vapor inlet port 20. The microphone detector 26 is connected to the oscilloscope 18 to record and analyze radiometric and photoacoustic measurements based on interaction of light rays or beams 32 with an interface or gaseous matrix 30 formed by the carrier gas 14 and the analyte vapor 15, as described in greater detail below.

[0028] FIGURES 2A-C generally show measurement precision examples comparing a system response to a T-R regression vector of a multivariate optical element, where T-R is a regression estimator (t_r).

[0029] Aspects of the invention may be better understood with reference to FIGURES 1-2C and to an exemplary method of operation.

[0030] As shown in FIGURE 1 and briefly introduced above, the dual function infrared gas cell 12 can be designed to be inserted directly into a spectrometer (for example, a FT-infrared spectrometer) so that the system response of this detector can be determined precisely.

[0031] As briefly introduced, photoacoustic spectroscopy is a specific thermal, non-destructive measurement of the interaction between the incident light rays 32 and the carrier gas 14 and the interface 30 via a non-radiative relaxation process. As shown in FIGURE 1, the incident light rays 32 are emitted by the pulsed or chopped light source 16, which in this example is a broadband light source. The light passes through a sample 35, containing at least one gaseous analyte to be measured. After passing through the sample, the light rays 32 enter the photoacoustic cell 12. The cell 12 is filled with a gaseous mixture of vapor of the

same molecular type as the analyte 15, with possibly an inert/absorption-free carrier gas 14. The fill gas absorbs the incident light rays 32. This interaction produces a thermal wave 34 or heat proportional to the intensity of the incident beam 32, which oscillations can be detected by the microphone 26. By modulating the source 16 and thus the intensity of the incident radiation 32 at a fixed frequency, the detector response can be read at the reference frequency yielding a very precise measurement. Ultimately, the analyte-rich fill gas 15 becomes the detector since the microphone 26 only responds to those wavelengths that were absorbed by the fill gas 15.

[0032] The skilled artisan will understand that photoacoustic detection is not limited to gases, but can be applied to liquids and even solids. Other types of thermal detectors can also be used to measure gases, liquids and solids by the method described here.

[0033] Turning now to FIGURE 2A, poor precision is shown because there is little overlap between a system response 36 and a regression vector 38. In comparison, FIGURE 2B shows moderate precision since the system response 136 is also accumulating a signal from wavelengths outside of a regression vector 138. In FIGURE 2C, an ideal system response according to this aspect of the invention is shown in which only the wavelengths with a non-zero spectral weighting produce a system response 236, which correlates substantially with a regression vector 238.

[0034] While preferred embodiments of the invention have been shown and described, those skilled in the art will recognize that other changes and modifications may be made to the foregoing examples without departing from the scope and spirit of the invention. It is intended to claim all such changes and modifications as fall within the scope of the appended claims and their equivalents.

That which is claimed is:

1. A method of using photoacoustic spectroscopy to determine chemical information about an analyte, the method comprising the steps of:
emitting a light ray for interaction with a sample of an analyte;
transmitting the light ray through a fill fluid disposed in a detection cell, the fill fluid
; having molecules substantially similar to molecules of the analyte to absorb the light ray;
producing a thermal wave and oscillation in the fill fluid proportional to an intensity
of the light ray;
inducing a pressure oscillation in the fill fluid by the thermal wave; and
detecting the pressure oscillation by a microphone to determine information about the
) analyte.
2. The method as in Claim 1, wherein the analyte is one of a gaseous analyte, a liquid analyte, a solid analyte, a dissolved analyte, a powdered analyte, or an emulsified analyte.
3. The method as in Claim 1, wherein the analyte molecules are the same as the fill fluid molecules.
4. The method as in Claim 1, wherein the analyte further includes a non-absorbing carrier fluid to absorb the light ray.
5. The method as in Claim 1, wherein the light ray interacts with the analyte by being emitted through, emitted by, scattered from, or reflecting from the analyte.
6. The method as in Claim 1, wherein the light ray is emitted from a broadband light source.
7. The method as in Claim 1, further comprising the step of modulating an intensity of the light ray at a fixed frequency.
8. The method as in Claim 7, further comprising the step of reading a detector response at the fixed frequency.
9. The method as in Claim 7, wherein a wavelength of the light ray includes a non-zero spectral weighting.
10. The method as in Claim 1, wherein the microphone records only the pressure

oscillation induced by an absorbed wavelength of the light ray.

11. A photoacoustic detection system, comprising:

a detection cell having a chamber and a port defined therein, the chamber being configured to hold a fill fluid and an analyte; and

a microphone detector disposed in the port, the microphone detector being configured to record a pressure oscillation in the fill fluid induced by the wavelengths of a light ray absorbed by the fill fluid such that information about the analyte can be determined.

12. The photoacoustic detection system as in Claim 11, wherein the detection cell includes an inlet defined therein, the inlet being configured to inject the fill fluid and the analyte into the chamber.

13. The photoacoustic detection system as in Claim 11, wherein the detection cell includes an outlet defined therein, the outlet being configured to release the fill fluid and the analyte from the chamber.

14. The photoacoustic detection system as in Claim 11, wherein the pressure oscillation detected by the microphone detector provides information about the analyte.

15. The photoacoustic detection system as in Claim 11, further comprising a light source being configured to emit the light ray in a direction of the chamber.

16. The photoacoustic detection system as in Claim 15, wherein the light source is a broadband light source.

17. The photoacoustic detection system as in Claim 15, wherein the light source is configured to modulate an intensity of the light ray at a fixed frequency.

18. The photoacoustic detection system as in Claim 7, further comprising an oscilloscope in communication with the microphone detector, the oscilloscope being configured to present a system response based on the pressure oscillation.

19. The photoacoustic detection system as in Claim 18, wherein the system response is produced by a wavelength of the light ray with a non-zero spectral weighting.

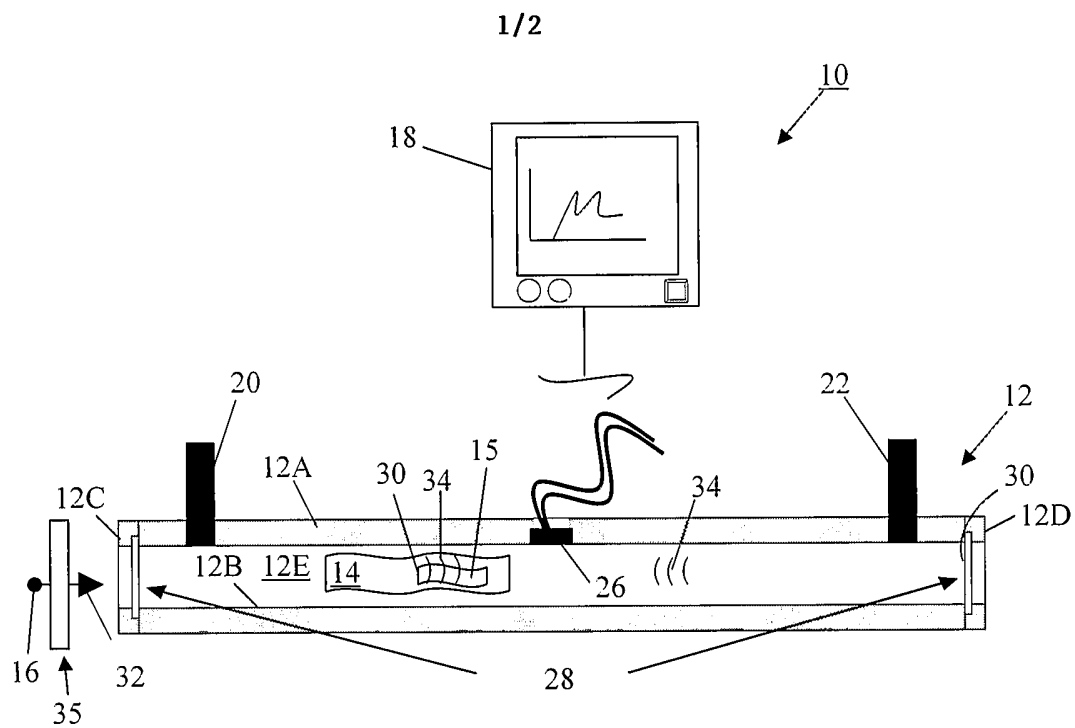


FIGURE 1

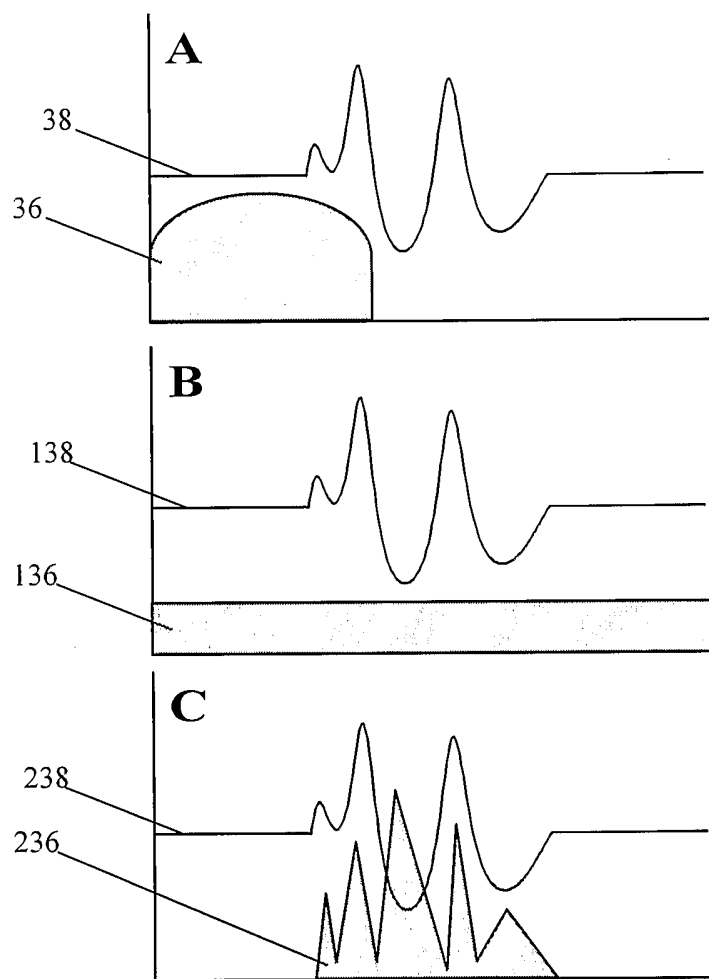


FIGURE 2