



(51) International Patent Classification:

E21B 47/04 (2006.01)

E21B 43/24 (2006.01)

E21B 41/00 (2006.01)

(21) International Application Number:

PCT/US2020/021924

(22) International Filing Date:

10 March 2020 (10.03.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/816,639

11 March 2019 (11.03.2019)

US

(71) Applicant (for US only): **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).

(71) Applicant (for CA only): **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 125 - 9 Avenue SE, Calgary, Alberta T2G 0P6 (CA).

(71) Applicant (for FR only): **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, 75007 Paris (FR).

(71) Applicant (for all designated States except CA, FR, US): **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; Parkstraat 83, 2514 JG The Hague (NL).

(72) Inventors: **HOU, Chang-Yu**; 21 West Street, Sharon, Massachusetts 02067 (US). **LIANG, Lin**; 743 Belmont Street, Belmont, Massachusetts 02478 (US). **VENKATARAMANAN, Lalitha**; 61 Webb St., Lexington, Massachusetts 02420 (US). **DATIR, Harish Baban**; Solaveien 80D, 4316 Sandnes (NO). **BOYD, Austin**; 390 Limestone Road, Ridgefield, Connecticut 06877 (US). **GKORTSAS, Vasileios-Marios**; 1 Emerson Place, Apt 4H, Boston, Massachusetts 02114 (US).

(74) Agent: **LAFFEY, Bridget M.** et al.; Schlumberger, 10001 Richmond Avenue, Room 4720, Houston, Texas 77042 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: ESTIMATION OF FLUID SATURATION OF A FORMATION FROM INTEGRATION OF MULTIPLE WELL LOGS

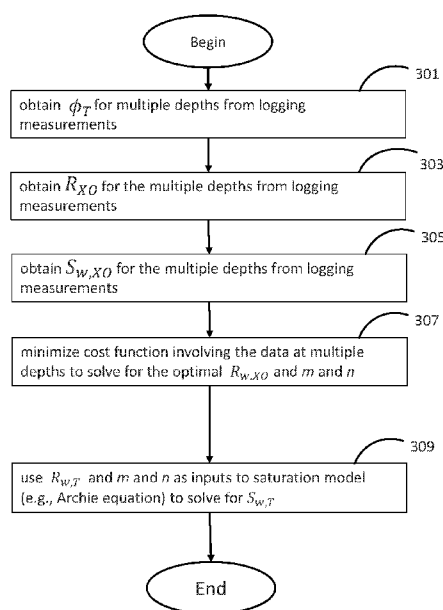


FIG. 3A

(57) Abstract: Methods and systems are provided characterizing a formation traversed by a wellbore, wherein the formation includes at least a flushed zone and an uninvaded zone, which involve obtaining well log data based on plurality of different well log measurements of the formation at multiple depths in the wellbore. The well log data is used to a computational model that solves for a set of petrophysical parameters that characterize a portion of the formation corresponding to the multiple depths in the wellbore, wherein the set of petrophysical parameters include a cementation exponent, a saturation exponent, and a flushed zone water resistivity. The solved-for set of petrophysical parameters can be used to determine a value of water saturation of the uninvaded zone for the portion of the formation corresponding to the multiple depths in the wellbore.

SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

- 1 -

ESTIMATION OF FLUID SATURATION OF A FORMATION FROM INTEGRATION OF MULTIPLE WELL LOGS

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] The present disclosure claims priority from U.S. Provisional Patent Appl. No. 62/816,639, filed on March 11, 2019, herein incorporated by reference in its entirety.

BACKGROUND

1. Field

[0002] The present disclosure relates to well logging to obtain measurements of a formation as well as interpretation of such measurements to determine petrophysical properties that characterize the formation.

2. State of the Art

[0003] During the drilling of a wellbore, drilling fluid (such as mud) is introduced into the wellbore under pressure in order to flush rock chips and other unwanted debris out of the wellbore. Such pressure is typically greater than the pressure of the formation traversed by the wellbore in order to prevent a phenomenon known as well blowout. The resultant pressure differential between the pressure of the drilling fluid and the formation pressure forces drilling fluid filtrate (commonly referred to as "mud filtrate") into the permeable formation and deposits solid particles of the drilling fluid on the wellbore wall forming a mudcake. The mudcake typically has a very low permeability. Once developed, the mudcake can reduce the rate of further mud filtrate invasion into the formation. In a region very close to the wellbore wall, most of the original formation water and some of the hydrocarbons may be flushed away by the mud filtrate. This region is known as the "flushed zone", or the "invaded zone". If the flushing is complete, the flushed zone pore space contains only mud filtrate; in addition, if the flushed zone was originally hydrocarbon bearing, it would contain only residual hydrocarbons. Further out from the wellbore wall, the displacement of the formation fluids by the mud filtrate is less and less complete thereby resulting in a second region, this second region undergoing a transition from mud filtrate saturation to original formation water saturation. The second region is known as the "transition zone". The extent or depth of the flushed and transition zones depends on many parameters, among them being the type and characteristics of the drilling fluid, the formation porosity, the formation permeability, the pressure differential, and the time since the formation was first drilled. The undisturbed formation beyond the transition zone is known as the "uninvaded" or "virgin" or "uncontaminated" zone.

- 2 -

[0004] Figure 1 is a schematic cross section of a wellbore, showing the results of the mud invasion process during drilling the wellbore. The wellbore is filled with drilling fluid. A layer of mudcake covers the wellbore wall. The surrounding formation includes a flushed zone, a transition zone, and an uninvaded zone extending radially from the wellbore wall.

[0005] The flushed zone can be characterized by a resistivity R_{XO} , a water resistivity $R_{w,XO}$, a total porosity ϕ_T , and a water saturation $S_{w,XO}$. Here, the total porosity ϕ_T is the volume fraction of the pore space of the flushed zone, while the $S_{w,XO}$ is the fraction of water with its resistivity, $R_{w,XO}$, that fills the pore space of the flushed zone. The resistivity R_{XO} governs the electric current responses of the formation in the flushed zone, which is dominated by the electric conduction through the water that saturates the pore space of the flushed zone.

[0006] The uninvaded zone can be characterized by a resistivity R_T , a water resistivity $R_{w,T}$, the total porosity ϕ_T , and a water saturation $S_{w,T}$. Here, the total porosity ϕ_T is the volume fraction of the pore space of the uninvaded zone, which is the same as that in the flushed zone. The S_w is the fraction of water with its resistivity, $R_{w,T}$, that fills the pore space of the uninvaded zone. The R_T is the true formation resistivity in the uninvaded zone, which is dominated by the electric conduction through the water that saturates the pore space of the uninvaded zone.

[0007] The characterization and evaluation of the water saturation S_w of the uninvaded zone is used to quantify the hydrocarbon content of the reservoir and thus is an important factor in estimating the value of the hydrocarbon content of the reservoir. Furthermore, evaluating water saturation of the uninvaded zone during production can be useful in monitoring and controlling water flooding in some enhanced oil recovery processes.

[0008] In order to accurately measure the water saturation S_w of the uninvaded zone, suitable petrophysical parameters, such as cementation exponent m , saturation exponent n and brine resistivity R_w , are required for formations obeying Archie's saturation equation. For shaly sand formation, additional formation property, cation exchange capacity (CEC) or Q_v , is also needed. Conventionally, all these petrophysical parameters are obtained from laboratory core measurements, which can take months to complete. Furthermore, the core measurements only represent limited depths of formation properties. In addition, measurement procedures for extracting these petrophysical parameters, such as CEC or Q_v , are not standardized, which can cause variation of measurement results from different laboratory. Also, laboratory measurements are not performed in the downhole conditions.

- 3 -

SUMMARY

[0009] Methods and systems are provided characterizing a formation traversed by a wellbore, wherein the formation includes at least a flushed zone and an uninvaded zone, which involve obtaining well log data based on plurality of different well log measurements of the formation at multiple depths in the wellbore. The well log data is used to a computational model that solves for a set of petrophysical parameters that characterize a portion of the formation corresponding to the multiple depths in the wellbore, wherein the set of petrophysical parameters include a cementation exponent, a saturation exponent, and a flushed zone water resistivity. The solved-for set of petrophysical parameters can be used to determine a value of water saturation of the uninvaded zone for the portion of the formation corresponding to the multiple depths in the wellbore.

[0010] In embodiments, the methods and systems can efficiently and effectively quantify water saturation of the uninvaded zone of a formation from a number of well logging measurements. The methods and systems can avoid external input from either prior knowledge or from the laboratory measurement.

[0011] In embodiments, the plurality of different well logging measurements can include at least one relatively deep resistivity measurement of the uninvaded zone of the formation in combination with at least one additional well logging measurement.

[0012] In embodiments, the methods and systems can be configured to combine the plurality of different well logging measurements using a suitable algorithm and one or more physical models that are configured to solve for a set of petrophysical parameters that include the cementation exponent m (or m^*) and the saturation exponent n (or n^*) of a suitable saturation model along with a water resistivity (either at the flush zone or at the uninvaded zone depending on the combined log). The set of petrophysical parameters (e.g., m (or m^*), n (or n^*), water resistivity either at the flush zone or at the uninvaded zone, and possibly CEC or Q_v) can be used to quantify the water saturation S_w of the uninvaded zone based on suitable models.

[0013] In embodiments, the plurality of different well logging measurements can be performed at multiple depths in the wellbore and/or in multiple radial depths of investigation.

[0014] In embodiments, for the case where the set of well logging measurements do not vary in radial depth of investigation, the set of well logging measurements can include well logging measurements of resistivity R_{xo} of the flushed zone (for example, by a micro-resistivity logging tool, induction logging tool or laterlog tool), total porosity ϕ_T of the uninvaded zone (for example, by a

- 4 -

neutron-density logging tool or ELAN logging analysis) and water saturation $S_{w,XO}$ of the flushed zone (for example, from a dielectric logging tool or NMR logging tool).

[0015] In other embodiments, for example in a water-base-mud (WBM) scenario, the set of well logging measurements can include measurements performed at multiple radial depths of investigation (for example, by an array induction logging tool) and a physical model of the hydrocarbon-containing uninvaded zone can be solved to determine the cementation exponent m , the saturation exponent n and potentially the water resistivity $R_{w,T}$ of the uninvaded zone with fewer measurements of varying wellbore depth.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Figure 1 is a schematic cross-sectional view of a wellbore that traverses a formation, including the zones that result from invasion of drilling fluid into the formation as a result of the drilling the wellbore.

[0017] Figure 2 is a schematic diagram of an exemplary wellsite system according to the present disclosure.

[0018] Figures 3A and 3B are flowcharts illustrating a workflow for quantifying water saturation of the uninvaded zone of a formation from multiple well logging measurements according to a first embodiment of the present disclosure.

[0019] Figures 4A and 4B are flowcharts illustrating a workflow for quantifying water saturation of the uninvaded zone of a formation from multiple well logging measurements according to a second embodiment of the present disclosure.

[0020] Figures 5A and 5B, collectively, is a flowchart illustrating a workflow for quantifying water saturation of the uninvaded zone of a formation from multiple well logging measurements according to a third embodiment of the present disclosure.

[0021] Figure 6 is a plot of the variation of the resistivity responses in the logarithmic scale as a function of porosity and water saturation for formations with different cementation and saturation exponents.

[0022] Figure 7 shows an example of the well logging measurements that can be obtained as inputs for the workflows of Figures 3A-3B and 4A-4B.

[0023] Figure 8 shows the results for the simulated data in the $\phi_T - R_{XO}$ cross-plot with total porosity ϕ_T , invaded zone resistivity R_{XO} , and invaded zone water saturation $S_{w,XO}$ as input.

- 5 -

[0024] Figure 9 is a schematic diagram of an exemplary computer processing system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] The particulars shown herein are by way of example and for purposes of illustrative discussion of the embodiments of the subject disclosure only and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the subject disclosure. In this regard, no attempt is made to show structural details in more detail than is necessary for the fundamental understanding of the subject disclosure, the description taken with the drawings making apparent to those skilled in the art how the several forms of the subject disclosure may be embodied in practice. Furthermore, like reference numbers and designations in the various drawings indicate like elements.

[0026] In embodiments, methods and systems are provided that efficiently and effectively quantify water saturation of the uninvaded zone of a formation from a number of well logging measurements. The methods and systems can avoid external input from either prior knowledge or from the laboratory measurement.

[0027] In embodiments, the number of well logging measurements can include at least one relatively deep resistivity measurement of the uninvaded zone of the formation in combination with at least one additional well logging measurement.

[0028] In embodiments, the methods and systems can be configured to combine the number of well logging measurements using a suitable algorithm and one or more physical models that are configured to solve for a set of petrophysical parameters that include the cementation exponent m (or m^*) and the saturation exponent n (or n^*) of a suitable saturation model along with a water resistivity (either at the flush zone or at the uninvaded zone depending on the combined log). The cementation exponent m (or m^*) models how much the pore network of the formation rock increases the resistivity of the formation rock, as the rock itself is assumed to be non-conductive. The saturation exponent n (or n^*) models the dependency on the presence of non-conductive fluid (hydrocarbons) in the pore-space, and is related to the wettability of the rock. Water-wet rocks will, for low water saturation values, maintain a continuous film along the pore walls making the rock conductive. Oil-wet rocks will have discontinuous droplets of water within the pore space, making the rock less conductive. The set of petrophysical parameters can also include a cation exchange capacity (CEC) or Q_v property, which accounts for clay minerals in the formation rock. The set of petrophysical parameters (e.g., m (or m^*), n (or n^*), water resistivity either at the flush zone or at the uninvaded zone, and possibly CEC or Q_v) can be used to quantify the water saturation S_w of the uninvaded zone based on suitable models.

- 6 -

[0029] In embodiments, the number of well logging measurements can be performed at multiple depths in the wellbore and/or in multiple radial depths of investigation.

[0030] In embodiments, for the case where the set of well logging measurements do not vary in radial depth of investigation, the set of well logging measurements can include well logging measurements of resistivity R_{XO} of the flushed zone (for example, by a micro-resistivity logging tool, induction logging tool or laterlog tool), total porosity ϕ_T of the uninvaded zone (for example, by a neutron-density logging tool or ELAN logging analysis) and water saturation S_{wXO} of the flushed zone (for example, from a dielectric logging tool or NMR logging tool).

[0031] In other embodiments, for example in a water-base-mud (WBM) scenario, the set of well logging measurements can include measurements performed at multiple radial depths of investigation (for example, by an array induction logging tool) and a physical model of the hydrocarbon-containing uninvaded zone can be solved to determine the cementation exponent m , the saturation exponent n and potentially the water resistivity $R_{w,T}$ of the uninvaded zone with fewer measurements of varying wellbore depth.

[0032] Figure 2 shows an apparatus which can be used to practice an embodiment of the present disclosure for investigation of an earth formation 31 traversed by a wellbore 32, which is filled with a drilling fluid 33. A logging device 40 is suspended in the wellbore 32 on an armored cable 35, the length of which substantially determines the depth of the downhole logging device 40. The cable length is controlled by conventional means at the surface (not shown). A processor 51, shown at the surface, although portions thereof may be downhole, represents processing circuitry for the various logging measurements performed by the logging device 40. A sheave wheel 96 can be conventionally provided for determination of depth of the logging device 40, and signals therefrom are coupled to the processor 51 for integration with the logging measurements.

[0033] The downhole logging device 40 of the present embodiment comprises a tool string that includes a number of tools. In the present embodiment, the reference numeral 41 represents one or more resistivity tools that measure the resistivity of the surrounding formation. The resistivity tool(s) can include a micro-resistivity tool, multi-depth array induction tool or lateral log tool as are well known in the arts. Note that resistivity and conductivity are inverses, and it will be understood that references herein to one of these imply that the other could be substituted, in an inverse sense. The array induction tool can be configured to measure resistivity at varying radial depths of investigation (DOI) that extend from the wellbore wall into the formation.

- 7 -

[0034] The tool string of downhole apparatus 40 also includes, in this embodiment, a logging device 43 which is used to obtain measurements of total porosity ϕ_T of the formation. This logging tool may comprise, for example, a conventional type of neutron-density logging device or other suitable tool measurements that combine nuclear, density, lithology tools for ELAN logging analysis.

[0035] Further included in the tool string is an NMR logging device 45 which can be used to measure the water saturation $S_{w,XO}$ in the flushed zone, for example by analysis of a measured NMR T2 distribution with a proper choice of T2 cutoff. Alternatively or additionally, the tool string can include a dielectric tool (not shown) whose log measurements can be interpreted to determine the water resistivity $S_{w,XO}$ in the flushed zone.

[0036] The tool string can also typically include appropriate conventional telemetry equipment and power supplies (not separately shown), as well as other logging subassemblies conventionally used with equipment of this type. It will also be understood that at least some of the measurements hereof could be made by equipment on a drill string as part of a logging-while drilling tool string.

[0037] For clean sandstone and carbonate formation, the resistivity saturation evaluation is largely based on the Archie's equation (Archie, 1942):

$$R_f(m, n, R_w, \phi_T, S_w) = R_w \phi_T^{-m} S_w^{-n}, \quad (\text{Eq. 1})$$

where R_f is the formation resistivity, ϕ_T is the total porosity of the formation, m is the cementation exponent, n is the saturation exponent, R_w is the water resistivity. This Archie's equation can in principle be applied to both the invaded and uninvaded zones with the assumption that the exponents, m and n , and the total porosity ϕ_T are the same at two zones. For the invaded zone, one has the formation resistivity $R_f = R_{XO}$, the water resistivity $R_w = R_{w,XO}$, and the water saturation $S_w = S_{w,XO}$. For uninvaded zone, one has the formation resistivity $R_f = R_T$, the water resistivity $R_w = R_{w,T}$, and the water saturation $S_w = S_{w,T}$. See Archie, G. E., 1942, "The Electrical Resistivity Log as an Aid in Determining Some Reservoir Characteristics," trans. of AIME 146 (1): 54-62.

[0038] For more complicate formations, such as shaly sand formation, one representative saturation equation is the Waxman-Smith saturation equation (Waxman and Smits, 1968; Waxman and Thomas, 1974):

$$\frac{1}{R_f^{WS}(m^*, n^*, R_w, Q_v, \phi_T, S_w)} = \phi_T^{-m^*} S_w^{-n^*} \left(\frac{1}{R_w} + \frac{B \cdot Q_v}{S_w} \right), \quad (\text{Eq. 2})$$

where R_f^{WS} is the formation resistivity, Q_v is the excess charge density in meq/cm³ due to the presence of clay, B is the constant converting the excess charge density to conductivity. Here the star

- 8 -

superscript at both exponents, m^* and n^* indicates that they are not the same as exponents in Archie's equation. Eq. (2) can in principle be applied to both invaded and uninvaded zone with the assumption that the exponents, m and n , the total porosity ϕ_T and the Q_v are the same at two zones. For invaded zone, one has the formation resistivity $R_f = R_{XO}$, the water resistivity $R_w = R_{w,XO}$, and the water saturation $S_w = S_{w,XO}$. For uninvaded zone, one has the formation resistivity $R_f = R_T$, the water resistivity $R_w = R_{w,T}$, and the water saturation $S_w = S_{w,T}$. See Waxman, M. H. and Smits, L. J. M., 1968, "Electrical Conductivities in Oil-Bearing Shaly Sands," SPE J. 8 (2): 107-122. SPE-1863-PA; and Waxman, M. H. and Thomas, E. C., 1974, "Electrical Conductivities in Shaly Sands-I. The Relation Between Hydrocarbon Saturation and Resistivity Index; II. The Temperature Coefficient of Electrical Conductivity," J Pet Technol 26 (2): 213-225. SPE-4094-PA. The resistivity saturation evaluation is largely based on these types of saturation models (equations), which requires the input of various petrophysical parameters.

[0039] The resistivity signals R_f can be obtained by various resistivity logging tools, such as micro-resistivity, multi-depth induction tool and lateral log. Often, the resistivity of the flushed zone is denoted as R_{XO} , and the resistivity of the uninvaded zone is denoted as R_T as described herein.

[0040] The total porosity ϕ_T of the formation can be obtained through either neutron-density logs or standard ELAN analysis combining multiple nuclear, density, lithology tools.

[0041] The water saturation $S_{w,XO}$ in the flushed zone can be obtained from interpretation of NMR tool measurements, such as the analysis of NMR T2 distribution with a proper choice of T2 cutoff, for the case where the flushed zone has minimum water saturation and thus corresponds to an irreducible water zone. Alternatively, the water saturation $S_{w,XO}$ in the flushed zone can be obtained from interpretation of the multifrequency dielectric measurements, for examples as described in Hizem, M., Budan, H., Deville, B., Faivre, O., Mosse, L., and Simon, M., 2008, "Dielectric dispersion: a new wireline petrophysical measurement," SPE ATCE Trans., paper SPE-116130.

[0042] In accordance with embodiments of the present disclosure, a formation can be modelled as multiple zones with similar properties stretching across a finite thickness. Furthermore, the embodiments can assume that the formation satisfies Archie's equation. In other embodiments, similar workflow can be established for more complicated formations using respective saturation equations.

[0043] Figures 3A and 3B illustrate an exemplary workflow according to a first embodiment of the present disclosure, which can be applied to cases that use oil-based drilling fluid or water-based drilling fluid. For the case of oil-based drilling fluid, one can assume $R_{XO} = R_T$, while an additional method/measurement is used to determine R_T .

- 9 -

[0044] At 301, the total porosity ϕ_T at multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by a conventional type of neutron-density logging device or other suitable tool measurements that combine nuclear, density, lithology tools for ELAN logging analysis (e.g., tool 43 of Figure 2).

[0045] At 303, the resistivity R_{XO} of the flushed zone at the multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by micro-resistivity, multi-depth induction logging tool or lateral log tool (e.g., tool 41 of Figure 2).

[0046] At 305, the water saturation $S_{w,XO}$ of the flushed zone at the multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by an NMR tool or dielectric tool (e.g., tool 45 of Figure 2).

[0047] At 307, under the assumption that the formation within the considered thickness covered by the multiple depths of the logging measurements have similar petrophysical properties, a cost function can be defined that uses a saturation model (such as the Archie saturation model of Eq. (1)) to relate the measured ϕ_T , R_{XO} , and $S_{w,XO}$ values at the multiple depths to values of m , n and the water resistivity $R_{w,XO}$ of the flushed zone. This cost function can be minimized to find values of m , n and $R_{w,XO}$ that fit the measured data. In this case, the values of m , n and $R_{w,XO}$ characterize that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 301 to 305. Exemplary operations that minimize the cost function to solve for values of m , n and $R_{w,XO}$ are set shown in Figure 3B.

[0048] In one embodiment, given the measurements of $\phi_{T,i}$, $R_{XO,i}$, and $S_{w,XO,i}$ for $i = 1, \dots, N$ depths, the best value of m , n and $R_{w,XO}$ that fits all the data can be found by minimizing the following cost function:

$$cost = \sum_{i=1}^N \left(R_{XO,i} - R_f(m, n, R_{w,XO}, \phi_{T,i}, S_{w,XO,i}) \right)^2. \quad (\text{Eq. 3})$$

Here R_f is defined according to Eq. (1) where $R_{w,XO}$ is used for R_w and $S_{w,XO,i}$ is used for S_w .

[0049] In other embodiments, different types of cost functions can also be used to invert for values of m , n and $R_{w,XO}$ to alleviate the effect of outlier data points. In the presence of measurement standard deviations, one can also weight each data points with the respective error to emphasize the data with less errors.

- 10 -

[0050] At 309, the values of m , n and water resistivity $R_{w,XO}$ for the flushed zone as determined in 307 is input to a saturation model (such as the Archie model of Eq.(1)) to quantify the water saturation S_w of the uninvaded zone of the formation. In the case where the saturation model requires the water resistivity $R_{w,T}$ (connate water resistivity) of the uninvaded zone, the value for this parameter can be obtained from other measurements. For example, for the case of water-base drilling fluid, the value of $R_{w,T}$ can be obtained either from independent formation fluid measurements or from other complimentary workflows (such as those described in Grau, J., Miles, J., and Mosse, L., 2019, “Measuring Spectral Contributions of Elements in Regions In and About Borehole Using Borehole Spectroscopy Tool,” PCT application PCT/US19/35231. In another example, for the case of oil-base drilling fluid mud, the value of $R_{w,T}$ can be assumed to be close to the value of the inverted $R_{w,XO}$, or to be obtained from other workflows (see Grau et.al, 2019). In this case, the value of the water saturation S_w calculated in 309 characterizes the uninvaded zone for that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 301 to 305.

[0051] According to a second embodiment of the present disclosure, for more complicated formations such as a shaly sand formation, a similar workflow can be used to solve for values of m^* , n^* , $R_{w,XO}$ and CEC_{clay} . Here CEC_{clay} in meq/g represents the averaged cation exchange capacity of the clay in the interested zone, which can be related to the Q_v by the relation

$$Q_v = f_{cl} \rho_{cl} CEC_{clay} \frac{1-\phi_T}{\phi_T}, \quad (\text{Eq. 4})$$

with the knowledge of total clay volume fraction, f_{cl} and the clay density ρ_{cl} in g/cm³. The total clay volume fraction, f_{cl} , can be reasonably estimated through standard mineral analysis from logs, while the clay density is around $\rho_{cl} \approx 2.8$ g/cm³ without much of variation. With these additional assumptions and inputs, a similar workflow can be established as shown in Figures 4A and 4B. This workflow can be applied to cases that use oil-based drilling fluid or water-based drilling fluid.

[0052] At 401, the total porosity ϕ_T at multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by a conventional type of neutron-density logging device or other suitable tool measurements that combine nuclear, density, lithology tools for ELAN logging analysis (e.g., tool 43 of Figure 2).

[0053] At 403, the clay volume fraction f_{cl} at multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed suitable tool measurements that combine nuclear, density, lithology tools for ELAN logging analysis (e.g., tool 43 of Figure 2).

- 11 -

[0054] At 405, the resistivity R_{XO} of the flushed zone at the multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by micro-resistivity, multi-depth induction logging tool or lateral log tool (e.g., tool 41 of Figure 2).

[0055] At 407, the water saturation $S_{w,XO}$ of the flushed zone at the multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by an NMR tool or dielectric tool (e.g., tool 45 of Figure 2).

[0056] At 409, under the assumption that the formation within the considered thickness covered by the multiple depths of the logging measurements have similar petrophysical properties, a cost function can be defined that uses a saturation model (such as the Waxman-Smith saturation model of Eq. (2)) to relate the measured ϕ_T , f_{cl} , R_{XO} , and $S_{w,XO}$ values at the multiple depths to values of m^* , n^* , CEC_{cl} and the water resistivity $R_{w,XO}$ of the flush zone. This cost function can be minimized to find values of m^* , n^* , CEC_{cl} and $R_{w,XO}$ that fit the measured data. In this case, the values of m^* , n^* , CEC_{cl} and $R_{w,XO}$ characterize that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 401 to 407. Exemplary operations that minimize the cost function to solve for values of m^* , n^* , CEC_{cl} and $R_{w,XO}$ are set shown in Figure 4B.

[0057] In one embodiment, given the measurements of $\phi_{T,i}$, $R_{XO,i}$, $f_{cl,i}$ and $S_{w,XO,i}$ for $i = 1, \dots, N$ depths, the best value of m^* , n^* , CEC_{cl} and $R_{w,XO}$ that fits the data can be found by minimizing the following cost function:

$$cost = \sum_{i=1}^N \left(R_{XO,i} - R_f^{WS}(m^*, n^*, R_{w,XO}, CEC_{cl}, f_{cl,i}, \phi_{T,i}, S_{w,XO,i}) \right)^2. \quad (\text{Eq. 5})$$

Here R_f^{WS} is defined according to Eq. (2) where $R_{w,XO}$ is used for R_w , $S_{w,XO,i}$ is used for S_w , Q_v is determined according to Eq. (4) above, and B is a predefined constant as described above.

[0058] In other embodiments, different types of cost functions can also be used to invert for values of m^* , n^* , CEC_{cl} and $R_{w,XO}$ to alleviate the effect of outlier data points. In the presence of measurement standard deviations, one can also weight each data points with the respective error to emphasize the data with less errors.

[0059] At 411, the values of m^* , n^* and water resistivity $R_{w,XO}$ for the flushed zone as determined in 409 is input to a saturation model (such as the Waxman-Smith saturation model of Eq. (2)) to quantify the water saturation S_w of the uninvaded zone of the formation. In the case where the saturation model requires the water resistivity $R_{w,T}$ (connate water resistivity) of the uninvaded zone, the value for this parameter can be obtained from other measurements. For example, for the case of

- 12 -

water-base drilling fluid, the value of $R_{w,T}$ can be obtained either from independent formation fluid measurements or from other complimentary workflows (such as those described in Grau, J., Miles, J., and Mosse, L., 2019, “Measuring Spectral Contributions of Elements in Regions In and About Borehole Using Borehole Spectroscopy Tool,” PCT application PCT/US19/35231. In another example, for the case of oil-base drilling fluid mud, the value of $R_{w,T}$ can be assumed to be close to the value of the inverted $R_{w,XO}$, or to be obtained from other workflows (see Grau et.al, 2019). In this case, the value of the water saturation S_w calculated in 411 characterizes the uninvaded zone for that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 401 to 407.

[0060] According to a third embodiment of the present disclosure, for the case of where the mud-filtrate invasion is water-based drilling fluid, a workflow can be provided that solves for values of m , n and $R_{w,T}$ from the resistivity data at the multiple radial depths of investigation in the oil zone of the formation as shown in Figures 5A and 5B.

[0061] At 501, the total porosity ϕ_T at multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by a conventional type of neutron-density logging device or other suitable tool measurements that combine nuclear, density, lithology tools for ELAN logging analysis (e.g., tool 43 of Figure 2).

[0062] At 503, the formation resistivity R_i at a number of radial depths of investigation (e.g., where $i = 1, \dots, N$ for a number of radial DOI) is obtained at multiple depths in the wellbore from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by a multi-depth induction logging tool or lateral log tool (e.g., tool 41 of Figure 2).

[0063] At 505, the water saturation $S_{w,XO}$ of the flushed zone at the multiple depths in the wellbore is obtained from well logging measurements at the multiple depths in the wellbore. Such well logging measurements can be performed by an NMR tool or dielectric tool (e.g., tool 45 of Figure 2).

[0064] At 507, a physics model is used to model the mud-filtrate invasion process to determine the radial distribution of water saturation and salt concentration and possibly additional useful parameters for the multiple depths. In embodiments, the physics model can be based on two-phase, three-component (oil, water, salt) porous medium fluid-flow model as described in Liang, L., Abubakar, A., and Habashy, T. M., 2011, “Estimating petrophysical parameters and average mud-filtrate invasion rates using joint inversion of induction logging and pressure transient data,” Geophysics, 76(2), E21-E34; or Ramakrishnan, T. S., and Wilkinson, D. J., 1999, “Water-Cut and Fractional-Flow Logs From Array-Induction Measurements,” Society of Petroleum Engineers.

- 13 -

doi:10.2118/54673-PA. In another embodiment, the physics model can be based on a specifically designed spatial regularization (e.g., parameterized radial profiles of water saturation and salt concentration) to constrain the $S_{w,i}$ and $C_{w,i}$ (salt concentration), at different radial depths, given the mud-filtrate salt concentration $C_{w,mud}$, estimate of formation brine salt concentration $C_{w,form}$, $S_{w,XO}$, and other relevant parameters governing the mud-filtrate invasion process, such as the invasion volume per unit depth, viscosity ratio, relative permeabilities and capillary pressures for this flow unit, as well as the free water level. In embodiment, the physics model can be based on the assumption that the formation within the considered thickness covered by the multiple depths of the logging measurements have similar petrophysical properties.

[0065] At 509, the radial distributions of water saturation and salt concentration and possibly additional useful parameters for the multiple depths as determined in 507 is used to determine estimates for the parameters m and n of the formation. In this case, the estimated values of m and n characterize that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 501 to 505.

[0066] In embodiments, in 509, the physics model of 507 can be used to minimize a cost function to solve for the parameters m and n . For example, given the measurements of $\phi_{T,i}$, $C_{w,mud}$, $C_{w,form}$, and $S_{w,XO,i}$ for $i = 1, \dots, N$ depths, the best value of m , n , and $R_{w,i}$ that fits the data can be found by minimizing the following cost function:

$$cost = \sum_{k=1}^N \left(R_k^M - R_k^S(m, n, C_{w,mud}, C_{w,form}, \phi_{T,i}, S_{w,XO,i}, U) \right)^2. \quad (\text{Eq. 6})$$

Here R_k^M are measured apparent resistivity logs, k is the channel index of resistivity logs, R_k^S are simulated apparent resistivity logs by integrating the fluid-flow model, Archie's equation, and the array-resistivity tool response simulator, U represents a set of parameters (in addition to $m, n, C_{w,mud}, C_{w,form}, \phi_{T,i}, S_{w,XO,i}$) that are part of the physics model.

[0067] At 511, the estimates for the parameters m and n as determined in block 509 are used in an inversion process, which employs a tool response forward solver to model resistivity of the formation for the number of radial DOI at the multiple depths of block 503 given the parameters m and n . The estimates for the parameters m and n as determined in block 509 are used as the initial values of m and n in the inversion process. The inversion process adjusts the parameters m and n as input to the tool response forward modeler until the resulting resistivity model output by the tool response forward modeler matches the measured R_i obtained in block 503. The final values for the parameters m and n are solved for and output by the inversion process. In this case, the final values of m and n characterize that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 501 to 505.

- 14 -

[0068] In embodiments, the tool response forward solver of 511 can model array-resistivity tool responses by solving the Maxwell's equations, for example as shown in Liu, Q.H. and Chew, W.C., 1990, "Numerical mode-matching method for the multiregion vertically stratified media (EM wave propagation)," IEEE transactions on antennas and propagation, 38(4), pp.498-506.

[0069] At 513, the values of m and n as output by the inversion process in 511 are input to a saturation model (such as the Archie saturation model of Eq. (1)) to quantify the water saturation S_w of the uninvaded zone of the formation. In the case where the saturation model requires the water resistivity $R_{w,T}$ (connate water resistivity) of the uninvaded zone, the value for this parameter can be obtained from other measurements. For example, the value of $R_{w,T}$ can be obtained either from independent formation fluid measurements or from other complimentary workflows (such as those described in Grau, J., Miles, J., and Mosse, L., 2019, "Measuring Spectral Contributions of Elements in Regions In and About Borehole Using Borehole Spectroscopy Tool," PCT application PCT/US19/35231. In this case, the value of the water saturation S_w calculated in 513 characterizes the uninvaded zone for that portion (thickness) of the formation corresponding to the multiple depths of the underlying logging measurements of steps 501 to 505.

[0070] Figure 6 shows the variation of the resistivity responses in the logarithmic scale as a function of porosity and water saturation for formations with different cementation and saturation exponents. The separation of response for different values of m and n allows the workflows described herein to be performed reliably.

[0071] Figure 7 shows an example of the well logging measurements that can be obtained as inputs of the workflows of Figures 3A-3B and 4A-4B.

[0072] Figure 8 shows the results for the simulated data in the $\phi_T - R_{XO}$ cross-plot. With ϕ_T , R_{XO} , and $S_{w,XO}$ as input, Figure 8 demonstrates that it is possible to invert for a single set of m , n and the flush zone water resistivity $R_{w,XO}$, to represent the formation resistivity response, which can be used to further compute the water saturation S_w at the uninvaded zone.

[0073] Figure 9 illustrates an example device 2500, with a processor 2502 and memory 2504 that can be configured to implement parts or all of various embodiments of the workflows described herein. Memory 2504 can also host one or more databases and can include one or more forms of volatile data storage media such as random-access memory (RAM), and/or one or more forms of nonvolatile storage media (such as read-only memory (ROM), flash memory, and so forth).

[0074] Device 2500 is one example of a computing device or programmable device and is not intended to suggest any limitation as to scope of use or functionality of device 2500 and/or its possible

- 15 -

architectures. For example, device 2500 can comprise one or more computing devices, programmable logic controllers (PLCs), etc.

[0075] Further, device 2500 should not be interpreted as having any dependency relating to one or a combination of components illustrated in device 2500. For example, device 2500 may include one or more of computers, such as a laptop computer, a desktop computer, a mainframe computer, etc., or any combination or accumulation thereof.

[0076] Device 2500 can also include a bus 2508 configured to allow various components and devices, such as processors 2502, memory 2504, and local data storage 2510, among other components, to communicate with each other.

[0077] Bus 2508 can include one or more of any of several types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. Bus 2508 can also include wired and/or wireless buses.

[0078] Local data storage 2510 can include fixed media (e.g., RAM, ROM, a fixed hard drive, etc.) as well as removable media (e.g., a flash memory drive, a removable hard drive, optical disks, magnetic disks, and so forth).

[0079] One or more input/output (I/O) device(s) 2512 may also communicate via a user interface (UI) controller 2514, which may connect with I/O device(s) 2512 either directly or through bus 2508.

[0080] In one possible implementation, a network interface 2516 may communicate outside of device 2500 via a connected network.

[0081] A media drive/interface 2518 can accept removable tangible media 2520, such as flash drives, optical disks, removable hard drives, software products, etc. In one possible implementation, logic, computing instructions, and/or software programs comprising elements of module 2506 may reside on removable media 2520 readable by media drive/interface 2518. Various processes of the present disclosure or parts thereof can be implemented by instructions and/or software programs that are elements of module 2506. Such instructions and/or software programs may reside on removable media 2520 readable by media drive/interface 2518 as is well known in the computing arts.

[0082] In one possible embodiment, input/output device(s) 2512 can allow a user (such as a human annotator) to enter commands and information to device 2500, and also allow information to be presented to the user and/or other components or devices. Examples of input device(s) 2512 include,

- 16 -

for example, sensors, a keyboard, a cursor control device (e.g., a mouse), a microphone, a scanner, and any other input devices known in the art. Examples of output devices include a display device (e.g., a monitor or projector), speakers, a printer, a network card, and so on.

[0083] Various processes or parts of the workflow of the present disclosure may be described herein in the general context of software or program modules, or the techniques and modules may be implemented in pure computing hardware. Software generally includes routines, programs, objects, components, data structures, and so forth that perform particular tasks or implement particular abstract data types. An implementation of these modules and techniques may be stored on or transmitted across some form of tangible computer-readable media. Computer-readable media can be any available data storage medium or media that is tangible and can be accessed by a computing device. Computer readable media may thus comprise computer storage media. “Computer storage media” designates tangible media, and includes volatile and non-volatile, removable and non-removable tangible media implemented for storage of information such as computer readable instructions, data structures, program modules, or other data. Computer storage media include, but are not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other tangible medium which can be used to store the desired information, and which can be accessed by a computer.

[0084] In embodiments, any one or any portion or all of the steps or operations of the workflow as described above can be performed by a processor. The term “processor” should not be construed to limit the embodiments disclosed herein to any particular device type or system. The processor may include a computer system. The computer system may also include a computer processor (e.g., a microprocessor, microcontroller, digital signal processor, or general-purpose computer) for executing any of the methods and processes described above.

[0085] The computer system may further include a memory such as a semiconductor memory device (e.g., a RAM, ROM, PROM, EEPROM, or Flash-Programmable RAM), a magnetic memory device (e.g., a diskette or fixed disk), an optical memory device (e.g., a CD-ROM), a PC card (e.g., PCMCIA card), or other memory device.

[0086] Some of the methods and processes described above, can be implemented as computer program logic for use with the computer processor. The computer program logic may be embodied in various forms, including a source code form or a computer executable form. Source code may include a series of computer program instructions in a variety of programming languages (e.g., an object code, an assembly language, or a high-level language such as C, C++, or JAVA). Such computer instructions can be stored in a non-transitory computer readable medium (e.g., memory) and executed by the

- 17 -

computer processor. The computer instructions may be distributed in any form as a removable storage medium with accompanying printed or electronic documentation (e.g., shrink wrapped software), preloaded with a computer system (e.g., on system ROM or fixed disk), or distributed from a server or electronic bulletin board over a communication system (e.g., the Internet or World Wide Web).

[0087] Alternatively or additionally, the processor may include discrete electronic components coupled to a printed circuit board, integrated circuitry (e.g., Application Specific Integrated Circuits (ASIC)), and/or programmable logic devices (e.g., a Field Programmable Gate Arrays (FPGA)). Any of the methods and processes described above can be implemented using such logic devices.

[0088] While the invention has been described with respect to a limited number of embodiments, those skilled in the art, having benefit of this disclosure, will appreciate that other embodiments can be devised which do not depart from the scope of the invention as disclosed herein. Accordingly, the scope of the invention should be limited only by the attached claims. Moreover, embodiments described herein may be practiced in the absence of any element that is not specifically disclosed herein.

[0089] In the claims, means-plus-function clauses are intended to cover the structures described herein as performing the recited function and not only structural equivalents, but also equivalent structures. Thus, although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures. It is the express intention of the applicant not to invoke 35 U.S.C. § 112, paragraph 6 for any limitations of any of the claims herein, except for those in which the claim expressly uses the words 'means for' together with an associated function.

[0090] There have been described and illustrated herein one or more embodiments of methods and systems that quantify uninvaded zone water saturation from resistivity measurements of the formation in combination with other well logging measurements. It will therefore be appreciated by those skilled in the art that yet other modifications could be made to the provided invention without deviating from its spirit and scope as claimed.

- 18 -

WHAT IS CLAIMED IS:

1. A method of characterizing a formation traversed by a wellbore, wherein the formation includes at least a flushed zone and an uninvaded zone, the method comprising:

a) obtaining well log data based on plurality of different well log measurements of the formation at multiple depths in the wellbore;

b) using the well log data of a) as inputs to a computational model that solves for a set of petrophysical parameters that characterize a portion of the formation corresponding to the multiple depths in the wellbore, wherein the set of petrophysical parameters include a cementation exponent, a saturation exponent, and a flushed zone water resistivity; and

c) using the set of petrophysical parameters solved for in b) to determine a value of water saturation of the uninvaded zone for the portion of the formation corresponding to the multiple depths in the wellbore.

2. A method according to claim 1, further comprising:

storing in computer memory or outputting the value of water saturation of the uninvaded zone as determined in c).

3. A method according to claim 1, wherein:

the well log data of a) characterizes at least one of total porosity, resistivity or conductivity of the flushed zone, resistivity or conductivity of the formation at a set of radial depths of investigation, and water resistivity of the flushed zone.

4. A method according to claim 3, wherein:

the well log data of a) further characterizes clay volume fraction; and

the set of petrophysical parameters further includes a *CEC* or Q_v parameter.

5. A method according to claim 1, wherein:

the computation model of b) minimizes a cost function that includes the well log data of a), wherein the cost function can assume that the cementation exponent, the saturation exponent, and the flushed zone water resistivity are constant for the multiple depths.

- 19 -

6. A method according to claim 5, wherein:

the cost function has the form

$$cost = \sum_{i=1}^N \left(R_{XO,i} - R_f(m, n, R_{w,XO}, \phi_{T,i}, S_{w,XO,i}) \right)^2$$

where i represents N multiple depths from 1 to N ,

$R_{XO,i}$ is resistivity of the flushed zone at each depth i ,

m is the cementation exponent,

n is the saturation exponent,

$R_{w,XO}$ is the water resistivity of the flushed zone,

$\phi_{T,i}$ is total porosity at each depth i , and

$S_{w,XO,i}$ is the water saturation of the flushed zone at each depth i ,

and $R_f()$ represents Archie equation of the form

$$R_f(m, n, R_w, \phi_T, S_w) = R_w \phi_T^{-m} S_w^{-n}$$

where $R_{w,XO}$ is used for R_w and $S_{w,XO,i}$ is used for S_w .

7. A method according to claim 5, wherein:

the cost function has the form

$$cost = \sum_{i=1}^N \left(R_{XO,i} - R_f^{WS}(m^*, n^*, R_{w,XO}, CEC_{cl}, f_{cl,i}, \phi_{T,i}, S_{w,XO,i}) \right)^2$$

where i represents N multiple depths from 1 to N ,

$R_{XO,i}$ is resistivity of the flushed zone at each depth i ,

m^* is the cementation exponent,

n^* is the saturation exponent,

$R_{w,XO}$ is the water resistivity of the flushed zone,

- 20 -

$f_{cl,i}$ is the clay volume fraction at each depth i ,

$\phi_{T,i}$ is total porosity at each depth i , and

$S_{w,XO,i}$ is the water saturation of the flushed zone at each depth i ,

and $R_f^{WS}()$ represents Waxman-Smith equation of the form

$$\frac{1}{R_f^{WS}(m^*, n^*, R_w, Q_v, \phi_T, S_w)} = \phi_T^{-m^*} S_w^{-n^*} \left(\frac{1}{R_w} + \frac{B \cdot Q_v}{S_w} \right)$$

where $R_{w,XO}$ is used for R_w , $S_{w,XO,i}$ is used for S_w , Q_v is the excess charge density due to the presence of clay, and B is a predefined constant.

8. A method according to claim 1, wherein the computation model of b) is configured to:

solve for radial distribution of water saturation and salt concentration in the formation at the multiple depths;

use the radial distribution of water saturation and salt concentration to determine an estimate of the cementation exponent and the saturation exponent; and

perform an inversion process that solves for the cementation exponent and the saturation exponent by matching a resistivity model generated by a tool response forward solver to measured resistivity of the formation at multiple depths of investigation.

9. A method according to claim 1, wherein:

the operations of a) to c) are performed by a processor.

10. A method according to claim 1, further comprising:

operating a plurality of different logging tools to perform the plurality of different well log measurements of the formation at multiple depths in the wellbore.

11. A system for characterizing a formation traversed by a wellbore, wherein the formation includes at least a flushed zone and an uninvaded zone, the system comprising:

at least one computer processor configured to perform operations that includes

a) obtaining well log data based on plurality of different well log measurements of the formation at multiple depths in the wellbore;

- 21 -

b) using the well log data of a) as inputs to a computational model that solves for a set of petrophysical parameters that characterize a portion of the formation corresponding to the multiple depths in the wellbore, wherein the set of petrophysical parameters include a cementation exponent, a saturation exponent, and a flushed zone water resistivity; and

c) using the set of petrophysical parameters solved for in b) to determine a value of water saturation of the uninvaded zone for the portion of the formation corresponding to the multiple depths in the wellbore.

12. A system according to claim 11, wherein:

the at least one computer process is configured to store in computer memory or outputting the value of water saturation of the uninvaded zone as determined in c).

13. A system according to claim 11, wherein:

the well log data of a) characterizes at least one of total porosity, resistivity or conductivity of the flushed zone, resistivity or conductivity of the formation at a set of radial depths of investigation, and water resistivity of the flushed zone.

14. A system according to claim 13, wherein:

the well log data of a) further characterizes clay volume fraction; and

the set of petrophysical parameters further includes a *CEC* or Q_v parameter.

15. A system according to claim 11, wherein:

the computation model of b) minimizes a cost function that includes the well log data of a), wherein the cost function can assume that the cementation exponent, the saturation exponent, and the flushed zone water resistivity are constant for the multiple depths.

16. A system according to claim 15, wherein:

the cost function has the form

$$cost = \sum_{i=1}^N \left(R_{XO,i} - R_f(m, n, R_{w,XO}, \phi_{T,i}, S_{w,XO,i}) \right)^2$$

where i represents N multiple depths from 1 to N ,

$R_{XO,i}$ is resistivity of the flushed zone at each depth i ,

- 22 -

m is the cementation exponent,

n is the saturation exponent,

$R_{w,XO}$ is the water resistivity of the flushed zone,

$\phi_{T,i}$ is total porosity at each depth i , and

$S_{w,XO,i}$ is the water saturation of the flushed zone at each depth i ,

and $R_f()$ represents Archie equation of the form

$$R_f(m, n, R_w, \phi_T, S_w) = R_w \phi_T^{-m} S_w^{-n}$$

where $R_{w,XO}$ is used for R_w and $S_{w,XO,i}$ is used for S_w .

17. A system according to claim 15, wherein:

the cost function has the form

$$cost = \sum_{i=1}^N \left(R_{XO,i} - R_f^{WS}(m^*, n^*, R_{w,XO}, CEC_{cl}, f_{cl,i}, \phi_{T,i}, S_{w,XO,i}) \right)^2$$

where i represents N multiple depths from 1 to N ,

$R_{XO,i}$ is resistivity of the flushed zone at each depth i ,

m^* is the cementation exponent,

n^* is the saturation exponent,

$R_{w,XO}$ is the water resistivity of the flushed zone,

$f_{cl,i}$ is the clay volume fraction at each depth i ,

$\phi_{T,i}$ is total porosity at each depth i , and

$S_{w,XO,i}$ is the water saturation of the flushed zone at each depth i ,

and $R_f^{WS}()$ represents Waxman-Smith equation of the form

$$\frac{1}{R_f^{WS}(m^*, n^*, R_w, Q_v, \phi_T, S_w)} = \phi_T^{-m^*} S_w^{-n^*} \left(\frac{1}{R_w} + \frac{B \cdot Q_v}{S_w} \right)$$

- 23 -

where $R_{w, \chi O}$ is used for R_w , $S_{w, \chi O, i}$ is used for S_w , Q_v is the excess charge density due to clay, and B is a predefined constant.

18. A system according to claim 11, wherein the computation model of b) is configured to:

solve for radial distribution of water saturation and salt concentration in the formation at the multiple depths;

use the radial distribution of water saturation and salt concentration to determine an estimate of the cementation exponent and the saturation exponent; and

perform an inversion process that solves for the cementation exponent and the saturation exponent by matching a resistivity model generated by a tool response forward solver to measured resistivity of the formation at multiple depths of investigation.

19. A system according to claim 11, wherein:

the operations of a) to c) are performed by a processor.

20. A system according to claim 11, wherein:

a plurality of different logging tools are configured to perform the plurality of different well log measurements of the formation at multiple depths in the wellbore.

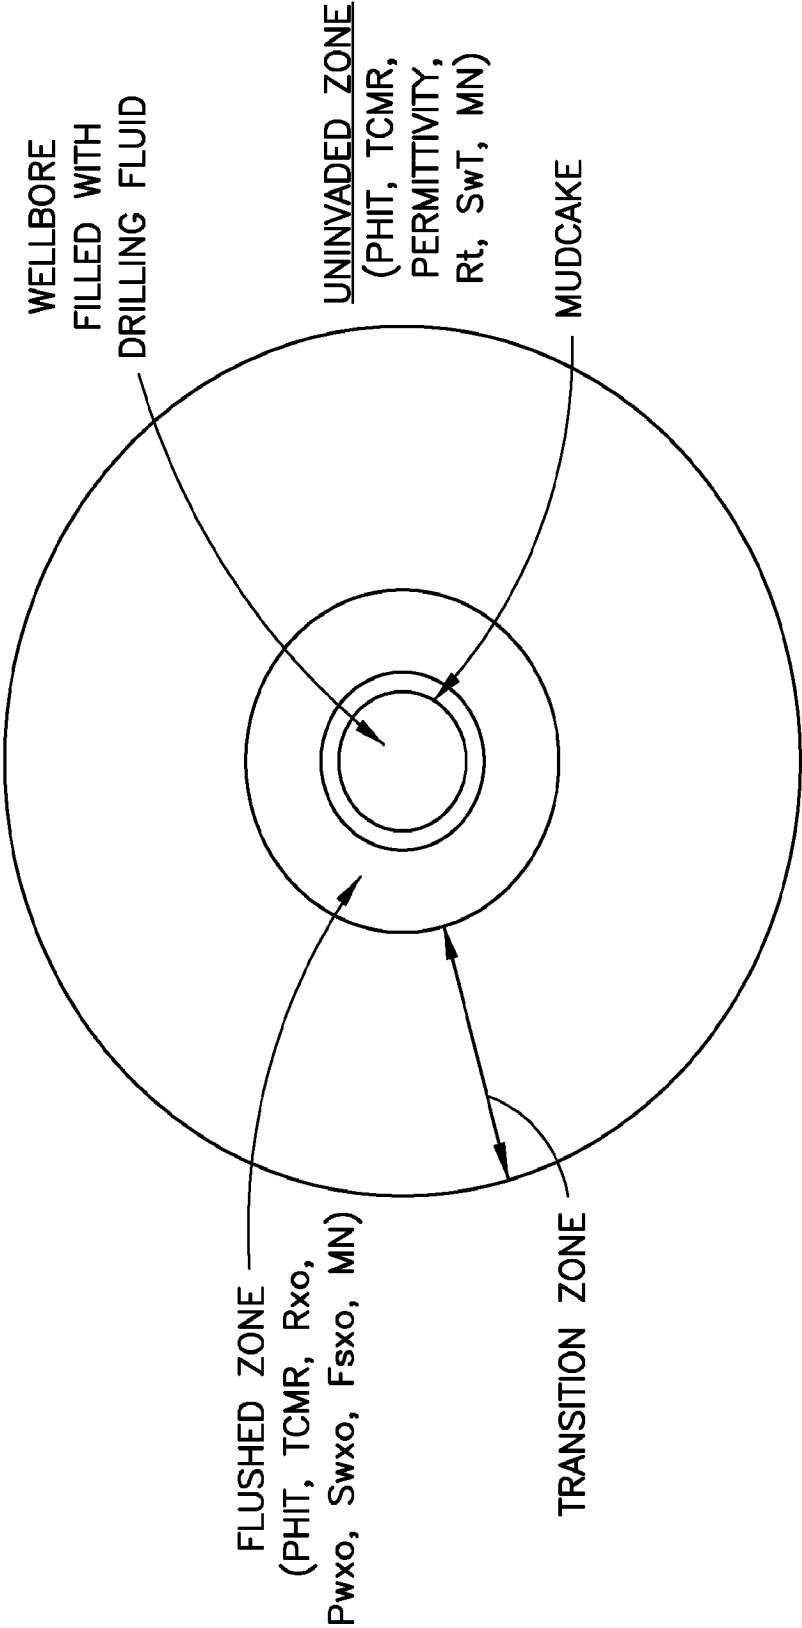


FIG.1

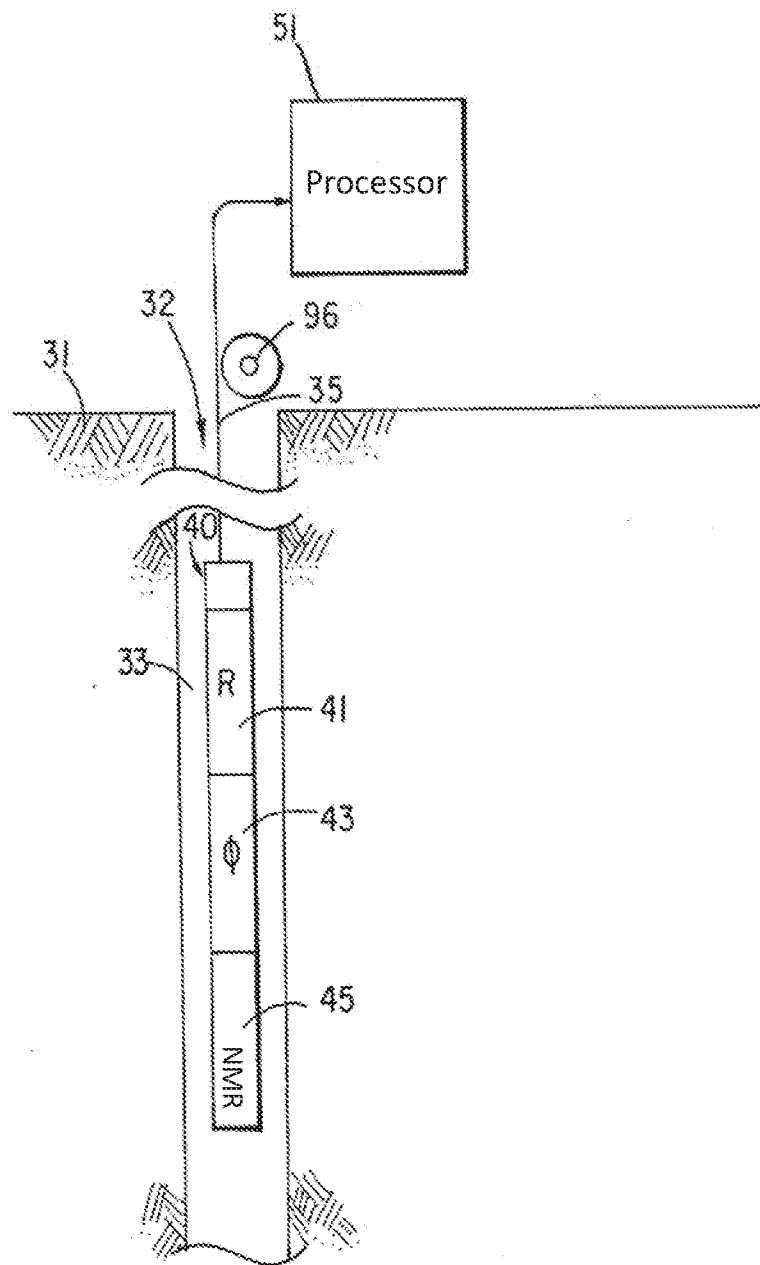


FIG. 2

3/12

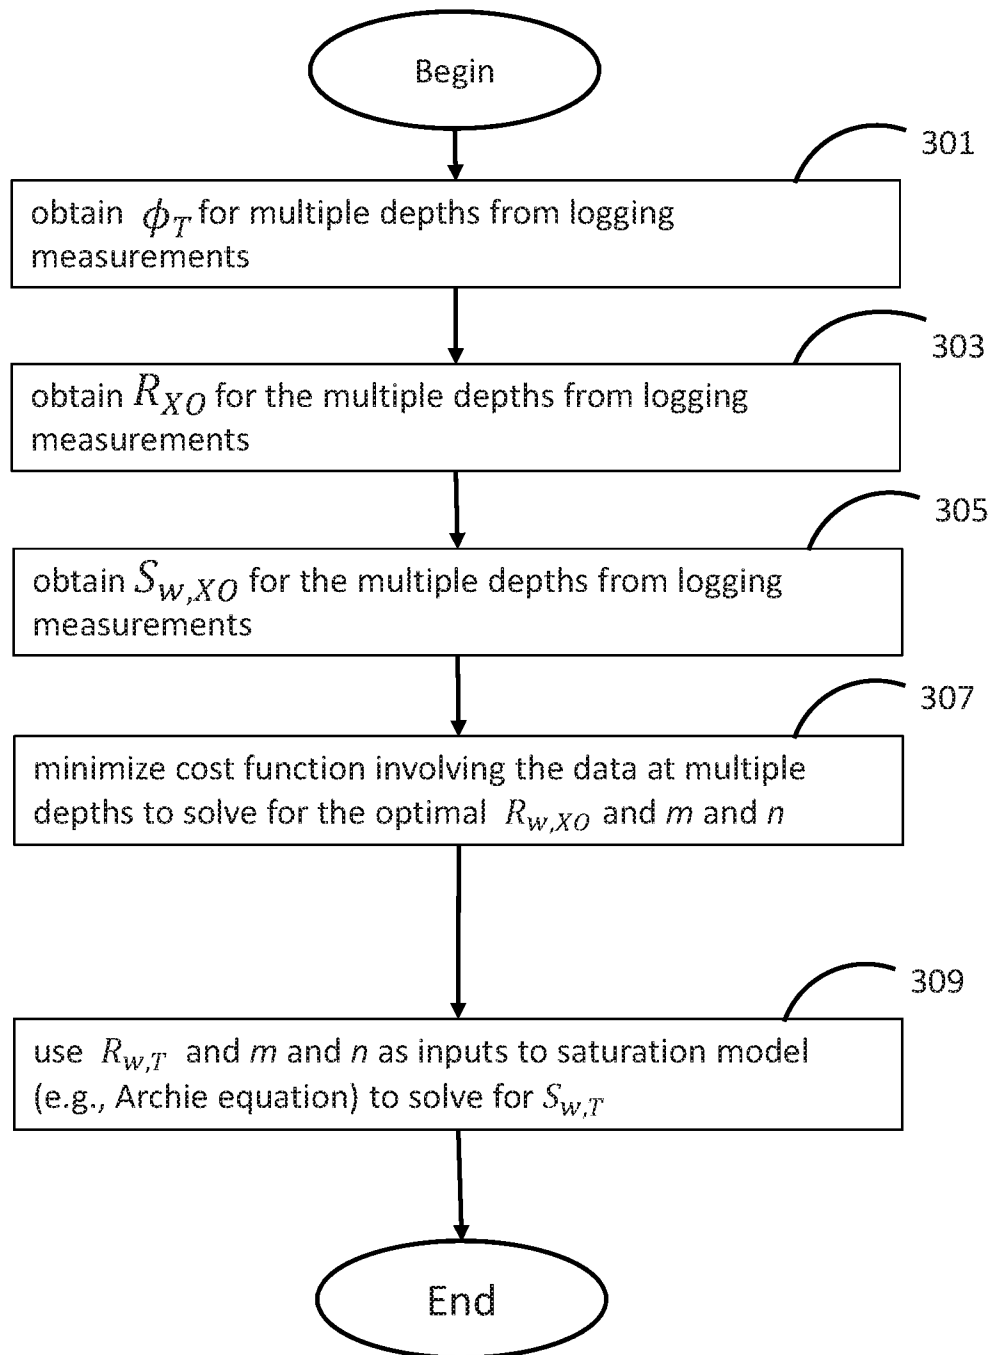


FIG. 3A

4/12

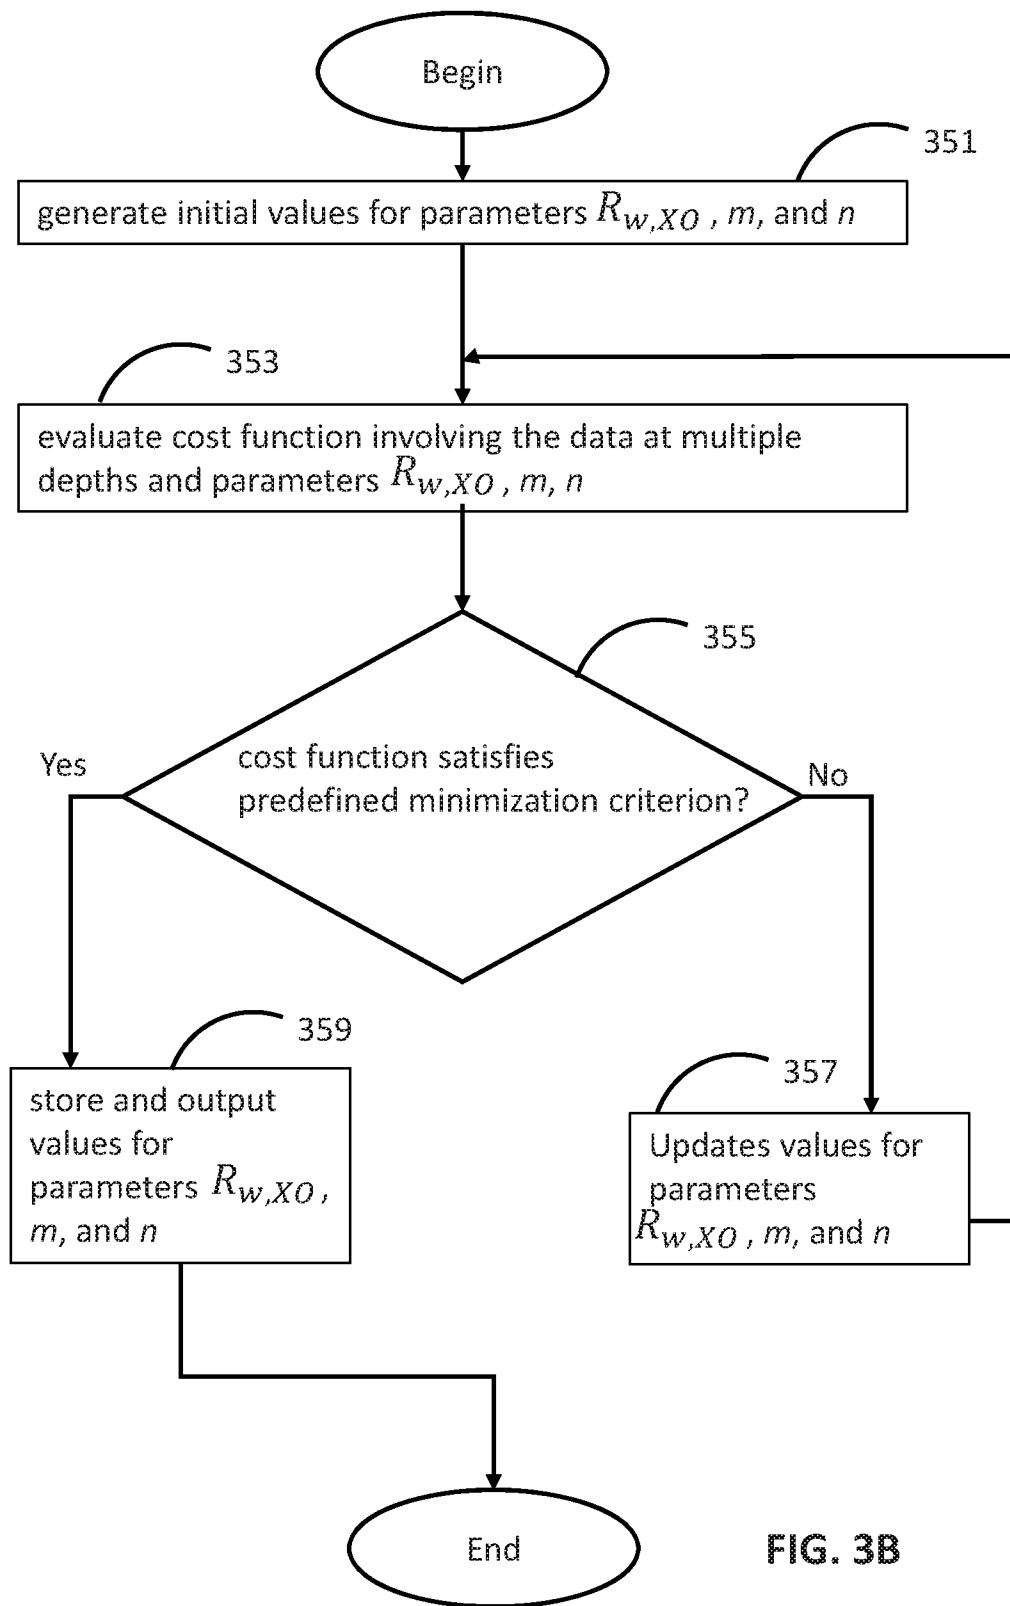


FIG. 3B

5/12

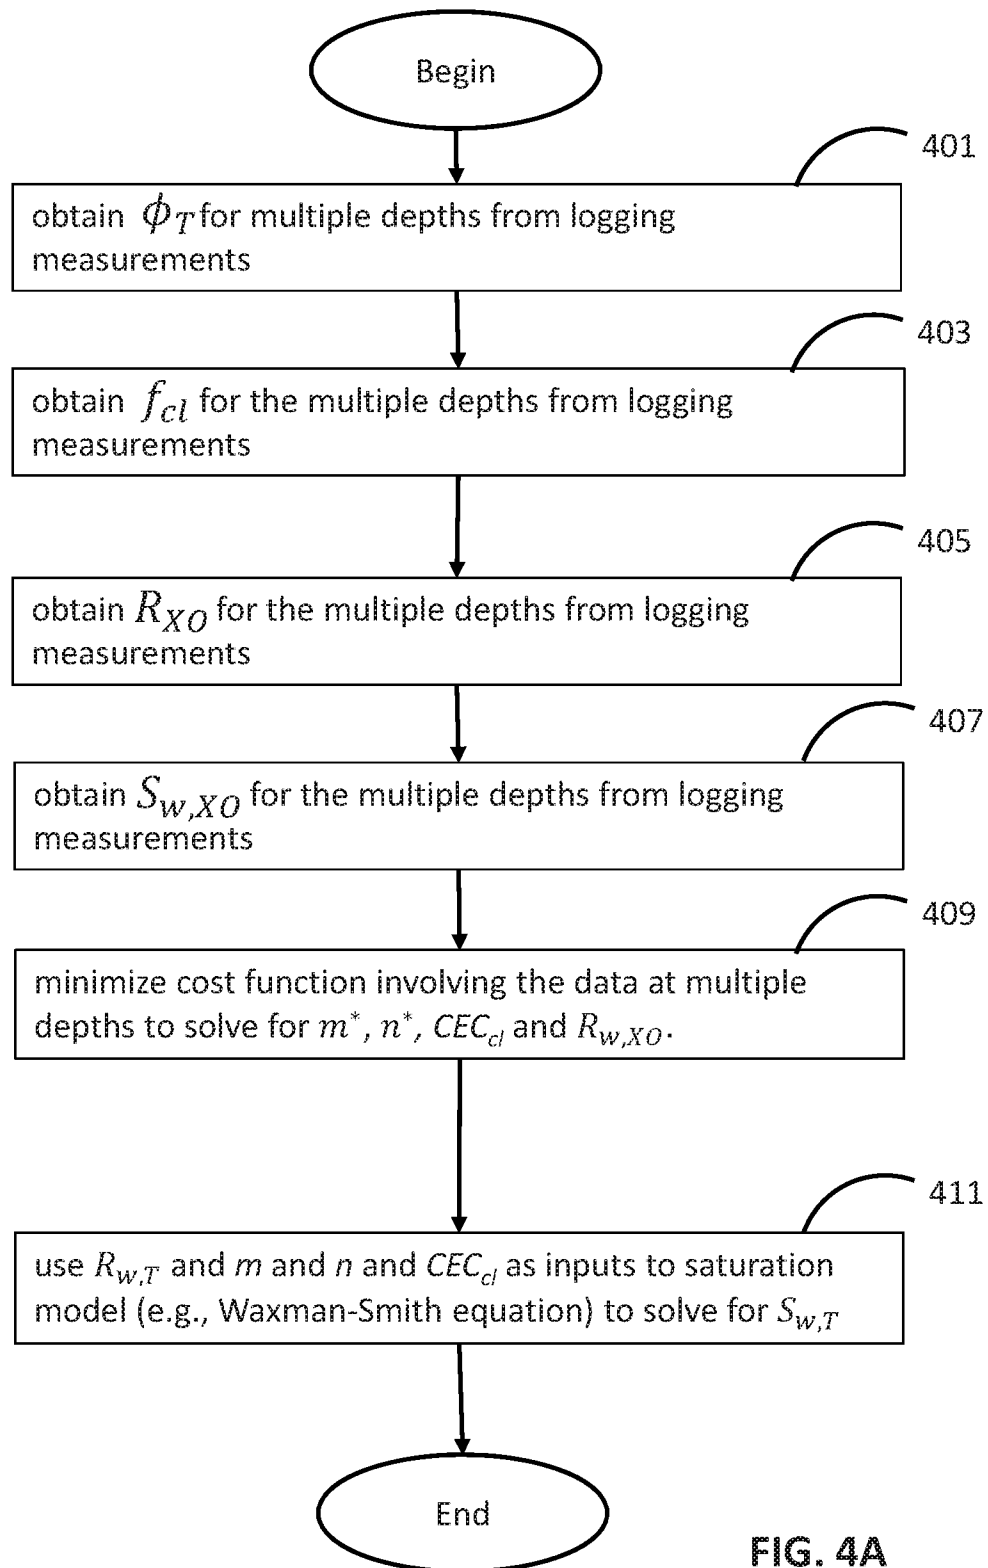


FIG. 4A

6/12

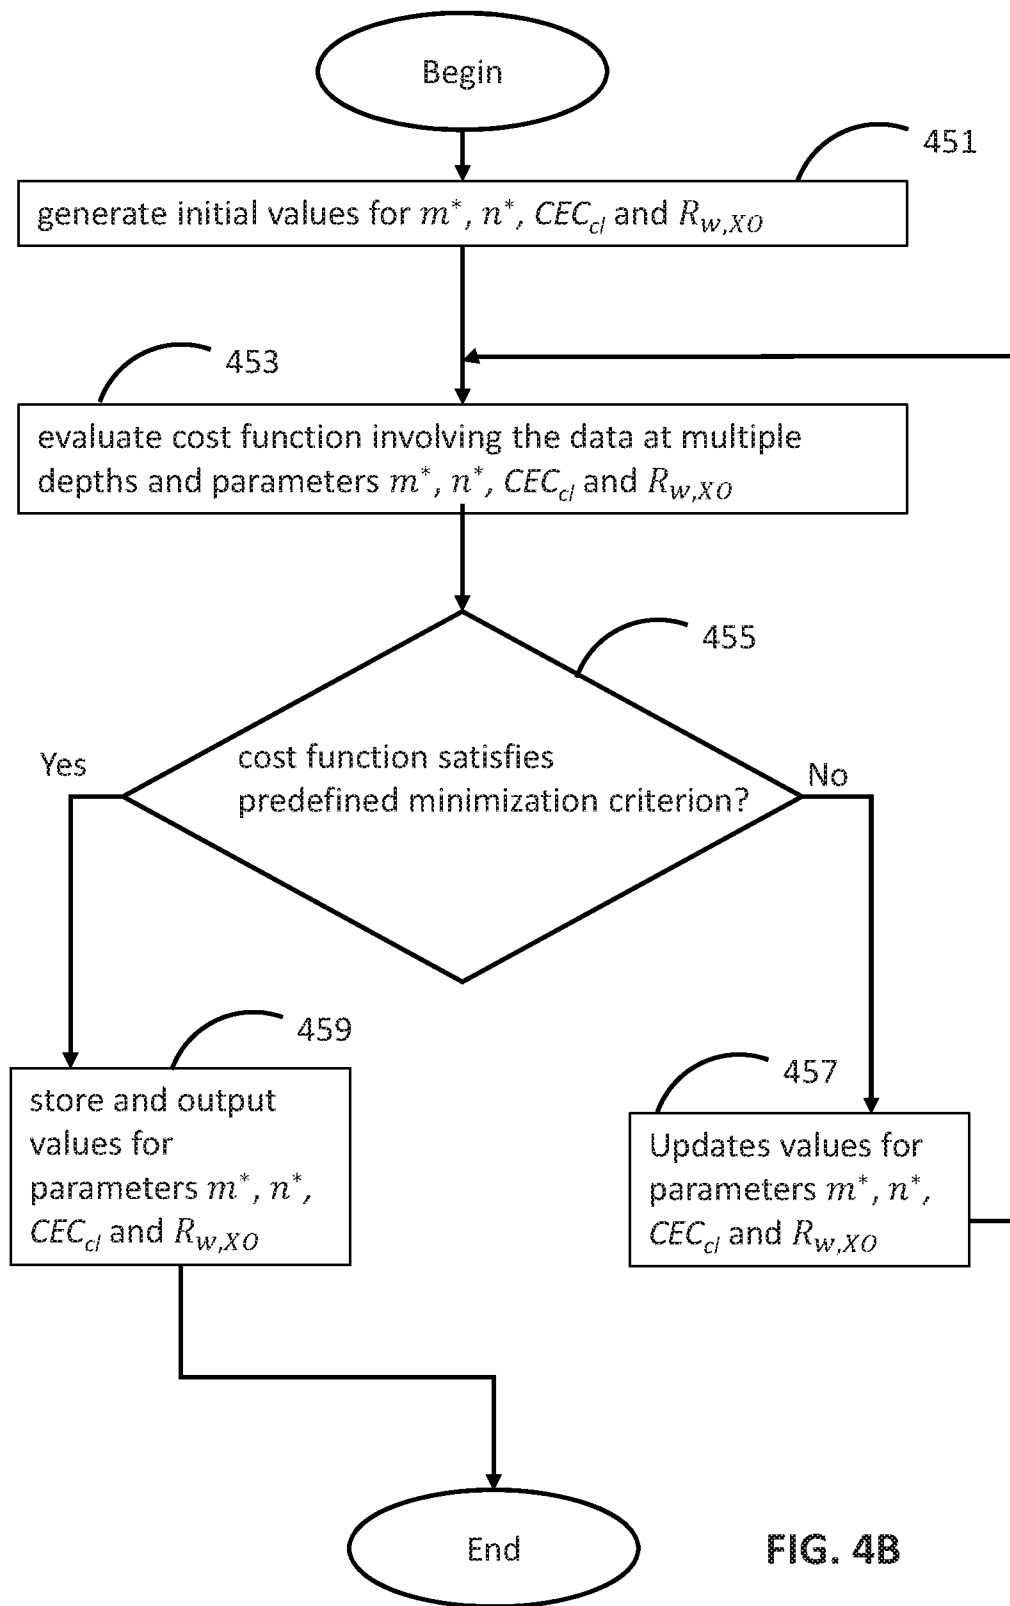


FIG. 4B

7/12

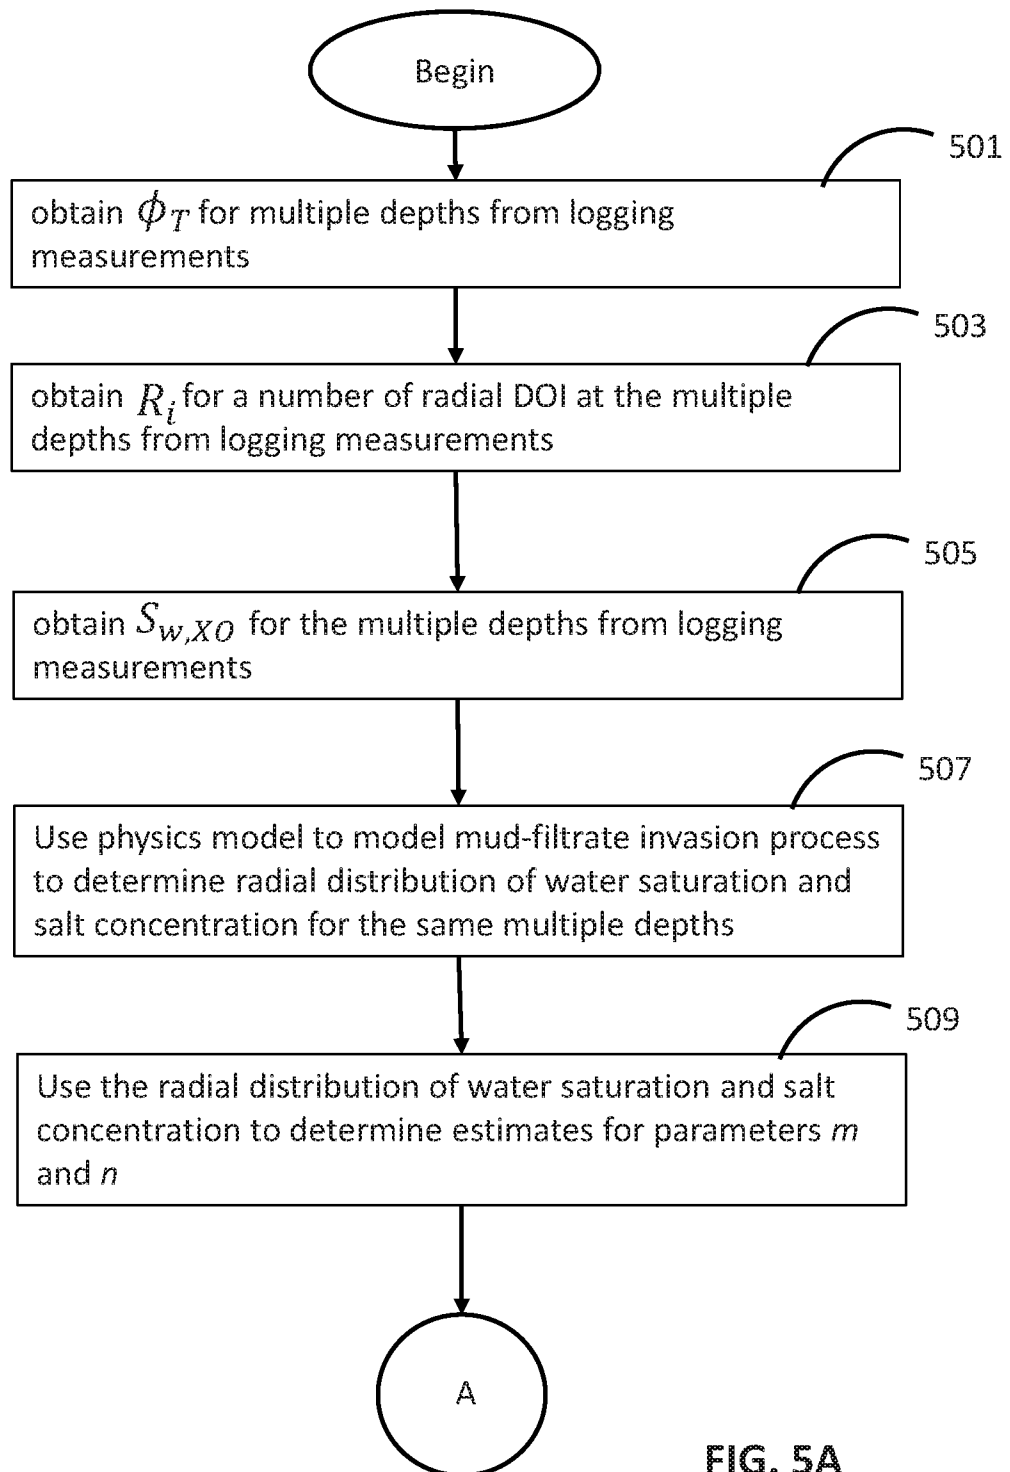


FIG. 5A

8/12

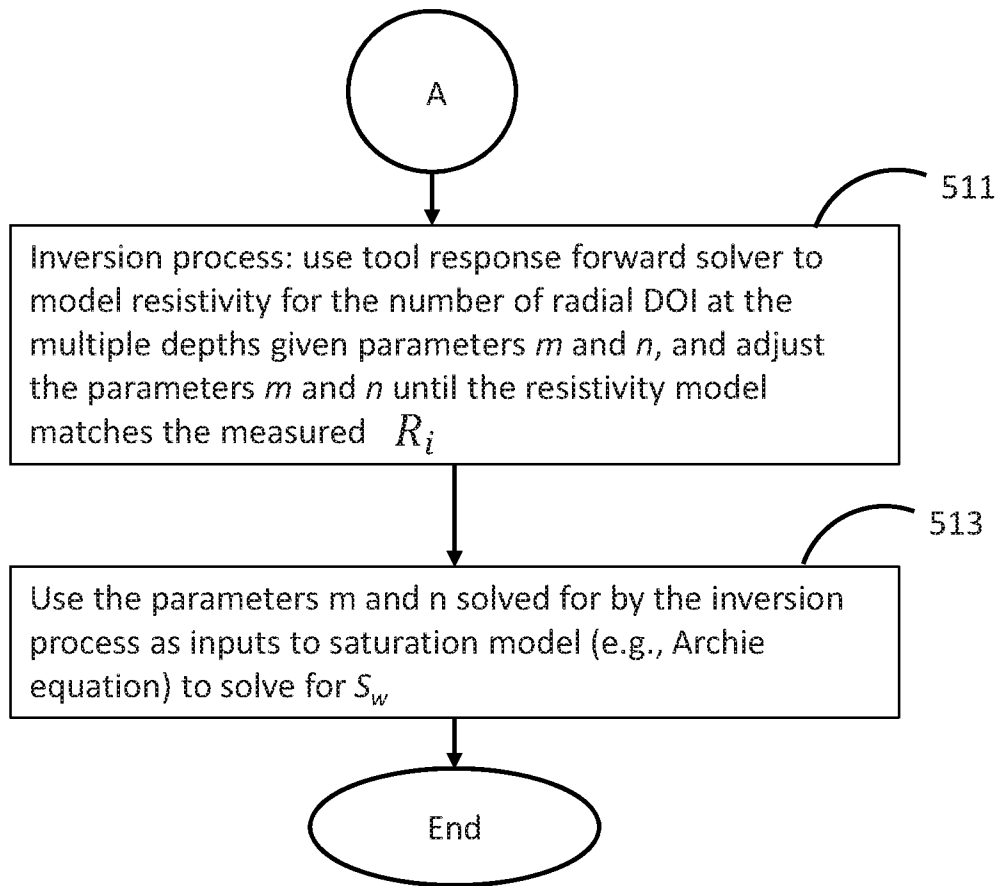


FIG. 5B

9/12

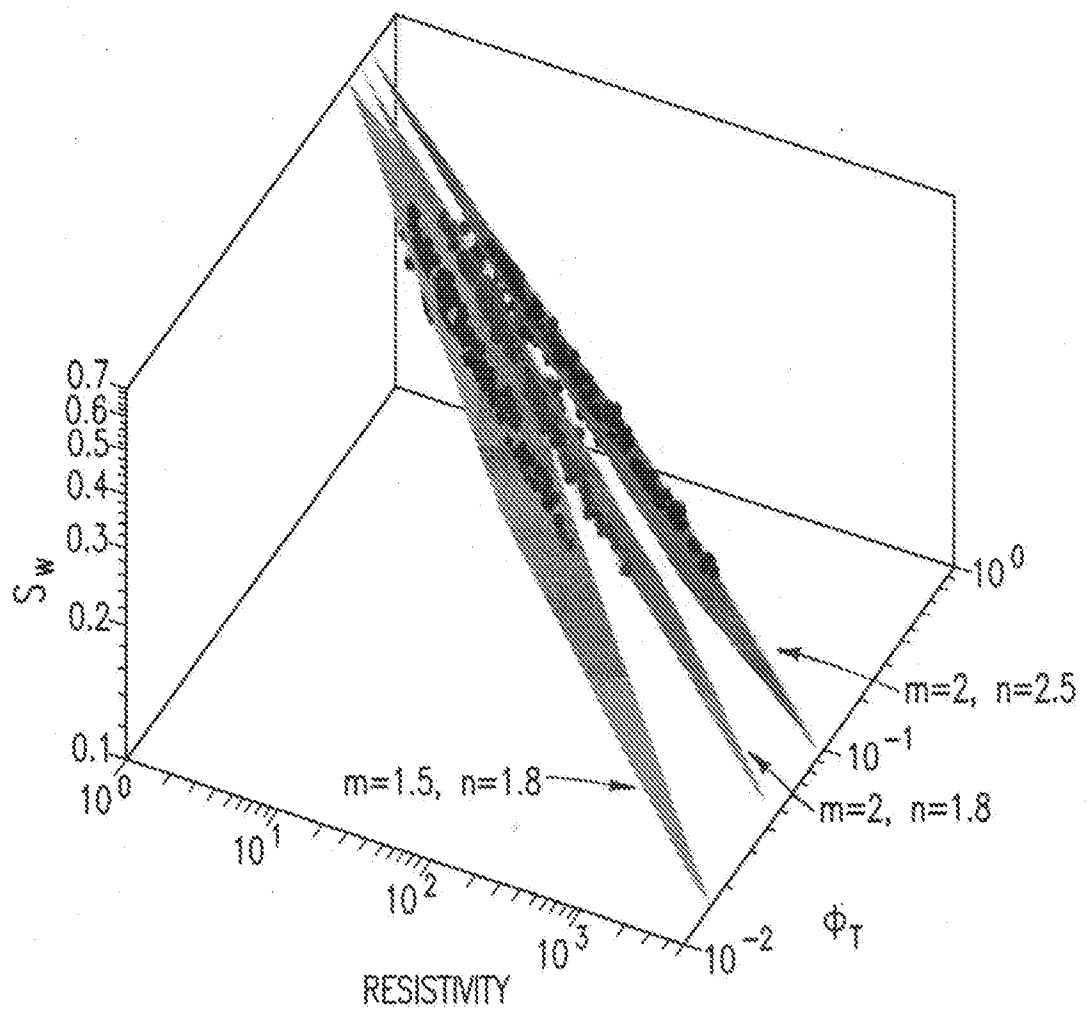


FIG.6

10/12

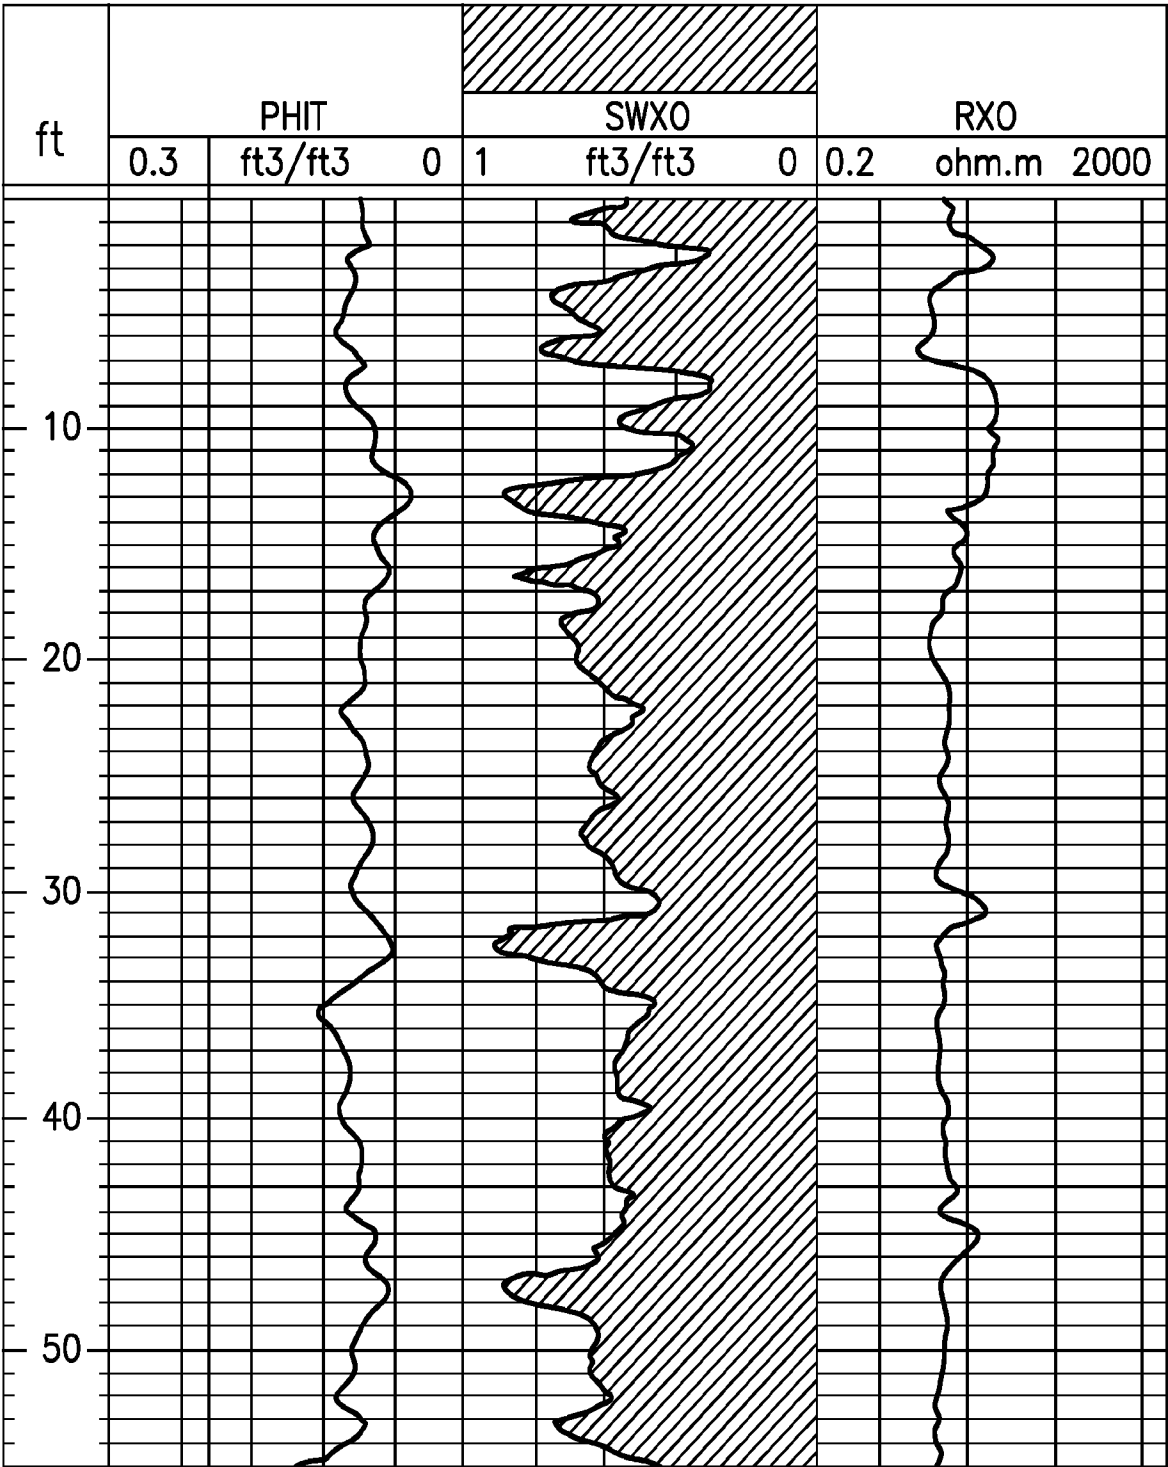


FIG.7

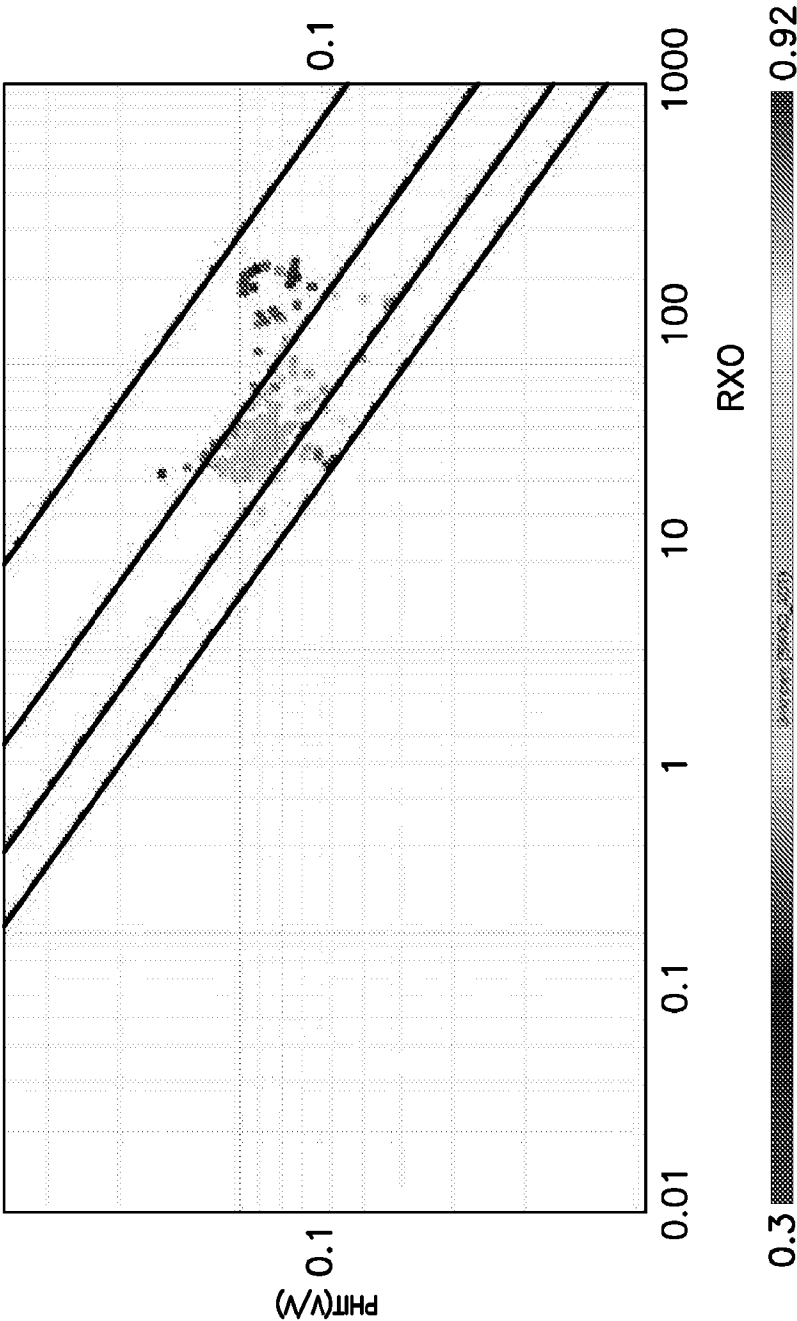


FIG.8

12/12

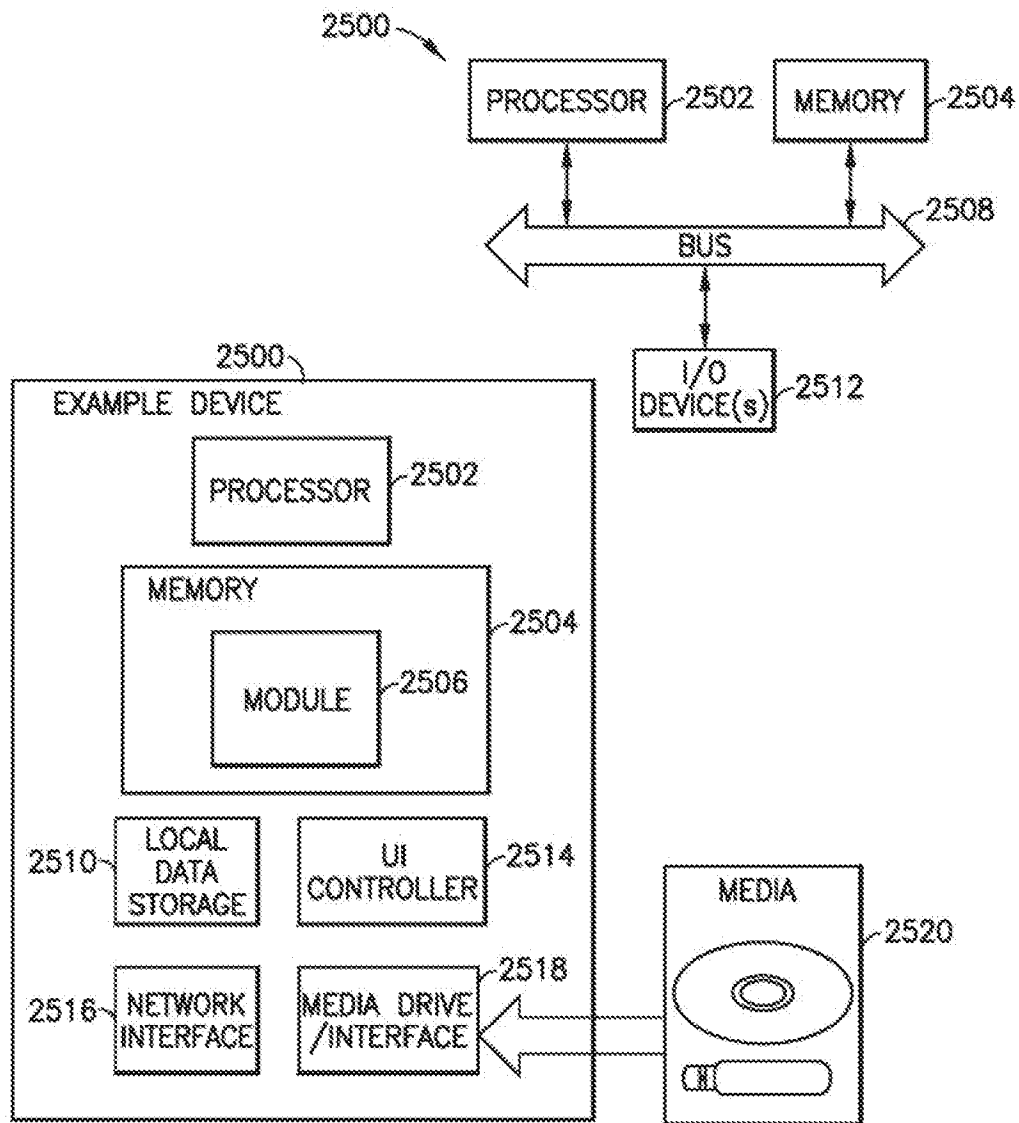


FIG. 9

A. CLASSIFICATION OF SUBJECT MATTER**E21B 47/04(2006.01)i, E21B 41/00(2006.01)i, E21B 43/24(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 47/04; G01V 003/18; G01V 11/00; G01V 3/26; G01V 3/28; G01V 3/38; G06F 17/12; E21B 41/00; E21B 43/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: wellbore, flushed zone, uninvaded zone, water saturation, resistivity

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2003-0105590 A1 (MOLLISON et al.) 05 June 2003 paragraphs [0015], [0050]-[0084] and claims 1-10	1-20
Y	WO 2017-058043 A1 (BAKER HUGHES INCORPORATED) 06 April 2017 page 14, line 14 - page 29, line 12	1-20
A	US 2014-0074406 A1 (SKELT, CHRISTOPHER HUGH) 13 March 2014 paragraphs [0002]-[0019]	1-20
A	WO 2017-184122 A1 (HALLIBURTON ENERGY SERVICES, INC.) 26 October 2017 claims 1-11	1-20
A	US 4769606 A (VINEGAR et al.) 06 September 1988 column 5, line 1 - column 9, line 26	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 2020 (30.06.2020)

Date of mailing of the international search report

01 July 2020 (01.07.2020)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

BAHNG, Seung Hoon

Telephone No. +82-42-481-5560



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2020/021924

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003-0105590 A1	05/06/2003	BR 9916714 A BR 9916714 B1 CA 2358124 A1 CA 2358124 C CA 2474480 A1 CN 1195996 C CN 1325494 A EP 1155342 A1 EP 1155342 A4 EP 1470406 A1 EP 1470406 A4 EP 2026105 A2 EP 2026105 A3 ID 29474 A MX PA01006730 A NO 20013288 A NO 20013288 D0 NO 20013288 L NO 20043200 A NO 20043200 L NO 332119 B1 RU 2242029 C2 US 2002-0128777 A1 US 6470274 B1 US 6493632 B1 US 6529833 B2 US 6711502 B2 WO 00-39612 A1 WO 03-065013 A1	04/12/2001 07/08/2012 06/07/2000 16/11/2004 07/08/2003 06/04/2005 05/12/2001 21/11/2001 24/05/2006 27/10/2004 26/05/2010 18/02/2009 08/07/2015 30/08/2001 14/07/2003 29/08/2001 29/06/2001 29/08/2001 01/10/2004 01/10/2004 25/06/2012 10/12/2004 12/09/2002 22/10/2002 10/12/2002 04/03/2003 23/03/2004 06/07/2000 07/08/2003
WO 2017-058043 A1	06/04/2017	US 10495780 B2 US 2017-0254924 A1	03/12/2019 07/09/2017
US 2014-0074406 A1	13/03/2014	AU 2013-315927 A1 AU 2013-315927 B2 CA 2883461 A1 CN 104620134 A EP 2895893 A1 US 10175383 B2 WO 2014-042866 A1	26/02/2015 21/09/2017 20/03/2014 13/05/2015 22/07/2015 08/01/2019 20/03/2014
WO 2017-184122 A1	26/10/2017	US 10422917 B2 US 2018-0172874 A1	24/09/2019 21/06/2018
US 4769606 A	06/09/1988	CA 1277226 C JP 63-159757 A	04/12/1990 02/07/1988