




(86) **Date de dépôt PCT/PCT Filing Date:** 2015/10/15
(87) **Date publication PCT/PCT Publication Date:** 2016/04/28
(45) **Date de délivrance/Issue Date:** 2020/02/25
(85) **Entrée phase nationale/National Entry:** 2017/04/18
(86) **N° demande PCT/PCT Application No.:** EP 2015/073830
(87) **N° publication PCT/PCT Publication No.:** 2016/062598
(30) **Priorité/Priority:** 2014/10/22 (EP14189956.7)

(51) **Cl.Int./Int.Cl. G05B 17/02** (2006.01),
G05B 23/02 (2006.01)
(72) **Inventeur/Inventor:**
HACKNEY, RICHARD, GB
(73) **Propriétaire/Owner:**
SIEMENS AKTIENGESellschaft, DE
(74) **Agent:** SMART & BIGGAR LLP

(54) **Titre : PROCÉDE POUR DETERMINER UN COMPORTEMENT D'EMISSIONS**

(54) **Title: METHOD FOR DETERMINING AN EMISSION BEHAVIOUR**

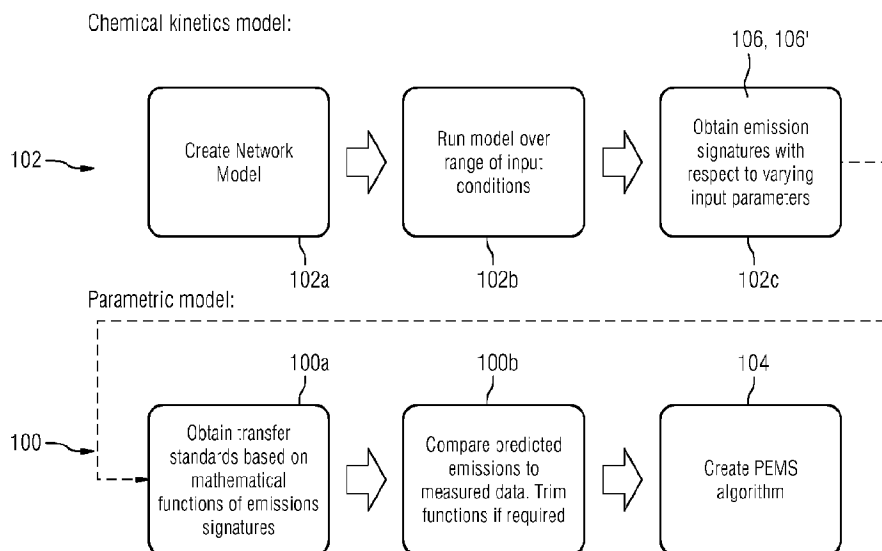

(57) **Abrégé/Abstract:**

The present invention relates to a method for determining an emission behaviour of a gas turbine engine (10). In order to provide a reliable operation of the gas turbine engine (10) the method comprises the steps of: parameterising (100) the emission behaviour of the gas turbine engine (10) for at least one selected first state variable (P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT) of the gas turbine engine (10) by using a model (102), which reflects a state behaviour of the gas turbine engine (10), and determining the emission behaviour of the gas turbine engine (10) by using the parameterisation (100).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2016/062598 A1

(43) International Publication Date
28 April 2016 (28.04.2016)

- (51) International Patent Classification:
G05B 17/02 (2006.01) *G05B 23/02* (2006.01)
- (21) International Application Number:
PCT/EP2015/073830
- (22) International Filing Date:
15 October 2015 (15.10.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14189956.7 22 October 2014 (22.10.2014) EP
- (71) Applicant: SIEMENS AKTIENGESSELLSCHAFT
[DE/DE]; Wittelsbacherplatz 2, 80333 München (DE).
- (72) Inventor: HACKNEY, Richard; 94 Rivermead, Lincoln
LN6 8FE (GB).
- (74) Agent: MAIER, Daniel; Postfach 22 16 34, 80506
München (DE).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD FOR DETERMINING AN EMISSION BEHAVIOUR

FIG 2

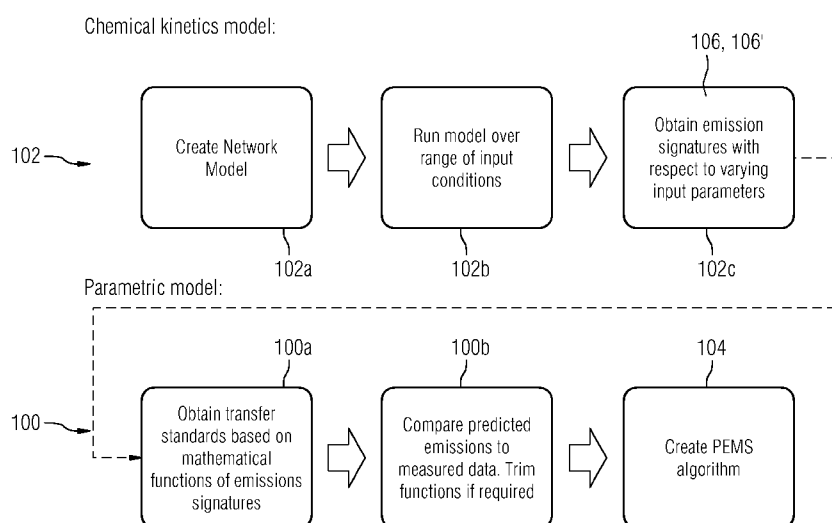

(57) Abstract: The present invention relates to a method for determining an emission behaviour of a gas turbine engine (10). In order to provide a reliable operation of the gas turbine engine (10) the method comprises the steps of: parameterising (100) the emission behaviour of the gas turbine engine (10) for at least one selected first state variable (P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT) of the gas turbine engine (10) by using a model (102), which reflects a state behaviour of the gas turbine engine (10), and determining the emission behaviour of the gas turbine engine (10) by using the parameterisation (100).

WO 2016/062598 A1

DESCRIPTION

METHOD FOR DETERMINING AN EMISSION BEHAVIOUR

5 Field of the Invention

The present invention relates to a method for determining an emission behaviour of a gas turbine engine. The present invention further relates to a gas turbine engine operateable
10 with such a method.

Background to the Invention

It is well known that industrial plants produce not only vast
15 amounts of energy but also emissions, like nitrogen oxides (NO_x) and carbon oxides (CO), that can be harmful to humans and the environment. Thus, high efforts are made to reduce these pollutants. Hence, it is essential to monitor emissions from industrial plants. Moreover, depending on the size of an
20 industrial plant, and applicable regulations, the continuous monitoring of emission levels (primarily NO_x) is legal requirement for some industrial combustion processes.

Continuous monitoring of plant emissions may be done by
25 either Automated Emission Monitoring Systems (AMS), which is a direct continuous method of emissions measurement, or by a Predicted Emissions Monitoring System (PEMS), which uses characteristic process parameters to calculate (predict) emission levels. Of the two methods, PEMS has a significantly
30 lower operating cost and complexity of operation. However, PEMS models typically require significant 'training' and calibration on site, and only tend to be applicable to a specific plant within calibrated operating/ambient conditions (see below). Such a system is for example described in
35 EP 1 864 193 B1.

Because PEMS models are typically produced by third parties

who may not have the same detailed product knowledge available compared to that of an Original Equipment Manufacturer (OEM), current PEMS models typically rely heavily on on-site 'training' (i.e. neural network-type setups) and calibration, and the model varies from site to site even for the same plant configuration. While a basic model may exist, and have some fundamental combustion characteristics included, the model is essentially an empirically-based relationship between process parameter and emission levels. Such models often require regular 'recalibration' following an engine's normal degradation over time. The accuracy of these models at ambient and operational conditions beyond their calibration range are questionable.

It is a first objective of the present invention to provide a method for determining an emission behaviour of a gas turbine engine with which the above-mentioned shortcomings can be mitigated, and especially providing a time efficient and reliable operation of the gas turbine engine.

It is a second objective of the invention to provide a gas turbine engine that can be operated reliably and with reduced emission levels.

These objectives may be solved by a method and a gas turbine engine according to the subject-matter of the independent claims.

Summary of the Invention

Accordingly, the present invention provides a method for determining an emission behaviour of a gas turbine engine.

It is provided that the method comprises the further steps of: parameterising the emission behaviour of the gas turbine

engine for at least one selected first state variable of the
gas turbine engine by using a model, which reflects a state
behaviour of the gas turbine engine, and determining the
emission behaviour of the gas turbine engine by using the
5 parameterisation.

Due to the inventive method the PEMS model will be able to
predict emissions for a wide range of input conditions.
Further, the inventive method will allow predicted emissions
10 levels to be utilized in the optimization of actual emission
levels. This will for example obtain a balance between
combustor pressure dynamics and low emissions, e.g. NO_x.
Furthermore, the confidence of the model being accurate over
a wider range of input and operating conditions is higher
15 than with conventional system, especially if the model is
based on chemical kinetic fundamentals. Moreover, the PEMS
model is relatively independent of site specific
configuration and requires a minimum of adjustment and
'training' on site. Advantageously, it will also accommodate
20 changes to engine operation over extended periods due, for
example, to component degradation or the effects of changes
to the installation (e.g. fuels, filters, burners). The model
is used to make prediction of the emission behaviour under
selected conditions. This results in 'signatures'
25 representing these conditions, which were then used in the
PEMS model. The use of 'signatures' rather than the model
itself means that a complex (and hence time consuming) model
can be used to model the combustion, but the final site-based
version can be a much simpler and faster running piece of
30 software.

Even if a term like state variable, processing unit or fuel
supply arrangement is used in the singular or in a specific
numeral form in the claims and the specification the scope of
35 the patent (application) should not be restricted to the
singular or the specific numeral form. It should also lie in

the scope of the invention to have more than one or a plurality of the above mentioned term(s) or structure(s).

In this context a state behaviour is intended to mean a
5 result of a specific condition or state of the gas turbine engine or a part thereof, like operating during a starting sequence of the gas turbine engine or operating in a high temperature environment etc., and an emission behaviour is intended to mean a result of a specific condition of the gas
10 turbine engine or a part thereof concerning the emission(s) of the gas turbine engine or the part thereof. This may be a one-dimensional value e.g. an emission level or a multidimensional depiction depending on more than one value or on at least to different kinds of values, like a signature
15 of the emission e.g. the change of the emission level over time or in referenced to a combustion temperature. Moreover, a state variable is intended to mean a variable representing a selected or specific state of the gas turbine engine, like a temperature at a selected area of the gas turbine engine or
20 parts thereof or a specific time during the operation of the gas turbine engine or parts thereof. The state variable may be a measured value or a derived/inferred value that is derived from a measured value.

25 A parameterisation is intended to mean either a single parameterisation or a plurality of individual parameterisations/sub-parameterisations. Moreover, a parameterization may also be named a parametric equation. Moreover, the model is preferably a mathematical model.

30 According to a preferred realisation of the invention the method comprises the step of: parameterising the emission behaviour of the gas turbine engine for the at least one selected first state variable and several different selected
35 second state variables. Thus, the emissions of a wide range of input conditions can be predicted. Advantageously and

specifically, the method comprises the step of: performing the parameterisation of the emission behaviour of the gas turbine engine by performing individual parameterisations for the at least one selected first state variable and for each
5 selected second state variable separately. Hence, different state variables can be investigated independently from other parameterisations of further state variables, resulting in a plurality of data sets. The individual parameterisations can be viewed as sub-parameterisations of a complex
10 parameterisation.

Preferably, at least one individual parameterisation of the emission behaviour of the gas turbine engine is a depiction in a two-dimensional state space. This allows the depiction
15 of dependencies of two state variables in a simple and straightforward manner.

In a preferred embodiment of the invention it is proposed that the method comprises the step of: describing the
20 emission behaviour of the gas turbine engine by using a further state variable of the gas turbine engine. Thus, conditions of the gas turbine engine or parts thereof can be easily defined. This further state variable of the gas turbine engine may be any variable suitable for a person
25 skilled in the art, like an exhaust temperature, a combustion temperature, an amount of unburned hydrocarbons (UHC's), or an emission parameter or most preferably an emission level of any suitable emission substance or combination of substances or, specifically an emission level of NO_x or an emission
30 level of CO.

Furthermore, the at least one selected first state variable represents an input of the model. In other words, the at least one selected first state variable is an input variable
35 of the model. Moreover, a further state variable, which reflects an emission behaviour of the gas turbine engine,

represents an output of the model. In other words, the further state variable is an output variable of the model. Consequently, defined dependencies can be found. Thus, the model maps the at least first state variable of the gas turbine engine as an input variable over a further state variable of the gas turbine engine as an output variable. The output variable may for example be the emission value of NO_x or a signature of the emission under selected conditions.

As stated above, the at least one selected first state variable is used as an input of the model. In an advantage realisation of the inventive method it comprises the step of: executing the model by varying the at least one selected first state variable, wherein further inputs of the model are held constant. This allows a solely examination of one selected or specific variable under defined conditions. As a result of the execution of the model a specific state behaviour of the gas turbine engine in dependency of a specific combination of the at least first state variable and the further state variables can be gained. Subsequently, the method comprises the step of: determining the parameterisation by using the modelled state behaviour of the variation of the at least one selected first state variable.

Moreover, the method comprises the step of: determining the parameterisation by using a discretisation resulting from the variation of the at least one selected first state variable and the modelled state behaviour, especially, a modelled value of a variable of the modelled state behaviour. Hence, the results of the model can be demonstrated simply. This is easily done when the method comprises the step of: determining the parameterisation with an approximation of the discretisation with a continuous function. Thus, the emission behaviour in is converted in a simple mathematical function (typically polynomial expressions). The implemented state of the art PEMS models are typically complex models and require

specialist software and significant processing time to run.
But by converting the outputs of the model into relatively
simple mathematical expressions as proposed by the inventive
method, a much faster acting model can be designed using more
5 simple software.

The results of the mathematical function or the signature of
the emission can be shown in a graphical representation,
providing a simple to read presentation of the results for an
10 operator. Moreover, the mathematical function can be
validated by using test and rig data (small constant offsets
are permissible) in order to match predicted and calculated
values more accurately.

15 Preferably, the model is a kinetic model and specifically,
the model is a physical kinetic model or most preferably a
chemical a kinetic model. A chemical kinetic model of a
specific gas turbine engine or its combustion system will be
able to predict emissions for a wide range of input
20 conditions.

Advantageously, the at least one selected first state
variable is a variable selected out of the group consisting
of: a directly measured parameter, an inferred parameter or a
25 thermodynamically derived parameter. Thus, a wide variety of
different variables or concrete values of variables can be
considered and used to determine the state behaviour of the
gas turbine engine or parts thereof. Additionally, also the
further state variable can be selected out of this group.

30 A thermodynamically derived parameter is one which is based
on measured values and constants derived from a factory test
of a gas turbine engine. These constants describe component
operating conditions (such as compressor turbine stage 1
35 swallowing capacity and compressor turbine loading) and are
based on thermodynamic principles of gas turbine engine

operation. When on site, the measured and derived constants are fed into a control algorithm and state variables or parameters which cannot be directly measured are obtained. It is known, for example, to use a calculated turbine inlet temperature to control part load operation of the gas turbine engine.

The at least one selected first state variable may be any parameter feasible for a person skilled in the art. But in case of a - directly - measured parameter it is preferably a variable selected out of the group consisting of: an ambient inlet pressure, an engine inlet pressure, an ambient inlet temperature, an engine inlet temperature, a compressor inlet temperature, a compressor inlet pressure, a compressor exit pressure or delivery pressure, respectively, a compressor exit temperature or delivery temperature, respectively, a turbine interduct pressure, a turbine interduct temperature, an exhaust temperature, a gas turbine engine operating temperature, a fuel flow, a fuel composition, a fuel temperature or a main to pilot fuel split ration. By using directly measured parameters the actual condition of the gas turbine engine or parts thereof can be accurately detected and considered.

Alternatively, in case that the at least one selected first variable is a thermodynamically derived parameter it is selected out of the group consisting of: a combustor exit pressure or a combustor discharge pressure, respectively, a combustor exit temperature or a combustor discharge temperature, respectively, a firing temperature, a compressor delivery air percentage bleed or a calculated mass flow. By using the inlet mass flow and/or the compressor delivery air percentage bleed from one of its bleed chambers as a thermodynamically derived parameter more accurate modelling of the combustion system of the gas turbine engine can be performed. It may act as a diagnostic tool for the directly

measured instruments and allow additional combustor operating parameters to be calculated (e.g. flame temperature, fuel air ratio). Moreover, by using derived parameters sensors for a direct measurement can be omitted, saving space, costs and mounting efforts.

Additionally, fundamental design characteristic of the combustion system may be also taken into account. This may for example be a geometry of components, like a combustor component, or calculated or derived combustor characteristics.

In case of, for example, more than one compressor or more than one turbine all above stated value may be correlated against e.g. the pressure or temperature between two adjacent compressors/turbines.

In an advantageous embodiment the model maps a thermodynamic behaviour of key components of the gas turbine engine allowing a close monitoring. Specifically, the model maps a combustion system of the gas turbine engine thus focussing of a system of the gas turbine engine highly relevant in view of the emissions of the gas turbine engine. A key component may be any component feasible for a person skilled in the art, but preferably the key component is a component selected out of the group consisting of: a combustion primary zone, a perfectly-stirred reactor, a main flame, a pilot flame, a plug-flow reactor or a mass flow merger, a mass flow splitter, a flow resistance.

In other word, the - chemical kinetic - model describing a specific gas turbine combustion system by creating a network model of the combustion system where key parts of the combustion process are represented by separate model components. Examples include: the combustion primary zone being represented by a series of perfectly-stirred reactor

model elements, where main and pilot flames are modelled separately (allowing the effect of main/pilot split to be investigated); downstream components are represented by plug-flow reactor model elements; dilution and mixing represented
5 by appropriate mass flow merger model elements and boundary conditions represented by boundary model elements.

Moreover, the method comprises the step of: using the parameterisation of the emission behaviour of the gas turbine
10 engine to predict an emission behaviour for predetermined values of the at least one selected first state variable. Hence, by using the predicted emission 'signatures' the operation of the gas turbine engine can be a much simpler and faster running in comparison with state of the art systems
15 using complex PEMS models.

The predictions resulting from the model and the subsequent parameterisation are used for running and operating the gas turbine engine. Thus, various mathematical functions obtained
20 from executing the model and the parameterisation are incorporated into a software package for the use in a processor unit of the gas turbine engine. Thus, predicted emission levels are fed in the engine control system. Then, when the gas turbine engine is running on site, the effects
25 of the variations of each parameter using the mathematical functions are combined to calculate predicted emissions.

According to the predictions concrete values of state variables of the gas turbine engine are adjusted to values
30 leading to a result or emission behaviour advised by the prediction of the model. This is of course done by influencing means or parts of the gas turbine engine affecting the concrete values, like temperature, pressure, fuel ratio etc. This may be any part or arrangement feasible
35 for a person skilled in the art, like a valve of a fuel or air supply, a position of a blade or vane, a cooling

arrangement for inlet cooling medium etc. Most preferably a main and pilot fuel split ratio is affected.

Beneficially, the method comprises the step of: using a
5 predicted emission behaviour or signature resulting from the model and the parameterisation to control an emission level during operation of the gas turbine engine. This may be done, as stated above, through manipulation of the main/pilot fuel split. This will allow the PEMS model to optimize emission
10 levels by alteration of the main and pilot fuel split ratio (for example, to ensure emission levels stay within regulated values).

The inventive method is for the use of - chemical kinetic -
15 models of a specific gas turbine engines or their combustion system to obtain emission 'signatures' for directly measured, inferred, and thermodynamically derived parameters, which will then be validated using test and rig performance data at a wide range of operating conditions. This means that the
20 PEMS model is relatively independent of site specific configuration and requires a minimum of adjustment and 'training' on site.

The inventive PEMS model can run either as a stand-alone
25 software package or it can be incorporated into the engine control system.

The present invention further relates to a gas turbine engine comprising at least one processing unit and being operatable
30 with at least one prediction obtained by using to the inventive method.

It is proposed that the model is implemented in the at least one processing unit to predict and/or control an emission
35 behaviour and specifically, an emission level of the gas turbine engine.

- Due to this the PEMS model will be able to predict emissions for a wide range of input conditions. Further, it is allowed that predicted emissions levels are utilized in the optimization of actual emission levels. This will for example
- 5 obtain a balance between combustor pressure dynamics and low emissions, e.g. NO_x. Furthermore, the confidence of the model being accurate over a wider range of input and operating conditions is higher than with conventional system, especially if the model is based on chemical kinetic fundamentals.
- 10 Moreover, the PEMS model is relatively independent of site specific configuration and requires a minimum of adjustment and draining' on site. Advantageously, it will also accommodate changes to engine operation over extended periods due, for example, to component degradation or the effects of changes to
- 15 the installation (e.g. fuels, filters, burners). The model is used to make prediction of the emission behaviour under selected conditions. This results in 'signatures' representing these conditions, which were then used in the PEMS model. The use of 'signatures' rather than the model itself means that a
- 20 complex (and hence time consuming) model can be used to model the combustion, but the final site-based version can be a much simpler and faster running piece of software.

- In a further realisation of the invention it is proposed that the gas turbine engine comprises at least one fuel supply
- 25 arrangement, wherein a main and pilot fuel split ratio of the at least one fuel supply arrangement is adjustable in such a way to influence the emission level according to the prediction of the model.

According to one aspect of the present invention, there is provided a method for determining an emission behaviour of a gas turbine engine, comprising: creating a model of a system of the gas turbine engine; running the model by varying at least
5 one selected first state variable used as an input of the model; obtaining an output of the model representing an emission behaviour of the gas turbine engine; parameterising the emission behaviour of the gas turbine engine for the at least one selected first state variable of the gas turbine
10 engine by converting the output into mathematical functions and determining the emission behaviour of the gas turbine engine by using the mathematical functions.

According to another aspect, there is provided a gas turbine engine comprising: at least one processing unit and being
15 operatable with at least one prediction obtained by using to the method as described herein, wherein the model, which reflects a state behaviour of the gas turbine engine and that obtains results that are converted into mathematical functions by a parameterisation, is implemented in the at least one
20 processing unit to predict and/or control an emission level of the gas turbine engine by using the mathematical functions; and at least one fuel supply arrangement, wherein a main and pilot fuel split ratio of the at least one fuel supply arrangement is adjustable in such a way to influence the emission level
25 according to the prediction of the model.

The above-described characteristics, features and advantages of this invention and the manner in which they are achieved are clear and clearly understood in connection with the

following description of exemplary embodiments which are explained in connection with the drawings.

5

Brief Description of the Drawings

The present invention will be described with reference to drawings in which:

10

FIG 1: shows a schematically and sectional view of a gas turbine engine being operatable with the inventive method,

15

FIG 2: shows a flow diagram of a chemical kinetic model and of a parameterisation implemented in a processor unit of the gas turbine engine from FIG 1,

20

FIG 3: shows exemplarily and simplified possible analysis elements of the chemical kinetic model of FIG 2,

25

FIG 4: shows schematically the gas turbine engine from FIG 1 with engine positions from where state variables of the chemical kinetic model of FIG 2 are obtained,

30

FIG 5: shows a diagram depicting the dependency of a NO_x emission from a combustor entry temperature obtained with the chemical kinetic model from FIG 2,

35

FIG 6 shows a diagram depicting the dependency of a NO_x emission from a pilot/main split ratio obtained with the chemical kinetic model from FIG 2 and

FIG 7: shows a flow diagram showing two possible operational modes of a PEMS model monitoring and controlling emissions from the gas turbine engine from FIG 1.

5

Detailed Description of the Illustrated Embodiments

10 The terms upstream and downstream refer to the flow direction of the airflow and/or working gas flow through the gas turbine engine 10 unless otherwise stated. If used and not otherwise stated, the terms axial, radial and circumferential are made with reference to a rotational axis 30 of the gas
15 turbine engine 10.

FIG 1 shows an example of a gas turbine engine 10 in a sectional view. The gas turbine engine 10 comprises, in flow series, an inlet 22, a compressor section 24, a combustion
20 section 26 and a turbine section 28, which are generally arranged in flow series and generally in the direction of a longitudinal or rotational axis 30. The gas turbine engine 10 further comprises a shaft 32 which is rotatable about the rotational axis 30 and which extends longitudinally through
25 the gas turbine engine 10. The shaft 32 drivingly connects the turbine section 28 to the compressor section 24.

In operation of the gas turbine engine 10, air 34, which is taken in through the air inlet 22 is compressed by the
30 compressor section 24 and delivered to the combustion section or burner section 26. The burner section 26 comprises a combustion system 14 with a burner plenum 36, one or more combustion chambers 38 defined by a double wall can 40 and at least one burner 42 fixed to each combustion chamber 38. The
35 combustion chamber(s) 38 and the burner(s) 42 are located inside the burner plenum 36. The compressed air passing

through the compressor section 24 enters a diffuser 44 and is discharged from the diffuser 44 into the burner plenum 36 from where a portion of the air enters the burner 42 and is mixed with a gaseous or liquid fuel. The air/fuel mixture is then burned and the combustion gas 46 or working gas from the combustion is channelled via a transition duct 48 to the turbine section 28.

The turbine section 28 comprises a number of blade carrying production discs 50 or turbine wheels attached to the shaft 32. In the present example, the turbine section 28 comprises four discs 50 each carry an annular array of turbine blades 52. However, the number of blade carrying production discs 50 could be different, i.e. only one production disc 50 or more than one production discs 50. In addition, stator stages or turbine cascades 54 are disposed between the turbine blades 52. Each stator stage carries an annular array of guiding vanes 56, which are fixed to a stator 58 of the gas turbine engine 10. Between the exit of the combustion chamber 38 and the leading turbine blades 52 inlet guiding vanes or nozzle guide vanes 60 are provided.

The combustion gas 46 from the combustion chamber 36 enters the turbine section 28 and drives the turbine blades 52 which in turn rotate the shaft 32. The guiding vanes 56, 60 serve to optimise the angle of the combustion or working gas 46 on to the turbine blades 52. The compressor section 24 comprises an axial series of guide vane stages 62 and rotor blade stages 64 with turbine blades 52 or vanes 56, respectively.

Furthermore, the gas turbine engine 10 comprises a processor unit 18 that is depicted outside of the gas turbine engine 10 for better presentability. To determine an emission behaviour of a gas turbine engine 10 or for monitoring and control emissions of the gas turbine engine 10, like NO_x and/or CO, the processor unit 18 comprises an implemented model of a

Predictive Emissions Monitoring System (PEMS) 104. The PEMS model 104 is based on the principles of a combination of a chemical kinetic model 102 and a parameterisation 100 or in other words, a parametric equation or model 102, which will be described in reference to FIG 2 to 7.

The PEMS model 104 is achieved through the modelling of selected systems of the gas turbine engine 10, like a combustion system 14 of the gas turbine engine 10. The modelling uses a chemical kinetics model 102 that will utilize the same input parameters or state variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT (see below) as the final PEMS model 104. However, the model 102 results are converted into mathematical functions which can be used to predict emissions without the need for online running of the chemical kinetics model 102.

A process to develop such a PEMS model 104 is depicted in the flow diagram of FIG 2.

For developing the chemical kinetic model 102 describing a specific combustion system 14 of the gas turbine engine 10 a suitable network model of the combustion system 14 is created (step 102a). Therefore, key parts or components 12 of the combustion process are identified. These key components 12 are represented by separate model components or analysis elements. This is exemplarily and simplified shown for two key components 12 in FIG 3 (also see FIG 1). The key component 12 may be, for example, a combustion primary zone 16 being represented by a series of perfectly-stirred reactor (PSR) 66 model elements, where main and pilot flames 68 are modelled separately (allowing the effect of main/pilot split to be investigated). A further key component 12 may be located in a downstream combustion zone 70 and be represented by plug-flow reactor (PFR) 72 model elements.

Additional key components 12 would be represented, for example, by appropriate mass flow merger model elements representing dilution and mixing of the various modelled gas streams, for example air or combustion products, or fuel, or by a mass flow splitter element or a flow resistance element. Boundary conditions (For example, how big is the volume of selected components or how much time is available for different processes) would be represented by boundary model elements (not shown).

10

As could be seen in FIG 3 at least one selected first state variable MCI is used as an input of the model 102. While this is defined as a 'mass flow' inlet it also contains selected pressures P, selected temperatures T, the fuel composition QH and the flow QF due to that the 'mass flow' inlet is a thermodynamically derived parameter. Other possible selected first state variables are P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, TFIRE, QF, QH, QT, SPLIT.

15

These variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT is either a directly measured parameter, an inferred parameter or a thermodynamically derived parameter.

20

In FIG 4 it is shown at which engine positions which conditions are present and where state variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT of the chemical kinetic model 102 may be obtained. Before entering the gas turbine engine 10 ambient air 34 has an ambient pressure and an ambient temperature (not specifically depicted with reference numerals). At the inlet 22 the air 34 traveling through a filter housing 74 has engine inlet pressure P0 and engine inlet temperature T0. Air entering a compressor of the compressor section 24 has compressor inlet pressure P1 and compressor inlet temperature T1. P2 is the compressor exit pressure, also named combustion

25

30

35

chamber inlet pressure P2 or compressor delivery pressure P2,
and T2 is the compressor exit temperature, also named
combustion chamber inlet temperature T2 or compressor
delivery temperature T2. Variable referring to the fuel 76
5 and the fuel supply arrangement 20 are a fuel flow QF, fuel
composition QH, a fuel temperature QT and a main and pilot
fuel split ratio SPLIT. Combustion gas 46 exiting the
combustion section 26 has combustor exit pressure P3 and
combustor exit temperature T3. Flow medium traveling an
10 interduct 78 located between a compressor turbine 80 and a
power turbine 82 of the turbine section 28 has turbine
interduct pressure P4 and turbine interduct temperature T4.
An exhaust gas 84 exiting the gas turbine engine 10 has an
exhaust pressure P5 and an exhaust temperature T5.

15
Directly measured parameter can be the engine inlet pressure
P0, the engine inlet temperature T0, the compressor inlet
temperature T1, the compressor inlet pressure P1, the
compressor exit pressure P2, the compressor exit temperature
20 T2, the turbine interduct pressure P4, the turbine interduct
temperature T4, the exhaust temperature T5, the gas turbine
engine operating temperature, the fuel flow QF, the fuel
composition QH, the fuel temperature QT or the main and pilot
fuel split ratio SPLIT. All these variables may be measured
25 by one or more not shown sensors.

The used abbreviation for the gas turbine operating
temperature depends on the gas turbine engine type and may be
TOP, TMAX or TLIMIT and it is calculated based on some of the
30 above measured values (not shown).

Variables that might be inferred based on relationship
parameters may be the compressor inlet pressure P1, the fuel
flow QF, the fuel composition QH and the exhaust temperature
35 T5.

Thermodynamically derived values use a combination of direct measurements and component characteristics derived from internal factory testing of the engine and might be the combustor exit pressure P3, the combustor exit temperature T3, an engine firing temperature TFIRE, a compressor bleed P2B or a calculated inlet mass flow MCI.

Moreover, fundamental design characteristic of the combustion system (used in chemical kinetics model) might be considered as well and they may be a combustor component geometry or calculated or derived combustor characteristics.

P2, T2, SPLIT, QH, QF, TFIRE, P2B and MCI are primary input parameter to the PEMS model or the used parametric model 100, respectively.

Subsequently, in step 102b the model 102 is run over a range of input conditions or in other words, the model 102 is executing by varying the at least one selected first state variable MCI, wherein further inputs or other input variables or selected second state variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT of the model 102 are held constant.

This may be done for several or all variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT individually. By varying individual boundary parameters/ variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT while all other input parameters P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT are held constant (insofar as reasonably practical) the effect of each parameter P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT on emissions over the parameter modelling range is obtained.

Parameters/variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT to be varied are ones that have an equivalent 'on-site' direct measurement available (P0, P1, P2, P4, T0, T1, T2, T4, T5, QF, QH, QT, SPLIT), can be inferred from a proven relationship to other directly measured parameters (P1, P3, T3, QF, QH, T5), or be a thermodynamically derived value using a combination of direct measurements and component characteristics derived from internal factory testing of the gas turbine engine 10 (P3, T3, TFIRE, P2B, MCI).

In step 102c of the model 102 emission 'signatures' 106, 106' with respect to the varying of the input parameters or the selected first and second state variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT, respectively, are obtained. The results of the variations may be represented graphically and known as the parameter 'signature' 106, 106'. Two exemplary signatures 106, 106' are shown in FIG 5 and 6, which show each a diagram depicting the dependency of a NO_x emission from a combustor entry temperature T2 (FIG 5) and a pilot/main split ration SPLIT (FIG 6) obtained with the chemical kinetic model 102.

As can be seen in FIG 5 and 6 the emission behaviour of the gas turbine engine 10 is described by using a further state variable OUT of the gas turbine engine (10) specifically an emission level of NO_x. In other words, the further state variable OUT, which reflects the emission behaviour of the gas turbine engine 10, represents an output of the model 102 (see also FIG 3).

Subsequently, in step 100a (Obtaining transfer standards based on mathematical functions of emission levels) the parameterisation 100 is done or the parametric model is executed. This is done by using the modelled state behaviour of the variation of the at least one selected first state

variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT and specifically, by using a discretisation resulting from the variation of the at least one selected first state variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT and the modelled state behaviour, especially, a modelled value of a variable of the modelled state behaviour and specifically, by determining the parameterisation 100 with an approximation of the discretisation with a continuous function.

In other words, the emission signatures 106, 106' or their graphical representations, respectively, are converted into relatively simple mathematical functions (typically polynomial expressions).

An example of such a mathematical function might be the following function, which represents the NO_x emission OUT in dependency of the compressor delivery pressure PCD or the compressor exit pressure P2:

$$\text{NO}_x = 12.26 + (4.93 \text{ E}^{-31} * \text{P2}^5) + (3.157 \text{ E}^{-18} * \text{P2}^5) - (1.88 \text{ E}^{-24} * \text{P2}^4) - (8.267 \text{ E}^{-13} * \text{P2}^2) - (4.58 \text{ E}^{-38} * \text{P2}^5) - (0,0000034 * \text{P2})$$

In a further step 100b the predicted emissions are compared to measured data. If required the functions might be trimmed. Moreover, the mathematical functions may be validated using test and rig data and small constant offsets are permissible in order to match predicted and calculated values more accurate.

The parameterisation 100 of the emission behaviour of the gas turbine engine 10 is performed by individual parameterisations 100 for the at least one selected first state variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT and for each selected

second state variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT separately.

Furthermore, one or each individual parameterisation 100 of the emission behaviour of the gas turbine engine 10 is a depiction in a two-dimensional state space.

In general, the inventive method comprises the steps of: parameterising 100 the emission behaviour of the gas turbine engine 10 for at least one selected first state variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT of the gas turbine engine 10 by using the model 102, which reflects a state behaviour of the gas turbine engine 10, and determining the emission behaviour of the gas turbine engine 10 by using the parameterisation 100.

The mathematical functions are used to create a PEMS algorithm or model 104 (see FIG 2). The various mathematical functions representing the dependencies of the state variables P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT, OUT are incorporated into a software package. This is shown in FIG 7 that shows a flow diagram showing two possible operational modes of a PEMS model monitoring and controlling emissions from the gas turbine engine 10. Then, when the gas turbine engine 10 is running on site, the effect of the variations of each parameter P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT using the mathematical functions are combined to calculate predicted emissions (step 108). Thus, the parameterisation 100 of the emission behaviour of the gas turbine engine 10 is used to predict an emission behaviour for predetermined values of the at least one selected first state variable P0, P1, P2, P3, P4, T0, T1, T2, T3, T4, T5, P2B, MCI, TFIRE, QF, QH, QT, SPLIT.

The model 102 or the resulting PEMS model 104 may be implemented in the processing unit 18 of the gas turbine engine 10 (left side of FIG 7) or might be a standalone software package (right side of FIG 7).

5

The predicted emission levels may be stored in a database (step 110) or they may be fed in the engine control system (step 112) and can be used to control emission levels of the gas turbine engine 10. This may be done by adjusting the main and pilot fuel split ratio SPLIT of the fuel supply arrangement 20 in such a way to influence the emission level according to the prediction of the model 102 (step 114).

As a result, the invention will predict and control emission levels (primarily NO_x and CO) using mathematically derived emission signatures based on chemical kinetic models of measured input parameters and thermodynamically derived parameters.

It should be noted that the term "comprising" does not exclude other elements or steps and "a" or "an" does not exclude a plurality. Also elements described in association with different embodiments may be combined. It should also be noted that reference signs in the claims should not be construed as limiting the scope of the claims.

Although the invention is illustrated and described in detail by the preferred embodiments, the invention is not limited by the examples disclosed, and other variations can be derived therefrom by a person skilled in the art without departing from the scope of the invention.

CLAIMS:

1. A method for determining an emission behaviour of a gas turbine engine, comprising:

5 creating a model of a system of the gas turbine engine;

running the model by varying at least one selected first state variable used as an input of the model;

obtaining an output of the model representing an emission behaviour of the gas turbine engine;

10 parameterising the emission behaviour of the gas turbine engine for the at least one selected first state variable of the gas turbine engine by converting the output into mathematical functions and

determining the emission behaviour of the gas turbine engine by using the mathematical functions.

2. A method according to claim 1, wherein the method comprises the step(s) of:

parameterising the emission behaviour of the gas turbine engine for the at least one selected first state variable and several different selected second state variables and specifically,

performing the parameterisation of the emission behaviour of the gas turbine engine by performing individual parameterisations for the at least one selected first state variable and for each selected second state variable separately.

3. A method according to claim 2, wherein at least one individual parameterisation of the emission behaviour of the gas turbine engine is a depiction in a two-dimensional state space.
- 5 4. A method according to any one of claims 1 to 3, wherein output of the model comprises a further state variable of the gas turbine engine, preferably an emission level, specifically an emission level of NO_x or an emission level of CO.
- 10 5. A method according to any one of claims 1 to 4, wherein, the at least one selected first state variable represents an input of the model and/or wherein a further state variable, which reflects an emission behaviour of the gas turbine engine, represents an output of the model.
- 15 6. A method according to any one of claims 1 to 5, wherein the method comprises the step(s) of:
- comparing the results of the mathematical functions with measured data.
7. A method according to any one of claims 1 to 6,
- 20 wherein the method comprises the step(s) of:
- determining the parameterisation by using a discretisation resulting from the variation of the at least one selected first state variable and the modelled state behaviour, especially, a modelled value of a variable of the modelled
- 25 state behaviour, and specifically determining the parameterisation with an approximation of the discretisation with a continuous function.

8. A method according to any one of claims 1 to 7, wherein the model is a kinetic model, specifically, wherein the model is a physical kinetic model or a chemical kinetic model.

9. A method according to any one of claims 1 to 8,
5 wherein the at least one selected first state variable is a variable selected out of the group consisting of: a directly measured parameter, an inferred parameter or a thermodynamically derived parameter.

10. A method according to any one of claims 1 to 9,
10 wherein the at least one selected first state variable is a variable selected out of the group of directly measured parameters consisting of: an ambient inlet pressure, an engine inlet pressure, an ambient inlet temperature, an engine inlet temperature, a compressor inlet temperature, a compressor inlet
15 pressure, a compressor exit pressure, a compressor exit temperature, a turbine interduct pressure, a turbine interduct temperature), an exhaust temperature, a gas turbine engine operating temperature, a fuel flow, a fuel composition, a fuel temperature or a main and pilot fuel split ratio.

20 11. A method according to any one of claims 1 to 10, wherein the at least one selected first state variable is a variable selected out of the group of thermodynamically derived parameters consisting of: combustor exit pressure, combustor exit temperature, an engine firing temperature, a compressor
25 delivery air percentage bleed or a calculated mass flow.

12. A method according to any one of claims 1 to 11, wherein the model maps a thermodynamic behaviour of key components of the gas turbine engine and specifically, of a combustion system of the gas turbine engine, and specifically,

wherein the key component is a component selected out of the group consisting of: a combustion primary zone, a perfectly-stirred reactor, a main flame, a pilot flame, a plug-flow reactor, a mass flow merger, a mass flow splitter or a flow
5 resistance.

13. A method according to any one of claims 1 to 12, wherein the method comprises the step of:

using the parameterisation of the emission behaviour of the gas turbine engine to predict an emission behaviour for
10 predetermined values of the at least one selected first state variable.

14. A gas turbine engine comprising:

at least one processing unit and being operatable with at least one prediction obtained by using to the method
15 according to any one of claims 1 to 13, wherein the model, which reflects a state behaviour of the gas turbine engine and that obtains results that are converted into mathematical functions by a parameterisation, is implemented in the at least one processing unit to predict and/or control an emission level
20 of the gas turbine engine by using the mathematical functions; and

at least one fuel supply arrangement, wherein a main and pilot fuel split ratio of the at least one fuel supply arrangement is adjustable in such a way to influence the
25 emission level according to the prediction of the model.

1 / 7

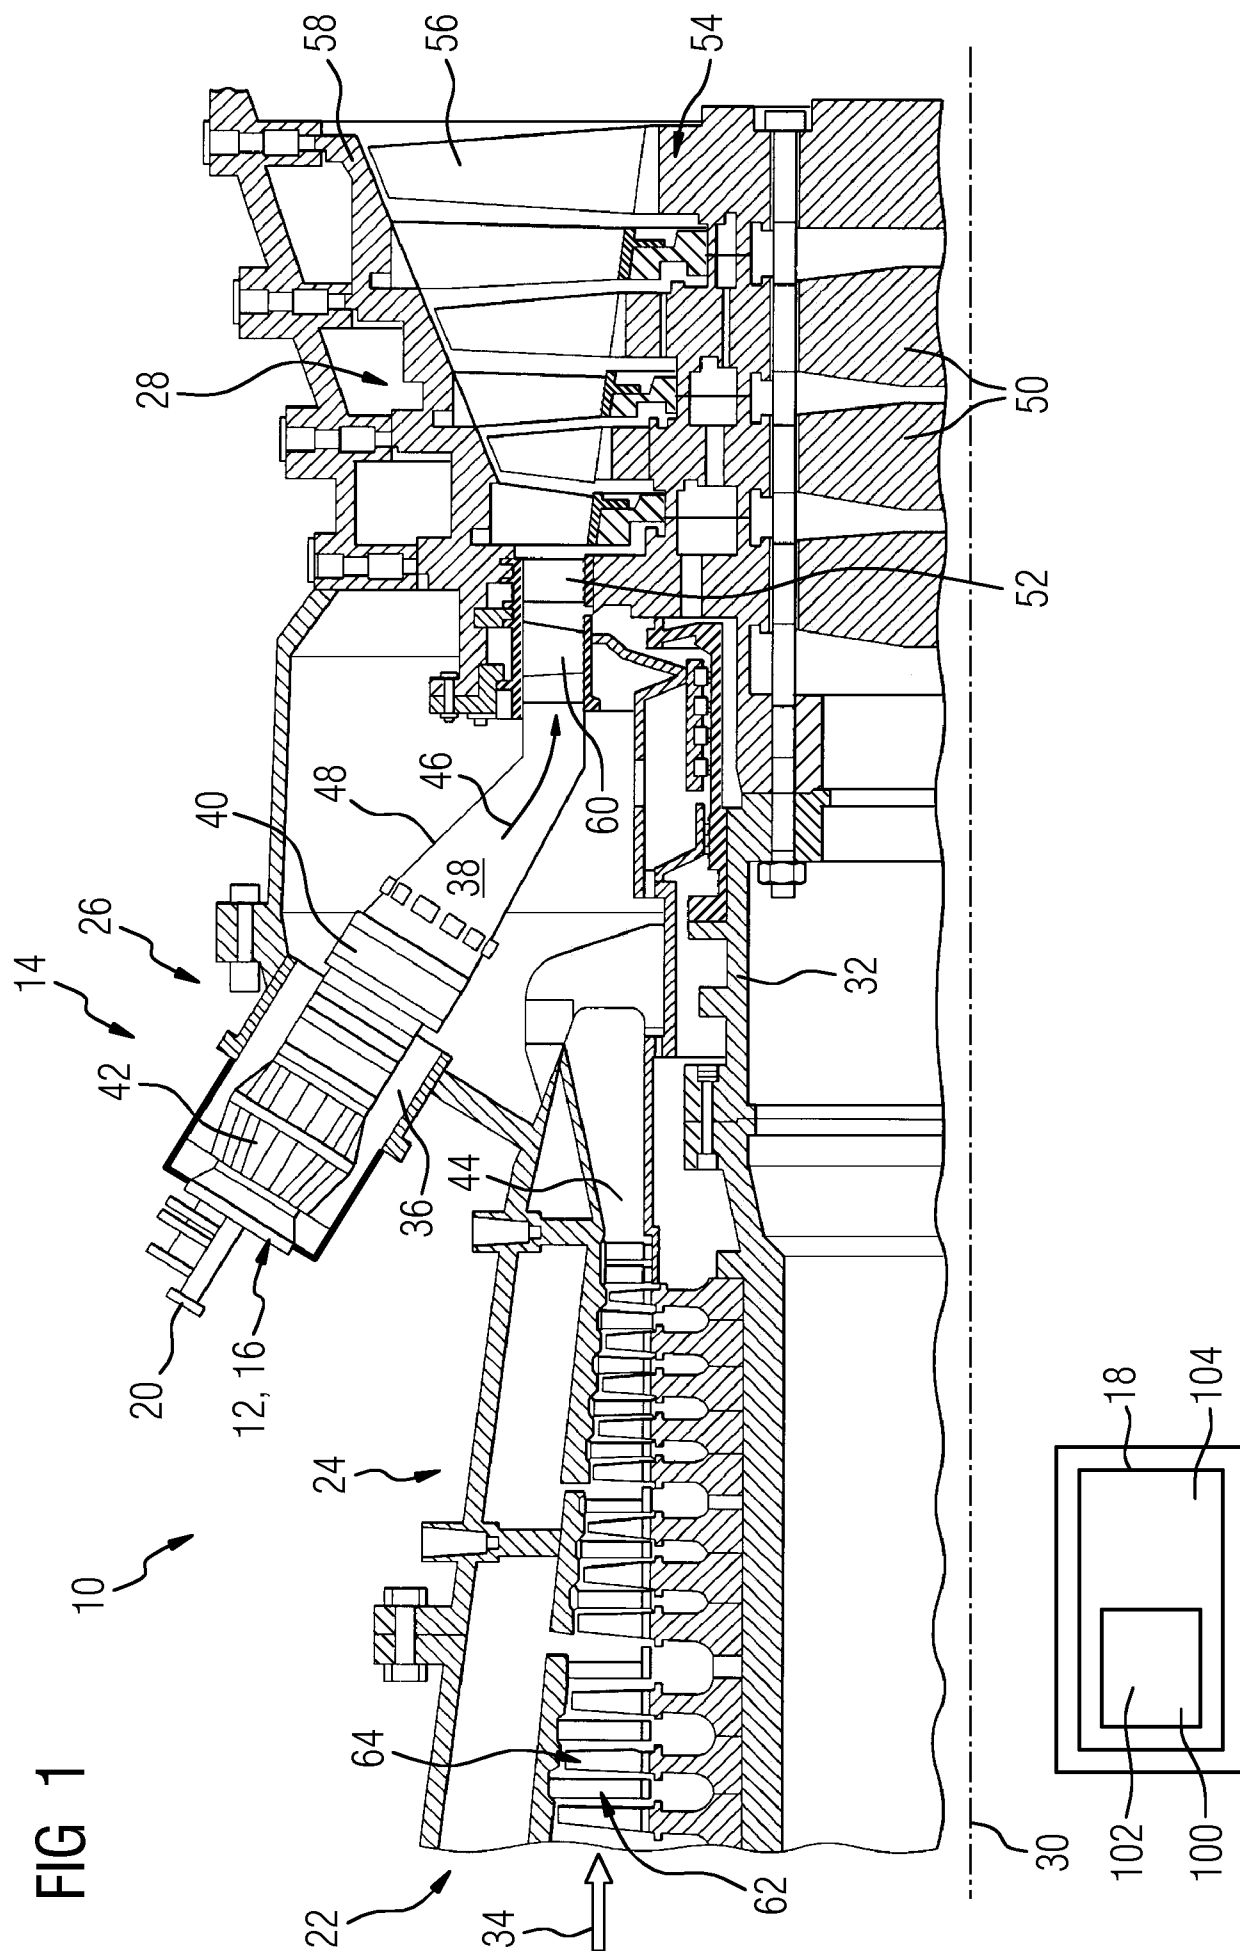


FIG 2

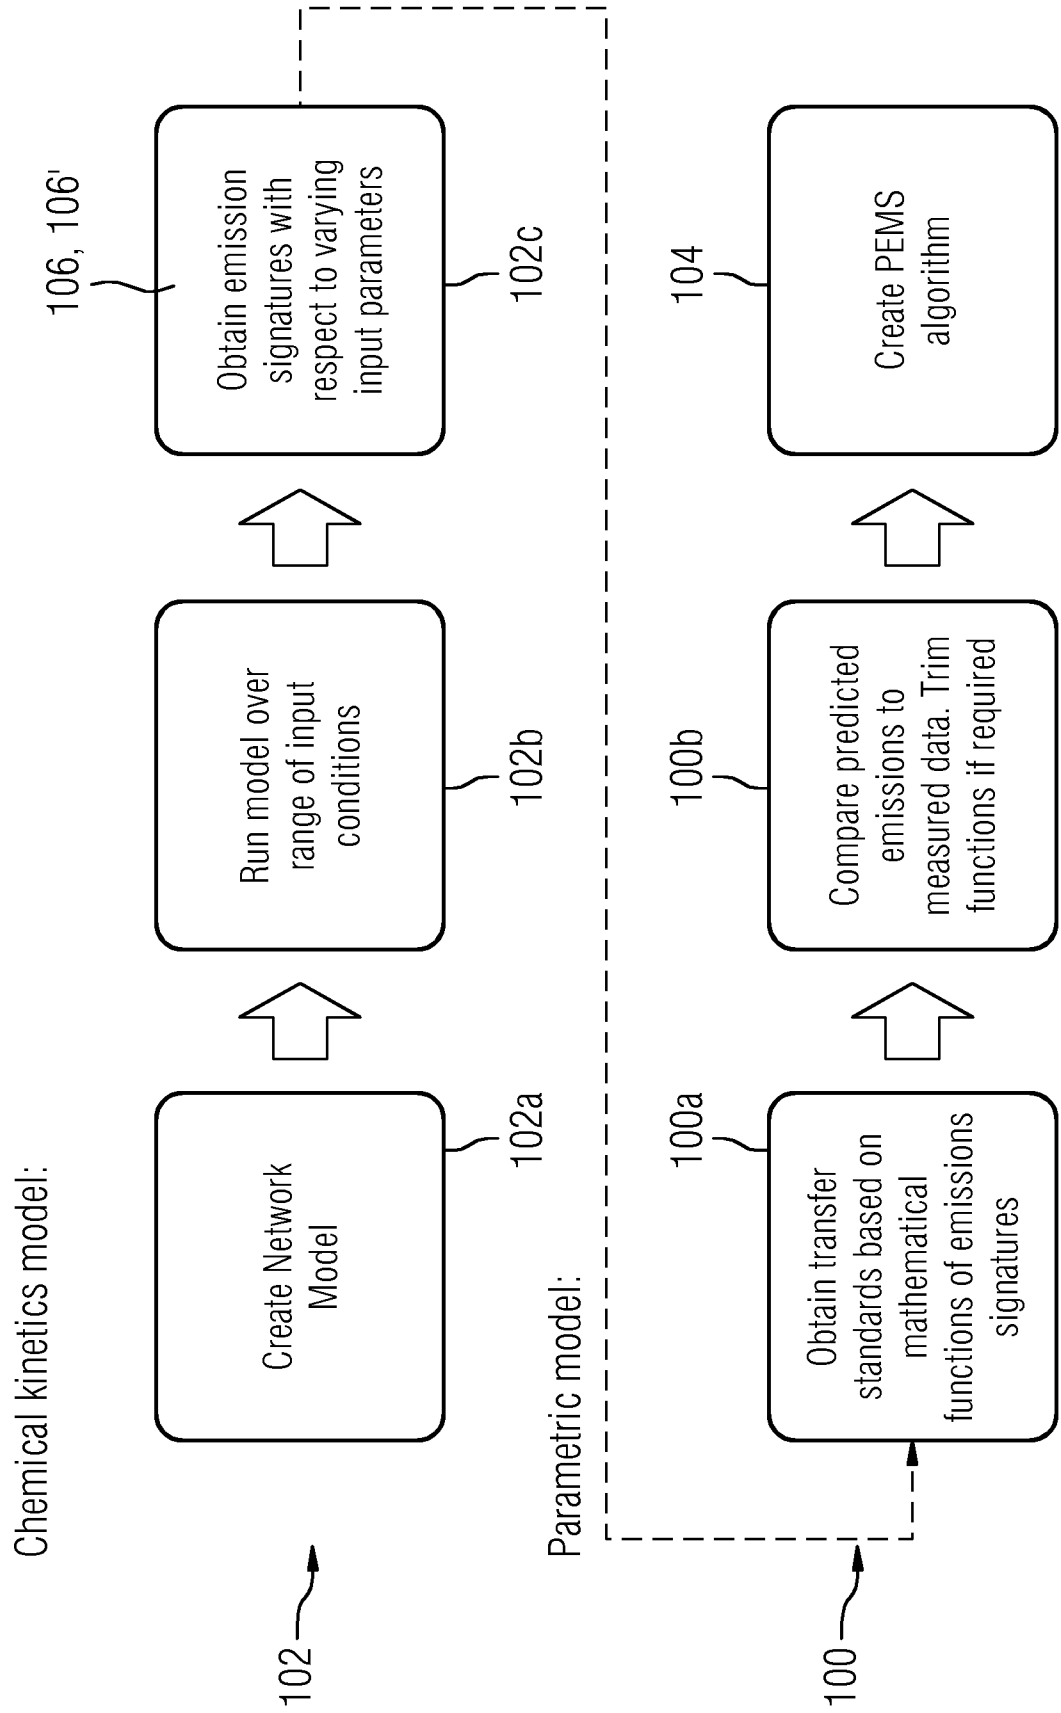


FIG 3

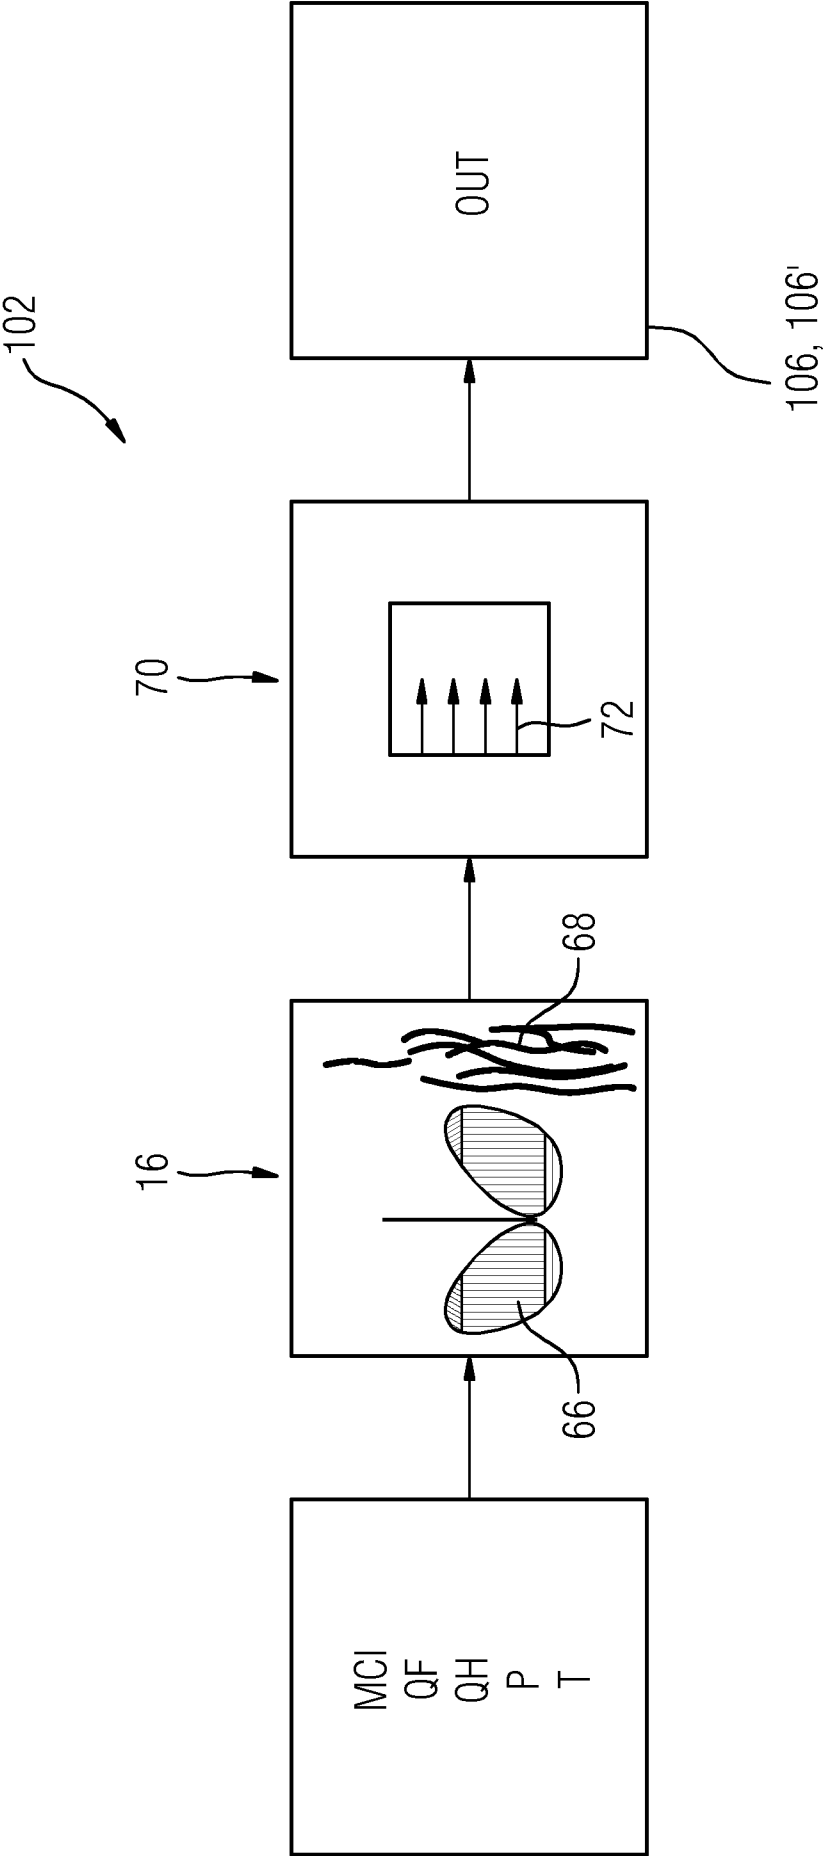


FIG 4

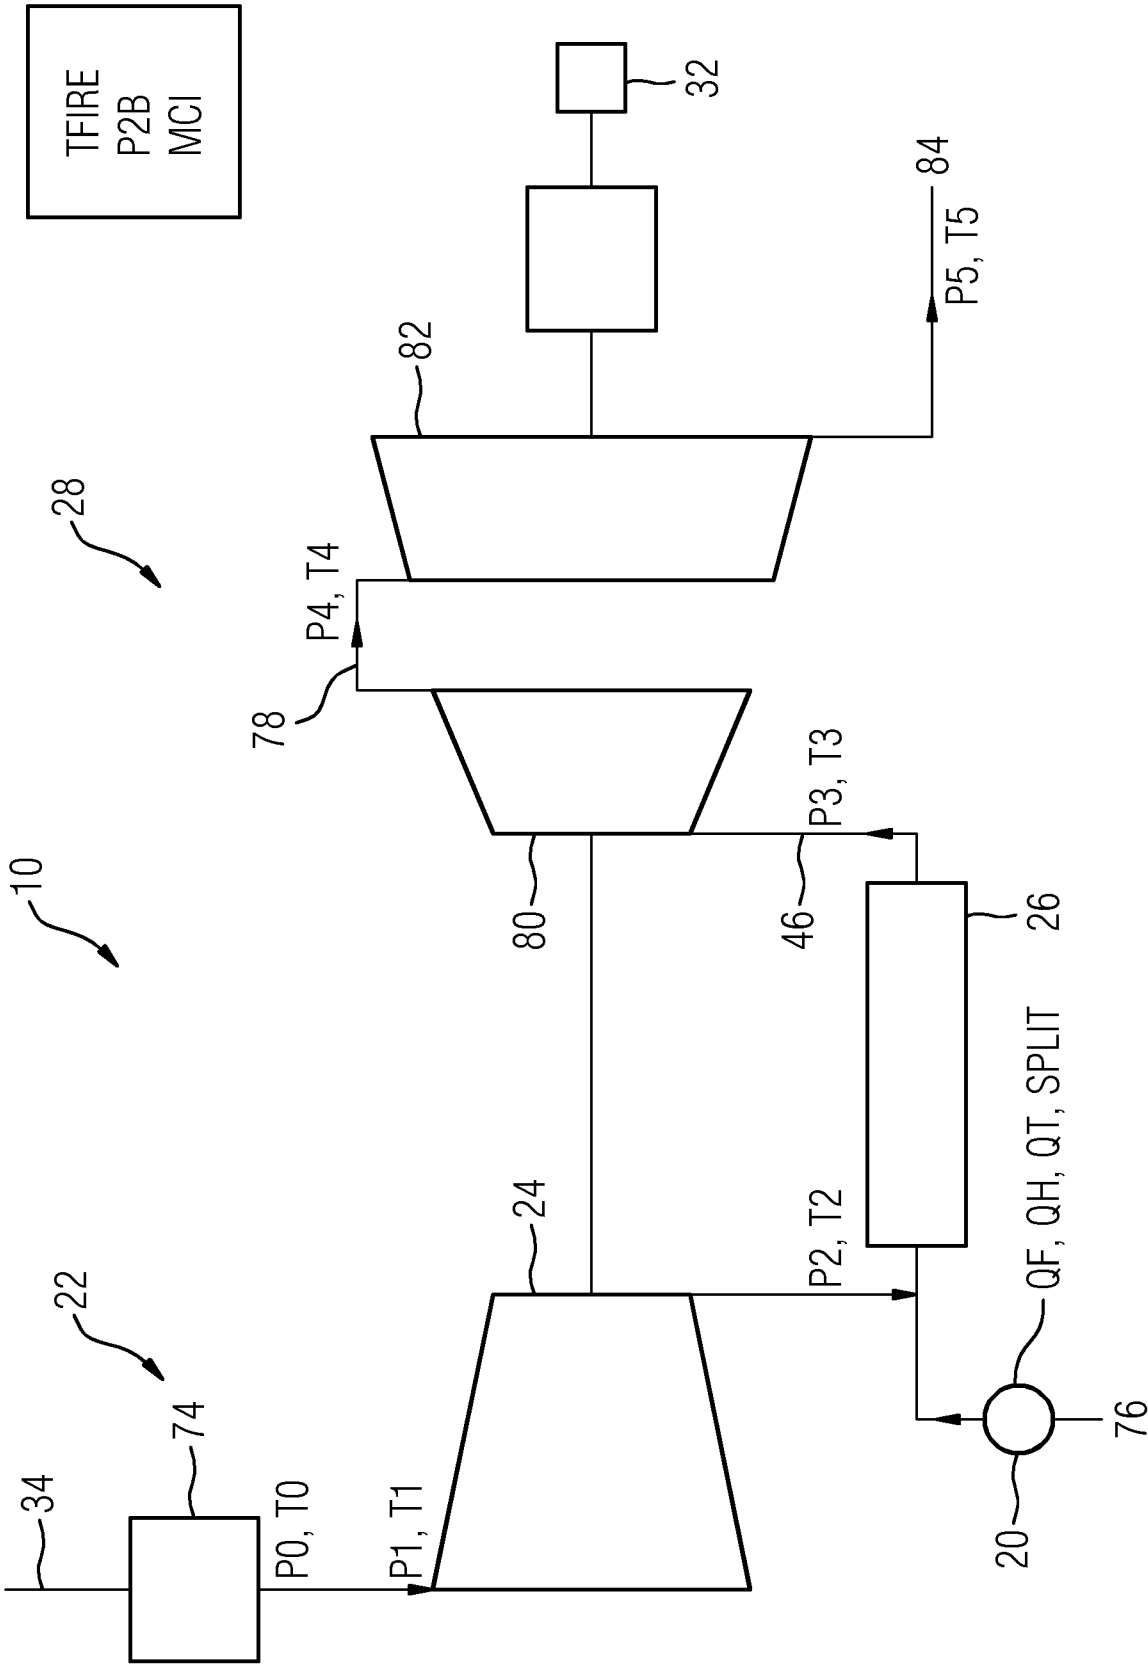


FIG 5




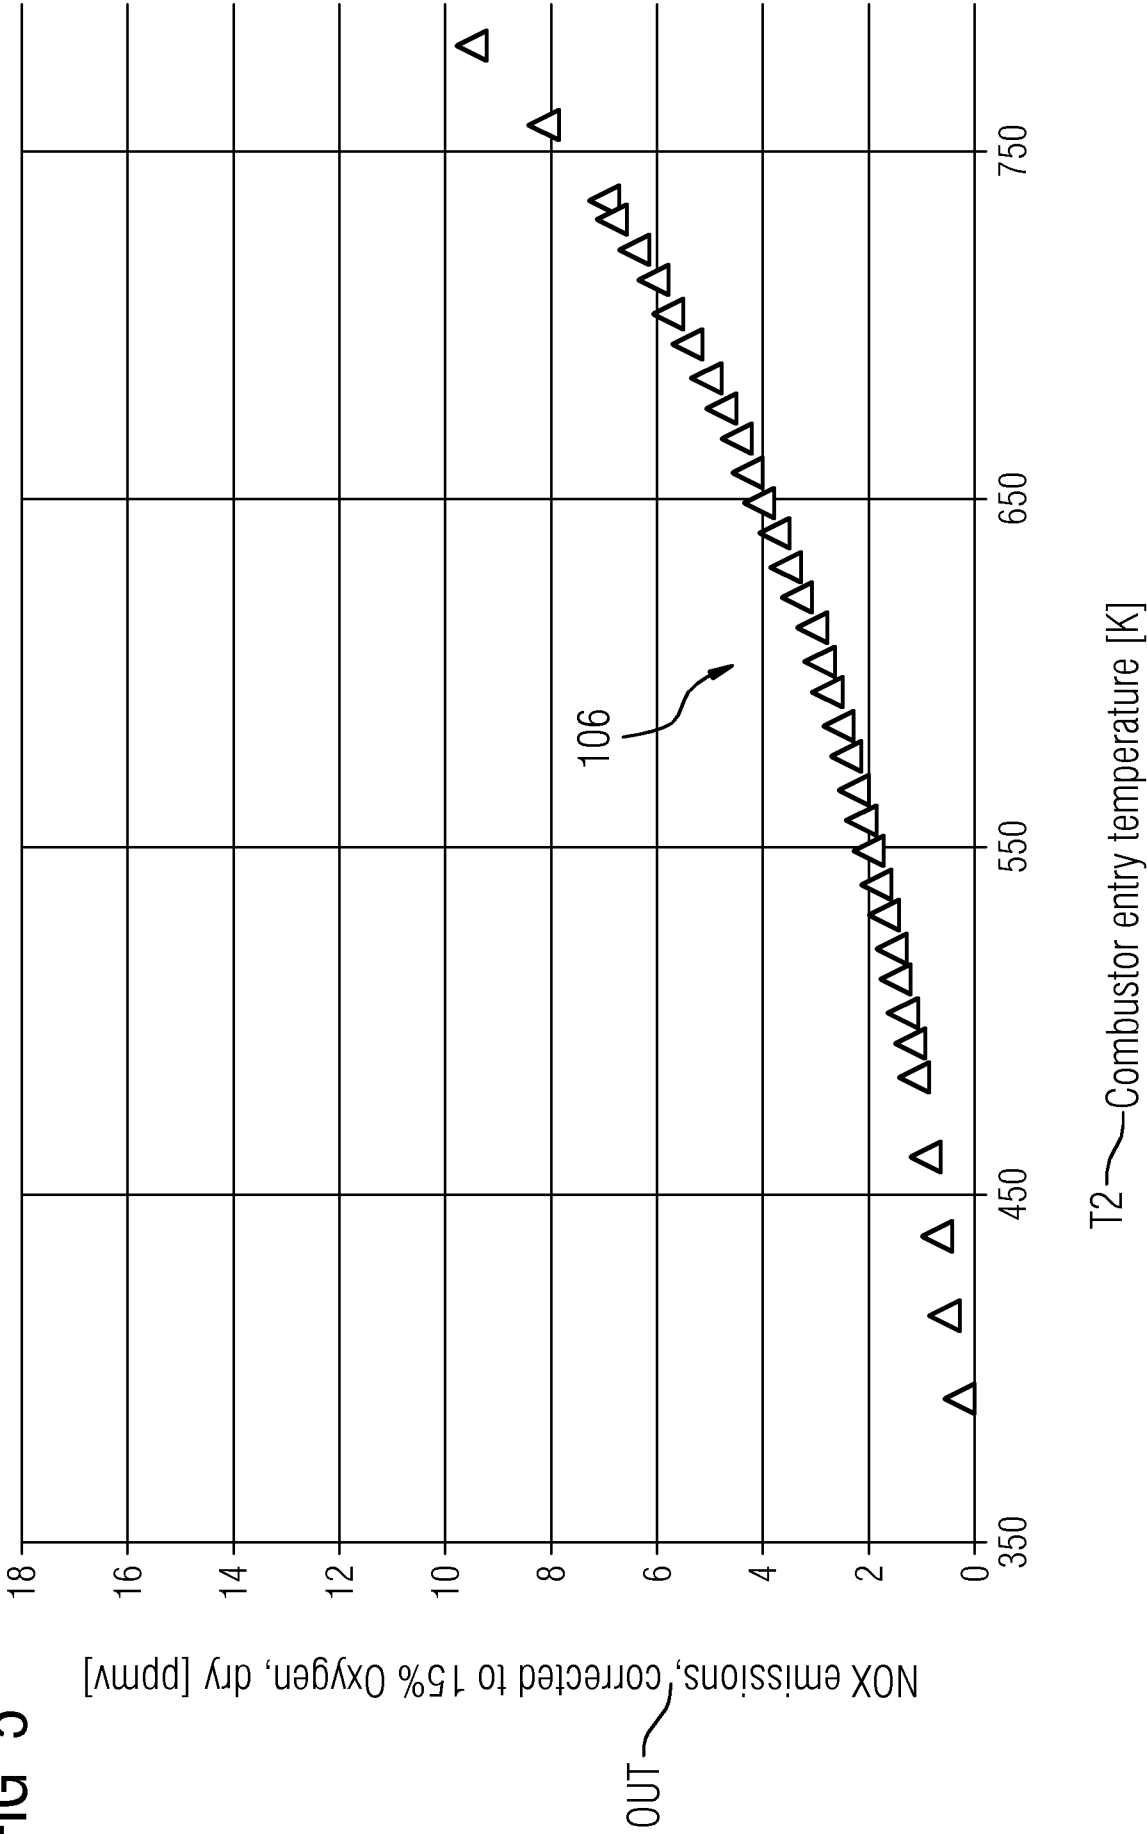


FIG 6

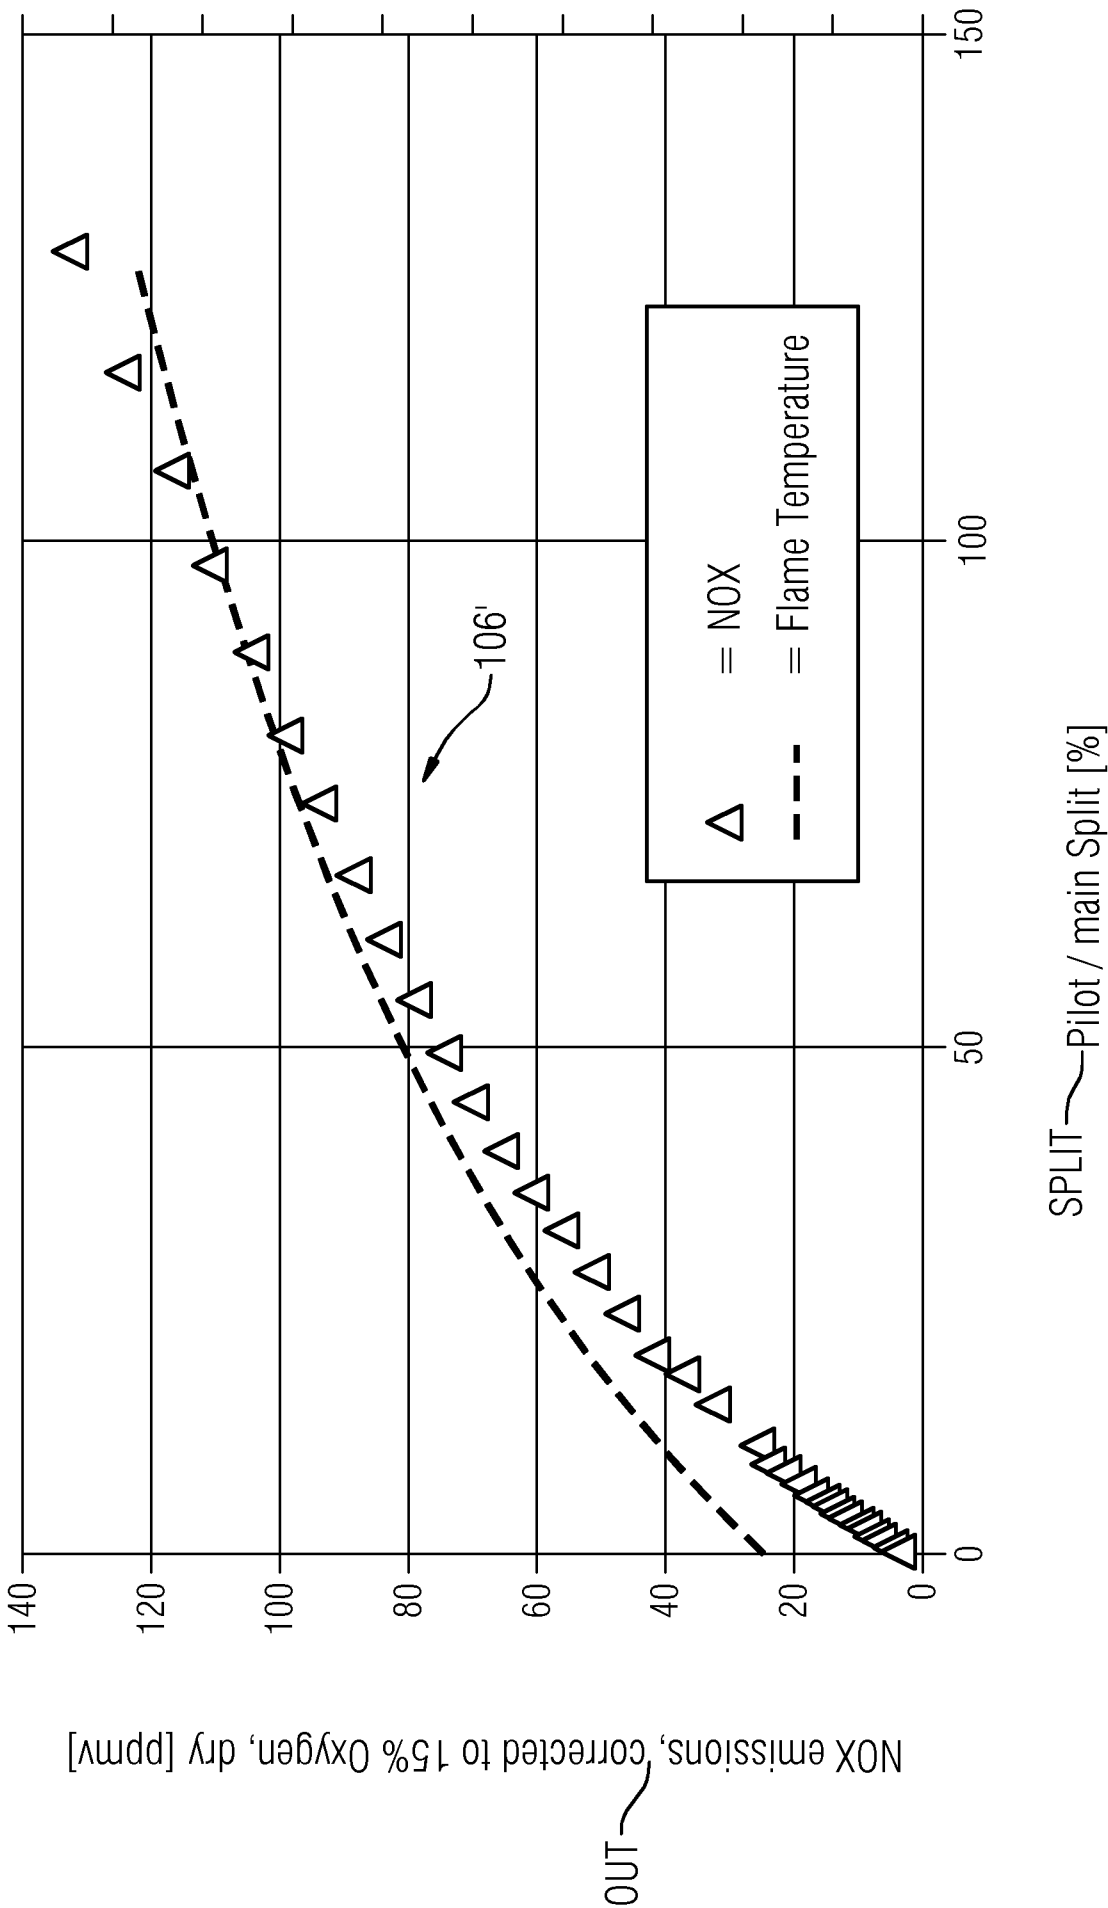

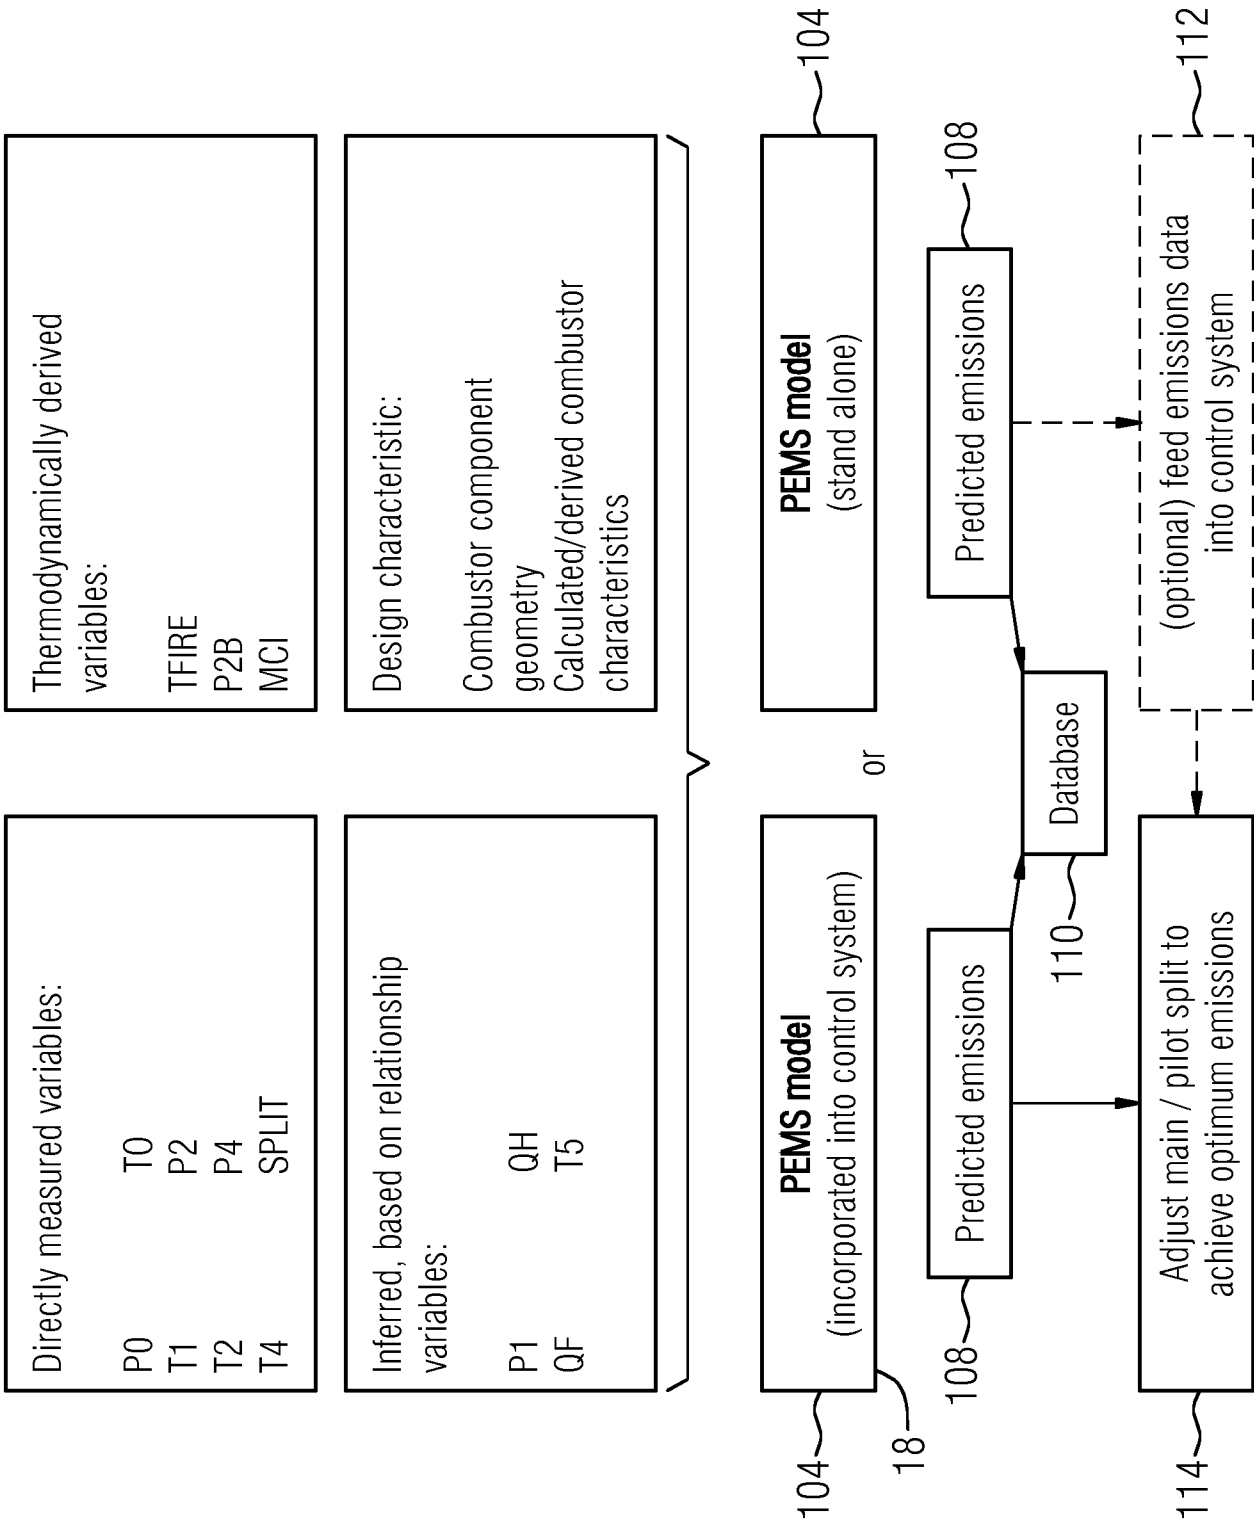

Chemical kinetics model:

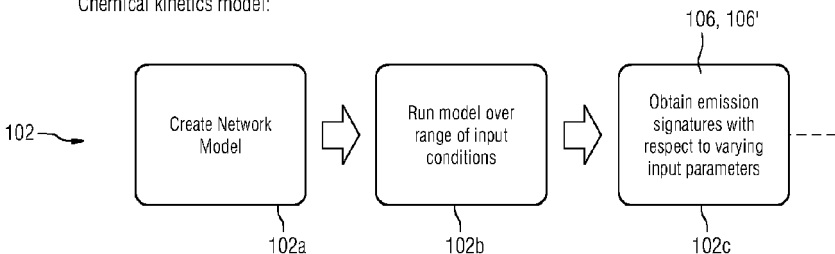

Parametric model:

