

COMMONWEALTH OF AUSTRALIA

628882

Patents Act 1952

CONVENTION APPLICATION FOR A STANDARD PATENT

We, COLGATE-PALMOLIVE COMPANY, a Delaware corporation of 300 Park Avenue, New York, N.Y. 10022, United States of America, hereby apply for the grant of a Standard Patent for an invention entitled

"DRIPLESS MEASURING CUP FOR CLOSURE ASSEMBLY"

which is described in the accompanying complete specification.

Details of basic application:-

Number of basic application:- 272,573


Name of Convention country in which basic application was filed:- United States of America

Date of basic application:- 16 November 1988

Our address for service is: F.B. RICE & CO.,
28A Montague St,
Balmain N.S.W. 2041

Dated this 9 day of November 1989

COLGATE-PALMOLIVE COMPANY

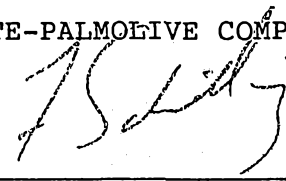By: 
Registered Patent Attorney

TO: The Commissioner of Patents,
COMMONWEALTH OF AUSTRALIA

SO11274 09/11/89

(12) PATENT ABRIDGMENT (11) Document No. AU-B-44526/89
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 628882

- (54) Title
DRIPLESS MEASURING CUP FOR CLOSURE ASSEMBLY
- International Patent Classification(s)
(51)⁴ **B65D 041/26 B65D 023/06 B65D 025/42 B65D 047/06**
- (21) Application No. : **44526/89** (22) Application Date : **09.11.89**
- (30) Priority Data
- (31) Number (32) Date (33) Country
272573 16.11.88 US UNITED STATES OF AMERICA
- (43) Publication Date : **24.05.90**
- (44) Publication Date of Accepted Application : **24.09.92**
- (71) Applicant(s)
COLGATE-PALMOLIVE COMPANY
- (72) Inventor(s)
THOMAS KIN-BON MON
- (74) Attorney or Agent
F B RICE & CO , 28A Montague Street, BALMAIN NSW 2041
- (56) Prior Art Documents
US 4706829
US 4773560
US 4830234

(57) Claim

1. A closure assembly for a container having an externally threaded neck comprising a pouring spout having a body portion receivable within said neck, said body portion having an outwardly peripheral lip, and a measuring cup forming means for closing said container, threaded means on said measuring cup for engaging said threaded neck, said threaded means including an outwardly extending flange intermediate the ends of said measuring cup and having a downwardly depending internally threaded skirt, and a second skirt between said threaded skirt and the wall of said measuring cup extending downwardly from said flange and extending into said body portion.

COMMONWEALTH OF AUSTRALIA

628882

Patent Act 1952

COMPLETE SPECIFICATION
(ORIGINAL)

Class Int. Class

Application Number :
Lodged :

Complete Specification Lodged :
Accepted :
Published :

Priority: 16 November 1988

Related Art :

Name of Applicant : COLGATE-PALMOLIVE COMPANY
Address of Applicant : 300 Park Avenue, New York, N.Y.
10022, United States of America
Actual Inventor : Thomas Kin-Bon Mon
Address for Service : F.B. RICE & CO.,
Patent Attorneys,
28A Montague Street,
BALMAIN. 2041.

Complete Specification for the invention entitled:

"DRIPLESS MEASURING CUP FOR CLOSURE ASSEMBLY"

The following statement is a full description of this invention including the best method of performing it known to us:-

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

This invention relates to a closure device for a liquid container and, more particularly, to a drip-proof measuring cup for a container equipped with a pouring spout.

DESCRIPTION OF THE PRIOR ART

Previous closures with pouring spouts and measuring cups which served also as caps had been devised, such as that shown in German Utility Model Patent No. G 84 31 343 9. However, while the measuring cup extended into the pouring spout body, spillage from the measuring cup sometimes caused contamination with the product in the container. Since these devices are especially adapted for use with laundry products, such as liquid detergents, softeners, bleach and the like, contamination of the threaded skirt could cause seepage along the container, making the closure and container very slippery and difficult to handle -- besides being unappealing to the user.



SUMMARY OF THE INVENTION

The present invention contemplates using a second skirt inwardly of an outwardly disposed internally threaded skirt both of which depend from a flange on a measuring cup or cap, which outward skirt is threaded over the neck of a container with the second skirt extending into the body of a pouring spout body.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a vertical sectional view of the closure assembly as installed on a container;

Fig. 2 is a vertical sectional view of the closure device and a portion of the container, with the combination measuring cup and cap removed;

Fig. 3 is an enlarged sectional detail view illustrating the closure assembly in its closed position;

and

Fig. 4 is an exploded sectional detail view of the closure assembly.

DETAILED DESCRIPTION OF THE INVENTION

With continuing reference to the accompanying drawing, wherein like reference numerals designate similar parts throughout the various views, and with initial attention directed to Fig. 4, there is shown for use with a container 10, a closure assembly including a first member 12 and a second member 14.

The container 10 is preferably blow-molded of a synthetic plastic material compatible with the contents for which it is to be used, such as laundry detergents, bleaches and fabric softeners, potable beverages or any other useful liquid material.

The container 10 includes a main portion 20, which has a neck 22. The neck 22 is externally threaded as at 24. The neck 22 has an upper peripheral edge 26.

Referring now to the first member 12, there is provided a tapered body 30, which is of a truncated conical configuration, extending downwardly and inwardly. Integral with the body 30 is a pouring spout of any selected and desired shape. On the upper outside surface of the body 30 there is provided suitable prongs or ribs 34, which form a seal seating the body 30 in the neck 22.

The upper peripheral edge 38 of the body 30 is provided with a peripheral lip 40, which seats on the upper edge of the neck 22.

The entire first member 12 is integrally molded from a synthetic plastic material commensurate with the contents of the container 20.



The second member 14 includes a measuring cup 50, which has a top portion 52 and a cylindrical side wall 54 which terminate in a lower end 56. Integral with the side walls 54 is an outwardly extending radial flange 58, which has integrally molded therewith a downwardly extending skirt 60 coaxial with the wall 54. The skirt 60 is internally threaded at 62.

As can be seen in Fig. 2, the closure assembly is especially adapted for large containers, such as are commonly used for laundry materials, and which may have an integrally molded handle 70 and are quite heavy when filled with liquid. In order to ensure against contamination of the threads 62, there is provided a second skirt 80 coaxial with the skirt 60 and wall 54. This skirt terminates above the lower end of wall 54, but extends below the skirt 60.

The first member 12 is pressed into the neck 22. Then, the second member is threaded in place allowing the skirt 80 to extend into the body 30.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A closure assembly for a container having an externally threaded neck comprising a pouring spout having a body portion receivable within said neck, said body portion having an outwardly peripheral lip, and a measuring cup forming means for closing said container, threaded means on said measuring cup for engaging said threaded neck, said threaded means including an outwardly extending flange intermediate the ends of said measuring cup and having a downwardly depending internally threaded skirt, and a second skirt between said threaded skirt and the wall of said measuring cup extending downwardly from said flange and extending into said body portion.
2. A closure assembly according to claim 1, wherein said second skirt lies close to said measuring cup wall.
3. A closure assembly according to claim 1, wherein said second skirt is coaxial with said measuring cup and said threaded skirt.
4. A closure assembly according to claim 1, wherein said second skirt extends downwardly below said threaded skirt.
5. A closure assembly according to claim 1, wherein said second skirt lies close to said measuring cup, said second skirt extending below said threaded skirt.
6. A closure assembly according to claim 2, wherein said second skirt is coaxial with said threaded skirt.
7. A closure assembly according to claim 1, wherein said second skirt is coaxial with said measuring cup wall and said threaded skirt, said second skirt extending below said threaded skirt.



8. A closure assembly according to claim 7, wherein said measuring cup extends below said second skirt and into said body portion.


DATED this 30th day of June 1992

COLGATE-PALMOLIVE COMPANY
Patent Attorneys for the
Applicant:

F.B. RICE & CO.



FIG. 1

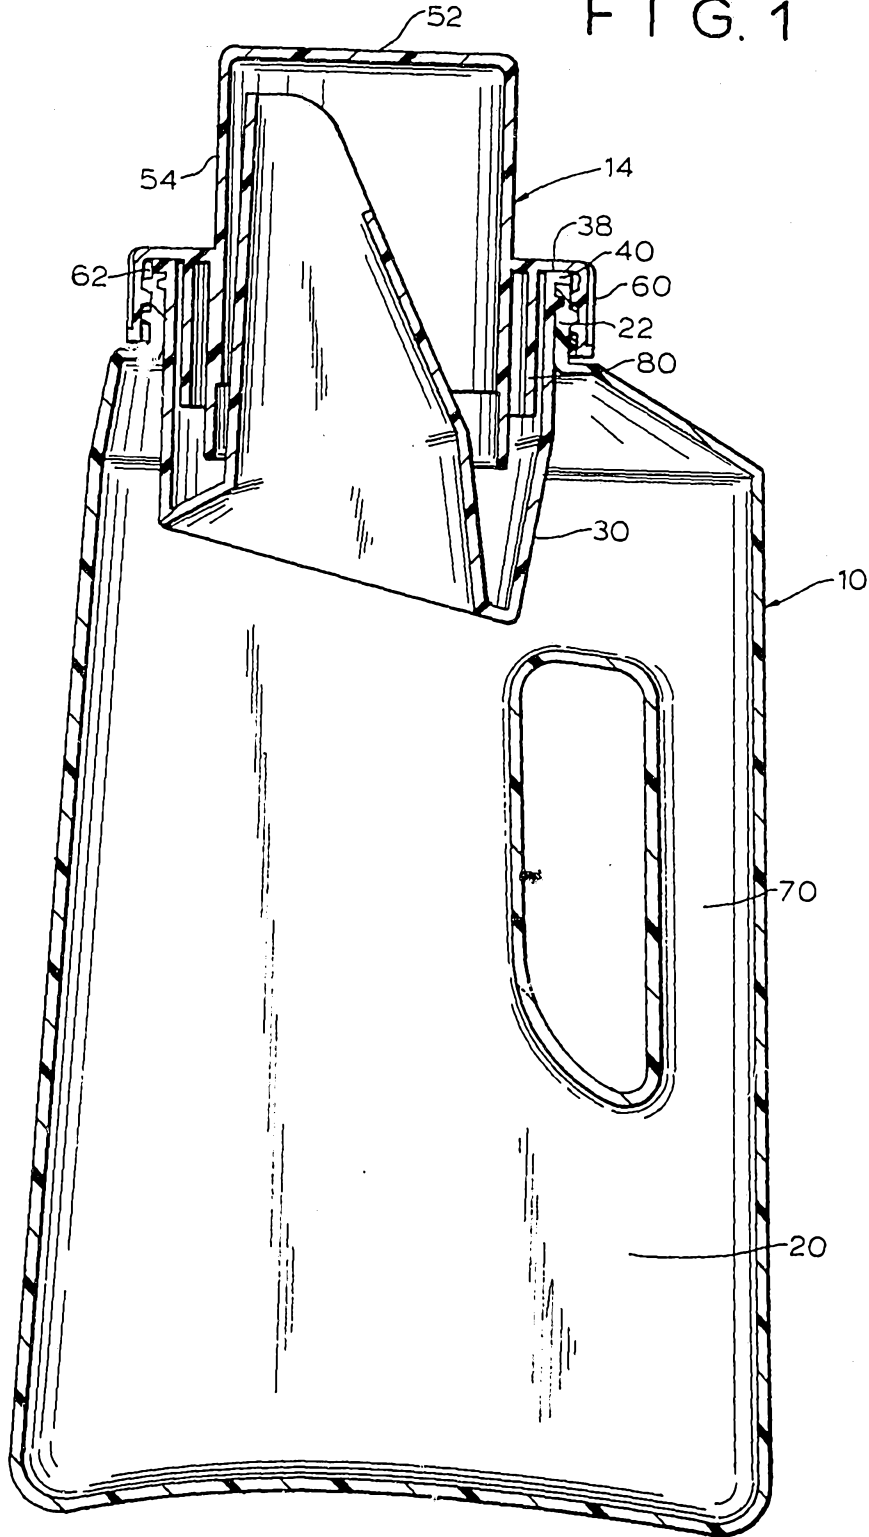

U.S. PATENT OFFICE

FIG. 2

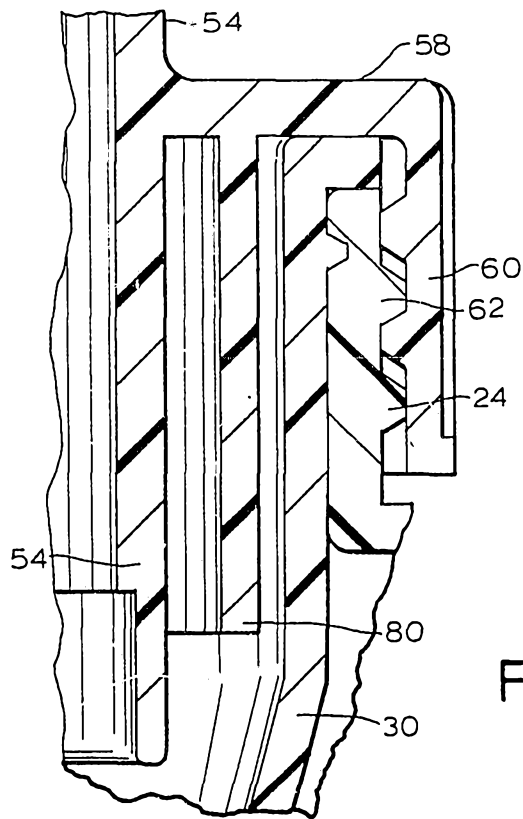
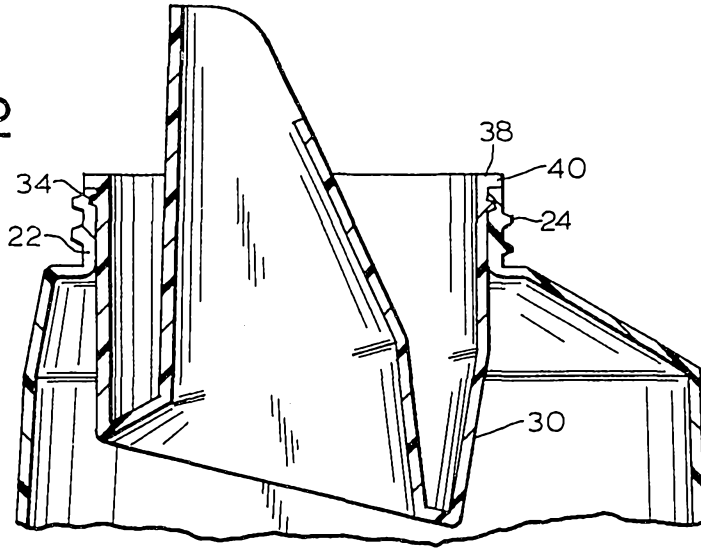


FIG. 3

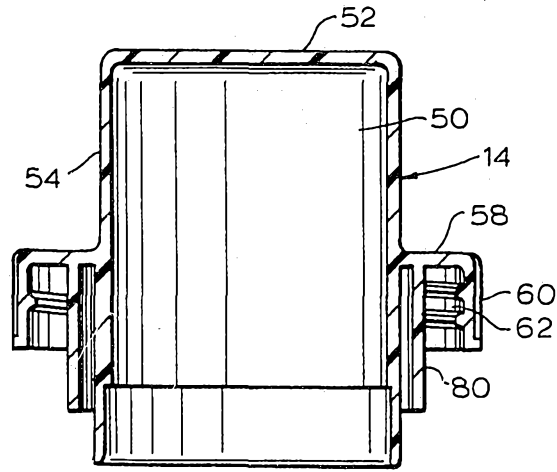


FIG. 4

