

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



**(43) International Publication Date
24 April 2003 (24.04.2003)**

PCT

(10) International Publication Number
WO 03/033195 A1

(51) International Patent Classification⁷: B23C 5/20,
5/22, 5/24

Rafael [IL/IL]; Jasmin Street 14/20, 20100 Karmiel (IL).
HECHT, Gil [IL/IL]; Ahad Ha'am Street 30/18, 22443 Nahariya (IL).

(21) International Application Number: PCT/IL02/00793

(74) **Agent: ISCAR LTD.; Patent Department, P.O. Box 11, 24959 Tefen (IL).**

(22) International Filing Date:
29 September 2002 (29.09.2002)

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(71) **Applicant (for all designated States except US): ISCAR LTD. [IL/IL]; P.O. Box 11, 24959 Tefen (IL).**

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and
(75) Inventors/Applicants (for US only): **MORGULIS,**

[Continued on next page]

(54) Title: CUTTING TOOL AND CUTTING INSERT THEREFOR

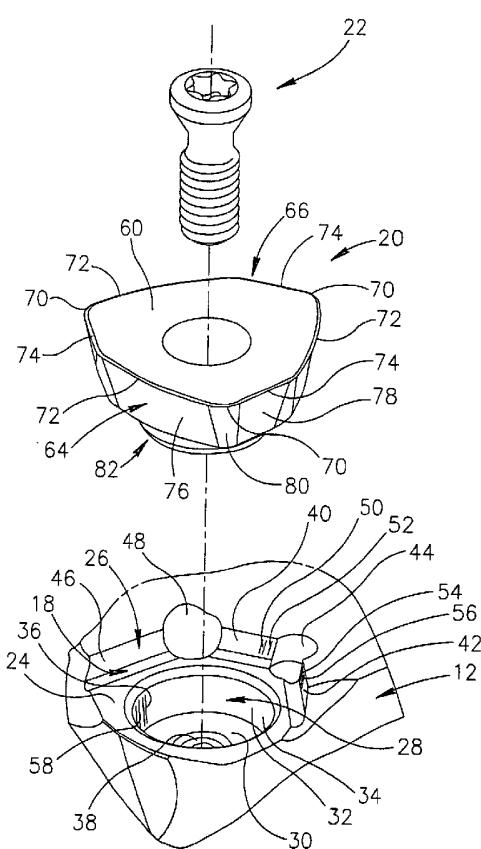

(57) Abstract: A cutting tool (10) having replaceable indexable cutting insert (20) retained in insert pockets (18). Each insert pocket (18) has a base wall (24) and first and second rear sidewall (40, 42) sections. A generally circular recess (28) having a peripheral wall (32) extends downwardly from the base wall (24). A first abutment surface (52) located on the first rear sidewall section (40) abuts a first support surface (52') located on the side surface (64) of the cutting insert (20), a second abutment surface (56') located on the side surface (64) of the cutting insert (20), and a third abutment surface (58) located on the peripheral wall (32) of the recess (28) abuts a third support surface (58') located on the cylindrical protrusion (82) of the cutting insert (20).

WO 03/033195 A1



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CUTTING TOOL AND CUTTING INSERT THEREFOR

FIELD OF THE INVENTION

The present invention relates to a cutting tool and particularly to a milling cutting tool capable of performing face milling operations at a high feed rate and a long tool shank. The invention also discloses an indexable cutting insert for use 5 with the cutting tool.

BACKGROUND OF THE INVENTION

Japanese Publication No. 2000202703 A to Masaharu discloses a boring tool having two identical nearly parallelogrammatic plate form tips. Each tip has a pair 10 of first cutting edges 15 and a pair of second cutting edges 16 arranged in a rotational symmetry and connected via a nose part 17. The first cutting edge 15 having a circular arcing cutting edge 15a at the side of the nose part 17 and a rectilinear cutting edge 15b merging with the cutting edge 15a via a first bending part 15. The second cutting edge 16 having two rectilinear cutting edges 16a and 15 16b merging via a second bending part 16c.

Each of the tips used in '703 is disposed differently with respect to the tool since each of the cutting edges has different characteristics. Since the cutting edges are arranged in 180° rotational symmetry, each tip can be indexed only two times at

its pocket. Furthermore, if the tips used in '703 are used to perform ramp-down milling they are not properly supported against radially outwardly directed cutting forces that tend to withdraw each tip out of its pocket.

Japanese Publication No. 2000-005921 to Yoshimitsu shows, in Fig. 4 thereof, a three-corner cutting insert. Each of the three cutting edges comprises a small curved cutting edge portion 7 and a large straight cutting edge portion 8. The cutting insert of '921 does not have a cutting edge specifically designed for performing ramp-down milling. Furthermore, the cutting insert is not properly supported against radially outwardly directed cutting forces that tend to withdraw the cutting insert out of its pocket during a ramp-down milling operation.

Another kind of tool, having means for preventing rotation of the cutting insert around the axis of the clamping screw, is shown in European Patent No. EP 0 091 408 B1 to Bylund. In '408 there is disclosed a cutting insert 12 having three convex cutting edges 16, 17 and 18. Each of the cutting edges is connected, at a rear end thereof, to an auxiliary cutting edge 32, which extends transversely to the cutting edge and forms an obtuse angle therewith. The auxiliary cutting edge 32 is intended to cut the workpiece during reversed relative movement between the insert and the workpiece. The cutting edges of the cutting insert 12 are not peripherally continuous around the top face of the cutting insert. Instead, they are separated by an intermediate peripheral space 24, 25 and 26. The cutting insert 12 is not provided with a cutting edge for performing ramp-down milling operations and is not especially supported against radially outwardly directed cutting forces that tend to withdraw the cutting insert out of its pocket. For preventing rotation of the cutting insert, the cutting insert is provided with a supporting surface 27 that is directed substantially towards the center of the cutting insert. The supporting surface 27 abuts against an abutment surface 28 on the tool body that fits into the intermediate peripheral surface.

A disadvantage of the tool of '408 is that in order to prevent rotation of the cutting insert, the cutting edges are formed with recesses which complicate and weaken the cutting insert.

It is an object of the present invention to provide a cutting tool and a cutting 5 insert therefor that significantly reduce or overcome the aforementioned disadvantages.

SUMMARY OF THE INVENTION

In accordance with the present invention there is provided a cutting tool 10 (10) having a longitudinal axis (A), the cutting tool comprises a tool body (12), having at least one mounting leg (14) formed at a front end (16) thereof, the at least one mounting leg (14) having an insert pocket (18) with a cutting insert (20) retained therein;

the insert pocket comprises a base wall (24) and first and second rear sidewall 15 sections (40, 42) transversely directed to the base wall (24), a generally circular recess (28) extends downwardly from the base wall (24), the recess has a lower wall (30) bounded by a peripheral wall (32) extending uprightly from the lower wall (30) to the base wall (24),

the cutting insert comprises an upper surface (60), a lower surface (62) and a 20 side surface (64) extending therebetween, the upper and side surfaces (60, 64) intersecting at a cutting edge (66), a cylindrical protrusion (82) having a cylindrical peripheral surface (84) extends downwardly from the lower surface (62) to a bottom surface (86) of the protrusion (82);

wherein the cutting insert (20) is retained in the insert pocket (18) with first, 25 second and third abutment surfaces (52, 56, 58) of the insert pocket (18) abutting the cutting insert (20), where the first abutment surface (52) is located on the first rear sidewall section (40) and it abuts a first support surface (52') located on the side surface (64) of the cutting insert, the second abutment surface (56) is located on the second rear sidewall section (42) and it abuts a second support surface (56') located

on the side surface (64) of the cutting insert, and the third abutment surface (58) is located on the peripheral wall (32) of the recess (28) and it abuts a third support surface (58') located on the cylindrical peripheral surface (84) of the protrusion (82) of the cutting insert (20).

5 In accordance with a preferred embodiment of the present invention, the cutting edge (66) comprises at least three cutting edge portions (68) that are separated from each other by corner cutting edges (70) and each cutting edge portion comprises a first cutting edge (72) that extends between a second cutting edge (74) and an adjacent corner cutting edge (70).

10 Preferably, the first cutting edge (72) is convex.

If desired, the second cutting edge (74) is straight.

Further in accordance with a preferred embodiment of the present invention, the side surface (64) comprises side surface sections with a first side surface section (76) adjacent the first cutting edge (72), a second side surface section (78) adjacent the second cutting edge (74) and a side surface corner section (80) adjacent the corner cutting edge (70), each of the side surface sections extending from its associated cutting edge towards the lower surface (62).

In accordance with a preferred embodiment, the first and second rear sidewall sections (40, 42) are separated by a first recessed region (44).

20 Further in accordance with a preferred embodiment, the first support surface (52') and the second support surface (56') are located on either side of a common side surface corner section (80).

Typically, a portion of the common side surface corner section (80) is located in the first recessed region (44).

25 Preferably, the peripheral wall (32) of the recess (28) comprises a major portion (34) having a major radius R1, and a minor portion (36) having a minor radius R2.

Further preferably, the minor radius R2 is smaller than the major radius R1.

Still further preferably, the angular extent of the minor portion (36) is smaller than the angular extent of the major portion (34).

In accordance with a preferred embodiment, a threaded bore (38) extends downwardly from the lower wall (30) of the recess (28).

5 Typically, a through bore (88), having an insert axis (B), extends between the upper surface (60) of the cutting insert (20) and the bottom surface (86) of the protrusion (82).

Further typically, a retaining screw (22) is located in the through bore (88) and threadingly engages the threaded bore (38).

10 In accordance with a specific embodiment of the present invention, first cutting edge (72) subtends a first angle (α) of 70° with the insert axis (B).

Further in accordance with a specific embodiment of the present invention, the second cutting edge (74) subtends a second angle (β) of 35° with the insert axis.

15 Typically, the first cutting edge (72) forms an obtuse interior third angle (γ) with the adjacent second cutting edge (74).

In accordance with a specific embodiment of the present invention, the third angle is 153° .

Also in accordance with the present invention there is provided a cutting insert (20), comprising an upper surface (60), a lower surface (62) and a side surface (64) extending therebetween, the upper and side surfaces (60, 64) intersecting at a cutting edge (66), a cylindrical protrusion (82) having a cylindrical peripheral surface (84) extends downwardly from the lower surface (62) to a bottom surface (86) of the protrusion (82), the cutting insert having an insert axis (B) passing through the upper and bottom surfaces (60, 86);

25 the cutting edge (66) comprises at least three cutting edge portions (68) that are separated from each other by corner cutting edges (70) and each cutting edge portion comprises a first convex cutting edge (72) that extends between a second cutting edge (74) and an adjacent corner cutting edge (70).

If desired, the second cutting edge (74) is straight.

In accordance with a specific embodiment of the present invention, first cutting edge (72) subtends a first angle (α) of 70° with the insert axis (B).

Further in accordance with a specific embodiment of the present invention, the second cutting edge (74) subtends a second angle (β) of 35° with the insert axis (B).

Typically, the first cutting edge (72) forms therewith an obtuse interior third angle (γ) with the adjacent second cutting edge (74).

In accordance with a specific embodiment of the present invention, the third angle is 153° .

Typically, a through bore (88), having as axis the insert axis (B), extends between the upper surface (60) of the cutting insert (20) and the bottom surface (86) of the protrusion (82).

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention and to show how the same may be carried out in practice, reference will now be made to the accompanying drawings, in which:

Fig. 1 is a perspective view of a cutting tool according to the present invention;

Fig. 2 is a bottom perspective view of a cutting insert shown in Fig. 1;

Fig. 3 is a partial exploded view of the cutting tool of Fig. 1 showing one of the cutting inserts removed from its pocket;

Fig. 4 is a partial view of the cutting tool of Fig. 1 showing a top view of one of the cutting inserts retained in its pocket;

Fig. 5 is the same view as Fig. 4 with the position of the cutting insert shown in

dashed lines so that the insert pocket can be seen in a top view; and

Fig. 6 is a cross-sectional view taken along line VI-VI in Fig. 4 with the retaining screw removed.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Attention is drawn to the drawings. A cutting tool **10** comprises a tool body **12** having a plurality of mounting legs **14** formed at a front end **16** of the tool body **12**. Each mounting leg **14** has an insert pocket **18** in which a cutting insert **20** is 5 retained by means of a retaining screw **22**. The cutting tool **10** has a rear end **23** opposite the front end **16** with an axis of rotation **A** passing through the front and rear ends **16, 23** defining a front to rear direction.

The insert pocket comprises a base wall **24** and a sidewall **26** that is transversely directed to the base wall **24**. A generally circular recess **28** extends 10 downwardly from the base wall **24**. The recess **28** has a lower wall **30** bounded by a peripheral wall **32** extending uprightly from the lower wall **30** to the base wall **24**. The peripheral wall **32** of the recess **28** preferably comprises two circular portions of differing radii, but having the same center. The peripheral wall **32** comprises a major portion **34** having a major radius **R1**, and a minor portion **36** having a minor 15 radius **R2**. The minor radius **R2** is smaller than the major radius **R1**. According to a specific application of the present invention, the minor radius **R2** is 0.25 mm smaller than the major radius **R1**. The angular extent of the minor portion **36** is smaller than the angular extent of the major portion **34**. In accordance with a specific application, the minor portion **36** of the peripheral wall **32** has an angular 20 extent ϕ of approximately 40° . A threaded bore **38**, having a pocket axis **C**, for receiving the retaining screw **22**, extends downwardly from the lower wall **30** of the recess **28**. The centers of the two circles on which the major and minor portions **34, 36** lie coincide with the axis **C**.

The sidewall **26** comprises three sidewall sections, two rear sidewall sections, 25 a first rear sidewall section **40** and a second rear sidewall section **42** separated by a first recessed region **44** and a side sidewall section **46**. The first rear sidewall section **40** is adjacent the side sidewall section **46** and separated from it by a second recessed region **48**. The first rear sidewall section **40** has a region **50** adjacent the first recessed region **44**, at least a portion of which constitutes a first abutment

surface 52 for abutting the cutting insert 20. Similarly, the second rear sidewall section 42 has a region 54 adjacent the first recessed region 44, at least a portion of which constitutes a second abutment surface 56 for abutting the cutting insert 20. Also, at least a portion of the minor portion 36 constitutes a third abutment surface 58 for abutting the cutting insert 20. As will be explained in greater detail below, the first, second and third abutment surfaces are designed to retain the cutting insert 20 in the insert pocket 18 in a well defined and secure manner.

Attention is drawn to Fig. 5. It will be noted that the minor portion 36, and therefore the third abutment surface 58, is located adjacent the side sidewall 46 towards the front of the insert pocket 18. In terms of an analog clock, the minor portion is located approximately between 7 and 8 O' clock. It will be appreciated that the precise location of the minor portion 36 is a question of design and distribution of forces. In practice, the illustrated location of the minor portion 36 is a preferred location. However, it can also be located at other locations between the preferred location up to approximately adjacent the second recessed region 48.

The cutting insert 20 comprises an upper surface 60, a lower surface 62 and a side surface 64 that extends between the upper and lower surfaces 60, 62. The upper surface 60 and the side surface 64 intersect at a cutting edge 66 comprising three cutting edge portions 68 separated from each other by corner cutting edges 70. Each of the three cutting edge portions comprises a convex first cutting edge 72 that extends between a straight second cutting edge 74 and an adjacent corner cutting edge 70. The side surface 64 is divided into sections corresponding to the various cutting edges. Accordingly, the side surface 64 has a first side surface section 76 adjacent the first cutting edge 72, a second side surface section 78 adjacent the second cutting edge 74 and side surface corner section 80 adjacent corner cutting edge 70. A cylindrical protrusion 82 having a cylindrical peripheral surface 84 extends downwardly from the lower surface 62 to a bottom surface 86 of the protrusion 82. The peripheral surface 84 is perpendicular to the lower surface 62. A centrally located through bore 88, having an insert axis B, extends between the

upper surface **60** and the bottom surface **86**. The protrusion **82** has a protrusion radius **R3**. The protrusion radius **R3** is smaller than the major radius **R1** and approximately equal to the minor radius **R2**.

The three cutting edge portions **68** are rotationally symmetrically arranged 5 with respect to the insert axis **B**. The first cutting edge **72** is substantially larger than the second cutting edge **74**. According to a preferred embodiment of the present invention, the first cutting edge **72** subtends a first angle α of 70° at the insert axis **B** and the second cutting edge **74** subtends a second angle β of 35° at the insert axis **B**. The first and second cutting edges **72, 74** of a given cutting edge 10 portion **68** make an obtuse interior third angle δ of 153° between each other. The cutting insert **20** is indexable and has three indexing positions.

In order to secure the cutting insert **20** in the insert pocket **18**, the protrusion **82** is inserted into the recess **28** until the lower surface **62** of the cutting insert abuts the base wall **24** of the insert pocket, with a portion of a given side surface corner 15 section **80** located in the first recessed region **44**. The retaining screw **22** is then placed in the through bore **88** of the cutting insert and threadingly engaged with the threaded bore **38** and tightened for securely retaining the cutting insert in the insert pocket **18**. When the cutting insert **20** is securely retained in the insert pocket **18** the first and second abutment surfaces **52, 56** abut the first and second side surface 20 sections **76, 78** located on either side of the given side surface corner **80**, being common to the first and second side surface sections **76, 78**, at first and second support surfaces **52', 56'**, respectively and the third abutment surface **58** abuts the cylindrical peripheral surface **84** of the protrusion **82** at a third support surface **58'**.

The pocket axis **C** of the threaded bore **38** is slightly offset with respect to 25 the insert axis **B**. This offset, i.e., eccentricity, is provided so that when the retaining screw **22** is tightened, abutment forces are exerted by the abutment surfaces **52, 56, 58** on the cutting insert providing a pre-tensioning of the cutting insert **20** in order to obtain a well defined location of the cutting insert **20** in the insert pocket **18**. Since the third abutment surface **58** lies on a surface which is concentric with the pocket

axis **C** the abutment force applied by it on the protrusion **82** of the cutting insert is directed towards the insert axis **B** and therefore cannot contribute to the rotation of the cutting insert about the insert axis **B**. The location and direction of each of the first and second abutment surfaces **52, 56** are designed so that the under working conditions net abutment force applied by these abutments surfaces to the side surface **64** of the insert does not give rise to rotation of the cutting insert about the insert axis **B**. In other words, the lines of action of the abutment forces of the first and second abutment surfaces **52, 56** operate in opposite senses about the insert axis **B** and cancel out. Hence, the present invention guarantees unique and stable 10 location of the cutting insert **20** in the insert pocket **18**.

The cutting tool **10** is particularly suitable for performing face milling by the first cutting edge **72** and ramp-down milling operations by the second cutting edge **74**. Since the first cutting edge **72** is convex and has a relatively large radius of curvature, the cutting insert **20** can cut at a relatively high feed speed at a small 15 depth of cut. The cutting forces acting on the cutting insert in such a case are directed substantially axially, therefore, it is possible to cut with a tool having a relatively long overhang without exceeding the allowed radial forces that tend to bend the tool and cause vibrations.

Although the present invention has been described to a certain degree of 20 particularity, it should be understood that various alterations and modifications could be made without departing from the spirit or scope of the invention as hereinafter claimed.

CLAIMS:

1. A cutting tool (10), having a longitudinal axis (A), the cutting tool comprises a tool body (12), having at least one mounting leg (14) formed at a front end (16) thereof, the at least one mounting leg (14) having an insert pocket (18) with a cutting insert (20) retained therein;

the insert pocket comprises a base wall (24) and first and second rear sidewall sections (40, 42) transversely directed to the base wall (24), a generally circular recess (28) extends downwardly from the base wall (24), the recess has a lower wall (30) bounded by a peripheral wall (32) extending uprightly from the lower wall (30) to the base wall (24),

the cutting insert comprises an upper surface (60), a lower surface (62) and a side surface (64) extending therebetween, the upper and side surfaces (60, 64) intersecting at a cutting edge (66), a cylindrical protrusion (82) having a cylindrical peripheral surface (84) extends downwardly from the lower surface (62) to a bottom surface (86) of the protrusion (82);

wherein the cutting insert (20) is retained in the insert pocket (18) with first, second and third abutment surfaces (52, 56, 58) of the insert pocket (18) abutting the cutting insert (20), where the first abutment surface (52) is located on the first rear sidewall section (40) and it abuts a first support surface (52') located on the side surface (64) of the cutting insert, the second abutment surface (56) is located on the second rear sidewall section (42) and it abuts a second support surface (56') located on the side surface (64) of the cutting insert, and the third abutment surface (58) is located on the peripheral wall (32) of the recess (28) and it abuts a third support surface (58') located on the cylindrical peripheral surface (84) of the protrusion (82) of the cutting insert (20).

2. The cutting tool according to claim 1, wherein the cutting edge (66) comprises at least three cutting edge portions (68) that are separated from each other by corner cutting edges (70) and each cutting edge portion comprises a first cutting

edge (72) that extends between a second cutting edge (74) and an adjacent corner cutting edge (70).

3. The cutting tool according to claim 2, wherein the first cutting edge (72) is convex.

5 4. The cutting tool according to claim 3, wherein the second cutting edge (74) is straight.

5. The cutting tool according to claim 2, wherein the side surface (64) comprises side surface sections with a first side surface section (76) adjacent the first cutting edge (72), a second side surface section (78) adjacent the second cutting edge (74) and a side surface corner section (80) adjacent the corner cutting edge (70), each of the side surface sections extending from its associated cutting edge towards the lower surface (62).

6. The cutting tool according to claim 5, wherein the first and second rear sidewall sections (40, 42) are separated by a first recessed region (44).

15 7. The cutting tool according to claim 6, wherein the first support surface (52') and the second support surface (56') are located on either side of a common side surface corner section (80).

8. The cutting tool according to claim 7, wherein a portion of the common side surface corner section (80) is located in the first recessed region (44).

20 9. The cutting tool according to claim 4, wherein the peripheral wall (32) of the recess (28) comprises a major portion (34) having a major radius R1, and a minor portion (36) having a minor radius R2.

10. The cutting tool according to claim 9, wherein the minor radius R2 is smaller than the major radius R1.

25 11. The cutting tool according to claim 10, wherein the angular extent of the minor portion (36) is smaller than the angular extent of the major portion (34).

12. The cutting tool according to claim 11, wherein a threaded bore (38) extends downwardly from the lower wall (30) of the recess (28).

13. The cutting tool according to claim 12, wherein a through bore (88), having an insert axis (B), extends between the upper surface (60) of the cutting insert (20) and the bottom surface (86) of the protrusion (82).

5 14. The cutting tool according to claim 13, wherein a retaining screw (22) is located in the through bore (88) and threadingly engages the threaded bore (38).

15. The cutting tool according to claim 13, wherein first cutting edge (72) subtends a first angle (α) of 70° with the insert axis (B).

16. The cutting tool according to claim 15, wherein the second cutting edge (74) subtends a second angle (β) of 35° with the insert axis.

10 17. The cutting tool according to claim 16, wherein the first cutting edge (72) forms an obtuse interior third angle (γ) with the adjacent second cutting edge (74).

18. The cutting tool according to claim 17, wherein the third angle is 153° .

19. A cutting insert (20), comprising an upper surface (60), a lower surface (62) and a side surface (64) extending therebetween, the upper and side surfaces (60, 15 64) intersecting at a cutting edge (66), a cylindrical protrusion (82) having a cylindrical peripheral surface (84) extends downwardly from the lower surface (62) to a bottom surface (86) of the protrusion (82), the cutting insert having an insert axis (B) passing through the upper and bottom surfaces (60, 86);

20 the cutting edge (66) comprises at least three cutting edge portions (68) that are separated from each other by corner cutting edges (70) and each cutting edge portion comprises a first convex cutting edge (72) that extends between a second cutting edge (74) and an adjacent corner cutting edge (70).

20. The cutting insert according to claim 19, wherein the second cutting edge (74) is straight.

25 21. The cutting insert according to claim 20, wherein first cutting edge (72) subtends a first angle (α) of 70° with the insert axis (B).

22. The cutting insert according to claim 21, wherein the second cutting edge (74) subtends a second angle (β) of 35° with the insert axis (B).

23. The cutting insert according to claim 22, wherein the first cutting edge (72) forms therewith an obtuse interior third angle (γ) with the adjacent second cutting edge (74).

24. The cutting insert according to claim 23, wherein the third angle is 153° .

5 25. The cutting insert according to claim 24, wherein a through bore (88), having as axis the insert axis (B), extends between the upper surface (60) of the cutting insert (20) and the bottom surface (86) of the protrusion (82).

1/4

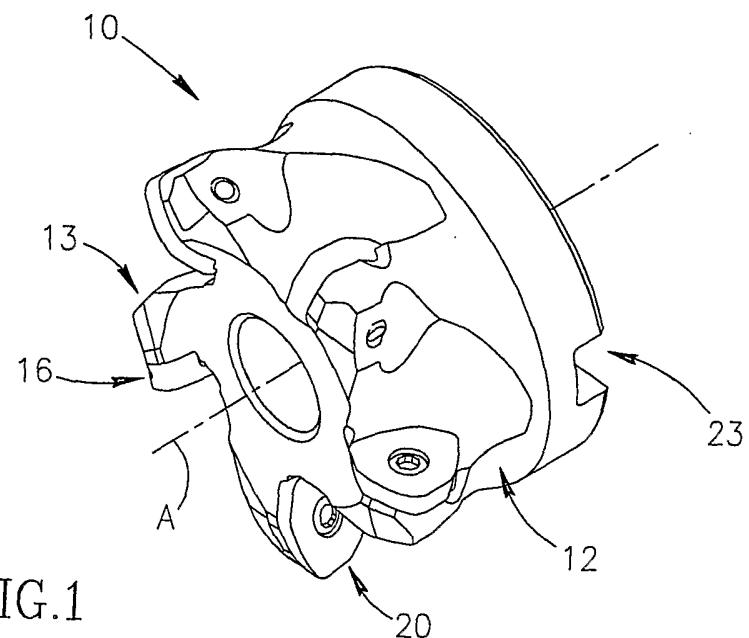


FIG.1

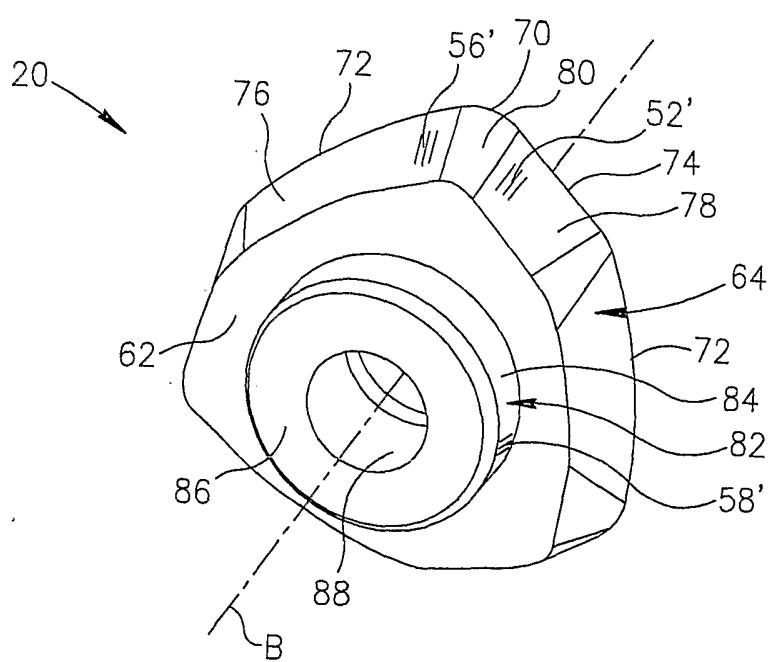


FIG.2

2/4

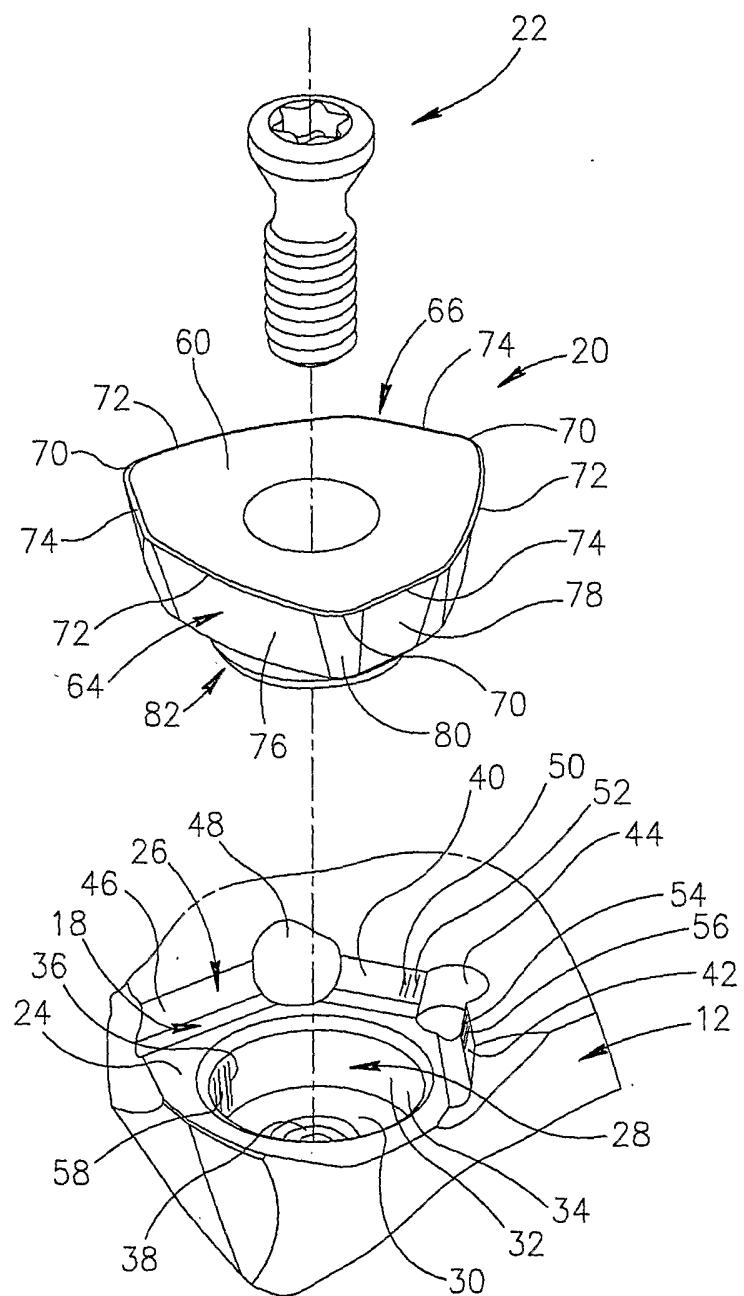


FIG. 3

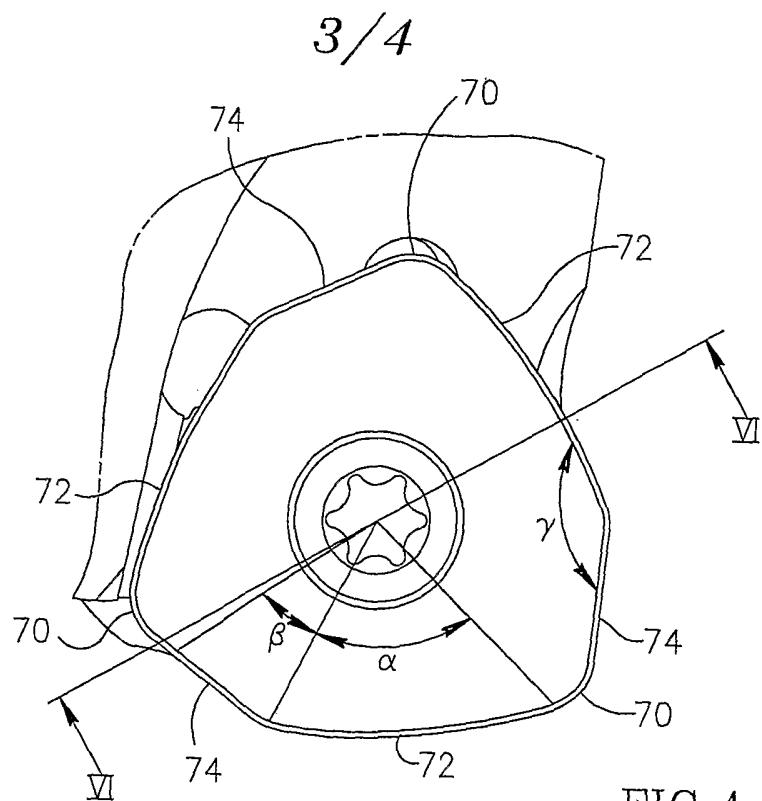


FIG. 4

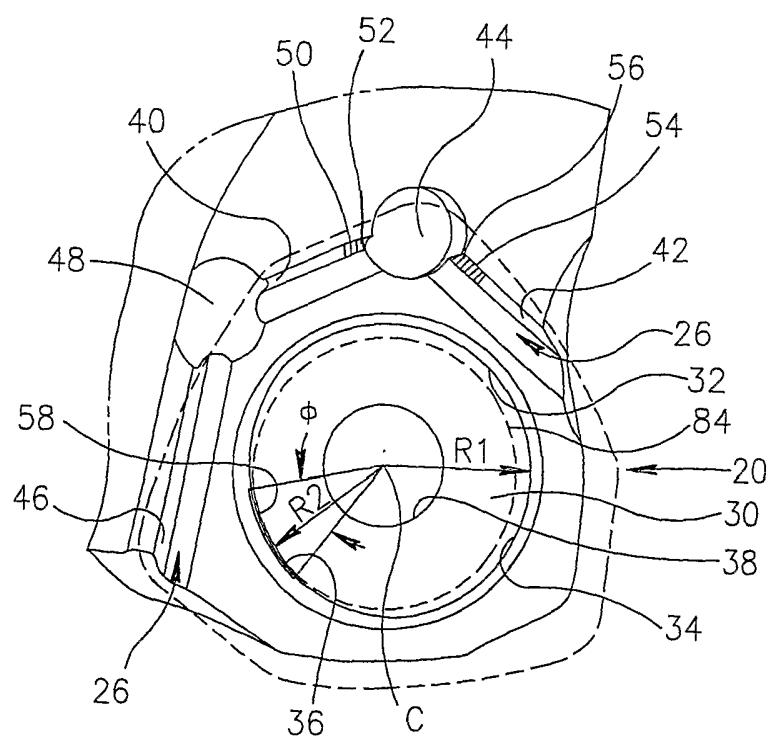


FIG.5

4/4

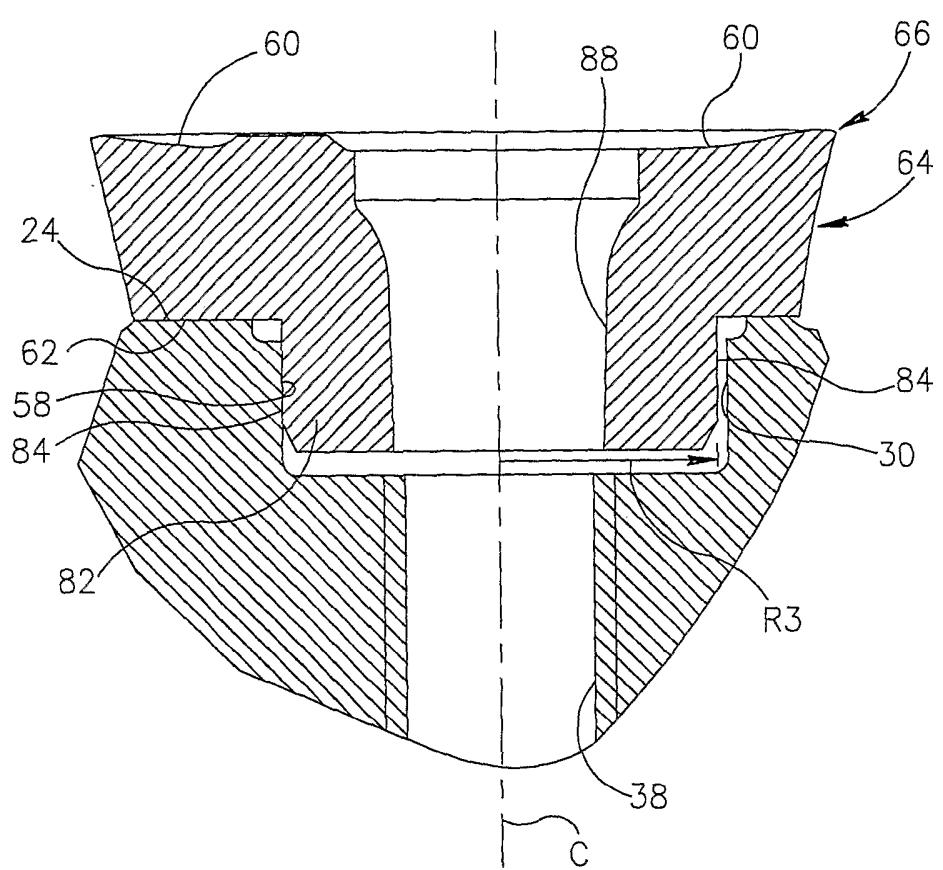


FIG.6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 02/00793

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B23C5/20 B23C5/22 B23C5/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B23C B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 14, 5 March 2001 (2001-03-05) & JP 2000 308908 A (TOSHIBA TUNGALOY CO LTD), 7 November 2000 (2000-11-07) abstract & DE 100 52 963 A (TOSHIBA TUNGALOY CO LTD.) 16 May 2002 (2002-05-16) paragraph '0026! figures 2,3A ----	1-4, 19-25
Y	DE 680 231 C (ELEK SCHE UNTERNEHMUNGEN AKT G) 24 August 1939 (1939-08-24) page 2, line 76 - line 84 figure 5 ----	1-4, 19-25
A	----	12-14 -/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

4 February 2003

13/02/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fiorani, G

INTERNATIONAL SEARCH REPORT

Internal	Application No
PCT/IL 02/00793	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 1 020 029 A (UDDEHOLMS AB) 16 February 1966 (1966-02-16) page 1, line 82 -page 2, line 11 page 2, line 61 - line 67 figure 3 ---	1-4, 15-25
A	US 4 889 456 A (KILLINGER BERND) 26 December 1989 (1989-12-26) column 2, line 67 figures ---	17,18, 23,24
A	EP 1 075 889 A (HITACHI TOOL ENG) 14 February 2001 (2001-02-14) paragraph '0023! figure 4 ---	
A	US 5 984 592 A (HARPER CLIVE ET AL) 16 November 1999 (1999-11-16) figure 2 ---	1,5-11
A	GB 882 482 A (FRANCIS FESSELET) 15 November 1961 (1961-11-15) page 1, line 65 - line 73 figures 3,4 -----	1-4, 19-25

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/IL 02/00793

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
JP 2000308908	A 07-11-2000	DE	10052963 A1	16-05-2002
DE 680231	C 24-08-1939	NONE		
GB 1020029	A 16-02-1966	NONE		
US 4889456	A 26-12-1989	DE AT AT CH ES FR GB IT JP JP SE SE	8800929 U1 396080 B 309988 A 677743 A5 2011941 A6 2626205 A1 2214456 A ,B 1228396 B 1234108 A 2877824 B2 469713 B 8900246 A	24-05-1989 25-05-1993 15-10-1992 28-06-1991 16-02-1990 28-07-1989 06-09-1989 14-06-1991 19-09-1989 05-04-1999 30-08-1993 24-01-1989
EP 1075889	A 14-02-2001	JP JP US EP	3317490 B2 2000005921 A 6413023 B1 1075889 A1	26-08-2002 11-01-2000 02-07-2002 14-02-2001
US 5984592	A 16-11-1999	DE DE EP GB JP WO	69619545 D1 69619545 T2 0868244 A1 2308325 A ,B 2000502958 T 9723323 A1	04-04-2002 10-10-2002 07-10-1998 25-06-1997 14-03-2000 03-07-1997
GB 882482	A 15-11-1961	CH FR LU	347058 A 1225700 A 37714 A	15-06-1960 04-07-1960