

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

(10) International Publication Number

WO 2018/011782 A1

(43) International Publication Date  
18 January 2018 (18.01.2018)

WIPO | PCT

(51) International Patent Classification:  
B23C 5/10 (2006.01) B23C 3/12 (2006.01)  
B23C 5/20 (2006.01)Street, 35843 Haifa (IL). PETRILIN, Andrei; 53 Horev  
Street, 343402 Haifa (IL).(21) International Application Number:  
PCT/IL2017/050672(74) Agent: SAVAGE, Nicholas et al.; Iscar Patent Department,  
P.O. Box 11, 24959 Tefen (IL).(22) International Filing Date:  
18 June 2017 (18.06.2017)(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,  
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,  
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

(26) Publication Language: English

(30) Priority Data:  
15/206,562 11 July 2016 (11.07.2016) US(71) Applicant: ISCAR LTD. [IL/IL]; P.O. Box 11, 24959  
Tefen (IL).(72) Inventors: KOIFMAN, Alexander; 27 Ela Street, 25147  
Kfar Vradim (IL). PASSOV, Alexander; 13/25 Etzel

(54) Title: STAR-SHAPED CUTTING INSERT FOR A FRONT AND BACK CHAMFERING ROTARY MILLING CUTTER

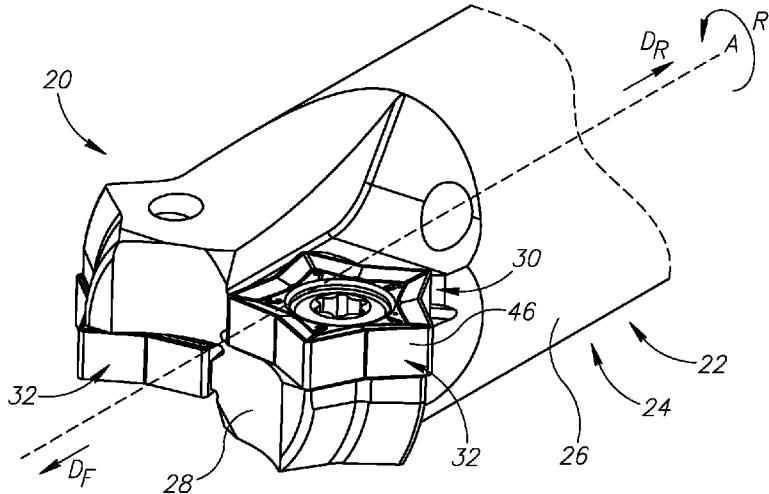


FIG. 7

(57) **Abstract:** A front and back chamfering rotary milling cutter (20) includes a cutter body (22) including an insert pocket (30) and a star-shaped indexable cutting insert (32) releasably retained in the pocket (30). The cutting insert (32) has star-shaped upper and lower surfaces (42, 44) connected by a peripheral surface (46) intersecting each of the upper and lower surfaces (42, 44). The cutting insert (32) includes a plurality of circumferentially alternating inner and outer corner portions (50, 52). A cutting portion (54) is defined by each outer corner portion (50) together with an adjacent first inner corner portion (52a) rotationally forward thereof and an adjacent second inner corner portion (52b) located rotationally rearward thereof. Each cutting portion (54) includes a front chamfering cutting edge (58a) extending from the outer corner portion (50) to the first inner corner portion (52a) and a back chamfering cutting edge (58b) extending from the outer corner portion (50) to the second inner corner portion (52b).



---

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

## STAR-SHAPED CUTTING INSERT FOR A FRONT AND BACK CHAMFERING ROTARY MILLING CUTTER

### FIELD OF THE INVENTION

5 The subject matter of the present application relates to rotary cutting tools in general and to rotary milling cutters in particular and to rotary milling cutters that can perform front and back chamfering further in particular.

### 10 BACKGROUND OF THE INVENTION

Cutting tools can be provided with cutting edges that are configured to perform, in particular, front and/or back chamfering cutting operations. It is noted that front chamfering, also known simply as chamfering, refers to beveling a top edge of a work-piece, while back 15 chamfering refers to beveling a bottom edge of a work-piece.

Some such cutting tools are milling cutting tools with chamfering cutting inserts releasably attached thereto. Examples of such cutting tools are disclosed in US 5,913,643 and US 7,713,005 B2.

Other such cutting tools are milling cutting tools that are integrally formed. Examples of 20 such cutting tools are disclosed in, for example, US 2014/0341661 A1 and US 7,441,991 B2

Yet other cutting tools are turning cutting tools, typically boring bars, with chamfering cutting inserts releasably attached thereto. Examples of such cutting tools are disclosed in, for example, and US 7,735,401 B2 and WO 98/01249.

It is an object of the subject matter of the present application to provide a new and 25 improved rotary milling cutter for front and back chamfering.

It is a further object of the subject matter of the present application to provide a rotary milling cutter having at least one chamfering cutting insert releasably attached thereto.

It is a yet further object of the subject matter of the present application to provide a rotary 30 milling cutter having at least one chamfering cutting insert that is indexable with an increased number of indexable positions.

It is a yet still further object of the subject matter of the present application to provide a rotary milling cutter that can perform non-hole chamfering and hole chamfering.

## SUMMARY OF THE INVENTION

In accordance with a first aspect of the subject matter of the present application there is

5 provided a front and back chamfering rotary milling cutter, having an axis of rotation around which the rotary milling cutter rotates in a direction of rotation, the axis of rotation extending in a forward to rearward direction, the rotary milling cutter comprising:

a cutter body comprising an insert pocket; and

10 a star-shaped cutting insert releasably retained in the insert pocket, the cutting insert comprising:

opposing insert top and bottom surfaces and an insert peripheral surface extending therebetween;

a centrally located insert axis extending through the insert top and bottom surfaces;

15 circumferentially alternating outer and inner corner portions, the inner corner portions being located closer to the insert axis than the outer corner portions; wherein

each outer corner portion together with an adjacent first inner corner portion rotationally forward thereof and an adjacent second inner corner portion located rotationally rearward thereof define a cutting portion;

20 each cutting portion comprising a cutting edge formed at the intersection of the insert top and peripheral surfaces; and

the cutting edge comprises a front chamfering cutting edge extending from the outer corner portion to the first inner corner portion and a back chamfering cutting edge extending from the outer corner portion to the second inner corner portion.

25 In accordance with a second aspect of the subject matter of the present application, there is also provided a double-sided star-shaped cutting insert, comprising

opposing insert top and bottom surfaces and an insert peripheral surface extending therebetween;

30 a centrally located insert axis extending through the insert top and bottom surfaces, the cutting insert being indexable on each of the insert top and bottom surfaces about the insert axis;

circumferentially alternating outer and inner corner portions, the inner corner portions being located closer to the insert axis than the outer corner portions;

a plurality of cutting portions, each cutting portion defined by one of said outer corner portions, an adjacent first inner corner portion rotationally forward thereof and an adjacent second inner corner portion located rotationally rearward thereof;

5 a median plane passing through the insert peripheral surface midway between the top and bottom surfaces;

a bisector plane formed at each cutting portion, each bisector plane containing the insert axis, and bisecting both an associated outer corner portion and an associated opposite inner corner portion;

10 a median axis formed at an intersection of each bisector plane and the median plane, each median axis intersecting the insert axis, and passing through both an associated outer corner portion and an associated opposite inner corner portion; wherein:

each cutting portion comprising a cutting edge formed at the intersection of the insert top and peripheral surfaces;

15 each cutting edge comprises a front chamfering cutting edge extending from the outer corner portion to the first inner corner portion and a back chamfering cutting edge extending from the outer corner portion to the second inner corner portion;

the cutting insert has a number N cutting portions and is N-way indexable on both the top and bottom surfaces, N being 3, 5, 7 or 9;

the cutting insert is mirror symmetrical about the median plane;

20 the cutting insert is mirror symmetrical about each bisector plane;

the cutting insert is 180° rotationally symmetrical about each median axis; and

the cutting insert is devoid of cutting edges which extend between top and bottom surfaces in a thickness direction of the cutting insert parallel to the insert axis.

It is understood that the above-said is a summary, and that features described hereinafter 25 may be applicable in any combination to the subject matter of the present application, for example, any of the following features may be applicable to the rotary milling cutter and/or cutting insert:

The outer and inner corner portions can be distanced at two different radii, an outer radius and an inner radius, from the insert axis, respectively.

30 The cutting insert can exhibit rotational symmetry about the insert axis.

The cutting insert can be double-sided and each cutting portion can comprise an additional cutting edge formed at the intersection of the insert bottom and peripheral surfaces.

At least one of the front and back chamfering cutting edges can be straight.

The insert pocket can be located at a forward end of the cutter body.

5 The cutting edge can comprise a curved non-operative corner edge extending between the front and back chamfering cutting edges.

The first length of the non-operative corner edge is less than 25% of the second length of either the front or back chamfering cutting edges.

10 The cutter body comprises a shank peripheral surface extending circumferentially around the axis of rotation. The front and back chamfering cutting edges of one of the cutting portions can be disposed radially outwardly with respect to the shank peripheral surface, defining an active cutting portion.

15 The front and back chamfering cutting edges of the remaining cutting portions can be disposed radially inwardly with respect to the shank peripheral surface, defining a plurality of non-active cutting portions.

In a side view of the rotary milling cutter, a bisector angle is formed with the rearward direction of the axis of rotation and a bisector of the outer corner portion of the active cutting portion. The bisector angle can be in range  $70^\circ \leq \beta \leq 110^\circ$ .

The bisector angle can be exactly  $90^\circ$ .

20 The cutting insert comprises exactly N cutting portions. N can be greater or equal to 3 and less than or equal to 9.

N can be equal to 5.

N can be an odd number.

The rotary milling cutter can comprise exactly one cutting insert.

25 The cutter body comprises a shank peripheral surface extending circumferentially around the axis of rotation. The shank peripheral surface has a shank diameter. In a side view of the rotary milling cutter, the insert axis is distanced from the axis of rotation by an axis distance. The axis distance is less than 25% of the shank diameter.

30 The shank peripheral surface has a shank diameter. The outer corner portions define an imaginary outer circle having an insert diameter. The insert diameter can be larger than the shank diameter.

In a plan view of the cutting insert, the front chamfering cutting edge on any given cutting portion and the adjacent back chamfering cutting edge rotationally forward thereof can converge towards each other in a radially inward direction with respect to the insert axis.

The front and back chamfering rotary milling cutter, has an axis of rotation around which 5 the rotary milling cutter rotates in a direction of rotation, the axis of rotation extending in a forward to rearward direction, the rotary milling cutter can comprise a cutter body comprising an insert pocket a cutting insert releasably retained in the insert pocket.

The cutter body can comprises a shank peripheral surface extending circumferentially around the axis of rotation. The front and back chamfering cutting edges of one of the cutting 10 portions can be disposed radially outwardly with respect to the shank peripheral surface, defining an active cutting portion. In a side view of the rotary milling cutter, a bisector angle is formed with the rearward direction of the axis of rotation and a bisector of outer corner portion of the active cutting portion. The bisector angle can be in range  $70^\circ \leq (\beta) \leq 110^\circ$ .

15

## BRIEF DESCRIPTION OF THE FIGURES

For a better understanding of the present application and to show how the same may be carried out in practice, reference will now be made to the accompanying drawings, in which:

**Fig. 1** is an exploded perspective view of a rotary milling cutter having one cutting insert;

20 **Fig. 2** is a perspective view of the rotary milling cutter shown in Fig. 1;

**Fig. 3** is a side view of the rotary milling cutter shown in Fig. 2;

**Fig. 4** is an end view of the rotary milling cutter shown in Fig. 2;

**Fig. 5** is a plan view of a cutting insert in accordance with the present invention;

**Fig. 6** is a perspective view of the cutting insert shown in Fig. 5; and

25 **Fig. 7** is a perspective view of another rotary milling cutter in accordance with the present invention having two cutting inserts.

It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the 30 elements may be exaggerated relative to other elements for clarity, or several physical components may be included in one functional block or element. Where considered appropriate,

reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

## DETAILED DESCRIPTION OF THE INVENTION

5 In the following description, various aspects of the subject matter of the present application will be described. For purposes of explanation, specific configurations and details are set forth in sufficient detail to provide a thorough understanding of the subject matter of the present application. However, it will also be apparent to one skilled in the art that the subject 10 matter of the present application can be practiced without the specific configurations and details presented herein.

Attention is first drawn to Figs. 1 and 2 showing a front and back chamfering rotary milling cutter **20** of the type used for milling operations, in particular for front and back chamfering of non-holes and holes, in accordance with embodiments of the subject matter of the 15 present application. It is appreciated that throughout the description non-hole chamfering refers to the beveling of a corner edge of a work-piece where the corner edge is non-circular and hole chamfering, also known as circular interpolation chamfering, refers to the beveling of a corner edge at the opening of a pre-made hole. It is noted that the rotary milling cutter **20** is also suitable for other cutting operations such as, but not limited to, side slotting (i.e. cutting a groove 20 in a work piece) and countersinking. The rotary milling cutter **20** has an axis of rotation **A**, around which the rotary milling cutter **20** rotates in a direction of rotation **R**. The axis of rotation **A** extends in a forward **D<sub>F</sub>** to rearward direction **D<sub>R</sub>**. It should be appreciated that use of the terms "forward" and "rearward" throughout the description and claims refer to a relative position in a direction of the head longitudinal axis **A** towards the left and right, respectively, in Fig. 3. In this 25 non-limiting example shown in the drawings, the rotary milling cutter **20** is a right handed rotary milling cutter.

Referring now also to Figs. 3 and 4, the rotary milling cutter **20** includes a cutter body **22**. The cutter body **22** can be typically made from steel. The cutter body **22** includes a shank portion **24** that includes a shank peripheral surface **26** that extends circumferentially around the axis of rotation **A**. The shank peripheral surface **26** can have a shank diameter **S**, as measured in a direction perpendicular to the axis of rotation **A**. The shank portion **24** includes a shank front surface **28** at a forward end of the shank portion **24** that is delimited by the shank peripheral

surface **26**. The shank portion **24** includes an insert pocket **30** designed for releasably retaining a cutting insert **32** therein. That is to say, the cutter body **22** includes the insert pocket **30**. In the description hereinafter references are made to one insert pocket **30** but it is understood that the cutter body **22** in accordance with the subject matter of the present application can include more than one insert pocket **30**. The insert pocket **30** is recessed in the shank peripheral surface **26**. As can be seen in Figs. 1 and 4, the insert pocket **30** can include a pocket base surface **34**, and a pocket peripheral surface **36** oriented substantially perpendicularly thereto and forming a partial boundary thereof. In this non-limiting example shown in the drawings, a pocket threaded bore **38** can be recessed in, and open out to, the pocket base surface **34**. The pocket threaded bore **38** is designed to threadingly receive a retaining screw **40** in order to releasably retain the cutting insert **32** in the insert pocket **30**. In accordance with some embodiments of the subject matter of the present application, the insert pocket **30** can be located at a forward end of the cutter body **22** and opens out to the shank front surface **28**.

Reference is now made to Figs. 5 and 6. The rotary milling cutter **20** includes a cutting insert **32**. In the description hereinafter references are made to one cutting insert **32** but it is understood that the rotary milling cutter **20** in accordance with the subject matter of the present application can include more than one cutting insert **32**. The cutting insert **32** can be made from cemented carbide. The cutting insert **32** includes insert top and bottom surfaces **42, 44** that oppose each other and an insert peripheral surface **46** that extends between the insert top and bottom surfaces **42, 44**. The cutting insert **32** has an insert axis **C** that extends through the insert top and bottom surfaces **42, 44**, at central portions thereof. That is to say, the insert axis **C** is centrally located. Reverting back to Fig. 4, the cutting insert **32** has an insert median plane **M** perpendicular to the insert axis **C** and passing through the insert peripheral surface **46**. The insert median plane **M** is located midway between the insert top and bottom surfaces **42, 44**.

The cutting insert **32** is a lay-down (i.e. non-tangential) insert and is releasably retained in the insert pocket **30**. It is noticed, that, in this non-limiting example shown in the drawings, the cutting insert **32** is formed with a clamping through hole **48** located in the middle thereof (see Figs. 4 and 5, for example) which opens out to the insert top and bottom faces **42, 44** and is configured for receiving a clamping member (for example, the retaining screw **40**) therethrough. The clamping through hole **48** can extend along the insert axis **C**. It is understood that alternative methods of fastening a cutting insert **32** to a cutter body **22** could be employed, for

example clamping jaws, and therefore such cutting inserts could be devoid of, or include a differently shaped, clamping through hole **48**. When the cutting insert **32** is retained in the insert pocket **30** a portion of the insert bottom surface **44** abuts a corresponding region of the pocket base surface **34** and portion(s) of the insert peripheral surface **46** abut corresponding region(s) of the pocket peripheral surface **36**.

In a plan view of the cutting insert **32** taken along the insert axis **C** (i.e. Fig. 5), the cutting insert **32** is star-shaped. The cutting insert **32** includes a number **N** of outer corner portions **50**, where **N** is a positive integer. The cutting insert **32** also includes a corresponding number (i.e. **N**) of inner corner portions **52** that alternate circumferentially with the outer corner portions **50**. Thus, each inner corner portion **52** is interposed between two adjacent outer corner portions **50**. The inner corner portions **52** are located closer to the insert axis **C** than the outer corner portions **50**. The outer corner portions **50** are interior corners and the inner corner portions **52** are exterior corners. Clearly, the star-shape of the cutting insert **32** has **N** points. In accordance with some embodiments of the subject matter of the present application, the outer corner portions **50** can define an imaginary outer circle **OC** having an outer radius **Ro** and an outer diameter **Do**. Likewise, the inner corner portions **52** can define an imaginary inner circle **IC** having an inner radius **Ri**. Thus, the outer corner portions **50** and inner corner portions **52** can be distanced at two different radii, the outer radius **Ro** and the inner radius **Ri**, from the insert axis **C** respectively, where the outer radius **Ro** is greater than the inner radius **Ri**. Each inner corner portion **52** can be located peripherally midway between two adjacent outer corner portions **50**.

The cutting insert **32** can exhibit rotational symmetry about the insert axis **C**. **N** can be greater or equal to 3 and less than or equal to 9. Beyond the maximum value in this range the benefit of increased indexability is somewhat negated by a reduction in the length of chamfer that can be achieved. Preferably, **N** can be equal to 5 so that a high level of indexability is achieved while maintaining satisfactory length of chamfer. In accordance with some embodiments of the subject matter of the present application **N** can be an odd number. Advantageously, when the cutting insert **32** has an odd number of cutting portions **50** then the region of the cutting insert **32** diametrically opposite the active cutting portion **68** is devoid of a non-active cutting portion **70**. Thus, the inert pocket **30** is not detrimentally weakened by being

configured to accommodate a non-active cutting portion **70** proximate the shank peripheral surface **26**.

Referring particularly to Fig. 6, each pair of adjacent inner corner portions **52** and the outer corner portion **50** located circumferentially therebetween define a cutting portion **54**. The 5 adjacent inner corner portion **52** rotationally forward of any given outer corner portion **50** forms a first inner corner portion **52a**. The adjacent inner corner portion **52** rotationally rearward of the given outer corner portion **50** forms a second inner corner portion **52b**. Thus, stated differently, each cutting portion **54** is formed by one of the outer corner portion **50** together with the first and second inner corner portions **52a, 52b**. It should be appreciated that use of the term "rotationally forward" and "rotationally rearward" throughout the description and claims is with respect to the 10 clockwise direction about the insert axis **C**, in a plan view of cutting insert **32**. Clearly, the number of cutting portions **54** corresponds to the number of outer corner portions **50** (i.e.  $N$ ).

In a plan view of the cutting insert **32** (i.e. Fig. 5), the insert peripheral surface **36** on each cutting portion **54** includes a rotationally forward peripheral surface **56a** and a rotationally 15 rearward peripheral surface **56b**. The rotationally forward and rearward peripheral surfaces **56a, 56b** are separated by the outer corner portion **50**.

Each cutting portion **54** includes a cutting edge **58** formed at the intersection of the insert top and peripheral surfaces **42, 46**. The cutting edge **58** includes a front chamfering cutting edge **58a** that extends from the outer corner portion **50** to the first inner corner portion **52a**. The 20 cutting edge **58** includes a back chamfering cutting edge **58b** that extends from the outer corner portion **50** to the second inner corner portion **52b**. Thus, the front and back chamfering cutting edges **58a, 58b** are formed on opposite sides of one of the outer corner portion **50**. The portion of the insert top surface **42** adjacent the front and back cutting edges and extending away therefrom act as rake surfaces **62**. The portion of the insert peripheral surface **46** adjacent the 25 front and back cutting edges and extending away therefrom act as relief surfaces **64**. In accordance with some embodiments of the subject matter of the present application, each cutting edge **58** can include a non-operative corner edge **66** extending between the front and back chamfering cutting edges **58a, 58b** that is not designed for cutting operations. That is to say, the front and back chamfering cutting edges **58a, 58b** can be separated by the non-operative corner 30 edge **66**. The non-operative corner edge **66** can be located at the outer portion **50**. The non-operative corner edge **66** is not designed or required to perform any cutting. Referring to Fig. 5,

the non-operative corner edge **66** has a first length **L1**. The front and back chamfering cutting edges **58a, 58b** can have a second length **L2**. The first length **L1** can be less than 25% of the second length **L2**. The non-operative corner edge **66** can be curved and optionally have a radius of curvature. At least one of the front and back chamfering cutting edges **58a, 58b** can be 5 straight. Preferably, both can be straight. In such a configuration, the cutting portions **54** can have a triangular shape in a plan view of the cutting insert **32**. In a plan view of the cutting insert **32**, the front chamfering cutting edge **58a** on any given cutting portion **54** and the adjacent back chamfering cutting edge **58b** rotationally forward thereof (i.e. on a different cutting portion **54**) can converge towards each other in a radially inward direction with respect to the insert axis **C**. 10 Thus, said front and back chamfering cutting edge **58a, 58b** can define an exterior angle that is less than 180°.

In accordance with some embodiments of the subject matter of the present application, the cutting insert **32** can be double-sided. That is to say, each cutting portion **54** can include an additional cutting edge **58** formed at the intersection of the insert bottom and peripheral surfaces 15 **44, 46**. Thus, the cutting insert **32** can be reversed so that the insert top surface **42** becomes the insert bottom surface **44** and vice versa, thereby doubling the number of cutting edges on the cutting insert **32**. When the cutting insert **32** is double-sided it can be mirror symmetrical about the insert median plane **M**.

In some embodiments, in a plan view of the insert, each of the cutting portions **54** has a 20 bisector plane **PS** which contains the insert axis **C**, and bisects both an associated outer corner portion **50** and an associated opposite inner corner portion **52**. Thus, in a plan view, the insert may be mirror symmetrical about each of the bisector planes **PS**. Each bisector plane **PS** intersects the median plane **M** at a median axis **AS** which intersects the insert axis **C**, and passes through both an associated outer corner portion **50** and an associated opposite inner corner portion **52**. Thus, a double-sided insert may have 180° rotational symmetry about each median 25 axis **AS**. And in a double-sided embodiment where **N** = 5, as seen in Figs. 5 and 6, the insert may have five cutting portions **54**, be five-way indexable on each of the top and bottom surfaces **42, 44**, mirror symmetrical about the median plane **M**, mirror symmetrical about each of the **N** = 5 bisector planes **PS**, and 180° rotational symmetrical about each of the **N** = 5 median 30 axes. Furthermore, and as seen in Fig. 6, such an insert may also be devoid of cutting edges

which extend between the top and bottom surfaces **42**, **44** in a thickness direction of the insert parallel to the insert axis **C**.

Referring back to Fig. 3, in accordance with some embodiments of the subject matter of the present application, any given cutting insert **32** is oriented such that the front and back 5 chamfering cutting edges **58a**, **58b** of one of the cutting portions **54** can be disposed radially outwardly with respect to the shank peripheral surface **26**, defining an active cutting portion **68**. By virtue of such a configuration, the shank peripheral surface **26** does not interfere with the work-piece when the rotary milling cutter **20** is performing chamfering cutting operations. For 10 said given cutting insert **32**, the front and back chamfering cutting edges **58a**, **58b** of the remaining cutting portions **54** can be disposed radially inwardly with respect to the shank peripheral surface **26**, defining a plurality of non-active cutting portions **70**. By virtue of such a configuration, the non-active cutting portions **70** do not interfere with the work-piece when the rotary milling cutter **20** is performing metal cutting operations. It is noted that the active cutting portion **68** is the most radially outward of all the cutting portions **54**.

15 The cutting insert **32** can be indexed by rotating the cutting insert **32** about the insert axis **C** so that one of the non-active cutting portions **70** becomes the active cutting portion **68**. It is noted that, unlike known milling cutters that have trigon and square shaped cutting inserts that can perform front and back chamfering, in such indexing a back chamfering cutting edge does not become a front chamfering cutting edge or vice versa.

20 Referring back to Fig. 3, in a side view of the rotary milling cutter **20**, the front chamfering cutting edge **58a** of the active cutting portion **68** is inclined towards the axis of rotation **A** in the forward direction **D<sub>F</sub>**, thus allowing the front chamfering cutting edge **58a** to perform front chamfering. Similarly, the back chamfering cutting edge **58b** of the active cutting portion **68** is inclined towards the axis of rotation **A** in the rearward direction **D<sub>R</sub>**, thus allowing 25 the back chamfering cutting edge **58b** to perform back chamfering. By such a configuration, any given cutting portion **54** can perform front and back chamfering cutting operations, and by virtue thereof the rotary milling cutter can perform side slotting.

30 Moreover, the front and back chamfering cutting edges **58a**, **58b** of the active cutting portion **68** form a corner angle **α** having a bisector **B** that forms a bisector angle **β** with the rearward direction **D<sub>R</sub>** of the axis of rotation **A**. That is to say, the bisector angle **β** is formed with the rearward direction **D<sub>R</sub>** of the axis of rotation **A** and the outer corner portion **50** of the

active cutting portion **68**. It is understood that the bisector **B** of corner angle **α** is coincident with one of the aforementioned bisector planes **PS**. It should also be appreciated that use of the term "side view of the rotary milling cutter" throughout the description and claims refer to a side view of the rotary milling cutter **20**, as viewed in a direction parallel to the insert axis **C** of one of the cutting inserts **32**, as shown in Fig. 3, for example. In accordance with some embodiments of the subject matter of the present application, and the bisector angle **β** can be in range  $70^\circ \leq \beta \leq 110^\circ$ . Preferably, the bisector angle **β** can be exactly  $90^\circ$ .

In accordance with some embodiments of the subject matter of the present application, the rotary milling cutter **20** can include exactly one cutting insert **32**. In a side view of the rotary milling cutter **20** the insert axis **C** is distanced from the axis of rotation **A** by an axis distance **D**. The axis distance **D** can be less than 25% of the shank diameter **S** (where the insert axis **C** is on the same side of the axis of rotation **A** as the active cutting portion **68**). This allows larger cutting inserts **32** to be retained in the inserts pockets **30**. For example, the outer diameter **D<sub>0</sub>** of the cutting insert **32** can be larger than the shank diameter **S** of the cutter body **22**.

Alternatively, in accordance with some other embodiments of the subject matter of the present application, the rotary milling cutter **20** can include exactly two or three cutting inserts **32**.

It should be noted that by virtue of the milling cutter **20** being a rotary cutting tool (i.e. rotating about an axis when performing a cutting operation while the work-piece is stationary, unlike, for example, turning cutting tools where the work-piece rotates about an axis) the rotary milling cutter **20** can perform hole and non-hole chamfering.

It should be further be noted that when the axis distance **D** is less than 25% of the shank diameter **S** (for rotary milling cutters **20** with one cutting insert **32**), the maximum tool dimension **D<sub>MAX</sub>** of the rotary milling cutter **20**, as measured in a plane perpendicular to the axis of rotation **A** is reduced, thus allowing the rotary milling cutter **20** to enter and back chamfer holes of smaller diameter as compared to other hole chamfering tools known in the art.

Although the subject matter of the present application has been described to a certain degree of particularity, it should be understood that various alterations and modifications could be made without departing from the spirit or scope of the invention as hereinafter claimed.

## CLAIMS

1. A front and back chamfering rotary milling cutter (20), having an axis of rotation (A) around which the rotary milling cutter (20) rotates in a direction of rotation (R), the axis of rotation (A) extending in a forward (D<sub>F</sub>) to rearward direction (D<sub>R</sub>), the rotary milling cutter (20) comprising:

a cutter body (22) comprising an insert pocket (30); and

a star-shaped cutting insert (32) releasably retained in the insert pocket (30), the cutting insert (32) comprising:

opposing insert top and bottom surfaces (42, 44) and an insert peripheral surface (46) extending therebetween;

a centrally located insert axis (C) extending through the insert top and bottom surfaces (42, 44);

circumferentially alternating outer and inner corner portions (50, 52), the inner corner portions (52) being located closer to the insert axis (C) than the outer corner portions (50); wherein

each outer corner portion (50) together with an adjacent first inner corner portion (52a) rotationally forward thereof and an adjacent second inner corner portion (52b) located rotationally rearward thereof define a cutting portion (54);

each cutting portion (54) comprising a cutting edge (58) formed at the intersection of the insert top and peripheral surfaces (42, 46); and

the cutting edge (58) comprises a front chamfering cutting edge (58a) extending from the outer corner portion (50) to the first inner corner portion (52a) and a back chamfering cutting edge (58a) extending from the outer corner portion (50) to the second inner corner portion (52b).

2. The rotary milling cutter (20) according to claim 1, wherein:

the outer and inner corner portions (50, 52) are distanced at two different radii, an outer radius (R<sub>O</sub>) and an inner radius (R<sub>I</sub>), from the insert axis (C), respectively.

3. The rotary milling cutter (20) according to claims 1 or 2, wherein the cutting insert (32) exhibits rotational symmetry about the insert axis (C).
4. The rotary milling cutter (20) according to any one of claims 1-3, wherein the cutting insert (32) is double-sided and each cutting portion (54) comprises an additional cutting edge (58) formed at the intersection of the insert bottom and peripheral surfaces (44, 46).
5. The rotary milling cutter (20) according to any one of claims 1-4, wherein at least one of the front and back chamfering cutting edges (58a, 58b) are straight.
6. The rotary milling cutter (20) according to any one of claims 1-5, wherein the insert pocket (30) is located at a forward end of the cutter body (22).
7. The rotary milling cutter (20) according to any one of claims 1-6, wherein the cutting edge (58) comprises a curved non-operative corner edge (66) extending between the front and back chamfering cutting edges (58a, 58b).
8. The rotary milling cutter (20) according to claim 7, wherein the first length (L1) of the non-operative corner edge (66) is less than 25% of the second length (L2) of either the front or back chamfering cutting edges (58a, 58b).
9. The rotary milling cutter (20) according to any one of claims 1-8, wherein:  
the cutter body (22) comprises a shank peripheral surface (26) extending circumferentially around the axis of rotation (A);  
the front and back chamfering cutting edges (58a, 58b) of one of the cutting portions (54) are disposed radially outwardly with respect to the shank peripheral surface (26), defining an active cutting portion (68).
10. The rotary milling cutter (20) according to claim 9, wherein the front and back chamfering cutting edges (58a, 58b) of the remaining cutting portions (54) are disposed radially

inwardly with respect to the shank peripheral surface (26), defining a plurality of non-active cutting portions (70).

11. The rotary milling cutter (20) according to claims 9 or 10, wherein:
  - in a side view of the rotary milling cutter (20), a bisector angle ( $\beta$ ) is formed with the rearward direction ( $D_R$ ) of the axis of rotation (A) and a bisector (B) of the outer corner portion (50) of the active cutting portion (68); and
  - the bisector angle ( $\beta$ ) is in range  $70^\circ \leq (\beta) \leq 110^\circ$ .
12. The rotary milling cutter (20) according to claim 11 wherein the bisector angle ( $\beta$ ) is exactly  $90^\circ$ .
13. The rotary milling cutter (20) according to any one of claims 1-12, wherein:
  - the cutting insert (32) comprises exactly N cutting portions (50); and
  - N is greater or equal to 3 and less than or equal to 9.
14. The rotary milling cutter (20) according to claim 13, wherein N is equal to 5.
15. The rotary milling cutter (20) according to claim 13, wherein N is an odd number.
16. The rotary milling cutter (20) according to any one of claims 1-15, wherein the rotary milling cutter (20) comprises exactly one cutting insert (32).
17. The rotary milling cutter (20) according to claim 16, wherein:
  - the cutter body (22) comprises a shank peripheral surface (26) extending circumferentially around the axis of rotation (A);
  - the shank peripheral surface (26) has a shank diameter (S);
  - in a side view of the rotary milling cutter (20), the insert axis (C) is distanced from the axis of rotation (A) by an axis distance (D); and
  - the axis distance (D) is less than 25% of the shank diameter (S).

18. The rotary milling cutter (20) according to claim 17, wherein the shank peripheral surface (26) has a shank diameter (S); the outer corner portions (50) define an imaginary outer circle (OC) having an insert diameter (ID); and the insert diameter (ID) is larger than the shank diameter (S).
19. A double-sided star-shaped cutting insert (32), comprising opposing insert top and bottom surfaces (42, 44) and an insert peripheral surface (46) extending therebetween;
  - a centrally located insert axis (C) extending through the insert top and bottom surfaces (42, 44), the cutting insert (32) being indexable on each of the insert top and bottom surfaces (42, 44) about the insert axis (C);
  - circumferentially alternating outer and inner corner portions (50, 52), the inner corner portions (52) being located closer to the insert axis (C) than the outer corner portions (50);
  - a plurality of cutting portions (54), each cutting portion (54) defined by one of said outer corner portions (50), an adjacent first inner corner portion (52a) rotationally forward thereof and an adjacent second inner corner portion (52b) located rotationally rearward thereof;
  - a median plane (M) passing through the insert peripheral surface (46) midway between the top and bottom surfaces (42, 44);
  - a bisector plane (PS) formed at each cutting portion (54), each bisector plane (PS) containing the insert axis (C), and bisecting both an associated outer corner portion (50) and an associated opposite inner corner portion (52);
  - a median axis (AS) formed at an intersection of each bisector plane (PS) and the median plane (M), each median axis (AS) intersecting the insert axis (C), and passing through both an associated outer corner portion (50) and an associated opposite inner corner portion (52); wherein:
    - each cutting portion (54) comprising a cutting edge (58) formed at the intersection of the insert top and peripheral surfaces (42, 46);
    - each cutting edge (58) comprises a front chamfering cutting edge (58a) extending from the outer corner portion (50) to the first inner corner portion (52a) and a back chamfering cutting edge (58a) extending from the outer corner portion (50) to the second inner corner portion (52b);

the cutting insert (32) has a number N cutting portions and is N-way indexable on both the top and bottom surfaces, N being 3, 5, 7 or 9;

the cutting insert (32) is mirror symmetrical about the median plane (M);

the cutting insert (32) is mirror symmetrical about each bisector plane (PS);

the cutting insert (32) is 180° rotationally symmetrical about each median axis (AS); and

the cutting insert (32) is devoid of cutting edges which extend between top and bottom surfaces (42, 44) in a thickness direction of the cutting insert (32) parallel to the insert axis (C).

20. The cutting insert (32) according to claim 19, where N is equal to 5.

21. The cutting insert (32) according to claims 19 or 20, wherein the cutting edge (58) comprises a curved non-operative corner edge (66) extending between the front and back chamfering cutting edges (58a, 58b).

22. The cutting insert (32) according to claim 21, wherein the first length (L1) of the non-operative corner edge (66) is less than 25% of the second length (L2) of either the front or back chamfering cutting edges (58a, 58b).

23. The cutting insert (32) according to any one of claims 19-22, wherein in a plan view of the cutting insert (32) the front chamfering cutting edge (58a) on any given cutting portion (54) and the adjacent back chamfering cutting edge (58b) rotationally forward thereof converge towards each other in a radially inward direction with respect to the insert axis (C).

24. A front and back chamfering rotary milling cutter (20), having an axis of rotation (A) around which the rotary milling cutter (20) rotates in a direction of rotation (R), the axis of rotation (A) extending in a forward (D<sub>F</sub>) to rearward direction (D<sub>R</sub>), the rotary milling cutter (20) comprising:

a cutter body (22) comprising an insert pocket (30); and

a cutting insert (32) in accordance with any one of claims 19-22 releasably retained in the insert pocket (30).



25. The rotary milling cutter (20) in accordance with claim 24, wherein:

the cutter body (22) comprises a shank peripheral surface (26) extending circumferentially around the axis of rotation (A);

the front and back chamfering cutting edges (58a, 58b) of one of the cutting portions (54) are disposed radially outwardly with respect to the shank peripheral surface (26), defining an active cutting portion (68); and

in a side view of the rotary milling cutter (20), a bisector angle ( $\beta$ ) is formed with the rearward direction ( $D_R$ ) of the axis of rotation (A) and a bisector (B) of outer corner portion (50) of the active cutting portion (68); and

the bisector angle ( $\beta$ ) is in range  $70^\circ \leq (\beta) \leq 110^\circ$ .

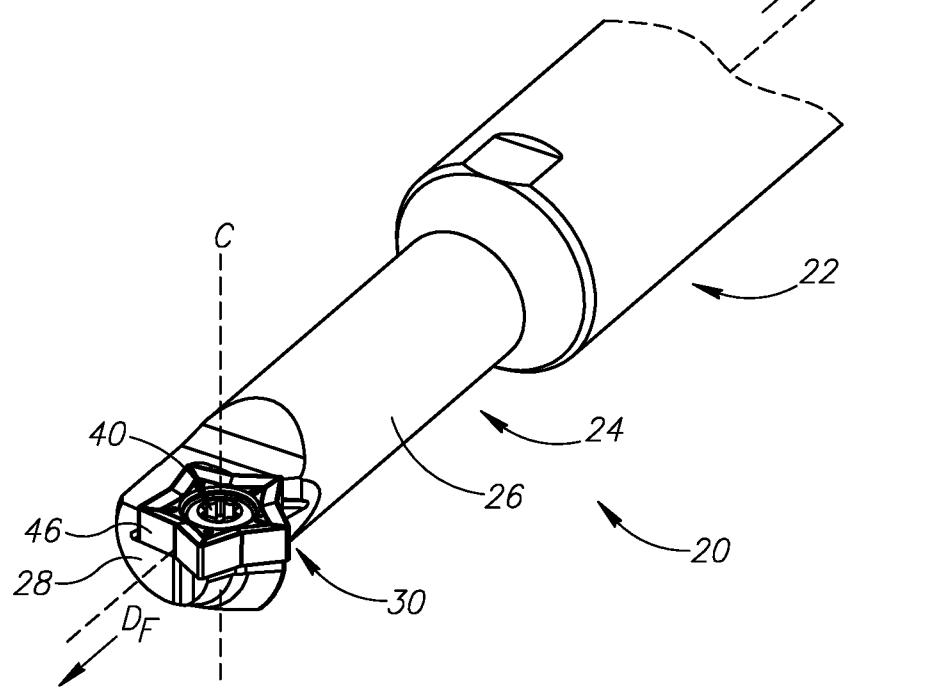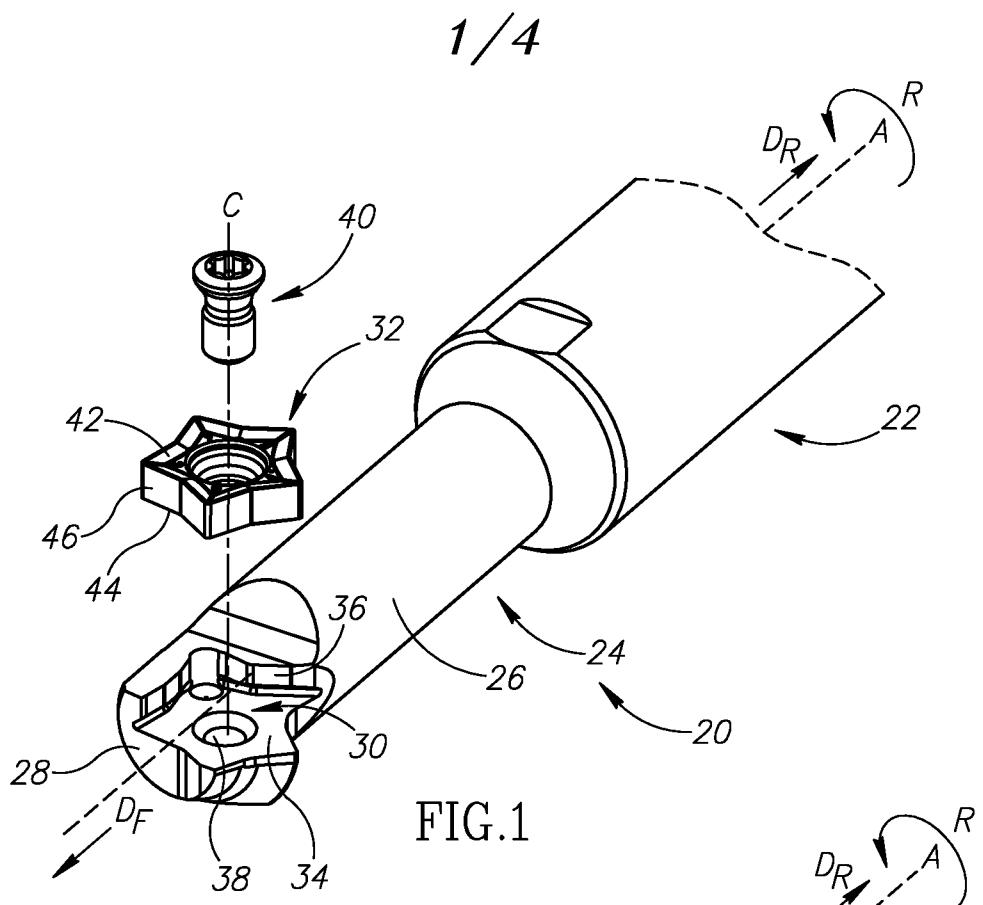

2/4

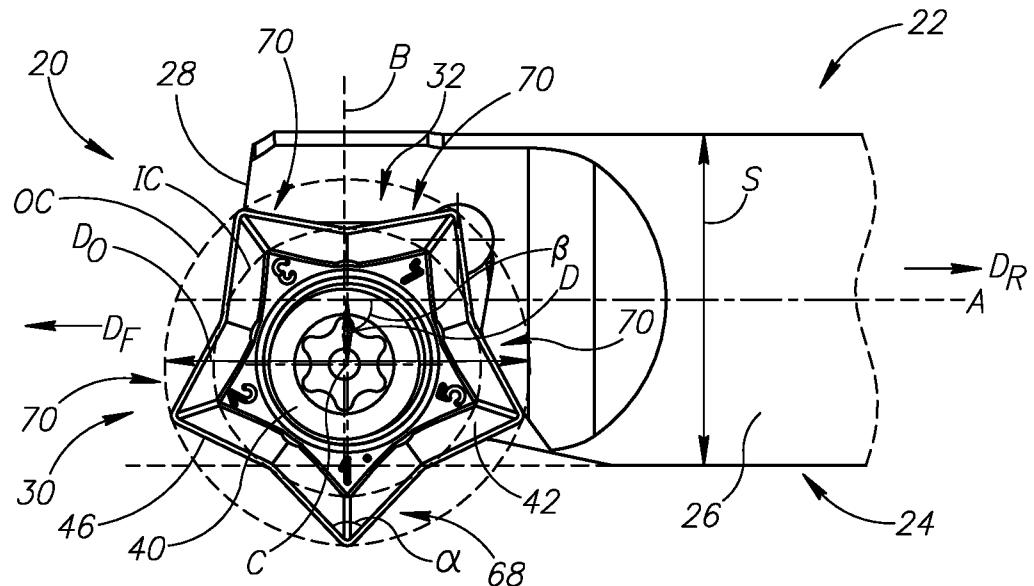


FIG.3



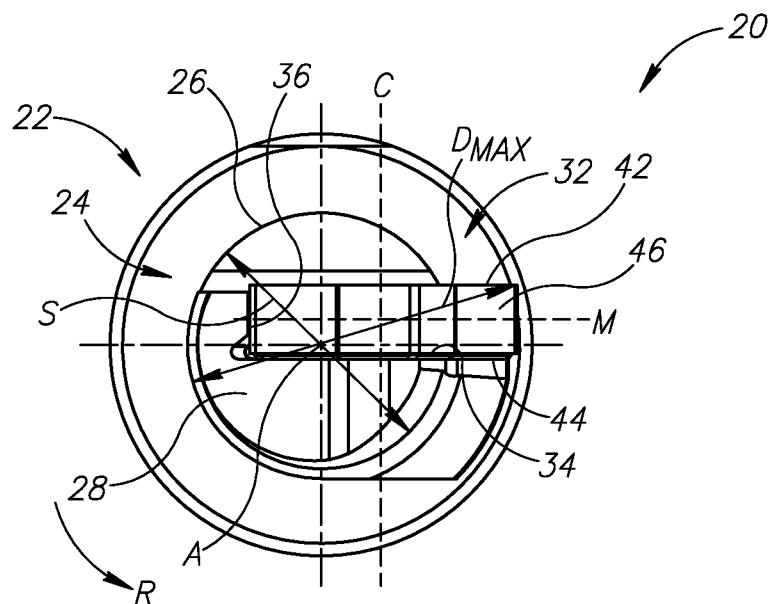


FIG. 4

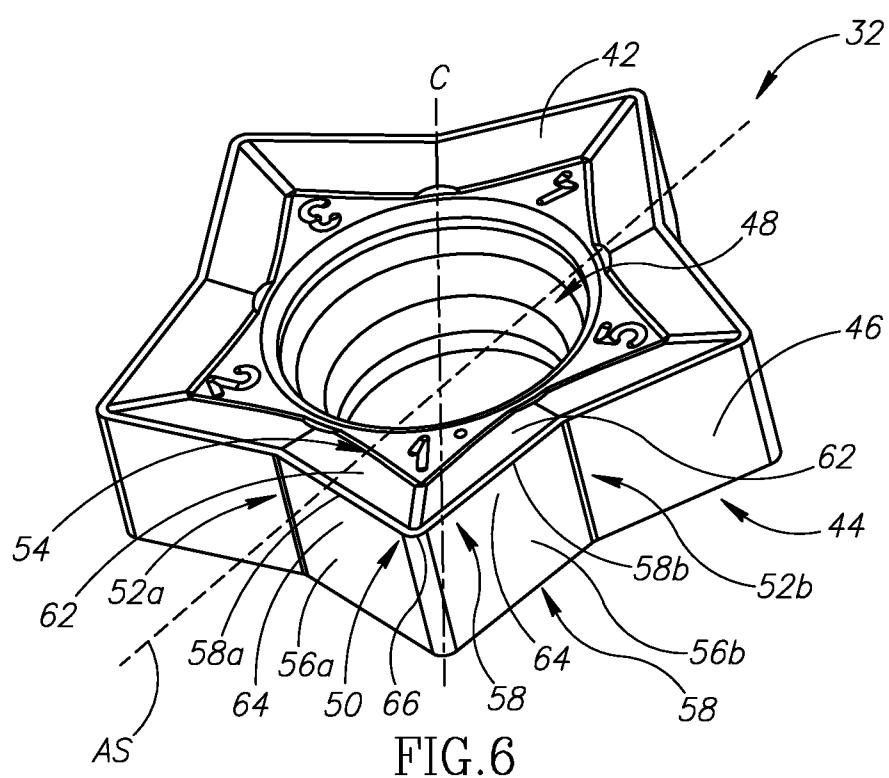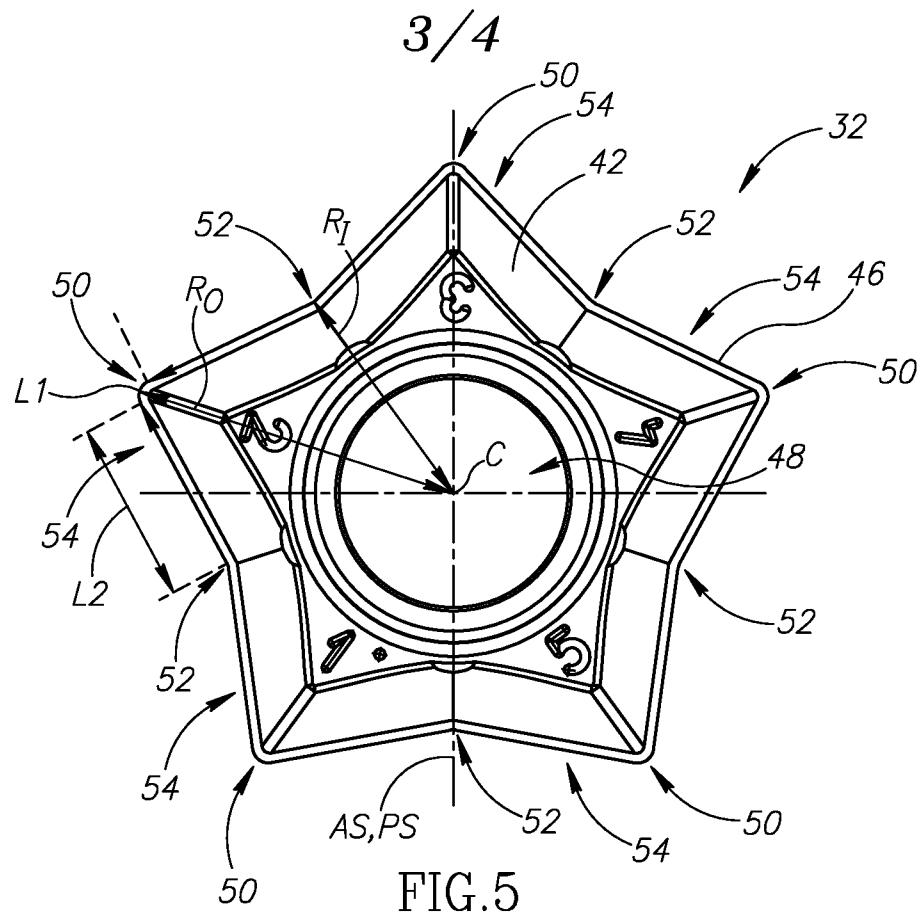

4/4

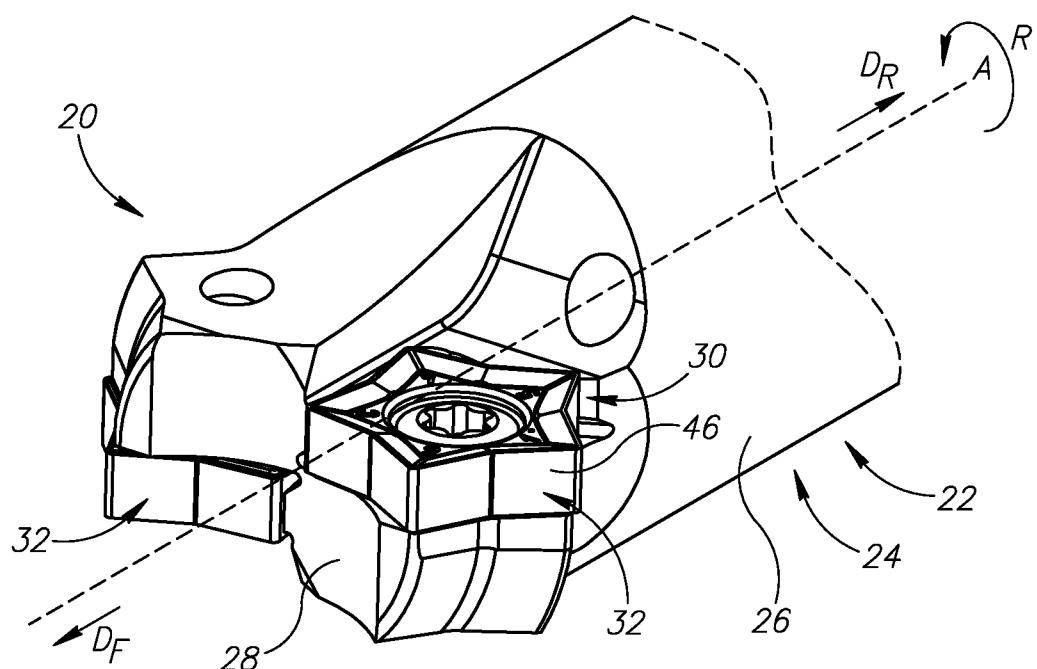


FIG. 7

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/IL2017/050672

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B23C5/10 B23C5/20 B23C3/12  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
B23C B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/243537 A1 (OGATA TATSUYA [JP]) 19 September 2013 (2013-09-19)	1-3,5-9, 11-18
Y	paragraphs [0008], [0016], [0036] -	4
A	[0056], [0064]; figures 1a,7 -----	10,19-25
Y	US 6 074 137 A (BETMAN BENJAMIN [IL] ET AL) 13 June 2000 (2000-06-13) column 4, lines 52-63; figures 8-10 -----	4
X	WO 98/01249 A1 (SANDVIK AB [SE]; GYLLENGAHM STEFAN [SE]) 15 January 1998 (1998-01-15)	19-23
A	page 1, lines 3-28 page 3, line 26 - page 6, line 10; figures 1-4 ----- -/-	1-18,24, 25

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier application or patent but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search  7 November 2017	Date of mailing of the international search report  14/11/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Rilliard, Arnaud

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/IL2017/050672

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 081 142 A (WIMET LTD) 17 February 1982 (1982-02-17) page 1, lines 1-61; figures 2,3 -----	19,21-23
A	JP 2000 071107 A (NGK SPARK PLUG CO) 7 March 2000 (2000-03-07) abstract -----	1-18,20, 24,25
A		1-25

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IL2017/050672

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 2013243537	A1 19-09-2013	CN 103221167 A EP 2626158 A1 JP 5589244 B2 JP 2012081526 A KR 20140002630 A TW 201235133 A US 2013243537 A1 WO 2012046485 A1			24-07-2013 14-08-2013 17-09-2014 26-04-2012 08-01-2014 01-09-2012 19-09-2013 12-04-2012
US 6074137	A 13-06-2000	AR 010692 A1 AT 252433 T AU 5133498 A BR 9713868 A CA 2272287 A1 CN 1239910 A DE 29721556 U1 DE 69725753 D1 DE 69725753 T2 EP 0946327 A1 HU 0003147 A2 JP 3049519 U JP 4049400 B2 JP 2001509087 A JP 2007268707 A KR 20000069339 A NO 992695 A PL 333351 A1 TR 9901108 T2 US 6074137 A WO 9824578 A1 ZA 9710959 B			28-06-2000 15-11-2003 29-06-1998 14-03-2000 11-06-1998 29-12-1999 30-04-1998 27-11-2003 13-05-2004 06-10-1999 28-04-2001 19-06-1998 20-02-2008 10-07-2001 18-10-2007 25-11-2000 03-06-1999 06-12-1999 23-08-1999 13-06-2000 11-06-1998 07-06-1999
WO 9801249	A1 15-01-1998	EP 0912281 A1 JP 2000515076 A WO 9801249 A1			06-05-1999 14-11-2000 15-01-1998
GB 2081142	A 17-02-1982	NONE			
JP 2000071107	A 07-03-2000	NONE			