

(19)



(11)

EP 4 056 459 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.02.2024 Bulletin 2024/08

(51) International Patent Classification (IPC):
B63B 25/08 (2006.01) **B63B 27/24** (2006.01)
F17C 6/00 (2006.01) **F17C 13/00** (2006.01)

(21) Application number: **20901800.1**

(52) Cooperative Patent Classification (CPC):
B63B 25/16; B63B 27/24; F17C 6/00;
F17C 2201/0109; F17C 2201/0128;
F17C 2201/035; F17C 2201/052; F17C 2201/054;
F17C 2205/013; F17C 2221/013; F17C 2223/0161;
F17C 2223/0192; F17C 2223/033;
F17C 2225/0192; F17C 2225/045; (Cont.)

(22) Date of filing: **08.09.2020**

(86) International application number:
PCT/JP2020/033866

(87) International publication number:
WO 2021/124619 (24.06.2021 Gazette 2021/25)

(54) SHIP AND METHOD OF LOADING LIQUEFIED CARBON DIOXIDE INTO SHIP

SCHIFF UND VERFAHREN ZUM LADEN VON VERFLÜSSIGTEM KOHLENDIOXID IN EIN SCHIFF

NAVIRE ET PROCÉDÉ DE CHARGEMENT DE DIOXYDE DE CARBONE LIQUÉFIÉ DANS UN NAVIRE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **19.12.2019 JP 2019228784**

(43) Date of publication of application:
14.09.2022 Bulletin 2022/37

(73) Proprietor: **Mitsubishi Shipbuilding Co., Ltd.
Yokohama-shi
Kanagawa 220-8401 (JP)**

(72) Inventors:
• **ISHIDA Toshinori**
Yokohama-shi, Kanagawa 220-8401 (JP)
• **MORIMOTO Shinsuke**
Yokohama-shi, Kanagawa 220-8401 (JP)
• **OGATA Toshio**
Yokohama-shi, Kanagawa 220-8401 (JP)

(74) Representative: **Studio Torta S.p.A.
Via Viotti, 9
10121 Torino (IT)**

(56) References cited:
WO-A1-2013/141453 WO-A1-2015/002499
WO-A1-2019/229368 JP-A- H04 297 392
JP-A- 2002 349 793 JP-A- 2008 506 899
JP-A- 2016 529 446 KR-A- 20100 125 624
KR-A- 20130 107 524 US-A- 3 962 881
US-A- 6 047 747 US-A1- 2018 313 496

- **Asai Koetsu, Ozaki Masahiko, Takakura Osamu, Suetake Yoshihiro: "Transportation System for CO2 into Deep Sea (2nd report)", JOURNAL OF THE SOCIETY OF NAVAL ARCHITECTS OF JAPAN, vol. 1992, no. 171, 1 January 1992 (1992-01-01), pages 609-619, XP055836054, JP ISSN: 0514-8499, DOI: 10.2534/jjasnaoe1968.1992.609**
- **K. Hattori, A. Omata: "Preliminary Feasibility Study on CO2 Carrier for Ship-based CCS (Phase-2 unmanned offshore facility)", FINAL REPORT, 30 November 2012 (2012-11-30), XP055836053, Retrieved from the Internet: URL:https://www.globalccsinstitute.com/archive/hub/publications/94501/preliminary-feasibility-study-co2-carrier-ship-based-ccs-unmanned-offshore-facility.pdf**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 4 056 459 B1

- SUZUKI, TAKAKAZU et al.: "Conceptual Design of C02 Transportation System for CC S", Energy Procedia, vol. 37, 2013, pages 2989-2996, XP055457386, DOI: 10.1016/j.egypro. 2013.06.185
- MITSUBISHI SHIPBUILDING CO., LTD.: "Efforts for mounting CCS on board", Efforts for mounting CCS on board Efforts for mounting CCS on board, pages 1-23, XP009537285, JP Retrieved from the Internet:
URL:<https://www.mlit.go.jp/common/001302148.pdf>

(52) Cooperative Patent Classification (CPC): (Cont.)
F17C 2225/047; F17C 2227/04; F17C 2250/032;
F17C 2250/0408; F17C 2250/043; F17C 2260/026;
F17C 2270/0105

Description

Technical Field

[0001] The present disclosure relates to a ship and a method of loading liquefied carbon dioxide into a ship.

[0002] This application claims the right of priority based on Japanese Patent Application No. 2019-228784 filed with the Japan Patent Office on December 19, 2019.

Background Art

[0003] PTL 1 discloses loading a liquefied gas such as LNG (Liquefied Natural Gas) into a tank through a pipe led from the vicinity of a top portion of the tank to the vicinity of a bottom portion of the tank.

Citation List

Patent Literature

[0004]

[PTL 1] Japanese Patent No. 5769445

[PTL 2] WO 2013/141453 A1

[PTL 3] WO 2015/002499 A1

Summary of Invention

Technical Problem

[0005] Incidentally, there is a demand for carrying liquefied carbon dioxide by using a tank as in PTL 1. In the liquefied carbon dioxide, the pressure of a triple point (hereinafter referred to as triple point pressure) at which a gas phase, a liquid phase, and a solid phase coexist is higher than the triple point pressure of LNG or LPG. Therefore, the triple point pressure becomes close to the operating pressure of the tank. In a case where the liquefied carbon dioxide is contained in the tank, for the following reasons, there is a possibility that the liquefied carbon dioxide may be solidified to generate dry ice.

[0006] In the tank of PTL 1, a lower end of a loading pipe, which is open in the tank, is disposed at a lower portion in the tank. With such disposition, the vicinity of the opening of the loading pipe is pressurized with an increase in liquid head. Therefore, flash evaporation of the liquefied gas discharged from the opening of the loading pipe can be suppressed. However, in a pipe top portion disposed at the highest position of the loading pipe, the pressure of the liquefied carbon dioxide inside is reduced by the amount corresponds to the height difference between the liquid level of the liquefied carbon dioxide in the tank and the pipe top portion with respect to the pressure of the liquefied carbon dioxide at the pipe lower end.

[0007] As a result, depending on a tank operating pressure, the pressure of the liquefied carbon dioxide be-

comes equal to or lower than the triple point pressure in the pipe top portion of the loading pipe where the pressure of the liquefied carbon dioxide becomes the lowest, or the liquefied carbon dioxide evaporates, and due to the evaporation latent heat thereof, the temperature of the liquefied carbon dioxide remaining without evaporating is lowered, so that there is a possibility that the liquefied carbon dioxide may be solidified in the pipe top portion of the loading pipe to generate dry ice.

[0008] Then, in this manner, if dry ice is generated in the loading pipe, the flow of the liquefied carbon dioxide in the loading pipe is obstructed, so that there is a possibility that the operation of the tank may be affected.

[0009] The present disclosure has been made in order to solve the above problem, and has an object to provide a ship and a method of loading liquefied carbon dioxide into a ship, in which it is possible to suppress the generation of dry ice in a loading pipe and smoothly perform the operation of a tank.

Solution to Problem

[0010] In order to solve the above problem, a ship according to the present disclosure includes a hull, a tank, and a loading pipe. The hull has a pair of broadsides. The tank is provided in the hull. The tank is capable of storing liquefied carbon dioxide. The loading pipe loads liquefied carbon dioxide that is supplied from an outside of the ship into the tank. The loading pipe includes a transport pipe, an upper loading pipe, a lower loading pipe, a first on-off valve, and a second on-off valve. The transport pipe has a connection part for connection with the outside of the ship. The upper loading pipe branches off and extends from the transport pipe. The upper loading pipe is open to an upper portion in the tank. The lower loading pipe branches off and extends from the transport pipe. The lower loading pipe is open to a lower portion in the tank. The first on-off valve is provided in the upper loading pipe. The second on-off valve is provided in the lower loading pipe.

[0011] A method of loading liquefied carbon dioxide into a ship according to the present disclosure is a method of loading liquefied carbon dioxide into the ship described above. The method of loading liquefied carbon dioxide into a ship includes: a step of opening the first on-off valve to load the liquefied carbon dioxide into the tank through the upper loading pipe; and a step of closing the first on-off valve and opening the second on-off valve to load the liquefied carbon dioxide into the tank through the lower loading pipe, after a liquid level of the liquefied carbon dioxide in the tank has reached a switching level set to be higher than an opening of the lower loading pipe.

Advantageous Effects of Invention

[0012] According to the ship and the method of loading liquefied carbon dioxide into a ship of the present disclosure, it is possible to suppress the generation of dry ice

in a loading pipe and smoothly perform the operation of a tank.

Brief Description of Drawings

[0013]

Fig. 1 is a plan view showing a schematic configuration of a ship according to an embodiment of the present disclosure.

Fig. 2 is a side sectional view showing a tank and a loading pipe provided in the ship according to the embodiment of the present disclosure.

Fig. 3 is a side sectional view showing a state where liquefied carbon dioxide is loaded into a tank from an upper loading pipe, in the ship according to the embodiment of the present disclosure.

Fig. 4 is a side sectional view showing a state where liquefied carbon dioxide is loaded into a tank from a spray pipe, in the ship according to the embodiment of the present disclosure.

Fig. 5 is a diagram showing a hardware configuration of a control device provided on the ship according to the embodiment of the present disclosure.

Fig. 6 is a functional block diagram of the control device provided on the ship according to the embodiment of the present disclosure.

Fig. 7 is a flowchart showing procedure of a method of loading liquefied carbon dioxide into a ship according to the embodiment of the present disclosure.

Fig. 8 is a flowchart showing procedure of processing that is performed by the control device in order to execute the method of loading liquefied carbon dioxide into a ship according to the embodiment of the present disclosure.

Fig. 9 is a side sectional view showing a tank and a loading pipe provided in a ship according to a modification example the embodiment of the present disclosure. Description of Embodiments

[0014] Hereinafter, a ship according to an embodiment of the present disclosure will be described with reference to Figs. 1 and 2.

(Hull Composition of Ship)

[0015] A ship 1 of an embodiment of the present disclosure carries liquefied carbon dioxide or various liquefied gases including liquefied carbon dioxide. As shown in Figs. 1 and 2, the ship 1 includes at least a hull 2, a tank 21, and a loading pipe 30. In this embodiment, a case of carrying liquefied carbon dioxide will be described as an example.

(Configuration of Hull)

[0016] As shown in Fig. 1, the hull 2 has a pair of broadsides 3A and 3B forming an outer shell thereof, a ship

bottom (not shown), and an exposure deck 5. The broadsides 3A and 3B are provided with a pair of broadside outer plates forming the left and right broadsides respectively. The ship bottom (not shown) is provided with a ship bottom outer plate connecting the broadsides 3A and 3B. Due to the pair of broadsides 3A and 3B and the ship bottom (not shown), the outer shell of the hull 2 has a U-shape in a cross-section orthogonal to a bow-stern direction Da. The exposure deck 5 is an all-deck that is exposed to the outside. In the hull 2, a superstructure 7 having an accommodation space is formed on the exposure deck 5 on the stern 2b side.

[0017] In the hull 2, a tank system storage compartment (a hold) 8 is formed on the bow 2a side with respect to the superstructure (the accommodation space) 7. The tank system storage compartment 8 is a closed compartment that is recessed toward the ship bottom (not shown) below the exposure deck 5 and protrudes upward or has the exposure deck 5 as a ceiling.

(Configuration of Tank)

[0018] A plurality of tanks 21 are provided in the tank system storage compartment 8. In the tank 21 in this embodiment, for example, a total of seven tanks 21 are provided in the tank system storage compartment 8. The layout and the number of tanks 21 installed in the tank system storage compartment 8 are not limited in any way. In this embodiment, each tank 21 has, for example, a cylindrical shape extending in the horizontal direction (specifically, the bow-stern direction). The tank 21 contains liquefied carbon dioxide L inside. The tank 21 is not limited to a cylindrical shape and may have a spherical shape.

(Configuration of Loading Pipe)

[0019] The loading pipe 30 loads the liquefied carbon dioxide L, which is supplied from the outside of the ship, such as a liquefied carbon dioxide supply facility on land or a bunker ship, into the tank 21.

[0020] As shown in Fig. 2, the loading pipe 30 includes a transport pipe 31, an upper loading pipe 32, a lower loading pipe 33, a first on-off valve 34, a second on-off valve 35, and a spray pipe 38.

[0021] The loading pipe 30 has a connection part 31j provided at a bunker station or the like and connected to the outside of the ship. The connection part 31j has, for example, a flange or the like, and is provided on at least one (for example, the broadside 3A) of the broadsides 3A and 3B. A supply pipe (not shown) for supplying liquefied carbon dioxide from the outside of the ship, such as a liquefied carbon dioxide supply facility or a bunker ship, can be mounted to or dismounted from the connection part 31j. The loading pipe 30 is mainly provided in the hull 2.

[0022] The upper loading pipe 32 branches off from the transport pipe 31 and reaches the inside of the tank

21. The upper loading pipe 32 of this embodiment extends downward in a ship height direction (hereinafter referred to as an up-down direction Dv) from the transport pipe 31. An opening 32a formed at a lower end of the upper loading pipe 32 is located at an upper portion in the tank 21. Here, the upper portion in the tank 21 means a region in the tank 21 above the center of the tank 21 in the up-down direction Dv. The opening 32a of the upper loading pipe 32 may be located at a height equal to or higher than a height Ha when a liquid level Lf of the liquefied carbon dioxide L is at a height corresponding to, for example, 90% of the volume of the tank 21 in the up-down direction Dv. As shown in Fig. 3, the upper loading pipe 32 supplies the liquefied carbon dioxide L into the tank 21 from the opening 32a provided at the upper portion in the tank 21.

[0023] The lower loading pipe 33 branches off from the transport pipe 31 and reaches the inside of the tank 21, similar to the upper loading pipe 32. The lower loading pipe 33 of this embodiment extends downward in the up-down direction Dv from the transport pipe 31. An opening 33a formed at a lower end of the lower loading pipe 33 is located at a lower portion in the tank 21. Here, the lower portion in the tank 21 means a region in the tank 21 below the center of the tank 21 in the up-down direction Dv. The opening 33a of the lower loading pipe 33 may be located at a height equal to or lower than a height Hb when the liquid level Lf of the liquefied carbon dioxide L is at a height corresponding to, for example, 10% of the volume of the tank 21 in the up-down direction Dv. As shown in Fig. 2, the lower loading pipe 33 supplies the liquefied carbon dioxide L into the tank 21 from the opening 33a provided at the lower portion in the tank 21.

[0024] The first on-off valve 34 is provided in the upper loading pipe 32. The first on-off valve 34 opens and closes the flow path in the upper loading pipe 32.

[0025] The second on-off valve 35 is provided in the lower loading pipe 33. The second on-off valve 35 opens and closes the flow path in the lower loading pipe 33.

[0026] Each of the first on-off valve 34 and the second on-off valve 35 can be switched between an opened state and a closed state, based on a control signal that is output from a control device 60 (described later).

[0027] The spray pipe 38 branches off from the transport pipe 31 and reaches the inside of the tank 21. The spray pipe 38 has a plurality of injection holes (not shown). The injection holes of the spray pipe 38 exemplified in this embodiment are disposed on the lower side with respect to the opening 32a of the upper loading pipe 32 and the lower side with respect to the opening 33a of the lower loading pipe 33 in the up-down direction Dv. As shown in Fig. 4, the spray pipe 38 injects the liquefied carbon dioxide L that is supplied through the transport pipe 31 into the tank 21 from the plurality of injection holes. The spray pipe 38 is provided with an on-off valve 39 for opening and closing the flow path from the transport pipe 31 to the spray pipe 38 on the side close to the transport pipe 31. The on-off valve 39 can be switched

between an opened state and a closed state, based on a control signal that is output from the control device 60 (described later).

[0028] The ship 1 further includes a liquid level detection unit 51, a pressure detection unit 52, and the control device 60.

(Configurations of Liquid Level Detection Unit and Pressure Detection Unit)

[0029] The liquid level detection unit 51 detects the liquid level Lf of the liquefied carbon dioxide L that is stored in the tank 21. The liquid level detection unit 51 outputs a detection signal of the detected liquid level Lf to the control device 60.

[0030] The pressure detection unit 52 detects a pressure P of the liquefied carbon dioxide L in the loading pipe 30. The pressure detection unit 52 is provided, for example, at a top portion 30t, which is the highest position of the loading pipe 30. The pressure detection unit 52 detects the pressure P of the liquefied carbon dioxide L in the loading pipe 30 at the top portion 30t. The pressure detection unit 52 outputs a detection signal of the detected pressure P to the control device 60.

(Configuration of Control Device)

[0031] The control device 60 controls the opening/closing operations of the first on-off valve 34 and the second on-off valve 35, based on the liquid level Lf of the liquefied carbon dioxide L in the tank 21, which is detected by the liquid level detection unit 51, when the liquefied carbon dioxide L is loaded into the tank 21.

(Hardware Configuration Diagram)

[0032] As shown in Fig. 5, the control device 60 is a computer that includes a CPU 61 (Central Processing Unit), a ROM 62 (Read Only Memory), a RAM 63 (Random Access Memory), an HDD 64 (Hard Disk Drive), and a signal receiving module 65. The detection signal from the liquid level detection unit 51 and the detection signal from the pressure detection unit 52 are input to the signal receiving module 65.

(Functional Block Diagram)

[0033] As shown in Fig. 6, the control device 60 realizes a functional configuration of each of a signal input unit 70, an on-off valve control unit 71, a liquid level determination unit 72, a pressure determination unit 73, and an output unit 74 by executing, for example, a program stored in the own device in advance by the CPU 61.

[0034] The signal input unit 70 receives the detection signal from the liquid level detection unit 51 and the detection signal from the pressure detection unit 52 by using the signal receiving module 65.

[0035] The liquid level determination unit 72 deter-

mines whether or not the liquid level L_f of the liquefied carbon dioxide L in the tank 21 detected by the liquid level detection unit 51 has reached a switching level L_s (refer to Figs. 2 and 3) set in advance to be higher than the opening 33a of the lower loading pipe 33. As the switching level L_s , for example, the liquid level L_f in the range where the pressure P of the liquefied carbon dioxide L in the loading pipe 30 at the top portion 30t becomes higher than the triple point pressure of the liquefied carbon dioxide L when only the second on-off valve 35 of the lower loading pipe 33 is made be in an opened state is set. Further, as the switching level L_s , a lower limit or the liquid level L_f slightly higher than the lower limit, of the liquid level L_f in the range where the pressure P of the liquefied carbon dioxide L in the loading pipe 30 at the top portion 30t becomes higher than the triple point pressure of the liquefied carbon dioxide L, may be set. The switching level L_s can be obtained by, for example, an experiment, simulation, calculation, or the like.

[0036] The pressure determination unit 73 determines whether or not the pressure P of the liquefied carbon dioxide L detected by the pressure detection unit 52 has been lowered to a pressure equal to or lower than a reference pressure P_s determined in advance. Here, the reference pressure P_s is the triple point pressure of the liquefied carbon dioxide L, or a pressure higher than the triple point pressure.

[0037] The on-off valve control unit 71 controls the opening/closing operations of the first on-off valve 34, the second on-off valve 35, and the on-off valve 39.

[0038] The on-off valve control unit 71 makes the on-off valve 39 be in an opened state and the first on-off valve 34 and the second on-off valve 35 be in a closed state, prior to the loading of the liquefied carbon dioxide L into the tank 21. At the time of the start of the loading of the liquefied carbon dioxide L into the tank 21, the on-off valve control unit 71 makes the on-off valve 39 be in a closed state and the first on-off valve 34 be in an opened state. Further, after the start of the loading of the liquefied carbon dioxide L, the on-off valve control unit 71 makes the first on-off valve 34 be in a closed state and the second on-off valve 35 be in an opened state, in a case where the liquid level determination unit 72 determines that the liquid level L_f of the liquefied carbon dioxide L detected by the liquid level detection unit 51 has reached the switching level L_s . The on-off valve control unit 71 outputs a control signal for opening and closing the first on-off valve 34 and the second on-off valve 35 to the first on-off valve 34 and the second on-off valve 35 through the output unit 74. Further, the on-off valve control unit 71 makes the first on-off valve 34 be in an opened state, in a case where the pressure of the liquefied carbon dioxide L detected by the pressure detection unit 52 becomes equal to or lower than the reference pressure P_s determined in advance, when the second on-off valve 35 is made be in an opened state.

(Procedure of Method of Loading Liquefied Carbon Dioxide into Ship)

[0039] As shown in Fig. 7, a method S10 of loading the liquefied carbon dioxide L into the ship 1 according to this embodiment includes a step S11 of loading the liquefied carbon dioxide through the upper loading pipe, and a step S12 of loading the liquefied carbon dioxide through the lower loading pipe.

[0040] In the step S11 of loading the liquefied carbon dioxide through the upper loading pipe, first, only the on-off valve 39 among the first on-off valve 34, the second on-off valve 35, and the on-off valve 39 is made be in an opened state. Then, as shown in Fig. 4, the liquefied carbon dioxide L is injected from the spray pipe 38 into the tank. In this way, the inside of the tank 21 is cooled, the pressure in the tank 21 is lowered, and more liquefied carbon dioxide L can be loaded.

[0041] Thereafter, the on-off valve 39 is made be in a closed state and the first on-off valve 34 is made be in an opened state. In this way, as shown in Fig. 3, the liquefied carbon dioxide L is loaded into the tank 21 through the upper loading pipe 32. In this state, the upper loading pipe 32 is open to the upper portion in the tank 21. Therefore, the liquefied carbon dioxide L is discharged to a gas phase in the tank 21 from the opening 32a of the upper loading pipe 32. Further, a height difference Δh_1 from the top portion 30t, which is located at the highest position of the loading pipe 30, is smaller than a height difference Δh_2 between the opening 33a of the lower loading pipe 33, which is open to the lower portion in the tank 21, and the top portion 30t. Therefore, it is possible to suppress a decrease in the pressure of the liquefied carbon dioxide L in the top portion 30t of the loading pipe 30 regardless of the position of the liquid level L_f of the liquefied carbon dioxide L.

[0042] After the liquefied carbon dioxide L is loaded into the tank 21 through the upper loading pipe 32 and the liquid level L_f of the liquefied carbon dioxide L has reached the switching level L_s set to be higher than the opening 33a of the lower loading pipe 33, the processing transitions to the step S12 of loading the liquefied carbon dioxide through the lower loading pipe. In the step S12 of loading the liquefied carbon dioxide through the lower loading pipe, the first on-off valve 34 is made be in a closed state and the second on-off valve 35 is made be in an opened state. In this way, as shown in Fig. 2, the liquefied carbon dioxide L is loaded into the tank 21 through the lower loading pipe 33. In this state, the liquefied carbon dioxide L is stored to a level higher than the opening 33a of the lower loading pipe 33 (specifically, a level higher than the switching level L_s). Therefore, a pressure according to the height of the liquid level L_f (specifically, the switching level L_s or higher) of the liquefied carbon dioxide L stored in the tank 21 is applied to the liquefied carbon dioxide L in the lower loading pipe 33. In this way, the pressure of the liquefied carbon dioxide L in the top portion 30t of the loading pipe 30 is increased.

(Processing Procedure)

[0043] Next, procedure of processing for automatically executing the method of loading the liquefied carbon dioxide into the ship under the control of the control device 60 will be described.

[0044] As shown in Fig. 8, when the loading of the liquefied carbon dioxide L into the tank 21 is started, first, the control device 60 causes the on-off valve control unit 71 to make the on-off valve 39 of the spray pipe 38 be in an opened state (step S21). Then, the liquefied carbon dioxide L that is supplied from the outside of the ship is injected into the tank 21 from the spray pipe 38, and the pressure in the tank 21 is lowered.

[0045] Subsequently, the control device 60 causes the on-off valve control unit 71 to make the on-off valve 39 be in a closed state and the first on-off valve 34 be in an opened state (step S22). Then, the liquefied carbon dioxide L, which is supplied from the outside of the ship, is supplied from the upper portion in the tank 21 through the transport pipe 31 and the upper loading pipe 32. In this way, the "step S11 of loading the liquefied carbon dioxide through the upper loading pipe" is executed.

[0046] After the start of the loading of the liquefied carbon dioxide L, the liquid level determination unit 72 determines whether or not the liquid level Lf of the liquefied carbon dioxide L detected by the liquid level detection unit 51 has reached the switching level Ls set to be higher than the opening 33a of the lower loading pipe 33 (step S23). As a result of this determination, in a case where it is determined that the liquid level Lf has not reached the switching level Ls, the processing of step S23 is repeated at time intervals determined in advance. On the other hand, in a case where it is determined that the liquid level Lf has reached the switching level Ls, the processing proceeds to step S24.

[0047] In step S24, the on-off valve control unit 71 makes the first on-off valve 34 be in a closed state and the second on-off valve 35 be in an opened state. In this way, the supply of the liquefied carbon dioxide L to the tank 21 through the upper loading pipe 32 is stopped. Further, the supply of the liquefied carbon dioxide L to the tank 21 through the lower loading pipe 33 is started. In this way, the "step S12 of loading the liquefied carbon dioxide through the lower loading pipe" is executed.

[0048] After the start of the loading of the liquefied carbon dioxide L through the lower loading pipe 33, the pressure determination unit 73 determines whether or not the pressure P detected by the pressure detection unit 52, that is, the pressure P of the liquefied carbon dioxide L in the top portion 30t of the loading pipe 30 has been lowered to a pressure equal to or lower than the reference pressure Ps determined in advance (step S25). As a result, in a case where it is determined that the pressure of the liquefied carbon dioxide L has reached the reference pressure Ps, the processing proceeds to step S26.

[0049] In step S26, the on-off valve control unit 71 operates the second on-off valve 35 toward a closed state

and the first on-off valve 34 toward an opened state. At this time, the second on-off valve 35 may be operated to a fully-closed state in a short time or may be gradually closed, such as being stepwise closed for each the opening degree set in advance, for example. Similarly, the first on-off valve 34 may be operated to a fully-opened state in a short time or may be gradually opened, such as being stepwise opened for each opening degree determined in advance, for example.

[0050] In this way, for example, in a case where the pressure P of the liquefied carbon dioxide L is lowered to a pressure equal to or lower than the reference pressure Ps while the liquefied carbon dioxide L is being loaded through the lower loading pipe 33, the first on-off valve 34 is operated in an open direction. Then, as shown in Fig. 3, the liquefied carbon dioxide L is supplied into the tank 21 from the upper loading pipe 32. At this time, the opening 32a of the upper loading pipe 32 is disposed in the gas phase above the liquid level Lf of the liquefied carbon dioxide L loaded in the tank 21. The pressure of the gas phase (the operating pressure of the tank 21) is set to be higher than the reference pressure Ps. Therefore, the pressure of the liquefied carbon dioxide L in the top portion 30t of the loading pipe 30 increases.

[0051] Thereafter, the pressure determination unit 73 determines whether or not the pressure of the liquefied carbon dioxide L in the top portion 30t of the loading pipe 30, which is detected by the pressure detection unit 52, has been returned to a return pressure Pt determined in advance ($P_t > P_s$) (step S27). As a result of this determination, in a case where it is determined that the pressure of the liquefied carbon dioxide L has not reached the return pressure Pt, the loading of the liquefied carbon dioxide L from the upper loading pipe 32 is continued. On the other hand, in a case where in step S27, it is determined that the pressure of the liquefied carbon dioxide L has reached the return pressure Pt, the on-off valve control unit 71 makes the first on-off valve 34 be in a closed state and the second on-off valve 35 be in an opened state (step S28). In this way, the liquefied carbon dioxide L returns to a state of being supplied into the tank 21 from the lower loading pipe 33.

[0052] In this way, the liquefied carbon dioxide L is loaded into the tank 21, and when loading of a predetermined amount is completed, the on-off valve control unit 71 closes both the first on-off valve 34 and the second on-off valve 35 and ends the loading of the liquefied carbon dioxide L.

(Operation and Effects)

[0053] The ship 1 of the above embodiment includes the upper loading pipe 32 that is open to the upper portion in the tank 21, the lower loading pipe 33 that is open to the lower portion in the tank 21, the first on-off valve 34 provided in the upper loading pipe 32, and the second on-off valve 35 provided in the lower loading pipe 33.

[0054] In the ship 1, when the first on-off valve 34 is

made be in an opened state, the liquefied carbon dioxide L that is supplied from the outside of the ship 1 is supplied from the upper portion of the tank 21 through the transport pipe 31 and the upper loading pipe 32. Further, when the second on-off valve 35 is made be in an opened state, the liquefied carbon dioxide L that is supplied from the outside of the ship is supplied from the lower portion of the tank 21 through the transport pipe 31 and the lower loading pipe 33. Since the opening 32a of the upper loading pipe 32 is located at the upper portion in the tank 21, the height difference from the top portion 30t that is at the highest position in the loading pipe 30 is smaller than that in the opening 33a of the lower loading pipe 33 that is located at the lower portion in the tank 21. Therefore, when the liquefied carbon dioxide L is loaded by the upper loading pipe 32, it is possible to suppress a decrease in the pressure P of the liquefied carbon dioxide L at the highest position in the loading pipe 30 regardless of the liquid level Lf.

[0055] Further, since the opening 33a of the lower loading pipe 33 is located at the lower portion in the tank 21, if the liquefied carbon dioxide L is stored to a level higher than the opening 33a of the lower loading pipe 33, a pressure according to the height of the liquid level Lf of the liquefied carbon dioxide L stored in the tank 21 is applied to the liquefied carbon dioxide L in the lower loading pipe 33. Then, if the liquid level Lf reaches a position where due to a rise of the liquid level Lf, an ambient pressure of the opening 33a becomes higher than the gas phase in the tank 21, it is possible to make the liquefied carbon dioxide L flowing into the tank 21 from the opening 33a be in a pressurized state (in other words, a sub-cool state). Therefore, it is possible to suppress the occurrence of flash evaporation of the liquefied carbon dioxide L flowing into the tank 21.

[0056] In this manner, by appropriately adjusting the open/closed states of the first on-off valve 34 and the second on-off valve 35 according to the storage state or the like of the liquefied carbon dioxide L in the tank 21, it is possible to suppress a decrease in the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30. Therefore, it is possible to restrain the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 from approaching the triple point pressure. In this way, it becomes possible to suppress the generation of dry ice due to the solidification of the liquefied carbon dioxide L in the loading pipe 30 and smoothly perform the operation of the tank 21.

[0057] The ship 1 of the above embodiment further includes the control device 60 for controlling the opening/closing operations of the first on-off valve 34 and the second on-off valve 35, based on the liquid level Lf of the liquefied carbon dioxide L in the tank 21, in a case where the liquefied carbon dioxide L is loaded into the tank 21.

[0058] By controlling the opening/closing operations of the first on-off valve 34 and the second on-off valve 35 by the control device 60, based on the liquid level Lf of the liquefied carbon dioxide L in the tank 21, it is possible

to automatically suppress a decrease in the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30.

[0059] Further, in the ship 1 of the above embodiment, a configuration is made such that the control device 60 makes the second on-off valve 35 be in an opened state in a case where the liquid level Lf of the liquefied carbon dioxide L that is detected by the liquid level detection unit 51 reaches the switching level Ls set to be higher than the opening 33a of the lower loading pipe 33.

[0060] By such control of the control device 60, it is possible to load the liquefied carbon dioxide L into the tank 21 through the upper loading pipe 32 by making the first on-off valve 34 be in an opened state until the liquid level Lf of the liquefied carbon dioxide L in the tank 21 reaches the set switching level Ls. Since the upper loading pipe 32 is open to the upper portion in the tank 21, it is possible to perform the loading of the liquefied carbon dioxide L in a state of suppressing a decrease in the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30.

[0061] Further, by such control of the control device 60, it is possible to load the liquefied carbon dioxide L into the tank 21 through the lower loading pipe 33 by making the second on-off valve 35 be in an opened state in a case where the liquid level Lf of the liquefied carbon dioxide L in the tank 21 reaches the switching level Ls. At this time, since the liquefied carbon dioxide L is stored to a level higher than the switching level Ls, a pressure according to the height of the liquid level Lf of the liquefied carbon dioxide L stored in the tank 21, that is, the liquid level Lf equal to or higher than the switching level Ls, is applied to the liquefied carbon dioxide L in the lower loading pipe 33. In this way, it is possible to perform the loading of the liquefied carbon dioxide L in a state where the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 is increased.

[0062] Further, in the ship 1 of the above embodiment, a configuration is made such that the control device 60 makes the first on-off valve 34 be in an opened state in a case where the pressure P of the liquefied carbon dioxide L that is detected by the pressure detection unit 52 is equal to or lower than the reference pressure Ps determined in advance, when the second on-off valve 35 is in an opened state.

[0063] In this way, it is possible to make the first on-off valve 34 be in an opened state in a case where the pressure P of the liquefied carbon dioxide L in the loading pipe 30 is lowered to a pressure equal to or lower than the reference pressure Ps in a state where the second on-off valve 35 is made be in an opened state and the liquefied carbon dioxide L is loaded into the tank 21 through the lower loading pipe 33. Since the upper loading pipe 32 is open to the upper portion in the tank 21, it is possible to make the height difference from the highest position of the loading pipe 30 small as compared with when the liquefied carbon dioxide L is loaded through the lower loading pipe 33. In this way, it becomes possible

to increase the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30.

[0064] In the method of loading the liquefied carbon dioxide L into the ship 1 of the above embodiment, when loading the liquefied carbon dioxide L into the tank 21, first, the first on-off valve 34 is made be in an opened state and the liquefied carbon dioxide L is loaded into the tank 21 through the upper loading pipe 32. Since the upper loading pipe 32 is open to the upper portion in the tank 21, it is possible to perform the loading of the liquefied carbon dioxide L in a state of suppressing a decrease in the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30. Therefore, by restraining the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 from approaching the triple point pressure, it is possible to suppress the generation of dry ice due to the solidification of the liquefied carbon dioxide L in the loading pipe 30. Therefore, it becomes possible to smoothly perform the operation of the tank 21.

[0065] In the method of loading the liquefied carbon dioxide L, thereafter, the second on-off valve 35 is made be in an opened state and the liquefied carbon dioxide L is loaded into the tank 21 through the lower loading pipe 33. In a state where the liquefied carbon dioxide L is loaded through the lower loading pipe 33, the liquefied carbon dioxide L is stored to a level higher than the opening of the lower loading pipe 33. Therefore, a pressure according to the height of the liquid level Lf of the liquefied carbon dioxide L stored in the tank 21 can be applied to the liquefied carbon dioxide L in the lower loading pipe 33. In this way, flash evaporation of the liquefied carbon dioxide L that has flowed into the tank 21 can be suppressed.

<Other Embodiments>

[0066] The embodiments of the present disclosure have been described in detail above with reference to the drawings. However, the specific configurations are not limited to the embodiments, and also include design changes or the like within a scope which does not deviate from the gist of the present disclosure.

[0067] In the above embodiment, the lower loading pipe 33 is provided so as to extend downward from the top portion of the tank 21 into the tank 21. However, there is no limitation thereto.

[0068] For example, as shown in Fig. 9, a lower loading pipe 33B may be provided so as to wrap around from the upper side to the lower side of the tank 21, and an end portion of the lower loading pipe 33B may be connected to a lower end 21b of the tank 21. Even with such a configuration, the opening 33a of the lower loading pipe 33B can be located at the lower portion in the tank 21.

[0069] Further, in the above embodiment, the processing procedure in the method S10 of loading the liquefied carbon dioxide L into the ship 1 and the control device 60 for executing the method S10 of loading the liquefied

carbon dioxide L into the ship 1 are shown. However, the procedure can be appropriately changed in order.

[0070] Further, in the above embodiment, the liquefied carbon dioxide L is injected from the spray pipe 38 into the tank 21. However, the injection of the liquefied carbon dioxide L may be omitted.

<Additional Remark>

[0071] The ships 1 and the method of loading liquefied carbon dioxide into the ship 1 described in the embodiment are grasped as follows, for example.

(1) The ship 1 according to a first aspect includes the hull 2 having a pair of broadsides 3A and 3B, the tank 21 that is provided in the hull 2 and is capable of storing the liquefied carbon dioxide L, and the loading pipe 30 that loads the liquefied carbon dioxide L that is supplied from the outside of the ship into the tank 21, in which the loading pipe 30 includes the transport pipe 31 having the connection part 31j for connection with the outside of the ship and extending into the hull 2, the upper loading pipe 32 that branches off and extends from the transport pipe 31 and is open to the upper portion in the tank 21, the lower loading pipe 33 that branches off and extends from the transport pipe 31 and is open to the lower portion in the tank 21, the first on-off valve 34 provided in the upper loading pipe 32, and the second on-off valve 35 provided in the lower loading pipe 33.

[0072] In the ship 1, when the first on-off valve 34 is opened, the liquefied carbon dioxide L that is supplied from the outside of the ship is supplied from the upper portion in the tank 21 through the transport pipe 31 and the upper loading pipe 32. Further, when the second on-off valve 35 is opened, the liquefied carbon dioxide L that is supplied from the outside of the ship is supplied from the lower portion in the tank 21 through the transport pipe 31 and the lower loading pipe 33.

[0073] Since the upper loading pipe 32 is open to the upper portion in the tank 21, the height difference from the highest position in the loading pipe 30 is small as compared with that in the lower loading pipe 33 that is open to the lower portion in the tank 21. In this way, it is possible to suppress a decrease in the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 regardless of the liquid level Lf in the tank 21.

[0074] Further, since the lower loading pipe 33 is open to the lower portion in the tank 21, when the liquefied carbon dioxide L is stored to a level higher than the opening of the lower loading pipe 33, a pressure according to the height of the liquid level Lf of the liquefied carbon dioxide L stored in the tank 21 is applied to the liquefied carbon dioxide L in the lower loading pipe 33. In this way, the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 can be increased.

[0075] In this manner, by appropriately adjusting the opening and closing of the first on-off valve 34 and the second on-off valve 35 according to the storage situation or the like of the liquefied carbon dioxide L in the tank 21, it is possible to suppress a decrease in the pressure of the liquefied carbon dioxide L at the highest position in the loading pipe 30. Therefore, the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 can be restrained from approaching the triple point pressure. In this way, it is possible to suppress the generation of dry ice due to the solidification of the liquefied carbon dioxide L in the loading pipe 30. As a result, in a case where the liquefied carbon dioxide L is contained in the tank 21, it is possible to suppress the generation of dry ice in the loading pipe 30 and smoothly perform the operation of the tank 21.

[0076] (2) In the ship 1 according to a second aspect, the ship according to the above (1) further includes the control device 60 that controls the opening/closing operations of the first on-off valve 34 and the second on-off valve 35, based on the liquid level Lf of the liquefied carbon dioxide L in the tank 21, in a case where the liquefied carbon dioxide L is loaded into the tank 21.

[0077] In this way, the control device 60 controls the opening/closing operations of the first on-off valve 34 and the second on-off valve 35, based on the liquid level Lf of the liquefied carbon dioxide L in the tank 21, so that it is possible to automatically suppress a decrease in the pressure of the liquefied carbon dioxide L at the highest position in the loading pipe 30.

[0078] (3) In the ship 1 according to the above (3), the ship 1 of the above (2) further includes the liquid level detection unit 51 that detects the liquid level Lf of the liquefied carbon dioxide L that is stored in the tank 21, in which the control device 60 opens the first on-off valve 34 to load the liquefied carbon dioxide L into the tank 21 through the upper loading pipe 32, and opens the second on-off valve 35 to load the liquefied carbon dioxide L into the tank 21 through the lower loading pipe 33 in a case where the liquid level Lf of the liquefied carbon dioxide L that is detected by the liquid level detection unit 51 reaches the switching level Ls set to be higher than the opening 33a of the lower loading pipe 33.

[0079] In this way, by the control of the control device 60, the first on-off valve 34 is opened and the liquefied carbon dioxide L is loaded into the tank 21 through the upper loading pipe 32 until the liquid level Lf of the liquefied carbon dioxide L in the tank 21 reaches the set switching level Ls. Since the upper loading pipe 32 is open to the upper portion in the tank 21, the loading of the liquefied carbon dioxide L can be performed in a state of suppressing a decrease in the pressure of the liquefied carbon dioxide L at the highest position in the loading pipe 30.

[0080] Further, by the control of the control device 60, when the liquid level Lf of the liquefied carbon dioxide L in the tank 21 has reached the switching level Ls set to be higher than the opening 33a of the lower loading pipe

33, the second on-off valve 35 is opened and the liquefied carbon dioxide L is loaded into the tank 21 through the lower loading pipe 33. In this state, the liquefied carbon dioxide L is stored to a level higher than the opening of the lower loading pipe 33, and therefore, a pressure according to the height of the liquid level Lf of the liquefied carbon dioxide L stored in the tank 21 is applied to the liquefied carbon dioxide L in the lower loading pipe 33. In this way, it is possible to perform the loading of the liquefied carbon dioxide L in a state where the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 is increased.

[0081] (4) In the ship 1 according to a fourth aspect, the ship 1 of the above (2) or (3) further includes the pressure detection unit 52 that detects the pressure of the liquefied carbon dioxide L in the loading pipe 30, in which the control device 60 opens the first on-off valve 34 in a case where the pressure P of the liquefied carbon dioxide L that is detected by the pressure detection unit 52 is equal to or lower than the reference pressure Ps determined in advance, in a state where the second on-off valve 35 is opened.

[0082] In this way, the first on-off valve 34 is opened in a case where the pressure P of the liquefied carbon dioxide L in the loading pipe 30 has been lowered to a pressure equal to or lower than the reference pressure Ps in a state where the second on-off valve 35 is opened and the liquefied carbon dioxide L is loaded into the tank 21 through the lower loading pipe 33. Since the upper loading pipe 32 is open to the upper portion in the tank 21, it is possible to make the height difference from the highest position in the loading pipe 30 small as compared with when the liquefied carbon dioxide L is loaded through the lower loading pipe 33. In this way, it is possible to perform the loading of the liquefied carbon dioxide L in a state of suppressing a decrease in the pressure of the liquefied carbon dioxide L at the highest position in the loading pipe 30.

[0083] (5) The method of loading the liquefied carbon dioxide L into the ship 1 according to a fifth aspect is a method of loading the liquefied carbon dioxide L into the ship 1 of any one of the above (1) to (4) including: a step S11 of opening the first on-off valve 34 to load the liquefied carbon dioxide L into the tank 21 through the upper loading pipe 32, and a step S12 of closing the first on-off valve 34 and opening the second on-off valve 35 to load the liquefied carbon dioxide L into the tank 21 through the lower loading pipe 33, after the liquid level Lf of the liquefied carbon dioxide L in the tank 21 has reached the switching level Ls set to be higher than the opening 33a of the lower loading pipe 33.

[0084] In this way, when the liquefied carbon dioxide L is loaded into the tank 21, first, the first on-off valve 34 is opened and the liquefied carbon dioxide L is loaded into the tank 21 through the upper loading pipe 32. Since the upper loading pipe 32 is open to the upper portion in the tank 21, the loading of the liquefied carbon dioxide L can be performed in a state of suppressing a decrease

in the pressure of the liquefied carbon dioxide L at the highest position in the loading pipe 30.

[0085] Thereafter, the second on-off valve 35 is opened and the liquefied carbon dioxide L is loaded into the tank 21 through the lower loading pipe 33. In this state, the liquefied carbon dioxide L is stored to a level higher than the opening of the lower loading pipe 33, and therefore, a pressure according to the height of the liquid level Lf of the liquefied carbon dioxide L stored in the tank 21 is applied to the liquefied carbon dioxide L in the lower loading pipe 33. In this way, it is possible to perform the loading of the liquefied carbon dioxide L in a state where the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 is increased.

[0086] In this way, the pressure of the liquefied carbon dioxide L at the highest position of the loading pipe 30 is restrained from approaching the triple point pressure. In this way, it is possible to suppress the generation of dry ice due to the solidification of the liquefied carbon dioxide L in the loading pipe 30. As a result, in a case where the liquefied carbon dioxide L is contained in the tank 21, it is possible to suppress the generation of dry ice in the loading pipe 30 and smoothly perform the operation of the tank 21.

Industrial Applicability

[0087] According to the ship and the method of loading liquefied carbon dioxide into a ship of the present disclosure, it is possible to suppress the generation of dry ice in a loading pipe and smoothly perform the operation of a tank.

Reference Signs List

[0088]

1: ship
2: hull
2a: bow
2b: stern
3A, 3B: broadside
5: exposure deck
7: superstructure
8: tank system storage compartment
21: tank
21b: lower end
30: loading pipe
30t: top portion
31: transport pipe
31j: connection part
32: upper loading pipe
32a: opening
33, 33B: lower loading pipe
33a: opening
34: first on-off valve
35: second on-off valve
38: spray pipe

39: on-off valve
51: liquid level detection unit
52: pressure detection unit
60: control device
61: CPU
62: ROM
63: RAM
64: HDD
65: signal receiving module
70: signal input unit
71: on-off valve control unit
72: liquid level determination unit
73: pressure determination unit
74: output unit
L: liquefied carbon dioxide
Lf: liquid level
Ls: switching level

Claims

1. A ship (1) comprising:

a hull (2) having a pair of broadsides (3A, 3B);
a tank (21) that is provided in the hull (2) and is capable of storing liquefied carbon dioxide (L);
and
a loading pipe (30) that loads liquefied carbon dioxide (L) that is supplied from an outside of the ship (1) into the tank (21),
wherein the loading pipe (30) includes

a transport pipe (31) having a connection part (31j) for connection with the outside of the ship (1),
an upper loading pipe (32) that branches off and extends from the transport pipe (31) and is open to an upper portion in the tank (21),
a lower loading pipe (33) that branches off and extends from the transport pipe (31) and is open to a lower portion in the tank (21),
a first on-off valve (34) provided in the upper loading pipe (32),
a second on-off valve (35) provided in the lower loading pipe (33),
a spray pipe (38) that branches off from the transport pipe (31) to reach inside the tank (21) and has a plurality of injection holes disposed on a lower side with respect to an opening (32a) of the upper loading pipe (32) and on an upper side with respect to an opening (33a) of the lower loading pipe (33),
and
an on-off valve (39) provided in the spray pipe (38).

2. The ship (1) according to claim 1, further comprising:
a control device (60) that controls opening/closing operations of the first on-off valve (34) and the second on-off valve (35), based on a liquid level (Lf) of the liquefied carbon dioxide (L) in the tank (21), when the liquefied carbon dioxide (L) is loaded into the tank (21).
3. The ship (1) according to claim 2, further comprising:
a liquid level detection unit (51) that detects the liquid level (Lf) of the liquefied carbon dioxide (L) that is stored in the tank (21),
wherein the control device (60) opens the first on-off valve (34) to load the liquefied carbon dioxide (L) into the tank (21) through the upper loading pipe (32), and opens the second on-off valve (35) to load the liquefied carbon dioxide (L) into the tank (21) through the lower loading pipe (33) in a case where the liquid level (Lf) of the liquefied carbon dioxide (L) that is detected by the liquid level detection unit (51) reaches a switching level (Ls) set to be higher than the opening (33a) of the lower loading pipe (33).
4. The ship (1) according to claim 2 or 3, further comprising:
a pressure detection unit (52) that detects a pressure of the liquefied carbon dioxide (L) in the loading pipe (30),
wherein the control device (60) opens the first on-off valve (34) in a case where the pressure of the liquefied carbon dioxide (L) that is detected by the pressure detection unit (52) becomes equal to or lower than a reference pressure (Ps) determined in advance, in a state where the second on-off valve (35) is opened.
5. A method of loading liquefied carbon dioxide (L) into the ship (1) according to any one of claims 1 to 4, the method comprising:
a step of opening the on-off valve (39) to inject the liquefied carbon dioxide (L) into the tank (21) from the spray pipe (38);
a step of opening the first on-off valve (34) to load the liquefied carbon dioxide (L) into the tank (21) through the upper loading pipe (32); and
a step of closing the first on-off valve (34) and opening the second on-off valve (35) to load the liquefied carbon dioxide (L) into the tank (21) through the lower loading pipe (33), after a liquid level (Lf) of the liquefied carbon dioxide (L) in the tank (21) has reached a switching level (Ls) set to be higher than the opening (33a) of the lower loading pipe (33).

Patentansprüche

1. Ein Schiff (1), das Folgendes umfasst:

einen Rumpf (2) mit einem Paar Breitseiten (3A, 3B);
einen Tank (21), der in dem Rumpf (2) bereitgestellt wird und verflüssigtes Kohlendioxid (L) speichern kann; und
eine Ladeleitung (30), die verflüssigtes Kohlendioxid (L), das von außerhalb des Schiffes (1) zugeführt wird, in den Tank (21) lädt, wobei die Ladeleitung (30) Folgendes beinhaltet:

eine Transportleitung (31), die ein Verbindungsteil (31j) zur Verbindung mit der Außenseite des Schiffes (1) aufweist,
eine obere Ladeleitung (32), die von der Transportleitung (31) abzweigt und sich von dieser aus erstreckt und zu einem oberen Abschnitt im Tank (21) offen ist,
eine untere Ladeleitung (33), die von der Transportleitung (31) abzweigt und sich von dieser aus erstreckt und zu einem unteren Abschnitt im Tank (21) offen ist,
ein erstes Ein-Aus-Ventil (34), das in der oberen Ladeleitung (32) bereitgestellt wird,
ein zweites Ein-Aus-Ventil (35), das in der unteren Ladeleitung (33) bereitgestellt wird,
eine Sprühleitung (38), die von der Transportleitung (31) abzweigt, um in das Innere des Tanks (21) zu gelangen, und eine Vielzahl von Einspritzlöchern aufweist, die auf einer unteren Seite in Bezug auf eine Öffnung (32a) der oberen Ladeleitung (32) und auf einer oberen Seite in Bezug auf eine Öffnung (33a) der unteren Ladeleitung (33) angeordnet sind, und
ein Ein-Aus-Ventil (39), das in der Sprühleitung (38) bereitgestellt wird.

2. Das Schiff (1) nach Anspruch 1, das ferner Folgendes umfasst:
eine Steuervorrichtung (60), die die Öffnungs-/Schließvorgänge des ersten Ein-Aus-Ventils (34) und des zweiten Ein-Aus-Ventils (35) auf der Grundlage eines Flüssigkeitspegels (Lf) des verflüssigten Kohlendioxids (L) im Tank (21) steuert, wenn das verflüssigte Kohlendioxid (L) in den Tank (21) geladen wird.
3. Das Schiff (1) nach Anspruch 2, das ferner Folgendes umfasst:
eine Flüssigkeitspegel-Erfassungseinheit (51), die den Flüssigkeitspegel (Lf) des im Tank (21) gespeicherten verflüssigten Kohlendioxids (L)

erfasst,
wobei die Steuervorrichtung (60) das erste Ein-Aus-Ventil (34) öffnet, um das verflüssigte Kohlendioxid (L) durch die obere Ladeleitung (32) in den Tank (21) zu füllen, und das zweite Ein-Aus-Ventil (35) öffnet, um das verflüssigte Kohlendioxid (L) durch die untere Ladeleitung (33) in den Tank (21) zu füllen, in einem Fall in dem der Flüssigkeitspegel (Lf) des verflüssigten Kohlendioxids (L), der von der Flüssigkeitspegel-Erfassungseinheit (51) erfasst wird, einen Schallpegel (Ls) erreicht, der so eingestellt ist, dass er höher ist als die Öffnung (33a) der unteren Ladeleitung (33).

4. Das Schiff (1) nach Anspruch 2 oder 3, das ferner Folgendes umfasst:

eine Druck-Erfassungseinheit (52), die einen Druck des verflüssigten Kohlendioxids (L) in der Ladeleitung (30) erfasst,
wobei die Steuervorrichtung (60) das erste Ein-Aus-Ventil (34) in einem Fall öffnet, in dem der Druck des verflüssigten Kohlendioxids (L), der von der Druck-Erfassungseinheit (52) erfasst wird, gleich oder niedriger als ein vorab bestimmter Referenzdruck (Ps) wird, in einem Zustand, in dem das zweite Ein-Aus-Ventil (35) geöffnet ist.

5. Ein Verfahren zum Laden von verflüssigtem Kohlendioxid (L) in das Schiff (1) nach irgendeinem der Ansprüche von 1 bis 4, wobei das Verfahren Folgendes umfasst:

einen Schritt des Öffnens des Ein-Aus-Ventils (39), um das verflüssigte Kohlendioxid (L) aus der Sprühleitung (38) in den Tank (21) einzuspritzen;
einen Schritt des Öffnens des ersten Ein-Aus-Ventils (34), um das verflüssigte Kohlendioxids (L) durch das obere Füllrohr (32) in den Tank (21) zu laden; und
einen Schritt des Schließens des ersten Ein-Aus-Ventils (34) und des Öffnens des zweiten Ein-Aus-Ventils (35), um das verflüssigte Kohlendioxid (L) durch die untere Ladeleitung (33) in den Tank (21) zu laden, nachdem ein Flüssigkeitspegel (Lf) des verflüssigten Kohlendioxids (L) im Tank (21) einen Schallpegel (Ls) erreicht hat, der so eingestellt ist, dass er höher ist als die Öffnung (33a) der unteren Ladeleitung (33).

Revendications

1. Navire (1) comprenant :

une coque (2) ayant une paire de travers (3A, 3B) ;
un réservoir (21) qui est prévu dans la coque (2) et est apte à stocker du dioxyde de carbone liquéfié (L) ; et
un tuyau de chargement (30) qui charge du dioxyde de carbone liquéfié (L) qui est fourni à partir d'un extérieur du navire (1) dans le réservoir (21),
le tuyau de chargement (30) incluant
un tuyau de transport (31) ayant une partie de raccordement (31j) destinée à être raccordée avec l'extérieur du navire (1),
un tuyau de chargement supérieur (32) qui se ramifie et s'étend à partir du tuyau de transport (31) et est ouvert sur une portion supérieure dans le réservoir (21),
un tuyau de chargement inférieur (33) qui se ramifie et s'étend à partir du tuyau de transport (31) et est ouvert sur une portion inférieure dans le réservoir (21),
une première vanne tout ou rien (34) prévue dans le tuyau de chargement supérieur (32),
une deuxième vanne tout ou rien (35) prévue dans le tuyau de chargement inférieur (33),
un tuyau de pulvérisation (38) qui se ramifie à partir du tuyau de transport (31) pour atteindre l'intérieur du réservoir (21) et a une pluralité de trous d'injection disposés sur un côté inférieur par rapport à une ouverture (32a) du tuyau de chargement supérieur (32) et sur un côté supérieur par rapport à une ouverture (33a) du tuyau de chargement inférieur (33), et
une vanne tout ou rien (39) prévue dans le tuyau de pulvérisation (38).

2. Navire (1) selon la revendication 1, comprenant en outre :

un dispositif de commande (60) qui commande des opérations d'ouverture/fermeture de la première vanne tout ou rien (34) et de la deuxième vanne tout ou rien (35), sur la base d'un niveau de liquide (Lf) du dioxyde de carbone liquéfié (L) dans le réservoir (21), lorsque le dioxyde de carbone liquéfié (L) est chargé dans le réservoir (21).

3. Navire (1) selon la revendication 2, comprenant en outre :

une unité de détection de niveau de liquide (51) qui détecte le niveau de liquide (Lf) du dioxyde de carbone liquéfié (L) qui est stocké dans le réservoir (21),
dans lequel le dispositif de commande (60) ouvre la première vanne tout ou rien (34) pour charger le dioxyde de carbone liquéfié (L) dans le réservoir (21) à travers le tuyau de chargement supérieur (32), et ouvre la deuxième vanne

tout ou rien (35) pour charger le dioxyde de carbone liquéfié (L) dans le réservoir (21) à travers le tuyau de chargement inférieur (33) dans un cas où le niveau de liquide (Lf) du dioxyde de carbone liquéfié (L) qui est détecté par l'unité de détection de niveau de liquide (51) atteint un niveau de commutation (Ls) réglé pour être supérieur à l'ouverture (33a) du tuyau de chargement inférieur (33).

5

10

4. Navire (1) selon la revendication 2 ou la revendication 3, comprenant en outre :

une unité de détection de pression (52) qui détecte une pression du dioxyde de carbone liquéfié (L) dans le tuyau de chargement (30), dans lequel le dispositif de commande (60) ouvre la première vanne tout ou rien (34) dans un cas où la pression du dioxyde de carbone liquéfié (L) qui est détectée par l'unité de détection de pression (52) devient égale ou inférieure à une pression de référence (Ps) déterminée à l'avance, dans un état où la deuxième vanne tout ou rien (35) est ouverte.

15

20

25

5. Procédé de chargement de dioxyde de carbone liquéfié (L) dans le navire (1) selon l'une quelconque des revendications 1 à 4, le procédé comprenant :

une étape consistant à ouvrir la vanne tout ou rien (39) pour injecter le dioxyde de carbone liquéfié (L) dans le réservoir (21) à partir du tuyau de pulvérisation (38) ;
 une étape consistant à ouvrir la première vanne tout ou rien (34) pour injecter le dioxyde de carbone liquéfié (L) dans le réservoir (21) à travers le tuyau de chargement supérieur (32) ;
 une étape consistant à fermer la première vanne tout ou rien (34) et à ouvrir la deuxième vanne tout ou rien (35) pour charger le dioxyde de carbone liquéfié (L) dans le réservoir (21) à travers le tuyau de chargement inférieur (33), après qu'un niveau de liquide (Lf) du dioxyde de carbone liquéfié (L) dans le réservoir (21) a atteint un niveau de commutation (Ls) réglé pour être supérieur à l'ouverture (33a) du tuyau de chargement inférieur (33) .

30

35

40

45

50

55

FIG. 1

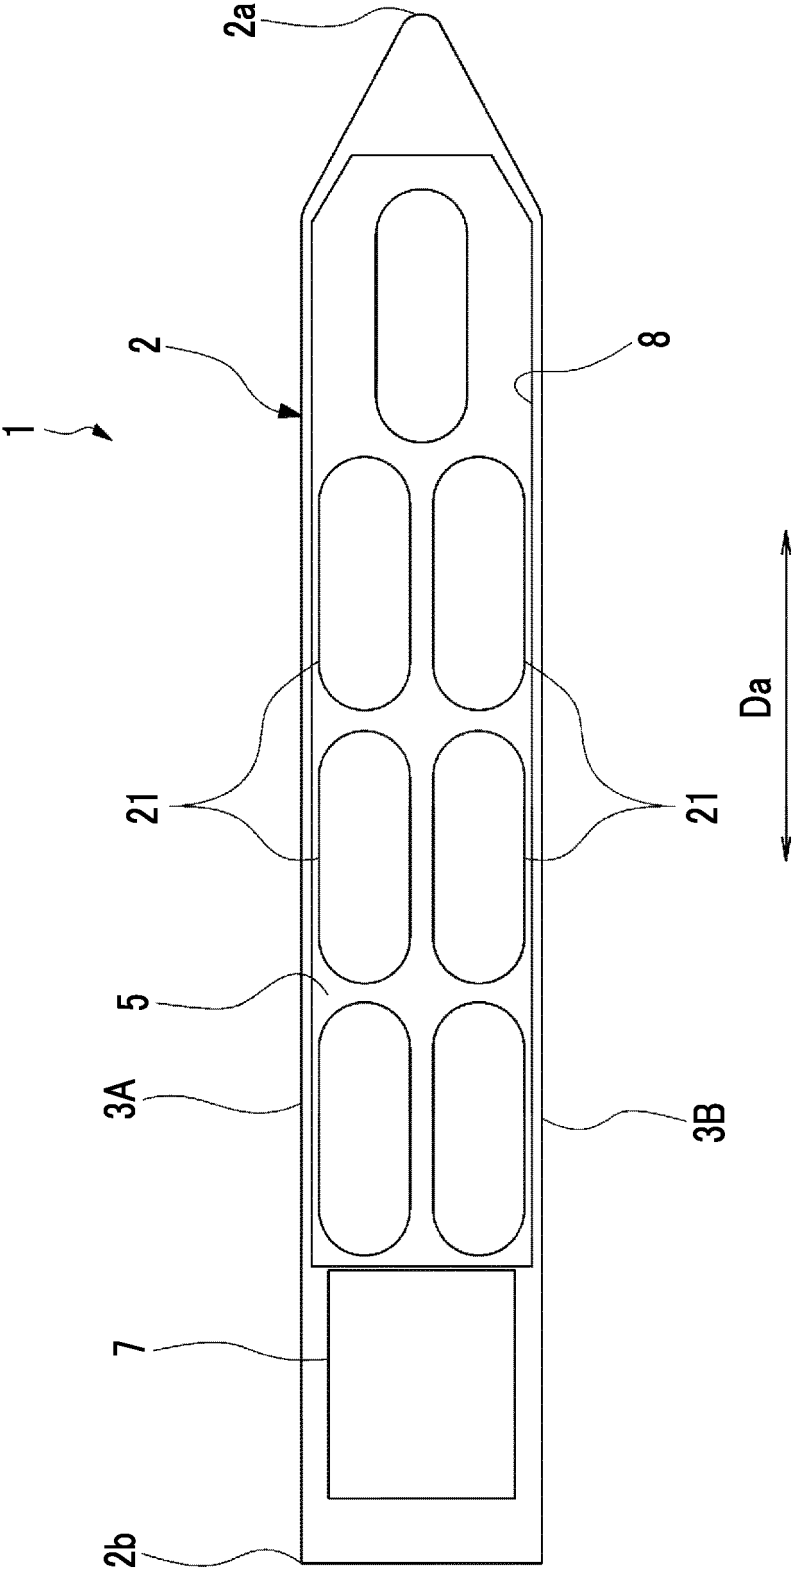


FIG. 2

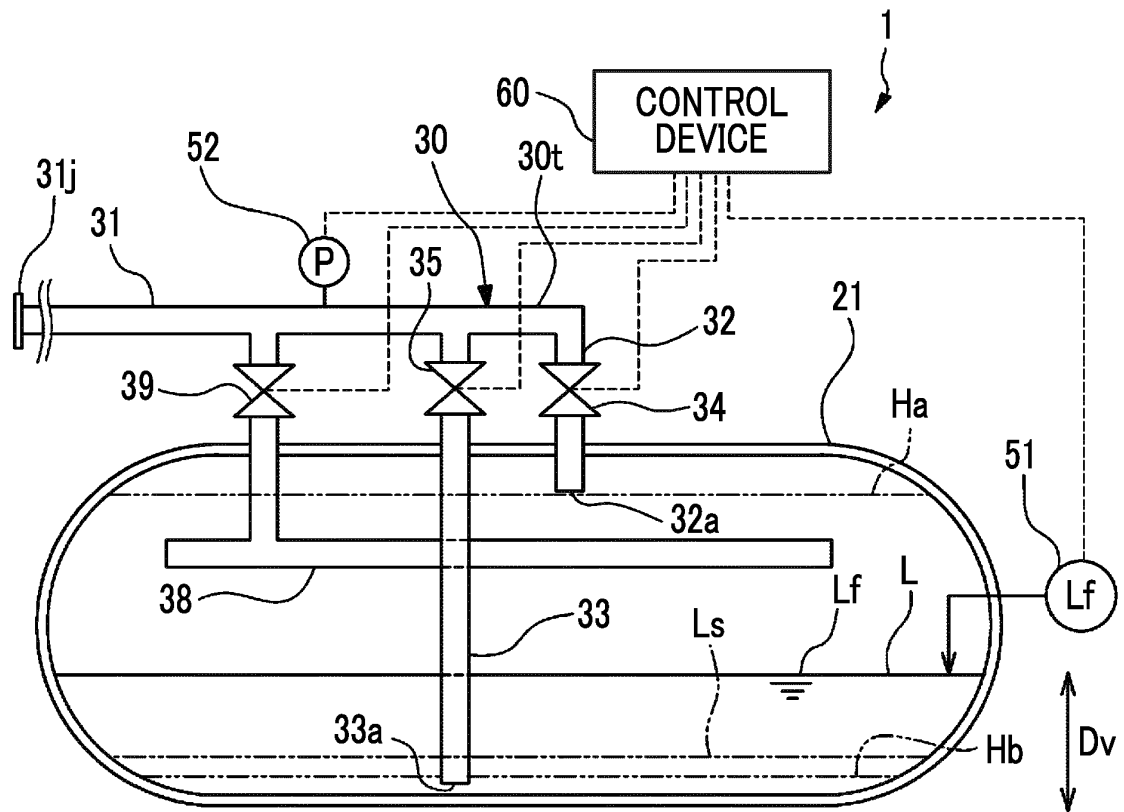


FIG. 3

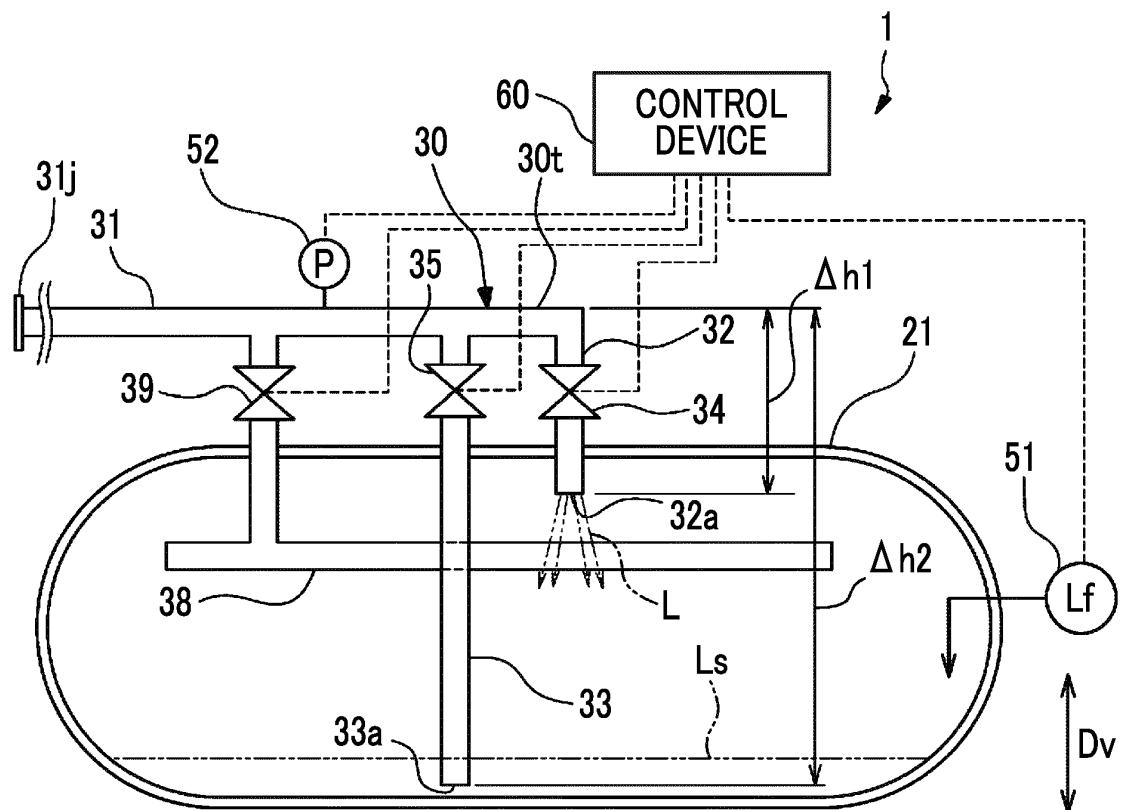


FIG. 4

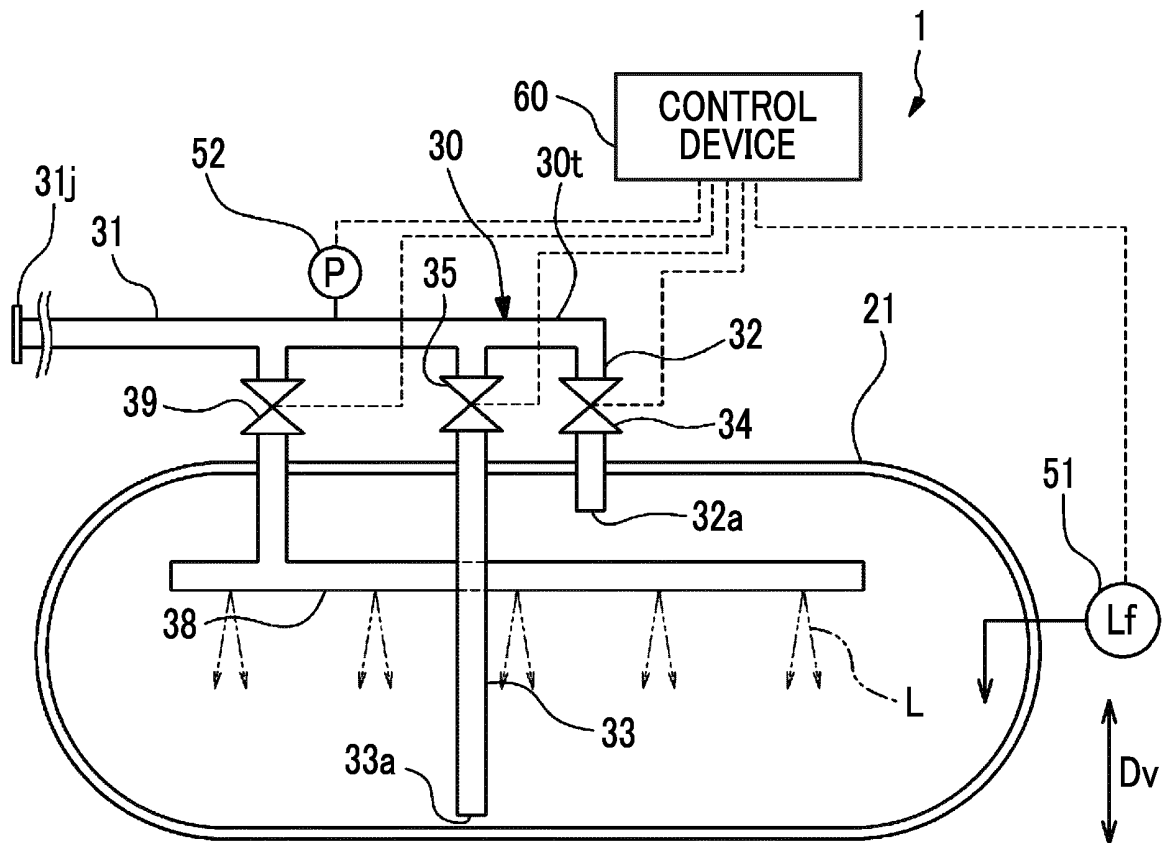


FIG. 5

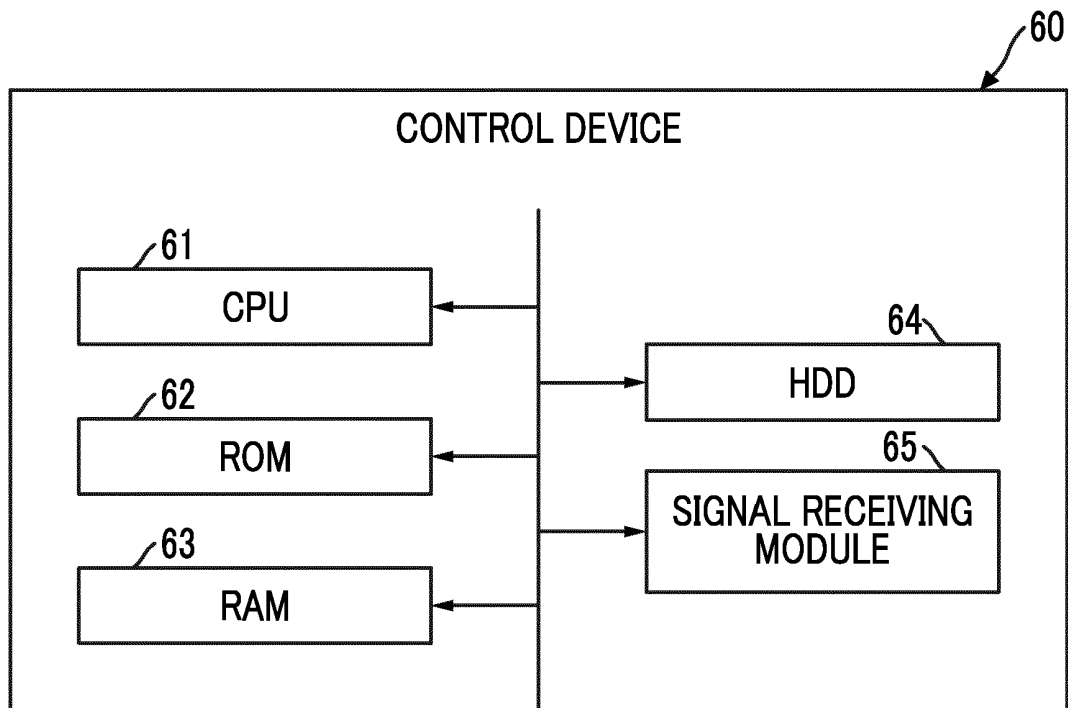


FIG. 6

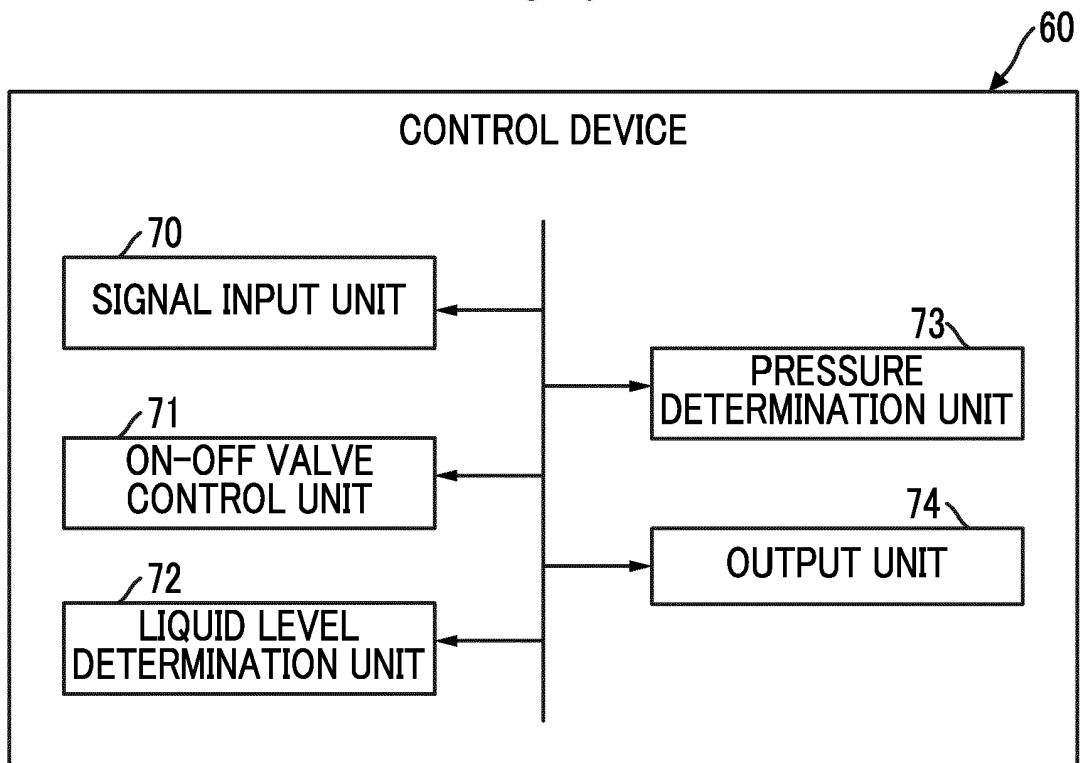


FIG. 7

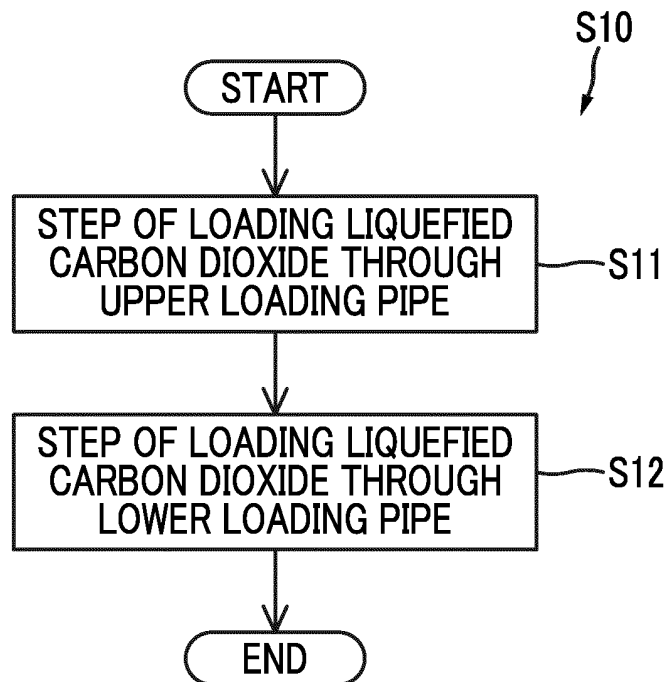


FIG. 8


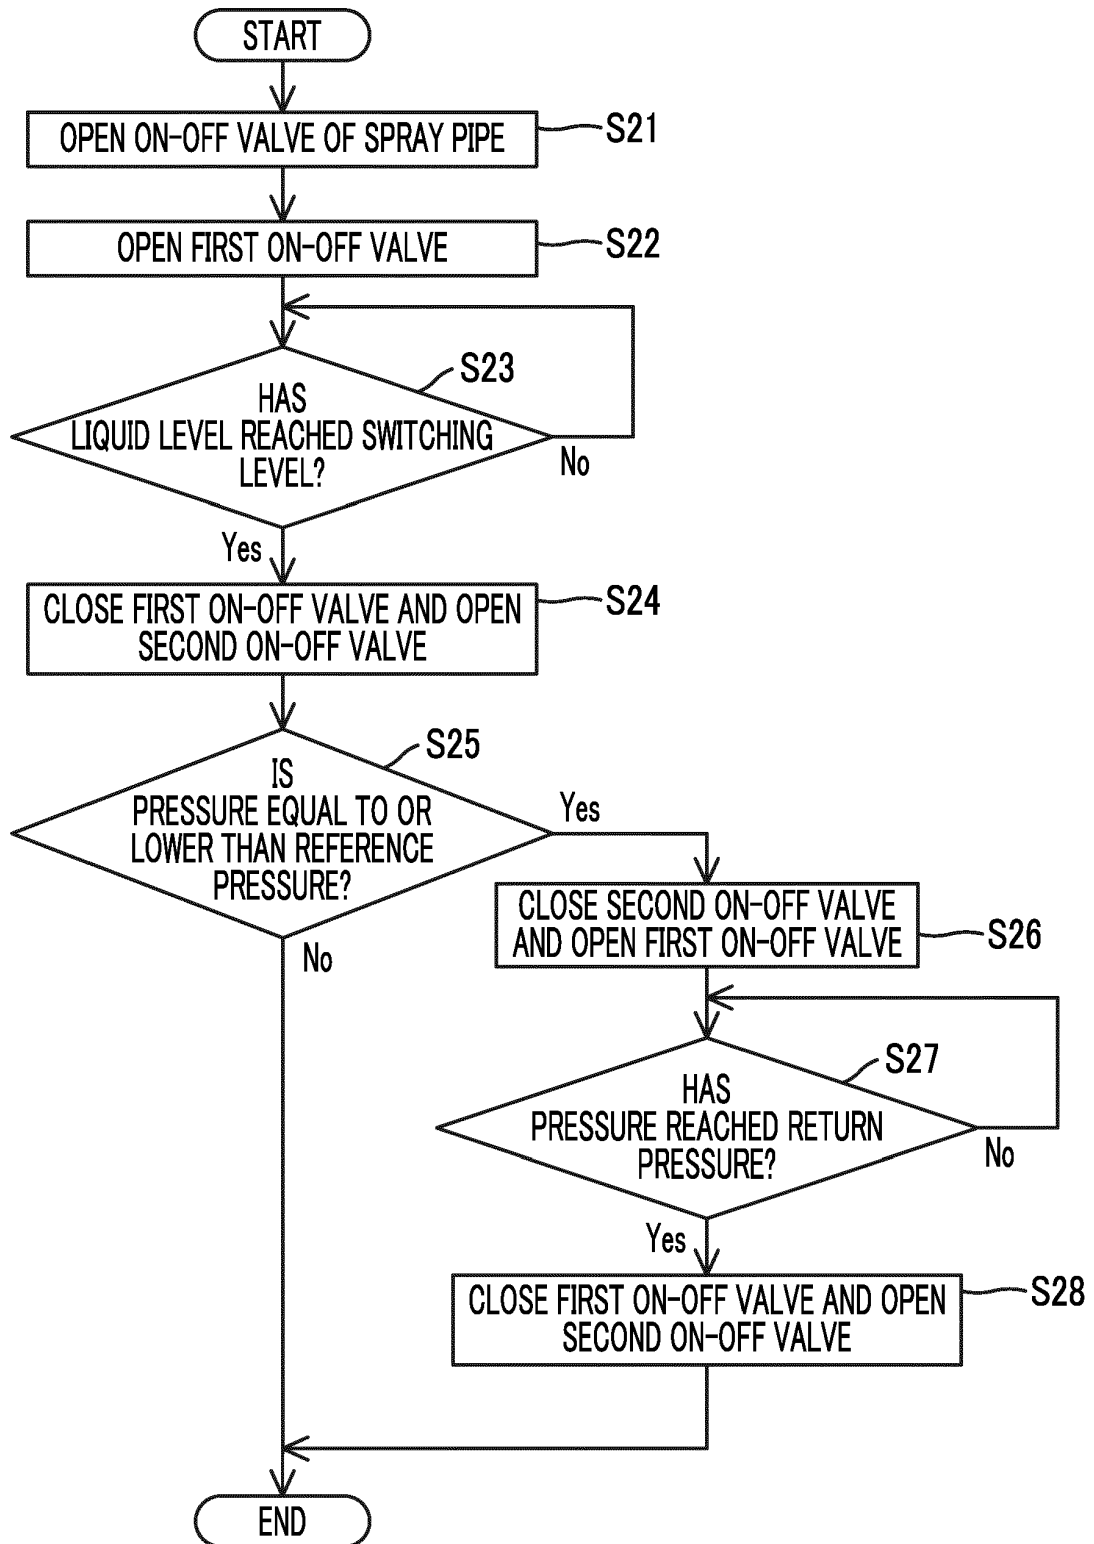


FIG. 9

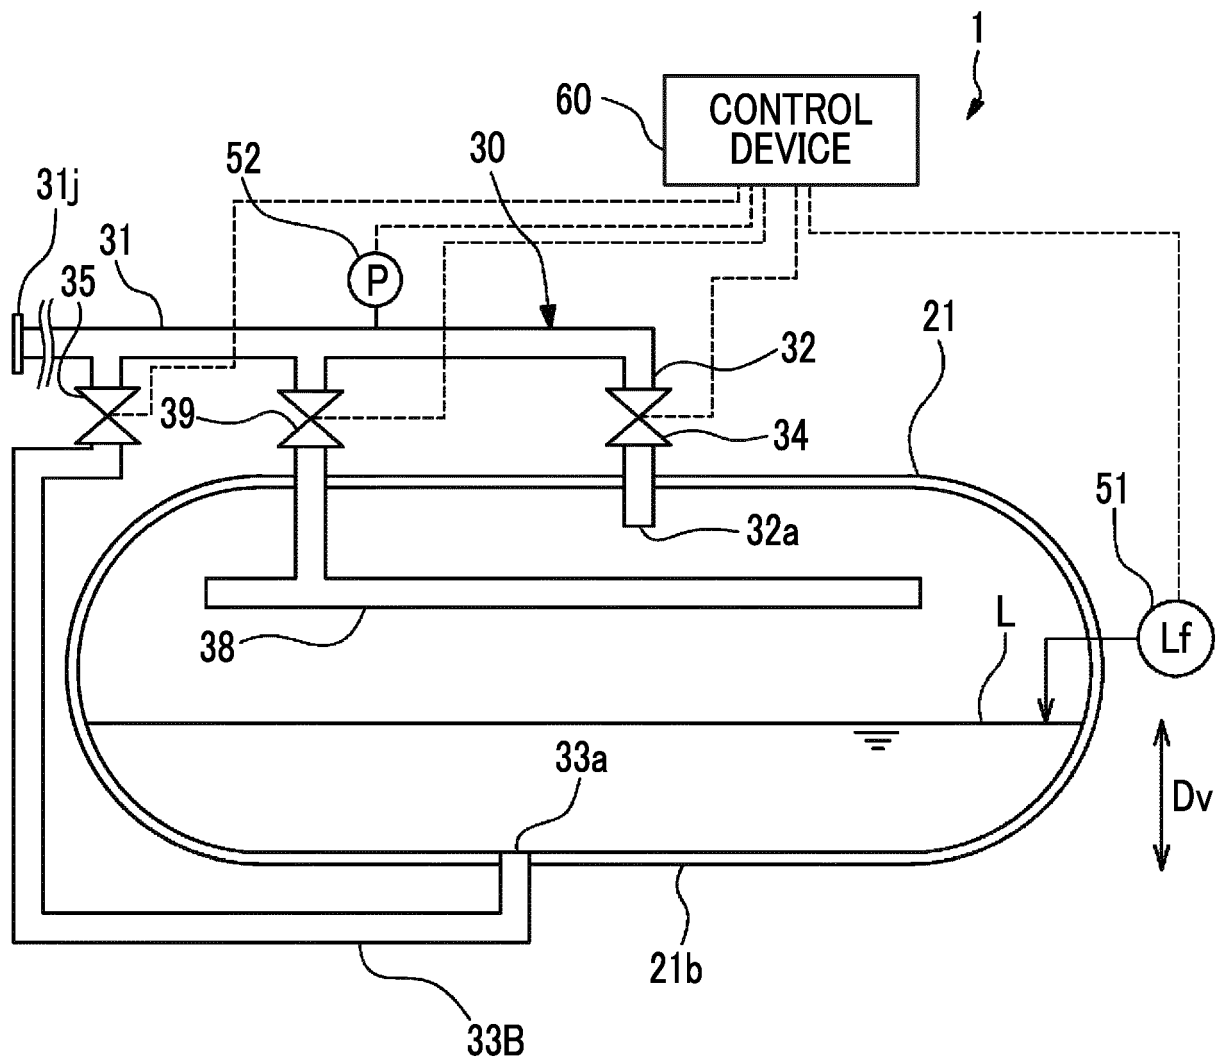

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2019228784 A [0002]
- JP 5769445 B [0004]
- WO 2013141453 A1 [0004]
- WO 2015002499 A1 [0004]