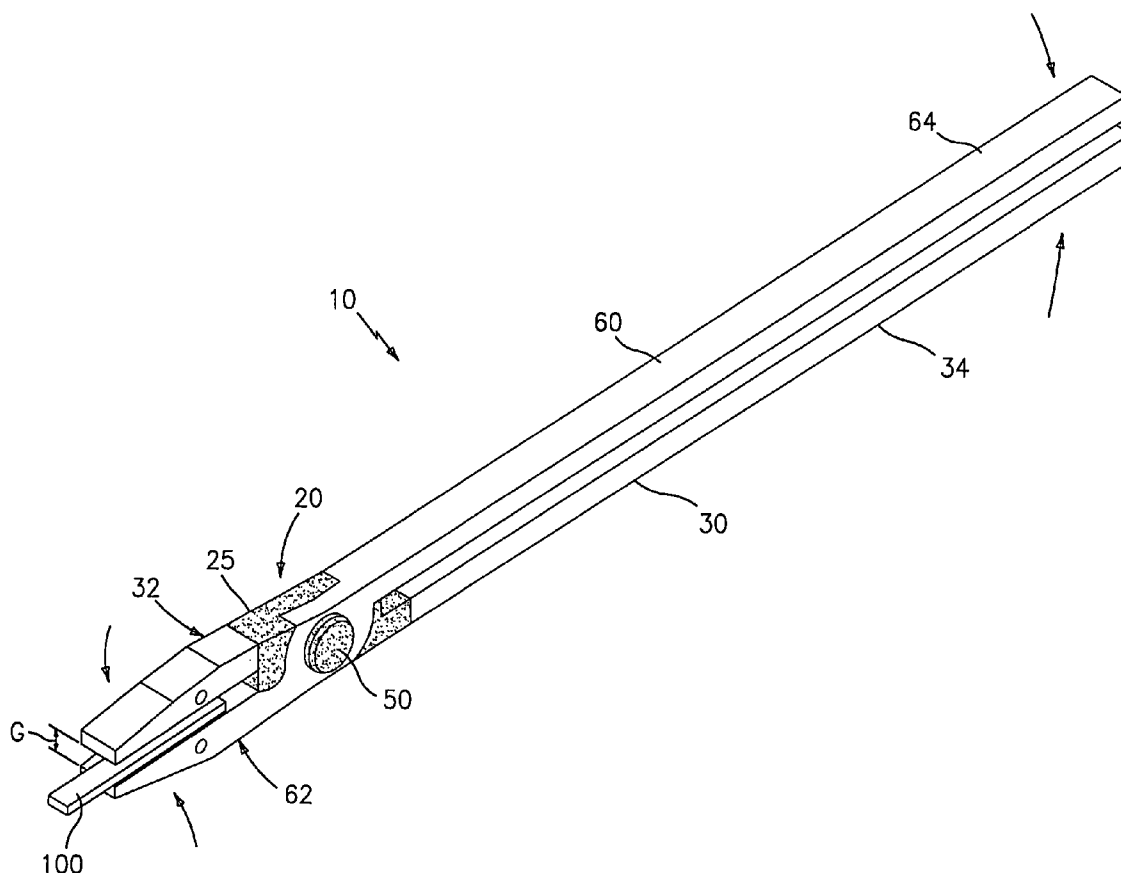


(43) **Pub. Date:** Nov. 23, 2006

An electrosurgical instrument includes a pair of first and second elongated shafts each having an end effector attached to a distal end thereof and a handle. The handle is movable from a first position wherein the end effectors are disposed in spaced relation relative to one another to a second position wherein the end effectors are closer relative to one another. Each of the elongated shafts includes a hinge plate which mounts atop a pivot assembly for effecting movement of the end effectors relative to one another. The instrument also includes a hinge assembly made from an overmold composition which encapsulates and secures the hinge plates and the pivot assembly. The overmold composition is made from an electrically insulating material which insulates the end effectors from one another.



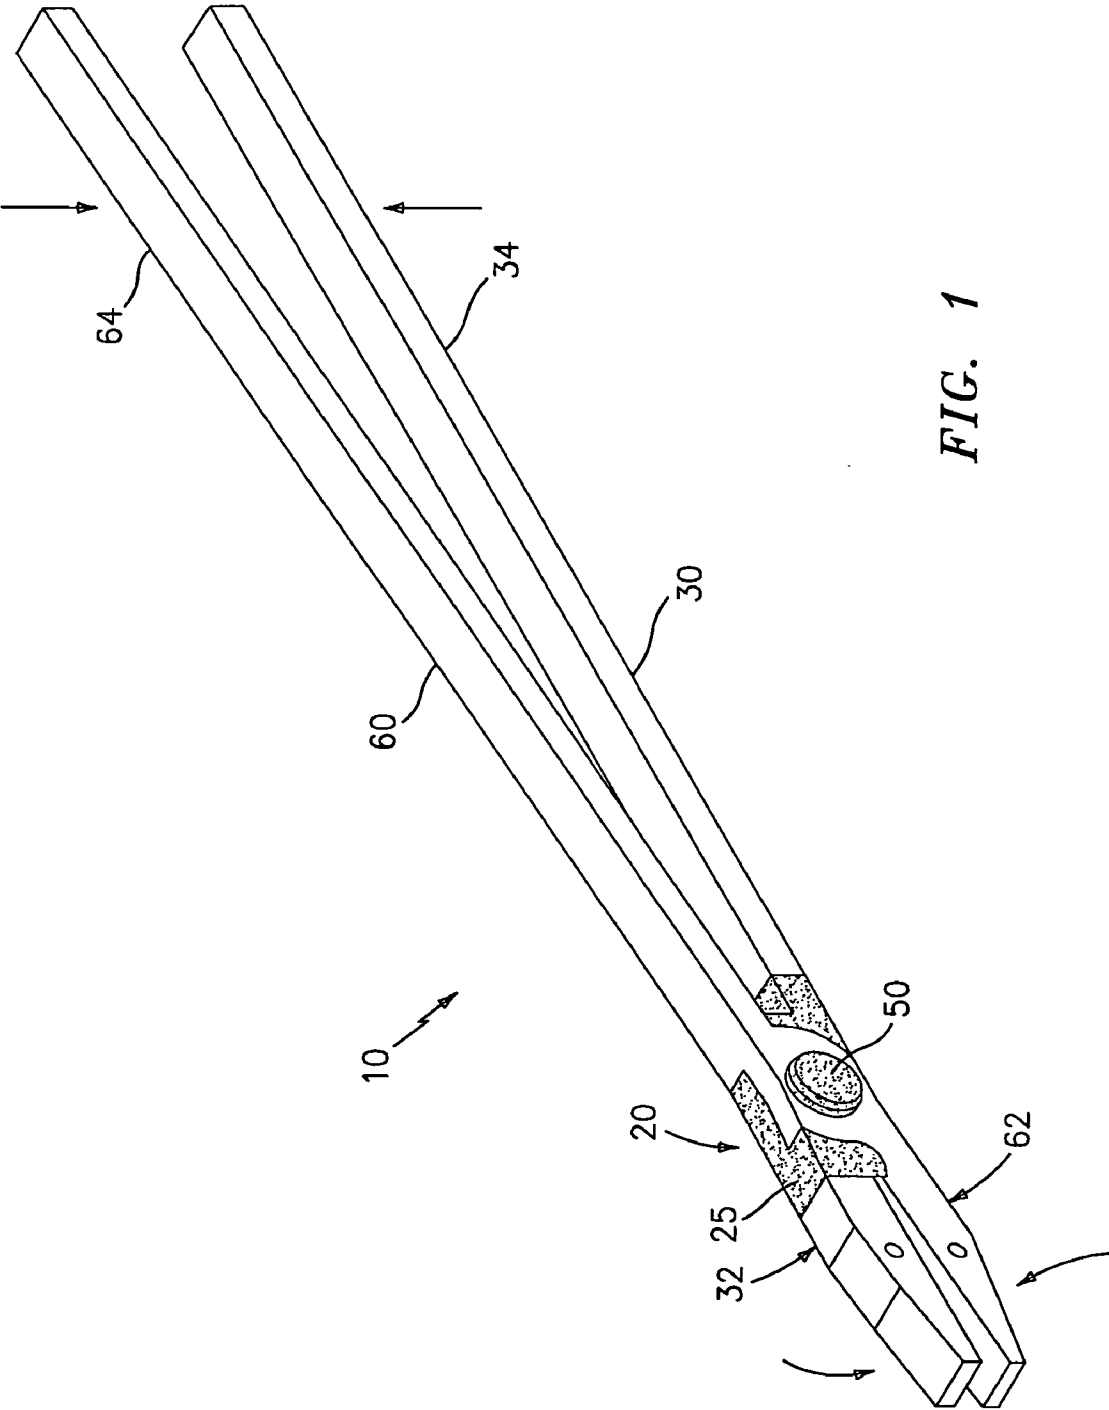


FIG. 1

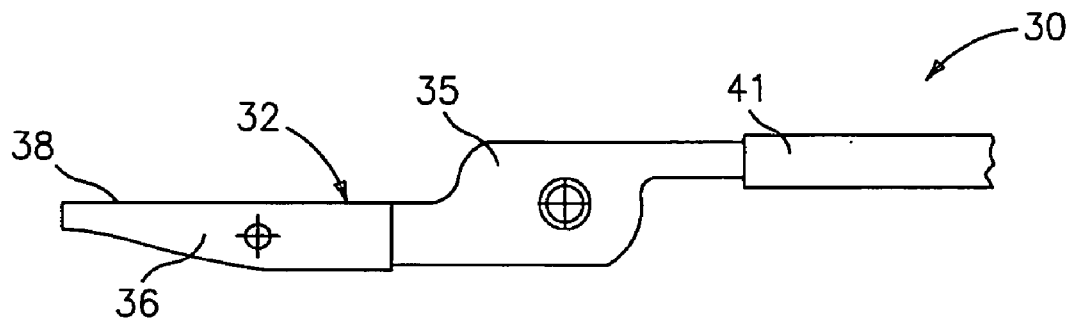


FIG. 2A

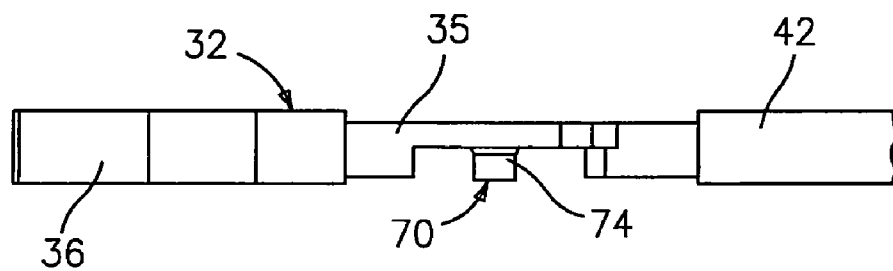


FIG. 2B

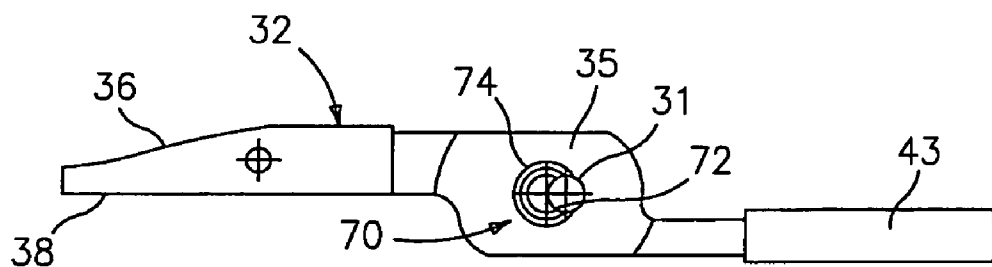


FIG. 2C

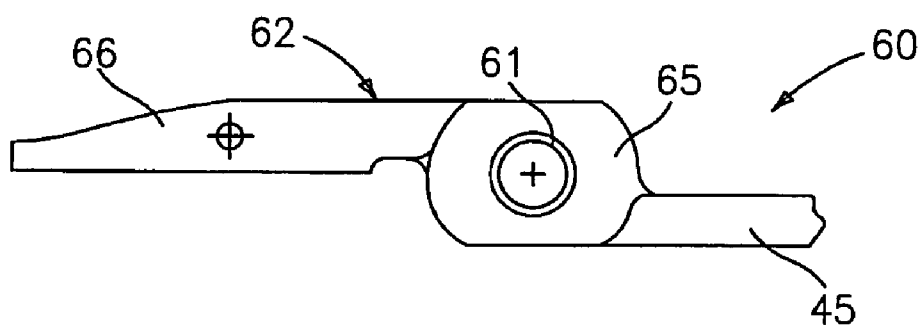


FIG. 3A

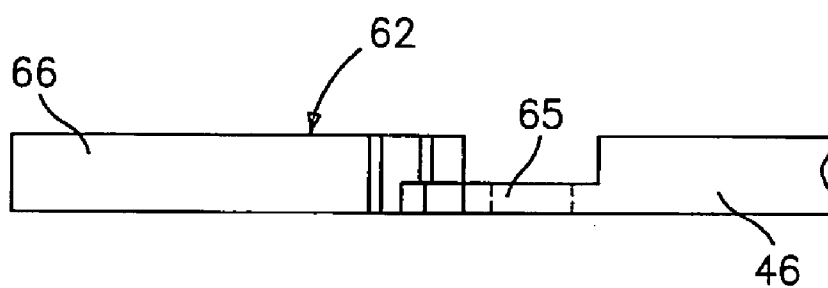


FIG. 3B



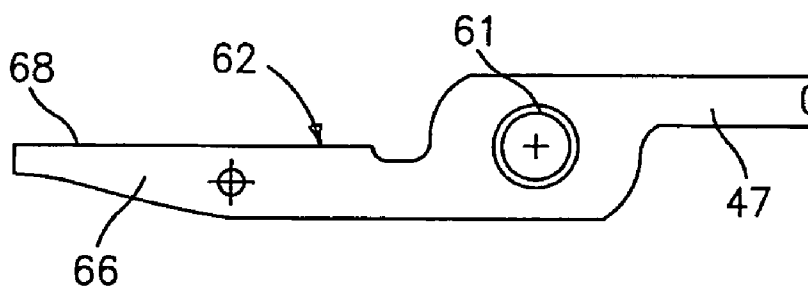


FIG. 3C

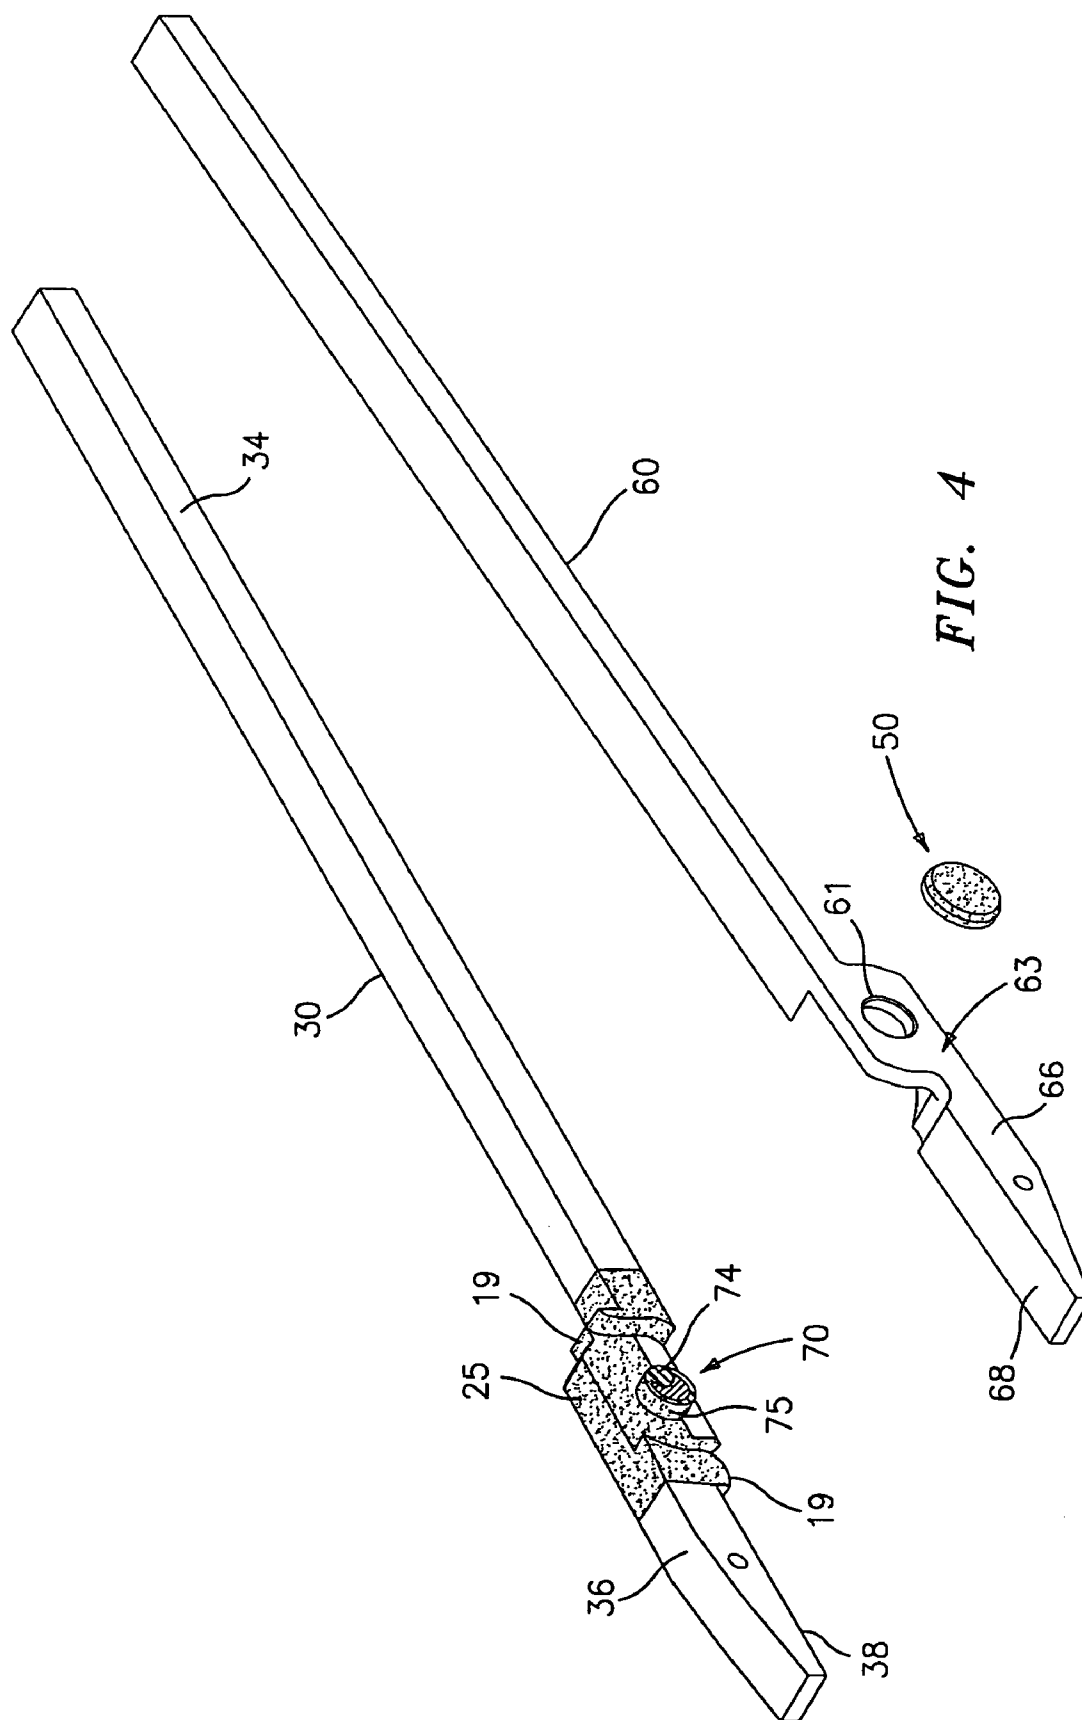

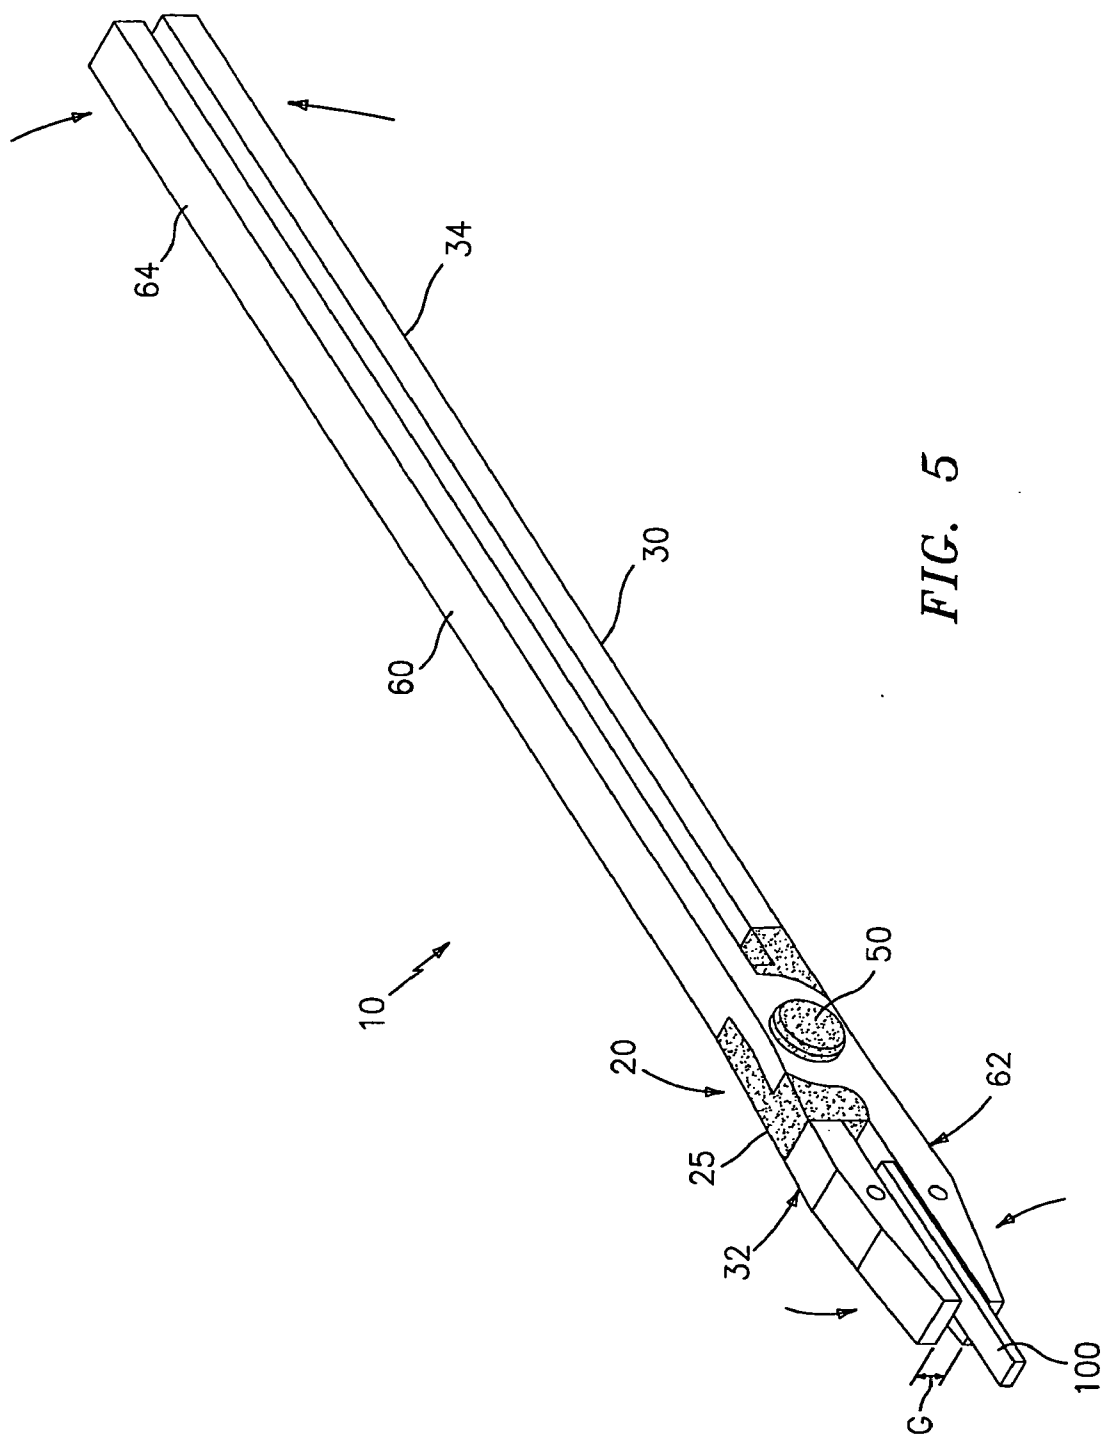

MOLDED INSULATING HINGE FOR BIPOLAR INSTRUMENTS

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefits of and priority to U.S. Provisional Patent Application Ser. No. 60/281,924 entitled: "MOLDED INSULATING HINGE FOR BIPO-LAR INSTRUMENT" which was filed on Apr. 6, 2001 by Sartor et al., the entire contents of this application are hereby incorporated by reference herein.

BACKGROUND

[0002] 1. Technical Field

[0003] The present disclosure relates to joints and hinges which connect movable components of an electrosurgical instrument and methods for fabricating hinges for movable components of an electrosurgical instrument. More particularly, the present disclosure relates to an easily customizable hinge made from a plastic overmold composition which connects two end effectors for relative movement therebetween. The present disclosure also relates to a method for fabricating the overmolded hinge.

[0004] 2. Background of Related Art

[0005] Typically, joints and hinges for electrosurgical instruments which connect movable components are formed from an insulating material to prevent shorting between component parts and/or prevent the formation of alternate current paths through the instrument. As such, instrument designers have manufactured electrosurgical instruments which involve complex rotating hinge configurations to isolate, insulate and/or control the electrosurgically active areas of the instrument. For example, traditional metal hinge configurations typically include multiple independent sub-assemblies which are overmolded with plastic material having high bond strengths. These separately overmolded subassemblies are mechanically integrated and arranged in a series of manufacturing steps that often require tightly controlled and time consuming processes to achieve proper jaw alignment and reliable and consistent gap separation between electrodes. Moreover, additional steps are often undertaken to control other parameters associated with the rotational movement about the hinge, e.g., friction, torque, etc.

[0006] Thus, a continuing need exists for a simple and effective insulating hinge that can be readily integrated into the manufacturing process to electrically isolate the movable components of an electrosurgical instrument. Further need exists for the development of a simplified manufacturing process which effectively fabricates an electrosurgical instrument which includes an insulated hinge that isolates and integrates the electrically active components of the instrument and results in the repeated formation of a reliable and easily customizable instrument which meets specific tolerance requirements for proper jaw alignment and gap distances.

SUMMARY

[0007] An electrosurgical instrument includes a pair of first and second elongated shafts each having an end effector attached to a distal end thereof and a handle. The handle is

movable from a first position wherein the end effectors are disposed in spaced relation relative to one another to a second position wherein the end effectors are closer relative to one another. Each of the elongated shafts includes a hinge plate which mounts atop a pivot assembly for effecting movement of the end effectors relative to one another. The instrument also includes a hinge assembly which is overmolded to encapsulate and secure the hinge plates and the pivot assembly. The hinge assembly is made from an electrically insulating material which insulates the end effectors from one another.

[0008] Preferably, the hinge assembly is made from a composition of materials selected from the group consisting of: polyamides, nylon, acrylonitrile-butane nitro styrene acetyl, polyesters, syndiotactic-polystyrene (SPS), polybutylene terephthalate (PBT), polycarbonate (PC), acrylonitrile butadiene styrene (ABS), polyphthalamide (PPA), polyimide, polyethylene terephthalate (PET), polyamide-imide (PAI), acrylic (PMMA), polystyrene-(PS and HIPS), polyether sulfone (PES), aliphatic polyketone, acetal (POM) copolymer, polyurethane (PU and TPU), nylon with polyphenylene-oxide dispersion and acrylonitrile styrene acrylate. In another embodiment, the hinge assembly is made from a composition of lubricating materials selected from the group consisting of: silicon, molybdenum disulfide and light olefins.

[0009] In one embodiment, the pivot assembly includes a pivot pin integrally associated with a first of the hinge plates and a pivot hole formed within a second of the hinge plates. Preferably, the pivot pin is made from an electrically insulating material. In another embodiment, the overmold composition of the hinge assembly is disposed between the pivot pin and the pivot hole to electrically insulate each of the hinge plates from one another.

[0010] In yet another embodiment, the hinge assembly includes a retention tab which secures the hinge assembly between the hinge plates. Preferably, the retention tab is formed during the overmold process as the overmold composition leaches through the pivot pin to form a tab on the outer-facing surface of the hinge plate. Once the retention tab cures, the hinge assembly is securely held between the hinge plates. In still yet another embodiment, the hinge assembly includes a stop member for limiting the movement of the end effectors relative to one another.

[0011] The present disclosure also relates to a method of forming a hinge assembly and includes the steps of: providing a pair of first and second elongated shafts each having an end effector attached to a distal end thereof, a handle and a hinge plate. The handle is dimensioned to effect movement of the end effectors relative to one another. The method further includes the step of mounting the elongated shafts to a die block, introducing an overmold composition into the die block to encapsulate at least a portion of the hinge plates and curing the overmold composition to form the hinge assembly.

[0012] In another embodiment, the method further includes the step of: selectively positioning at least one spacer between the end effectors to maintain a gap distance between the end effectors during the molding and curing step.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Preferred embodiments of the presently disclosed surgical instrument having a molded insulating hinge assembly are described herein with reference to the drawings, wherein:

[0014] **FIG. 1** is a perspective view of one embodiment of a bipolar forceps having a molded insulating hinge assembly constructed in accordance with the present disclosure;

[0015] **FIG. 2A** is an enlarged, right, side view of an end effector of the bipolar forceps of **FIG. 1** prior to overmolding;

[0016] **FIG. 2B** is a bottom view of the end effector of **FIG. 2A**;

[0017] **FIG. 2C** is a left, side view of the end effector of **FIG. 2A**;

[0018] **FIG. 3A** is an enlarged, right, side view of a second end effector of the bipolar forceps of **FIG. 1** prior to overmolding;

[0019] **FIG. 3B** is a bottom view of the end effector of **FIG. 3A**;

[0020] **FIG. 3C** is a left, side view of the end effector of **FIG. 3A**;

[0021] **FIG. 4** is an exploded, perspective view of the bipolar instrument of **FIG. 1**; and

[0022] **FIG. 5** is a perspective view of the embodiment shown in **FIG. 1** shown with a spacer disposed between a pair of jaw members to fix a specific gap distance during the overmolding process.

DETAILED DESCRIPTION

[0023] Referring now in specific detail to the drawings in which like reference numerals identify similar or identical elements throughout the several views, and initially to **FIGS. 1-3C**, one particular embodiment of an electrosurgical instrument **10** includes two elongated shafts **30** and **60** each having a distal end effector **32**, **62** and a proximal handle portion **34** and **64**, respectively. Handles **34** and **64** are movable relative to one another about a hinge assembly **20** from a first position wherein the distal end effectors **32**, **62** are positioned in spaced relation relative to one another to a second position in which the distal end effectors **32**, **62** cooperate to grasp tissue therebetween. It is envisioned that handles **34** and **64** may take any design configuration suitable for manipulation or control of the surgical instrument **10**.

[0024] Each distal end, e.g., **32**, has a jaw member **36** disposed at the distal end thereof which includes a tissue grasping surface **38** dimensioned to cooperate with the other jaw member, e.g., **66**, and other tissue grasping surface, e.g., **68**, to grasp tissue and other luminal structures upon actuation of the handles **34** and **64**. The jaw members **36**, **66** each also include a hinge plate **35**, **65**, respectively, which cooperate to support opposing sides of the hinge assembly **20** as explained in more detail below. Hinge plate **35** includes a pivot pin **74** which mechanically engages a corresponding pivot hole **61** disposed within hinge plate **65** to form pivot assembly **70**.

[0025] Hinge assembly **20** as described herein relates to one particular embodiment for use with a bipolar electrosurgical forceps **10**, however, it is contemplated that the presently disclosed hinge assembly **20** could be dimensioned for use with other electrosurgical instruments including vessel sealing instruments, grasping instruments, ablation instruments, electrosurgical scissors, etc. Moreover, it is also envisioned that the hinge assembly **20** may be configured for use with a broad range of other non-electrical surgical instruments such as pliers, scissors, shears, crimpers and wire cutters.

[0026] Preferably, hinge assembly **20** is made from a composition **25** of insulating material such as plastic which is overmolded to encapsulate the hinge plates **35**, **65** during the manufacturing process. As best seen in **FIG. 2C**, pivot pin **74** includes a reinforcing portion **72** which allows the mold composition **25** to extrude through the pivot pin **74** of hinge plate **35** to an opposite side **63** of hinge plate **65** to form a retention tab **50**. More particularly, after a significant amount of mold composition **25** is extruded around the reinforcing portion **72** of the pivot pin **74**, the retention tab **50** is stamped against the opposite side **63** of hinge plate **65** to secure the hinge plates **35** and **65** in close abutment about the pivot assembly **70**. As can be appreciated in this embodiment of the present disclosure, the mold composition **25** is contiguous with the exterior of the hinge plate **35** through aperture **31**, around reinforcing portion **72** and with the retention tab **50** which securely engages the hinge assembly **20** between the hinge plates **35**, **65**.

[0027] As can be appreciated, both the mold composition **25** and the retention tab **50** are formed during the same molding step resulting in the formation of the hinge assembly **20**. It is envisioned that once cured, the retention mechanism **50** forms a structural limit that at least partially controls the alignment of the distal end effectors **32** and **62** as well as the amount of pivotal movement between the jaw members **36** and **66**. Alternatively, the retention tab **50** may be made from the same or a different mold composition **25** and is designed to mechanically engage the pivot pin **74** or the hinge plate **65** to secure the hinge assembly between the hinge plates **35** and **65**.

[0028] As best shown in the exploded view of **FIG. 4**, the formation of the hinge assembly **20** in this manner electrically isolates the two end effectors **32** and **62** and the component parts thereof enabling a user to selectively apply electrosurgical energy through the tissue and between the jaw members **36** and **66** as needed. More particularly, during the overmold process, the plastic cures about the outer periphery **75** of pivot pin **74** which electrically isolates hinge plate **35** from hinge plate **65**. As can be appreciated, the retention tab **50** which, as mentioned above, is also formed of plastic which extrudes through pivot pin **74** to the opposite side **63** of hinge plate **65**, not only retains the two hinge plates **35** and **65** in secure abutment about the pivot assembly **70** but also electrically isolates the hinge plates **35** and **65** from one another.

[0029] Because the presently disclosed hinge assembly **20** is preferably formed during a single manufacturing step, it can be easily customized and dimensioned to suit a particular purpose or to achieve a particular result. For example, the alignment of the jaw members **36** and **66**, e.g., jaw angle or jaw offset, may be easily customized depending upon a

particular purpose. Moreover, the formation of a gap distance between the jaw members **36**, **66** may be easily customized. For example, the hinge assembly **20** may be molded or formed during the manufacturing process such that the jaw members **36** and **66** maintain a consistent and specific gap distance within the range of about 0.001 inches to about 0.005 inches at closure. The formation of the gap distance is discussed below with particular reference to **FIG. 5**.

[0030] Generally, hinge **20** is formed from an overmold composition containing a joint-forming base resin material and a lubricating component. Hinge-forming materials for use herein can be any commercially available materials known to one skilled in the art for toughness and strength as well as being capable of injection molding. Suitable joint-forming base resin materials include, but are not limited to, polyamides such as nylon, acrylonitrile-butadiene styrene; acetyl, polyesters, etc. Preferably, the overmold composition is made from a plastic or plastic-based material having a Comparative Tracking Index of about 300 volts to about 600 volts for dielectric isolation. For example, the overmold composition **25** may be made from a group of materials selected from a group which includes Nylons, Syndiotactic-polystyrene (SPS), Polybutylene Terephthalate (PBT), Polycarbonate (PC), Acrylonitrile Butadiene Styrene (ABS), Polyphthalamide (PPA), Polyimide, Polyethylene Terephthalate (PET), Polyamide-imide (PAI), Acrylic (PMMA), Polystyrene (PS and HIPS), Polyether Sulfone (PES), Aliphatic Polyketone, Acetal (POM) Copolymer, Polyurethane (PU and TPU), Nylon with Polyphenylene-oxide dispersion and Acrylonitrile Styrene Acrylate. Alternatively, it is envisioned that a non-plastic insulating material, e.g., ceramic, may be used in lieu of or in combination with one or more of the above-identified materials to facilitate the manufacturing process and possibly contribute to more uniform and consistent transfer of electrosurgical energy across the tissue.

[0031] Suitable lubricating components for use with the base resin material include a broad range of materials known to complement the overmold composition to provide mold having a low bonding strength with good surface lubricating qualities. Such lubricating components include, but are not limited to, silicon-like materials, molybdenum disulfide, light olefins, etc. Depending upon the overall composition of the base resin material being used, a lubricating component may not be required.

[0032] It is also anticipated that additional materials may be employed in combination with the above materials to achieve suitable levels of toughness and strength in the molded hinge **20**. These additional materials may include, for example, reinforcing agents such as glass fibers, ground glass, or elongated glass fibers. For example, in one particular embodiment, hinge assembly **20** is formed from a commercially available nylon material having about 2.5 wt. % glass fiber reinforcing material and a silicone lubricating component in the range of about 0.75 wt. % to about 10 wt. %. In another embodiment, hinge assembly **20** may be formed from a nylon having glass fiber reinforcing material in the range of about 5 wt. % to about 40 wt. % and silicone in the range of about 2 wt. % to about 8 wt. %.

[0033] While silicone or other lubricating agents are typically used in injection molding processes, it has been found

that the amount of silicone should be tightly controlled to provide uniform and consistent curing and operating efficiencies. It is envisioned that the silicone component of the overmold composition creates a sustained lubricated surface at the interface between hinge plates **35** and **65**. It has also been found that increasing the level of silicone, e.g., amounts greater than 2 wt.%, in the joint-forming material of hinge assembly **20**, produces an overmold composition having a low bond strength. As can be appreciated, although the overmold composition **25** has a low bond strength to the surrounding metals, i.e., elongated shafts **30**, **60** and hinge plates **35**, **65**, the low bonding strength is offset by the mechanical advantages of the retention tab **50** and aperture **31**.

[0034] As mentioned above, the presently disclosed hinge assembly **20** may be formed during a single manufacturing step and may be easily customized depending upon a particular purpose or to achieve a particular result. For example, parameters such as self lubrication of the hinge assembly **20**, hinge assembly **20** strength, jaw member **36**, **66** alignment, e.g., jaw angle or jaw offset, isolation of the jaw members **36** and **66** during electrosurgical application and the formation of a gap distance between the jaw members **36** and **66** (or electrodes or probes attached to the jaw members **36** and **66**) may be easily achieved.

[0035] The present application is not limited to the above identified materials, but contemplates a broad range of overmold composition **25** in varying combinations and amounts that provide an overmold composition suitable for the function of hinge assembly **20**. It is envisioned that applications described herein relating to the injection overmolding of thermoplastic polyamides, for example, may be translated into other areas including, but not limited to, other engineering plastic materials, engineering metals and ceramics that may be selectively applied in varying insulative as well as mechanical applications.

[0036] The overmold composition **25** of the present disclosure is configured to create a tough and strong hinge assembly **20** by at least partially encapsulating the hinge plates **35** and **65** and the pivot assembly **70** (and the various components thereof). The overmold composition **25** provides suitable strength as a result of its continuity of encapsulation as well as the ability of the overmold composition **25** to form surface features which are specifically dimensioned to improve the strength of the hinge assembly **20** once cured. For example, features within the pivot pin **74** and features within the pivot hole **61** may be provided to increase the overall strength of the instrument and/or hinge assembly **20**, e.g. notches, detents, cavities, overmolded posts, etc. Further, structural strength for the hinge assembly **20** may be gained by coating or filling features defined in the surface of the hinge plates **35**, **65** to augment the mechanical bonding of the plastic mold with the hinge plates **35**, **65**, pivot pins **74** and pivot holes **61**. For example, surface undulations such as lip structures, overhanging shapes, concave shapes, or cantilevered structures having different geometric shapes may be employed to mechanically engage the hinge assembly **20** to the hinge plates **35**.

[0037] Preferably, the elongated shafts **30**, **60** are made from a stainless steel material. However, other metal alloys, plastics, ceramics, or composites are also contemplated including combinations of one or more plastics, composites,

metals, graphite, carbon-coated plastics and/or any other conductive materials which are well suited for overmolding purposes. Preferably, the elongated shafts **30** and **60** are die-cut, stamped, or micro-machined such that the end effectors **32** and **62** and the hinge plates **35** and **65** from integral parts thereof. As can be appreciated, making these elements integral and utilizing the overmold hinge assembly **20** as presently disclosed herein greatly simplifies the overall manufacturing and assembly processes.

[0038] Instrument **10** may also include surface treatments (e.g., nylon powder coatings, chemical treatments, nickel alloy coatings, mechanical finish treatments, shrink tubing, etc.) which facilitate manipulation of the tissue structures, enhance conduction of electrosurgical energy across the jaw members **36**, **66** and/or reduce the likelihood of inconsistencies across the treatment area which may lead to collateral tissue damage, flashover, thermal spread, arcing, etc.

[0039] Preferably, the thickness of the hinge assembly **20** can be selectively altered depending upon a particular purpose or for use with a certain instrument. The ultimate thickness and strength of the overmold composition **25** is also related to the viscosity of the overmold composition **25** and the duration and temperature of the curing process. For example, the hinge assembly **20** may include a range of thickness from about 0.020 to about 0.040 inches in thickness. The thickness of the overmold composition **25** also depends on mechanical load bearing and dimensional requirements of a particular application.

[0040] As best shown in **FIG. 4**, the outer periphery **75** of pivot pin **74** provides a basis for the formation of additional molded material around the pivot pin **74** which not only electrically insulates the jaw members **36** and **66** from one another but also reduces the chances of the pivot slipping or rotating when torquing, cross-loading, or shearing forces are applied during the normal use of instrument **10**.

[0041] It is envisioned that the hinge assembly may be designed as a more complex mechanism and/or may be designed to encapsulate a more complex pivoting mechanism. For example, it is contemplated that the hinge assembly **20** may include various multiple-link systems such as a two-bar, three-bar or four-bar linkage or may include a two-step hinge. The pivot pin **74** and/or the pivot hole **61** may also be dimensioned in a variety of different shapes and sizes depending upon a particular purpose or to achieve a particular result, e.g., cam and cam-follower, arcuate, elliptical, etc. It is also envisioned that the hinge assembly **20** may include one or more stop members **19** which limit the overall distance that the jaw members **36**, **66** may pivot in either the open or closed positions. The stops **19** may be configured in steps or as a cantilevered feature to define more than one gap distance between jaw members **36** and **66**.

[0042] In one embodiment, retention tab **50** may be configured to mechanically engage a portion of the hinge plate **65** and/or pivot pin **74** which is contemplated to serve two purposes: 1) to mechanically retain the retention tab **50** against the hinge plate **65** and further secure the instrument **10** as assembled; and 2) to bias the pivot assembly **70** to a predetermined open, closed, or intermediary position. For example, the outer-facing surface **63** of hinge plate **65** may be provided with slots or grooves (not shown) which mechanically engage the retention tab **50**.

[0043] With respect the to particular surgical instrument of **FIGS. 1-4**, i.e., bipolar forceps **10**, first and second conductive wires **41** and **45** are each electrically coupled to a respective distal end effector **32** and **62** at one end thereof and ultimately connected to an electrosurgical generator (not shown) at the opposite end thereof. The first electrical conductor **41** (see **FIG. 2A**) connects the first jaw member **36** to a first electrical potential and the second electrical conductor **45** (see **FIG. 3A**) connects the second jaw member **66** to a second electrical potential. Preferably, the first and second electrical conductors **41** and **45** are disposed within longitudinally-oriented channels defined within elongated shafts **30** and **60**, respectively. The channels are preferably oriented and dimensioned to facilitate mechanical engagement of the electrical conductors **41** and **45** with the respective jaw members **36** and **66** in such a manner to allow free, pivotable movement of the jaw members **36** and **66** relative to one another. Preferably, the cable leads are attached to the electrically conductive jaw members **36** and **66** by a crimp-like electrical connection (not shown). As mentioned above, the hinge assembly **20** includes at least one stop **19** which abuts against elongated shafts **30**, **60** to prevent over-rotation of the jaw members **36** and **66** to avoid straining the electrical leads.

[0044] Preferably, hinge assembly **20** is manufactured in a single injection molding or manufacturing process step in which elongated shafts **30** and **60** are mounted atop a die block within an injection molding machine. The overmold composition **25** of the hinge assembly **20** is then injected between the jaw members **36** and **66** to encapsulate the hinge plates **35** and **65** and the pivot assembly **70**. As mentioned above, the hinge assembly **20** is strengthened by the continuity of the plastic overmold composition **25** which extrudes through the pivot pin **74** and pivot hole **61** to form the retention tab **50**. Thus, in one particular embodiment, the hinge assembly **20** is completely formed by overmold composition flowing around and through the various components parts of the hinge assembly **20** and the pivot assembly **70**. As mentioned above, the retention tab may be a separate component made from the same or a similar composition which is dimensioned to mechanically engage the pivot pin **74** or the outer-facing surface **63** of the hinge plate **65**.

[0045] As mentioned briefly above and as shown in **FIG. 5**, a spacer **100** may be positioned between jaw members **36** and **66** prior to the overmolding process. The spacer **100** sets a fixed gap distance "G" between jaw members **36** and **66** at closure (i.e., when the jaw members **36** and **66** are disposed in the closed or tissue grasping position) by limiting the formation of the stop **19** during the overmolding process. As can be appreciated, different and/or customized gap distances "G" between the jaw members **36** and **66** can be easily formed depending upon a particular purpose or to achieve a particular result.

[0046] The presently disclosed overmolding process also enables the manufacturer to customize the precise alignment of the jaw members **36** and **66** relative to one another. Thus, in applications in which the alignment of jaw members **36** and **66** is critical, such as for shearing, cutting and sealing, the accuracy, alignment and configuration of the hinge assembly **20**, pivot assembly **70** and jaw members **36** and **66** can be easily customized. Further, the presently disclosed

process also provides a repeatable and reliable alignment tool for mass manufacturing of surgical instruments according to specific tolerances.

[0047] From the foregoing and with reference to the various figure drawings, those skilled in the art will appreciate that certain modifications can also be made to the present disclosure without departing from the scope of the present disclosure. For example, it is contemplated that hinge assembly 20 can be configured to join a plurality of different components or subassemblies in the assembly depending upon a particular purpose. Moreover, the outer periphery 75 of pivot pin 74 could also include features such as a series of undulations or knurling, or a series of radially aligned cavities having features within those cavities that strengthen the mechanical interface of the overmold composition to the pivoting assembly 70.

[0048] In one embodiment, the instrument includes a conductive strip (not shown) disposed through one shaft, e.g., shaft 30. Electrosurgical wires or cables (not shown) from an electrosurgical generator (not shown) connect the two electrical potentials to the conductive strip. The opposite end of the conductive strip includes one electrical connection to end effector 32 and a second electrical connection to pivot assembly 70 which provides electrical continuity to the opposite end effector 62. More particularly, the second electrical connection of the conductive strip makes contact across the moving junction of the pivot assembly. It is not necessary that the conductive strip wrap around the pivot pin 74 between the instrument halves because during the molding process the conductive strip is forced into intimate contact with the opposite end effector 62, i.e., the flow of the uncured hinge material positions the conductive strip into contact with end effector 62.

[0049] As a result thereof, secondary washers or force loading devices are not required to initiate contact between the conductive strip and the opposite end effector 62. The conductive strip may also include a series of wave-like folds, e.g., accordion folds, which give the conductive strip a spring-like quality and which fosters contact with the opposite end effector 62 during and after curing. As can be appreciated, this arrangement assures that a moving or sliding contact is maintained between the conductive strip and the end effector 62 during movement, i.e., pivoting, of the end effectors relative to one another.

[0050] While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of preferred embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

1. An electrosurgical instrument comprising:

first and second elongated shafts each having an end effector attached to a distal end thereof and a handle, said handles being movable from a first position wherein the end effectors are disposed in spaced relation relative to one another to a second position wherein the end effectors are closer relative to one another;

each of said elongated shafts including a hinge plate which mounts atop a pivot assembly for effecting movement of the end effectors relative to one another; and

a hinge assembly formed from an overmold composition which, when cured, encapsulates said hinge plates, said overmold composition being made from an electrically insulating material which insulates each of said end effectors from one another.

2. An electrosurgical instrument according to claim 1 wherein said pivot assembly includes a pivot pin integrally associated with a first of said hinge plates and a pivot hole formed within a second of said hinge plates, said pivot pin being made from an electrically insulating material.

3. An electrosurgical instrument according to claim 1 wherein said pivot assembly includes a pivot pin integrally associated with a first of said hinge plates and a pivot hole formed within a second of said hinge plates, said overmold composition of said hinge assembly when cured being disposed between said pivot pin and said pivot hole to electrically insulate each of said hinge plates from one another.

4. An electrosurgical instrument according to claim 1 wherein said overmold composition of said hinge assembly includes materials selected from the group consisting of polyamides, nylon, acrylonitrile-butane nitro styrene acetyl, polyesters, syndiotactic-polystyrene (SPS), polybutylene terephthalate (PBT), polycarbonate (PC), acrylonitrile butadiene styrene (ABS), polyphthalamide (PPA), polyimide, polyethylene terephthalate (PET), polyamide-imide (PAI), acrylic (PMMA), polystyrene (PS and HIPS), polyether sulfone (PES), aliphatic polyketone, acetal (POM) copolymer, polyurethane (PU and TPU), nylon with polyphenylene-oxide dispersion and acrylonitrile styrene acrylate.

5. An electrosurgical instrument according to claim 4 wherein said overmold composition of said hinge assembly includes lubricating materials selected from the group consisting of silicon, molybdenum disulfide and light olefins.

6. An electrosurgical instrument according to claim 1 wherein said hinge assembly includes a retention tab which secures said hinge assembly between said hinge plates.

7. An electrosurgical instrument according to claim 4 wherein said pivot assembly includes a pivot pin integrally associated with a first of said hinge plates and a pivot hole formed within a second of said hinge plates, said pivot pin including a reinforcing portion disposed therein which permits said overmold composition of said hinge assembly to extrude through said pivot pin to form a retention tab for securing said hinge assembly between said hinge plates.

8. An electrosurgical instrument according to claim 1 wherein said hinge assembly includes a stop member for limiting the movement of said end effectors relative to one another.

9. (canceled)

10. (canceled)

11. (canceled)

12. (canceled)

13. An electrosurgical instrument comprising:

first and second elongated shafts each having an end effector attached to a distal end thereof and a handle, said handles being movable from a first position wherein the end effectors are disposed in spaced rela-

tion relative to one another to a second position wherein the end effectors are closer relative to one another;

each of said elongated shafts including a hinge plate that mounts atop a pivot assembly for effecting movement of the end effectors relative to one another;

a hinge assembly formed from an overmold composition that, when cured, encapsulates said hinge plates, said

overmold composition being made from an electrically insulating material that insulates each of said end effectors from one another; and

the hinge assembly including a stop member for limiting the movement of said end effectors relative to one another.

* * * * *