




(86) Date de dépôt PCT/PCT Filing Date: 2005/02/14
(87) Date publication PCT/PCT Publication Date: 2005/10/13
(85) Entrée phase nationale/National Entry: 2006/07/26
(86) N° demande PCT/PCT Application No.: US 2005/004480
(87) N° publication PCT/PCT Publication No.: 2005/095679
(30) Priorités/Priorities: 2004/03/18 (US60/554,123);
2004/08/30 (US10/929,911)

(51) Cl.Int./Int.Cl. *H01L 21/04* (2006.01),
H01L 21/20 (2006.01), *H01L 21/205* (2006.01)
(71) Demandeur/Applicant:
CREE, INC., US
(72) Inventeurs/Inventors:
HALLIN, CHRISTER, SE;
LENDENMANN, HEINZ, SE;
SUMAKERIS, JOSEPH JOHN, US
(74) Agent: SIM & MCBURNEY

(54) Titre : PROCEDES LITHOGRAPHIQUES SEQUENTIELS DESTINE A REDUIRE DES SITES DE NUCLEATION DE FAUTE D'EMPILEMENT ET STRUCTURES POSSEDANT DES SITES DE NUCLEATION DE FAUTE D'EMPILEMENT REDUITS

(54) Title: SEQUENTIAL LITHOGRAPHIC METHODS TO REDUCE STACKING FAULT NUCLEATION SITES AND STRUCTURES HAVING REDUCED STACKING FAULT NUCLEATION SITES

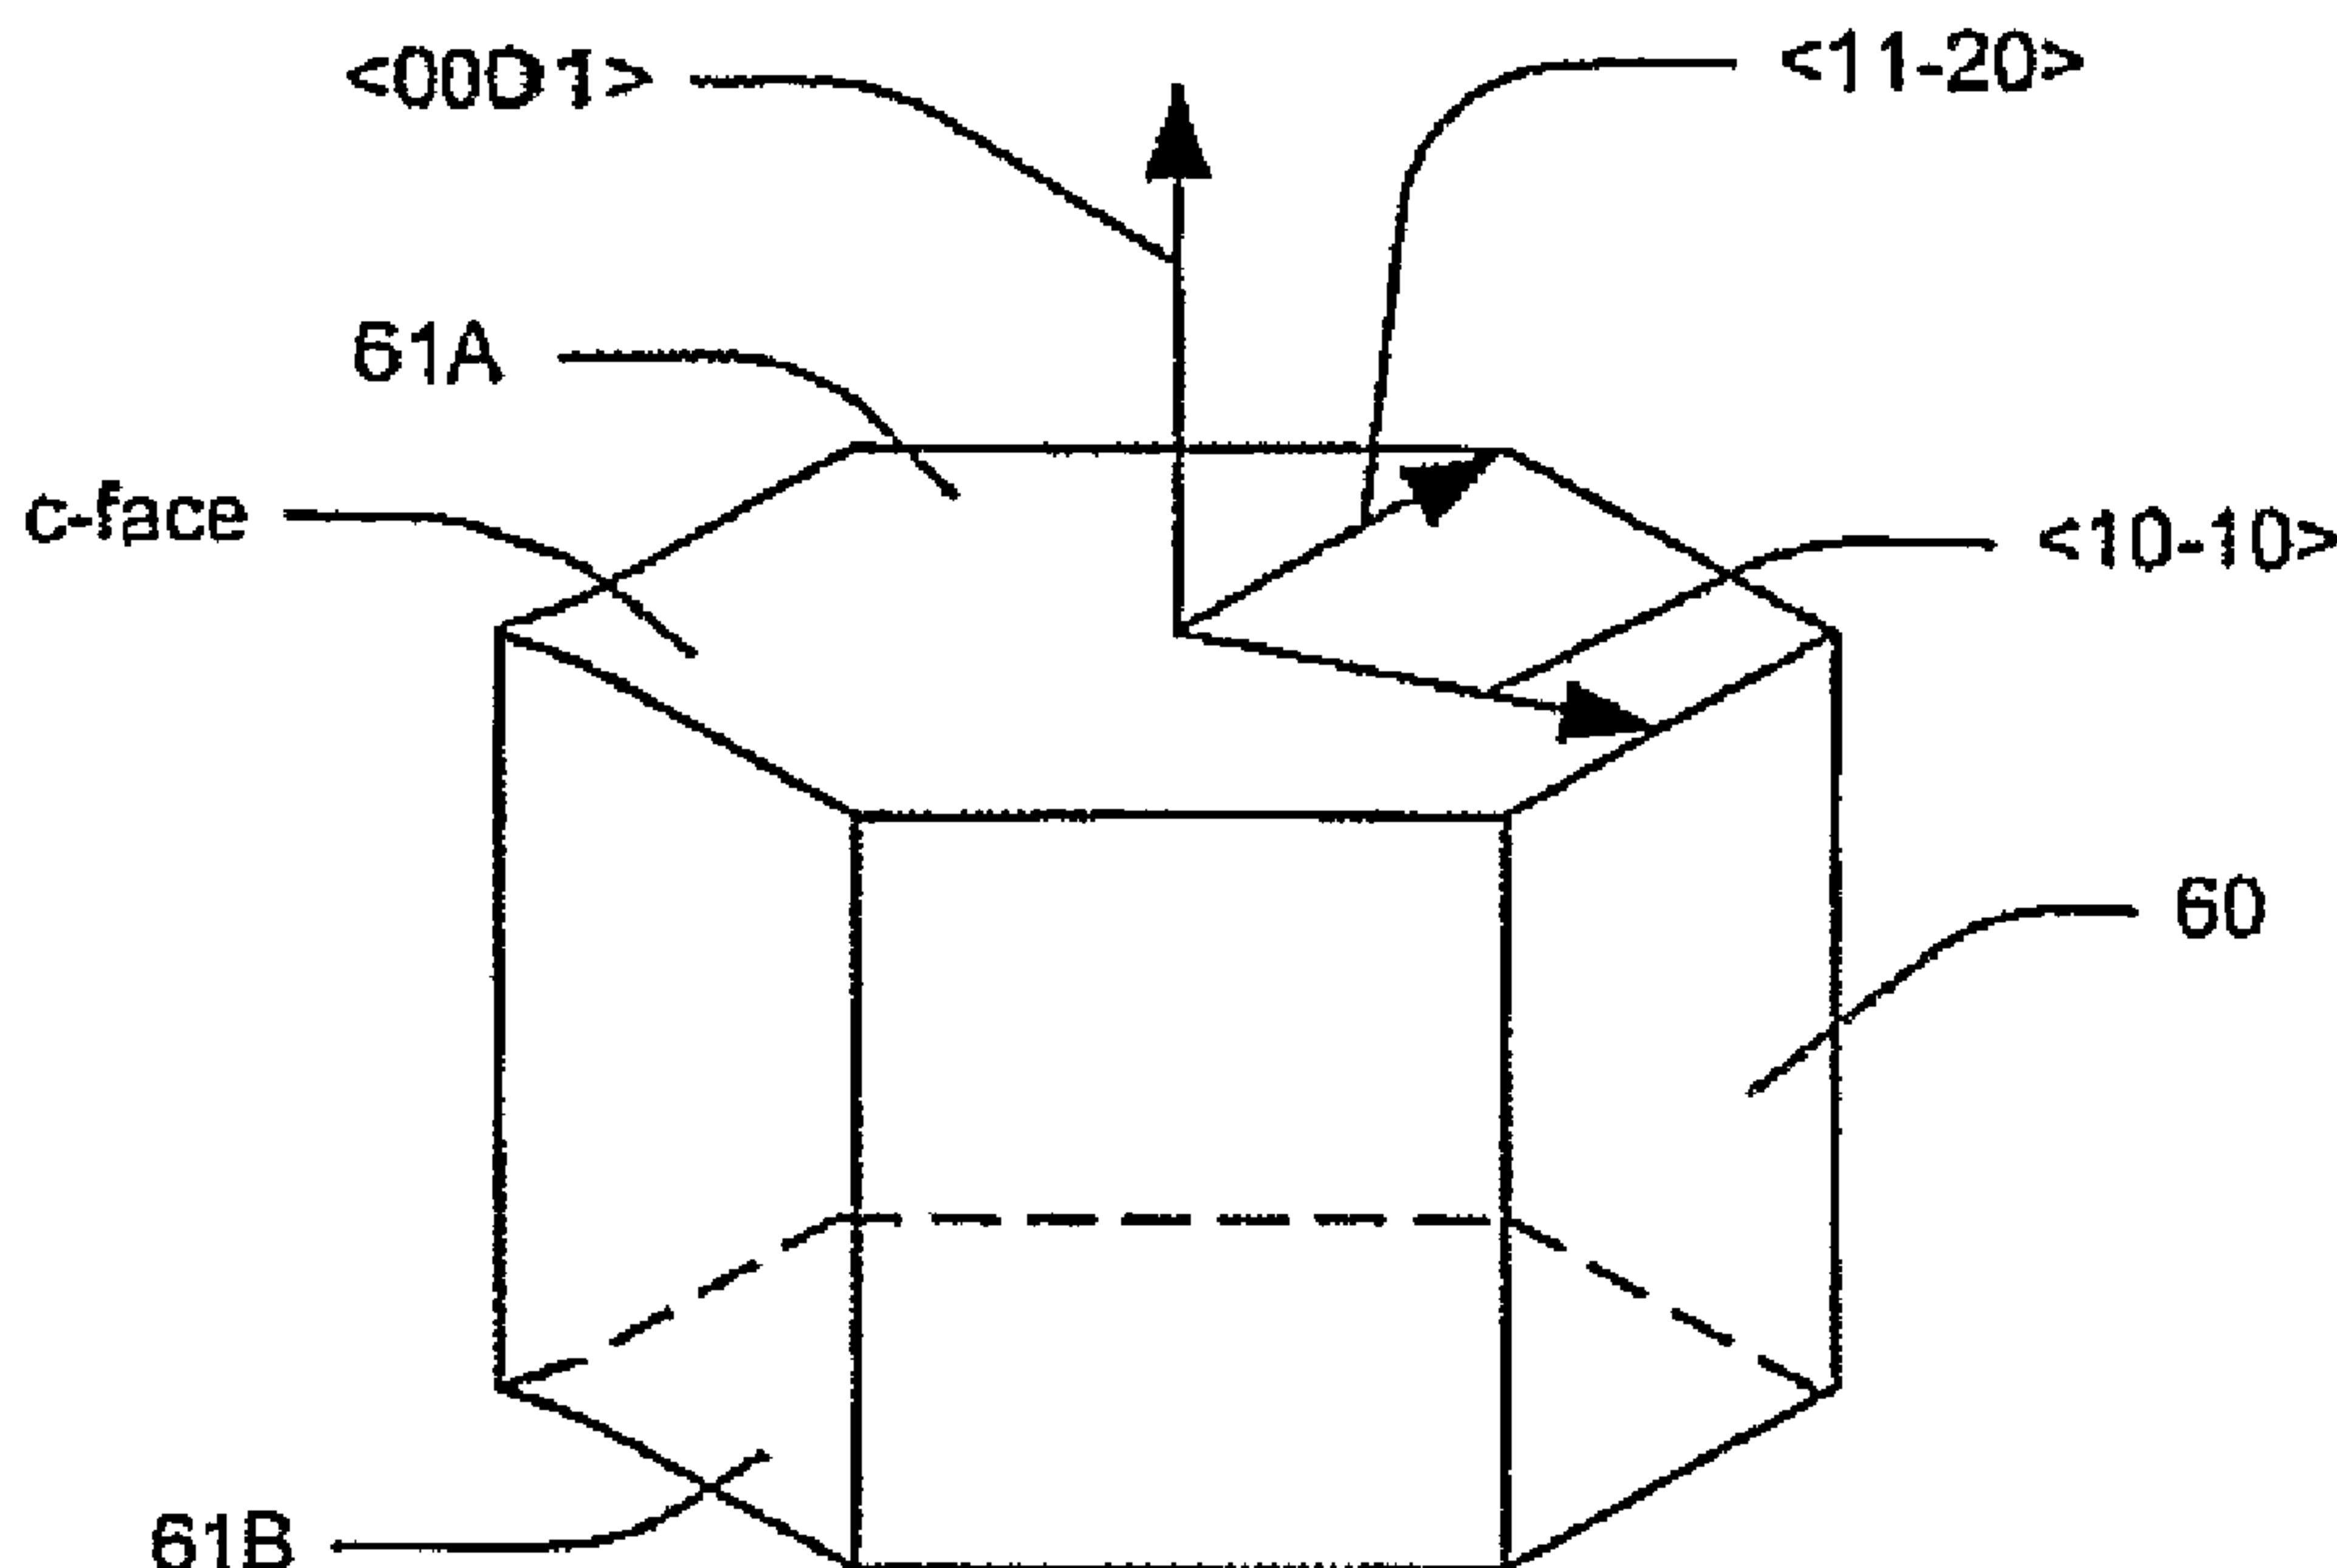

(57) Abrégé/Abstract:

An epitaxial silicon carbide layer is fabricated by forming first features in a surface of a silicon carbide substrate having an off-axis orientation toward a crystallographic direction. The first features include at least one sidewall that is orientated nonparallel (i.e., oblique or perpendicular) to the crystallographic direction. A first epitaxial silicon carbide layer is then grown on the surface of the silicon carbide substrate that includes first features therein. Second features are then formed in the first epitaxial layer. The second features include at least one sidewall that is oriented nonparallel to the crystallographic direction. A second epitaxial silicon carbide layer is then grown on the surface of the first epitaxial silicon carbide layer that includes the second features therein.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number
WO 2005/095679 A3

(51) International Patent Classification⁷: **H01L 21/04**,
21/20, 21/205

(21) International Application Number:
PCT/US2005/004480

(22) International Filing Date: 14 February 2005 (14.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/554,123 18 March 2004 (18.03.2004) US
10/929,911 30 August 2004 (30.08.2004) US

(71) Applicant (for all designated States except US): **CREE, INC.** [US/US]; 4600 Silicon Drive, Durham, North Carolina 27703 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HALLIN, Christopher** [SE/SE]; Nickelstigen 9, S-58729 Linköping (SE). **LENDENMANN, Heinz** [SE/SE]; Villavagen 12, S-182 79 Stocksund (SE). **SUMAKERIS, Joseph John** [US/US]; 4412 Surry Ridge Circle, Apex, North Carolina 27502 (US).

(74) Agent: **BIGEL, Mitchell, S.**; Myers Bigel Sibley & Sajovec, P.A., P.O. Box 37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
8 December 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEQUENTIAL LITHOGRAPHIC METHODS TO REDUCE STACKING FAULT NUCLEATION SITES AND STRUCTURES HAVING REDUCED STACKING FAULT NUCLEATION SITES

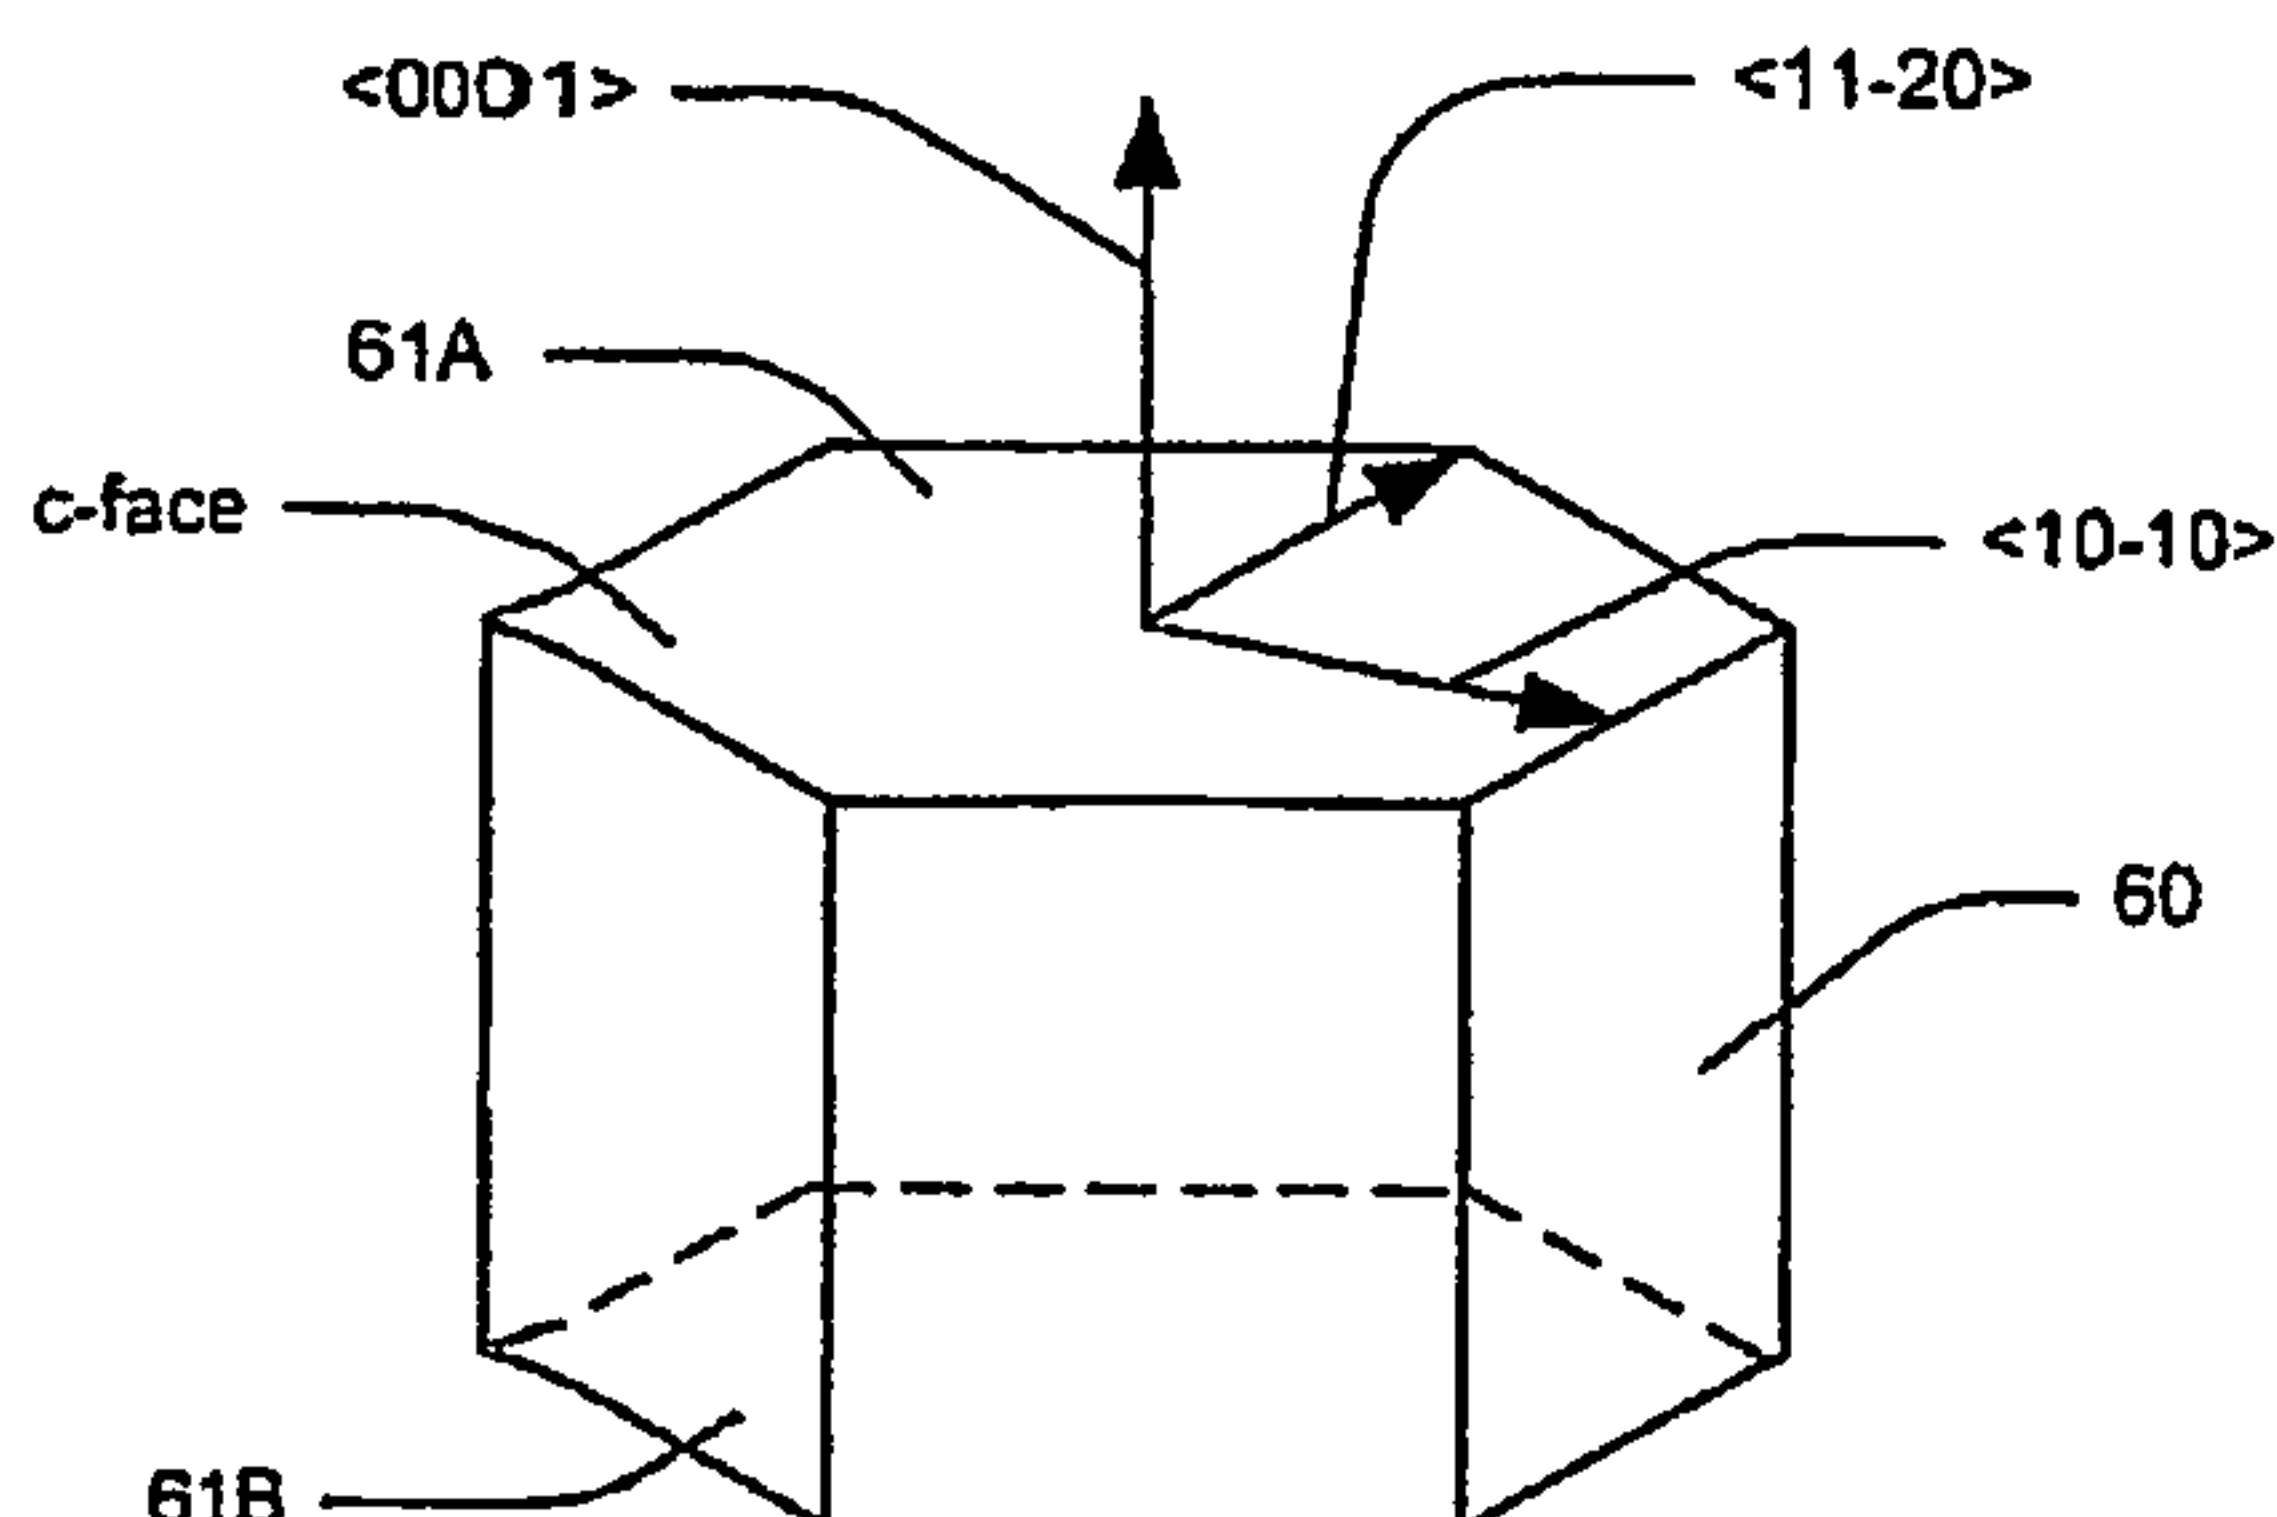

(57) Abstract: An epitaxial silicon carbide layer is fabricated by forming first features in a surface of a silicon carbide substrate having an off-axis orientation toward a crystallographic direction. The first features include at least one sidewall that is orientated nonparallel (i.e., oblique or perpendicular) to the crystallographic direction. A first epitaxial silicon carbide layer is then grown on the surface of the silicon carbide substrate that includes first features therein. Second features are then formed in the first epitaxial layer. The second features include at least one sidewall that is oriented nonparallel to the crystallographic direction. A second epitaxial silicon carbide layer is then grown on the surface of the first epitaxial silicon carbide layer that includes the second features therein.

WO 2005/095679 A3

**SEQUENTIAL LITHOGRAPHIC METHODS TO REDUCE STACKING
FAULT NUCLEATION SITES AND STRUCTURES HAVING REDUCED
STACKING FAULT NUCLEATION SITES**

Cross-Reference to Provisional Application

This application claims the benefit of and priority from Provisional Application Serial No. 60/554,123, filed March 18, 2004, entitled *Lithographic Method to Reduce Stacking Fault Nucleation Sites and Reduce V_f Drift in Bipolar Devices and Structures Having Reduced Stacking Fault Nucleation Sites*, the disclosure of which is hereby incorporated herein by reference in its entirety as if set forth fully herein.

Statement of Government Interest

This invention was developed under government contract No. N00014-02-C-0302. The U.S. Government has a paid-up license in this invention and the right in limited circumstances to require the patent owner to license others on reasonable terms as provided for by the terms of contract No. N00014-02-C-0302 awarded by the Defense Advanced Research Projects Agency ("DARPA").

Field of the Invention

This invention relates to semiconductor materials and devices and fabrication methods therefor, and more particularly to methods of growing monocrystalline semiconductor materials, materials formed thereby and devices formed therein.

Background

The present invention relates to methods of fabricating semiconductor materials used in electronic devices, such as power electronic devices. In particular, some embodiments of the invention relate to processes that can reduce crystal defects in silicon carbide, and the resulting structures and devices. The present invention is related to the subject matter disclosed and claimed in co-pending and commonly assigned application Serial No. 10/046,346; filed October 26, 2001 and now published as No. 2003-0080842 A1 as well as co-pending and commonly assigned application Serial No. 10/605,312 filed September 22, 2003; the contents of both of which are incorporated entirely herein by reference in their entirety, as set forth fully herein.

Silicon Carbide

Silicon carbide (SiC) has emerged over the last two decades as an appropriate candidate semiconductor material that can offer a number of advantages over both silicon and gallium arsenide. In particular, silicon carbide has a wide bandgap, a high breakdown electric field, a high thermal conductivity, a high saturated electron drift velocity, and is physically extremely robust. Silicon carbide has an extremely high melting point and is one of the hardest known materials in the world.

Because of its physical properties, however, silicon carbide also may be relatively difficult to produce. Because silicon carbide can grow in many polytypes, it may be difficult to grow into large single crystals. The high temperatures used to grow silicon carbide also may make control of impurity levels (including doping) relatively difficult, and likewise may raise difficulties in the production of thin films (*e.g.* epitaxial layers). Because of its hardness, the traditional steps of slicing and polishing semiconductor wafers also may be more difficult with silicon carbide. Similarly, its resistance to chemical attack may make it difficult to etch in a conventional fashion.

In addition, silicon carbide can form over 150 polytypes, many of which are separated by relatively small thermodynamic differences. As a result, growing single crystal substrates and high quality epitaxial layers ("epilayers") in silicon carbide has been, and may remain, a difficult task.

Nevertheless, based on a great deal of research and discovery in this particular field, including that carried out by the assignee of the present invention, a number of advances have been made in the growth of silicon carbide and its fabrication into useful devices. Accordingly, commercial devices are now available that incorporate silicon carbide as a substrate for other useful semiconductors such as the Group III nitrides, to produce blue and green light emitting diodes. Also, commercial silicon carbide-based devices are available for microwave and radio frequency (RF) high-power, high-voltage applications, and/or for other applications.

As the success of silicon-carbide technology has increased the availability of certain SiC-based devices, particular aspects of those devices have become more apparent. In particular, it has been observed that the forward voltage (V_f) of some silicon carbide-based bipolar devices such as bipolar power devices may increase noticeably during operation of some devices. This increase is generally referred to as

"V_f drift." For a number of reasons, such functional problems in semiconductor devices can often result from defects in the crystal structure of the material from which the devices are formed. Examples of these defects are discussed below.

Deposition systems and methods are commonly used to form layers of semiconductor materials, such as thin epitaxial films, on substrates. For example, a chemical vapor deposition (CVD) reactor system and process may be used to form a layer of semiconductor material such as silicon carbide (SiC) on a substrate. CVD processes may be particularly effective for forming layers with controlled properties, thicknesses, and/or arrangements such as epitaxial layers. Typically, in a deposition system, such as a CVD system, the substrate is placed in a reaction chamber within a susceptor and one or more process gases including reagents or reactants to be deposited on the substrate are introduced into the chamber adjacent the substrate. The process gases may be flowed through the reaction chamber in order to provide a uniform or controlled concentration of the reagents or reactants to the substrate.

Silicon Carbide Crystal Structure

A deposition system, such as a CVD reactor, may be used to form epitaxial layers of silicon carbide on a single crystal silicon carbide substrate having a predetermined polytype such as 2H, 4H, 6H, 15R, 3C and the like. The term "polytype" refers to the ordering and arrangement of layers of atoms within a crystal structure. Thus, although the different polytypes of silicon carbide are stoichiometrically identical, they possess different crystal structures and consequently may have different material properties such as bandgap, carrier mobility and breakdown field strength. The letters H, R and C refer to the general crystal structure of the polytype, namely, hexagonal, rhombohedral and cubic, respectively. The numbers in the polytype designations refer to the repetition period of layer arrangements. Thus, a 4H crystal has a hexagonal crystal structure in which the arrangement of atoms in a crystal repeats every four bi-layers.

Figure 1 illustrates a hexagonal unit cell of a hypothetical crystal. The unit cell **60** includes a pair of opposing hexagonal faces **61A**, **61B**. The hexagonal faces are normal to the c-axis, which runs along the $\langle 0001 \rangle$ direction as defined by the Miller-Bravais indexing system for designating directions in a hexagonal crystal. Accordingly the hexagonal faces are sometimes called the c-faces, which define the c-

planes or basal planes of the crystal. Planes perpendicular to the c-plane are referred to as prismatic planes.

Silicon carbide possesses a number of potentially advantageous physical and electronic characteristics for semiconductor performance and devices. These may include a wide bandgap, high thermal conductivity, high saturated electron drift velocity, high electron mobility, superior mechanical strength, and radiation hardness. However, the presence of crystalline defects in silicon carbide films may limit the performance of electronic devices fabricated in the films, depending on the type, location, and density of the defects. Accordingly, significant research has focused on reducing defects in silicon carbide films. Certain defects, such as micropipes, are known to severely limit and even prevent device performance. Other defects, such as threading dislocations, are not considered to be individually catastrophic to device operation, and therefore they may not significantly impact device performance at densities normally found in epitaxial films.

For applications where a high voltage blocking capability is desired (for example power switching applications), silicon carbide films are usually grown "off-axis." That is, the substrate crystal is sliced at an angle that is slightly oblique to the normal crystal axis (the c-axis). Taking for example a hexagonal polytype such as 4H or 6H, the oblique angle of the cut may be made in one of the standard crystallographic directions illustrated in **Figure 2**, namely the $\langle 11\bar{2}0 \rangle$ direction (towards a point of the hexagonal unit cell) or the $\langle 10\bar{1}0 \rangle$ direction (towards the center of a flat side of the hexagonal unit cell), or along a different direction. As a result of the off-axis slicing, the face of a prepared substrate may be characterized by a periodic arrangement of plateaus and steps. See, for example, U.S. Patent 4,912,064 to Kong et al, entitled *Homoepitaxial Growth of Alpha-SiC Thin Films and Semiconductor Devices Fabricated Thereon*, assigned to North Carolina State University, the disclosure of which is hereby incorporated herein by reference in its entirety as if set forth fully herein.

Thus when an epitaxial layer is grown on the substrate, the deposited atoms bond to atoms at the exposed edges of the crystal layer steps, which causes the steps to grow laterally in so-called step-flow fashion. Step-flow growth is illustrated in **Figure 3**. Each layer or step grows in the direction in which the crystal was originally cut off-axis (the $\langle 11\bar{2}0 \rangle$ direction in the case illustrated in **Figure 3**).

Crystallographic Defects

At the most basic level, structural crystallographic defects may fall into four categories: point defects, line defects, planar defects and three dimensional defects.

5 Point defects include vacancies, line defects include dislocations, planar defects include stacking faults and three-dimensional defects include polytype inclusions.

A dislocation is a kind of structural imperfection that extends for many unit cell lengths throughout a crystal. A more definite description of dislocation may classify them as screw and edge dislocations. As recognized by those persons skilled
10 in this art, a symmetrical path followed from atom to atom (or from ion to ion) in a real crystal that returns upon itself, is referred to as a Burgers circuit. If the same path in the lattice that typifies the structure does not return upon itself, so that the beginning and end do not lie on the same atom, then the Burgers circuit encloses one or more dislocations. The vector that completes the closed circuit in the lattice is
15 referred to as the Burgers vector and measures the magnitude and direction of the dislocation.

If the Burgers vector is parallel to the line that locates the dislocation, the defect is referred to as a screw dislocation. Alternatively, if the Burgers vector is perpendicular to the dislocation, it is referred to as an edge dislocation. The simplest
20 version of an edge dislocation is an incomplete plane of atoms or ions interleaved between two normal planes in a manner somewhat analogous to an extra card inserted halfway into a deck.

Screw dislocations are not necessarily disadvantageous and, in fact, can be advantageous for the growth of a crystal. For example, a 1C threading screw
25 dislocation at the nominally (0001) oriented growth surface of a silicon carbide crystal presents a regenerating edge that is one or a few atoms high. At this edge, continued growth of the crystal is relatively easy. Dislocations, however, allow plastic flow to occur in a crystal relatively easily. Dislocations may move preferentially along slip planes. The dislocation moves relatively easily through the crystal because motion in
30 the slipped plane involves only a slight displacement of the structural elements. Stated differently, the slipped planes provide a low-energy intermediate state by which a crystal can be reorganized.

Defects in Silicon Carbide

In silicon carbide power devices, the availability of such a relatively low-energy intermediate state may encourage faults to continue to grow, since the operation of the device can provide the relatively small amount of energy that may be required to drive dislocation motion.

Commercial quality SiC wafers and epilayers typically include both screw and edge dislocations. These dislocations can be further grouped by their alignment within the crystal. Those dislocations that propagate along the c-axis are called threading dislocations, while dislocations that lie within the c-plane are termed basal plane dislocations. In general, in SiC, it is energetically favorable that basal plane dislocations may preferentially decompose into partial dislocations via the mechanism described below:

$$1/3\langle 11\bar{2}0 \rangle \rightarrow 1/3\langle 10\bar{1}0 \rangle + 1/3\langle 01\bar{1}0 \rangle \quad \text{Equation 1}$$

The above decomposition reaction describes the decomposition of a basal plane dislocation into two Shockley partial dislocations. The line defects generated during the above decomposition will bound a stacking fault defect. In fact, partial dislocations will generally bind the entire perimeter of the stacking fault unless the stacking fault reaches a free surface. This stacking fault will generally be electrically active in bipolar devices, and, during forward operation, the density of the electron-hole plasma may be reduced in the vicinity of the stacking fault. The reduced plasma density may increase the forward voltage of the device. A further potential complication is that through recombination enhanced dislocation glide, the stacking fault may continue to expand during forward operation of the device. This behavior can raise a substantial barrier to device exploitation because it can result in devices with functional properties that can change unpredictably during operation.

Stated differently, the application of electric current through a silicon carbide bipolar device may tend to initiate or propagate (or both) changes in the crystal structure due to preexisting defects in the crystal. As noted above, many SiC polytypes are in close thermodynamic proximity, and solid phase transformations are quite possible. When the stacking faults impact a significant portion of the active area of a device, they tend to cause the forward voltage to increase in an undesirable manner that can prevent the device from operating as precisely and/or efficiently as required or desired in many applications.

In some conventions, dislocation density is described by centimeters of dislocation length per cubic centimeter of material, and thus report dislocation density units of per square centimeter (cm^{-2}). In another convention (and as used herein) the off-axis orientation of 4H-SiC substrates for SiC epilayer growth and the common etch technique used to detect dislocations make it more convenient to use etch pit density (also in the units of cm^{-2}), to describe dislocation densities in SiC. Those of skill in this art will thus recognize that for a given dislocation density expressed as cm/cm^3 , one could get a very different dislocation pit density when expressed as pits/ cm^2 depending on the typical dislocation configuration and the off-axis angle of the substrate. Therefore, although the two numbers will have the same net units (cm^{-2}), they do not necessarily indicate the same actual dislocation density. For the sake of clarity and consistency, in the present application, dislocation density will be described as the density of specific pits delineated on an etched epi-surface of a silicon face prepared, 8° off-axis (0001) oriented substrate.

Present commercially available 4H-SiC substrates may have approximately $1\text{E}3$ to $1\text{E}5$ (about 10^3 - 10^5) dislocations per cm^2 by the convention used herein. This includes threading screw and edge dislocations and basal plane dislocations. Presumably, all types of dislocations can impact device performance, but the basal plane dislocation has been particularly implicated as the prevalent nucleation site of the stacking faults that may cause V_f drift.

In turn, defects in the substrate are often replicated in epitaxial layers grown on such substrates, thus making substrate crystal quality a profoundly important factor with respect to the quality and performance of resulting devices.

Conventional substrate preparation and epilayer growth practices can fairly effectively reduce the density of basal plane dislocations from $1\text{E}3$ - $1\text{E}4 \text{ cm}^{-2}$ in the substrate to about 400 cm^{-2} in the epilayer. This reduction in dislocation density may be accomplished via changes in both the substrate preparation and the epilayer growth operations.

Accordingly, for continued improvement in the structure and operation of SiC-based bipolar and other devices it may be desirable to provide continued improvement in the underlying substrates and their crystal structures.

Summary of the Invention

Epitaxial silicon carbide layers may be fabricated, according to some embodiments of the present invention, by forming a plurality of first features in a surface of a silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction. The plurality of first features includes at least one sidewall that is orientated nonparallel (*i.e.*, oblique or perpendicular) to the predetermined crystallographic direction. A first epitaxial silicon carbide layer is then grown on the surface of the silicon carbide substrate that includes the plurality of first features therein. A plurality of second features is then formed in a surface of the first epitaxial layer. The plurality of second features includes at least one sidewall that is oriented nonparallel to the predetermined crystallographic direction. A second epitaxial silicon carbide layer is then grown on the surface of the first epitaxial layer that includes the plurality of second features therein. The first and second features may be identical or at least partially non-identical.

In some embodiments, the first and/or second features are formed by masking the silicon carbide surface and then etching the surface that is exposed. In some embodiments, etching may be performed by dry etching. Dry etching may be performed using an etchant gas etch such as NF_3 and/or SF_6 . In some embodiments, NF_3 is used. In some embodiments the predetermined crystallographic direction is the $\langle 11\bar{2}0 \rangle$ direction.

In some embodiments, the plurality of first and/or second features includes a plurality of trenches extending in a direction perpendicular to the predetermined crystallographic direction. In other embodiments, the trenches extend oblique to the predetermined crystallographic direction. Oblique and perpendicular trenches also may be provided. In other embodiments, the plurality of first and/or second features includes a plurality of pits such as a periodically repeating pattern of hexagonal pits. The first and second features, such as trenches, may be offset from one another.

In some embodiments, the first epitaxial silicon carbide layer is grown on the surface of the silicon carbide substrate such that the first epitaxial silicon carbide layer contains lower basal plane dislocation density than the silicon carbide substrate. Moreover, the second epitaxial silicon carbide layer contains lower basal plane dislocation density than the first epitaxial silicon carbide layer in other embodiments of the present invention.

A silicon carbide semiconductor structure according to some embodiments of the present invention includes a silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction and including a plurality of first features in the surface thereof. The plurality of first features includes at least one sidewall that is oriented nonparallel (*i.e.*, oblique and/or perpendicular) to the predetermined crystallographic direction. A first epitaxial silicon carbide layer is also provided on the surface of the silicon carbide substrate that includes the plurality of first features therein. Second features are provided in a surface of the first epitaxial layer that is remote from the silicon carbide substrate, and a second epitaxial silicon carbide layer is provided on the surface of the first epitaxial layer. The predetermined crystallographic direction may be the $\langle 11\bar{2}0 \rangle$ direction. The first and/or second features may include trenches and/or depressions and/or may be offset as was described above. As was also described above, the first epitaxial silicon carbide layer may contain lower basal plane dislocation density than the silicon carbide substrate, and the second epitaxial silicon carbide layer may contain lower basal plane dislocation density than the first epitaxial silicon carbide layer.

Other embodiments of the present invention fabricate an epitaxial silicon carbide layer by epitaxially growing from at least one sidewall of a plurality of first features in a surface of the silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction to form the epitaxial silicon carbide layer, the at least one sidewall being oriented nonparallel to the predetermined crystallographic direction. At least one sidewall of a plurality of second features is epitaxially grown in the surface of the first epitaxial layer. The features may be trenches and/or depressions as was described above.

Moreover, methods and structures according to other embodiments of the present invention may use monocrystalline substrates other than silicon carbide to fabricate two or more epitaxial layers thereon.

Brief Description of the Drawings

Figure 1 is a schematic diagram of a hexagonal crystal unit cell structure;

Figure 2 is a top view of a hexagonal unit cell illustrating standard crystallographic directions;

Figure 3 is a schematic side view of an off-axis silicon carbide crystal;

Figure 4 is a schematic view of an epitaxial deposition system;

Figure 5 is a cross section of a susceptor assembly that can form a part of the deposition system of **Figure 4**;

Figure 6 is a schematic view of a SiC wafer that has been processed in accordance with some embodiments of the invention;

Figures 7A and 7B are magnified views of a portion of the surface of a SiC wafer that has been processed in accordance with some embodiments of the invention;

Figure 8A is an interferometry-derived topographic representation of the surface of a silicon carbide wafer that has been patterned in accordance with some embodiments of the invention with a periodic hexagonal pit structure;

Figure 8B is a depth profile taken along line B-B of **Figure 8A**;

Figure 8C is a depth profile taken along line C-C of **Figure 8A**;

Figure 9A is a schematic plan view of the surface of a silicon carbide wafer that has been patterned in accordance with some embodiments of the invention with a periodic trench structure;

Figure 9B is a schematic elevation of the structure shown in **Figure 9A**;

Figure 9C is a schematic elevation of an alternate embodiment of the structure shown in **Figure 9A**;

Figure 10 is a schematic elevation of a structure according to some embodiments of the invention;

Figure 11 is a schematic elevation of a structure according to some embodiments of the invention;

Figure 12 is a schematic elevation of a structure according to some embodiments of the invention;

Figure 13 is a micrograph of the surface of a SiC epitaxial layer according to some embodiments of the invention;

Figure 14 is a micrograph of the surface of a SiC epitaxial layer according to further embodiments of the invention; and

Figure 15 is a micrograph of the surface of a SiC epitaxial layer according to further embodiments of the invention.

Detailed Description of Embodiments of the Invention

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are

shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the
5 drawings, the size and relative sizes of layers and regions may be exaggerated for clarity. It will be understood that when an element or layer is referred to as being "on" another element or layer, it can be directly on the other element or layer or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on" another element or layer, there are no intervening
10 elements or layers present. Like numbers refer to like elements throughout. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein,
15 the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers,
20 steps, operations, elements, components, and/or groups thereof. Thus, for example, three or more epitaxial layers may be grown according to embodiments of the invention even though growth of two layers is described herein.

It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these
25 elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of
30 the present invention.

Furthermore, relative terms, such as "lower" or "bottom" and "upper" or "top," may be used herein to describe one element's relationship to another element as illustrated in the Figures. It will be understood that relative terms are intended to encompass different orientations of the device in addition to the orientation depicted

in the Figures. For example, if the device in the Figures is turned over, elements described as being on the "lower" side of other elements would then be oriented on "upper" sides of the other elements. The exemplary term "lower", can therefore, encompass both an orientation of "lower" and "upper," depending on the particular orientation of the figure. Similarly, if the device in one of the figures is turned over, elements described as "below" or "beneath" other elements would then be oriented "above" the other elements. The exemplary terms "below" or "beneath" can, therefore, encompass both an orientation of above and below.

Embodiments of the present invention are described herein with reference to cross-sectional and/or other views that are schematic illustrations of idealized embodiments of the present invention. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the present invention should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, a grown or deposited region illustrated as a polygon will, typically, have rounded or curved features and/or a gradient of concentrations at its edges with another region rather than a discrete change from a first region to a second region of different composition. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the precise shape of a region of a device and are not intended to limit the scope of the present invention.

According to some embodiment of the invention, methods of fabricating an epitaxial silicon carbide layer on a silicon carbide substrate having an off-axis orientation toward a first crystallographic direction can include masking the first surface of the substrate with a patterned etch mask, etching the first surface of the substrate to form a plurality of features, each of which includes a sidewall oriented at an angle that is oblique or perpendicular to the first crystallographic direction, and growing an epitaxial layer of silicon carbide on the etched first surface. The substrate has an off-axis orientation towards a first crystallographic direction, such as the $\langle 11\bar{2}0 \rangle$ direction. The partially masked substrate may be etched using a dry etch process such as reactive ion etching using NF_3 and/or SF_6 .

In some embodiments, the plurality of features includes a plurality of trenches extending in a direction that is oblique and/or perpendicular to the first

crystallographic direction. In other embodiments, the plurality of features includes a periodically repeating pattern of hexagonal depressions.

In some embodiments, a substrate is patterned with a plurality of features including sidewalls and a first epitaxial layer is grown with a first defect density. The first epitaxial layer is then patterned with a plurality of features having sidewalls and a second epitaxial layer is grown with a second defect density less than the first defect density.

Semiconductor structures according to some embodiments of the invention can include an off-axis silicon carbide substrate having a first surface and an epitaxial layer of silicon carbide formed on the first surface. The first surface of the substrate includes a plurality of features, each of which has a sidewall that is perpendicular or oblique to the off-axis crystallographic direction. The epitaxial layer has a reduced density of basal plane dislocations compared to the substrate.

Other embodiments of the invention include an off-axis silicon carbide substrate having a first surface and a first epitaxial layer of silicon carbide formed on the first surface. The surface of the substrate includes a plurality of features, each of which has a sidewall that is perpendicular or oblique to the off-axis crystallographic direction. The first epitaxial layer has a reduced density of basal plane dislocations compared to the substrate. The first epitaxial layer further includes a plurality of features, each of which has a sidewall that is perpendicular or oblique to the off-axis crystallographic direction. A second epitaxial layer is grown on the first epitaxial layer. The second epitaxial layer has a reduced density of basal plane dislocations compared to the first epitaxial layer.

Some embodiments of the invention can provide methods of reducing stacking fault nucleation site density and/or reducing forward voltage (V_f) drift in silicon carbide-based bipolar devices, and silicon carbide structures having a reduced density of basal plane dislocations that can serve as stacking fault nucleation sites.

Some embodiments include conducting an etch, such as a dry etch, and in some embodiments a reactive ion etch (RIE) using NF_3 and/or SF_6 chemistry, on a masked surface of a silicon carbide substrate to form a plurality of structures having sidewalls from which epitaxial growth can proceed. Exemplary, but not limiting, techniques for dry etching of silicon carbide are set forth in U.S. Patents No. 4,865,685 and 4,981,551, the contents of which are incorporated entirely herein by reference. Other techniques and chemistries for carrying out the etches described

herein are generally well-recognized in the art and will not be described in detail herein other than to illustrate embodiments of the invention.

The term "substrate" is used herein in a sense that is broad enough to include both a bulk single crystal (usually cut from a boule) as well as a device precursor structure, such as a wafer, that can include one or more epitaxial layers, but which fundamentally (although not necessarily exclusively) serves as the physical and electronic support for a device formed thereon.

Similarly, the terms "dry etch" and "wet etch," are often used to refer to reactive ion or plasma etches ("dry") or to etches in molten salts or other solutions ("wet").

Generally--but not necessarily--the substrate will be n-type, because n-type substrates may offer a number of advantages in silicon carbide-based devices, and may have an activated carrier concentration of about 1E18-1E19 ($1 \times 10^{18} - 1 \times 10^{19}$) carriers per cm^3 . In comparison to the substrate, the carrier concentration of the epitaxial layer may be selected (or described) in terms of its purpose. "Conductive" layers may typically have a carrier concentration of 1E18-19 cm^{-3} . "Blocking" layers may typically have carrier concentrations less than 1E16 cm^{-3} . "Active" layers may have carrier concentrations within these parameters, depending on the structure or purpose of the end device. Accordingly, although terms such as n, n+ and n- can be used to describe both substrates and epilayers, such terminology should be considered in an illustrative rather than a limiting sense.

The silicon carbide substrate upon which the device is formed can be taken from a larger crystal (or "boule"), typically by the steps of sawing a silicon carbide substrate wafer from a silicon carbide boule, and thereafter conducting a nonselective etch on the substrate wafer. In most circumstances, the sawed substrate wafer is lapped, polished, etched (typically RIE), and cleaned (with an acid or solvent) prior to conducting a first patterned etch according to some embodiments of the invention. The term "lapped" is used in its typical sense; *i.e.*, to describe the steps of flattening the wafer surfaces using a counter-rotating lapping machine and an abrasive (*e.g.* diamond) slurry. Lapping can help make the wafer surfaces parallel and can reduce mechanical defects such as saw markings. Similarly, the polishing, etching and cleaning steps may be otherwise carried out conventionally prior to steps of the present invention.

Some embodiments of the invention can advantageously reduce the density of basal plane dislocations in the epilayer. This reduction in basal plane dislocation density may be combined with the measures identified to isolate active device regions from the substrate and surface defects discussed in previously-incorporated
5 application Serial No. 10/046,346, and may be used to provide SiC bipolar devices.

A deposition system **101** in which some embodiments of the present invention may be practiced is schematically shown in plan view in **Figure 4**. The deposition system **101** may be a horizontal, hot wall, flow through, CVD system as shown including a susceptor assembly **100**, a quartz tube **180** defining a through passage
10 **180A**, an electromagnetic frequency (EMF) generator **182** (for example, including a power supply and an RF coil surrounding the tube **180**) and a process gas supply **160**. An insulative cover may be provided about the susceptor assembly **100** in addition to or in place of the quartz tube **180**. The deposition system **101** may be used to form a layer or film on a substrate **120** (**Figure 5**). While only a single substrate **120** is
15 illustrated in **Figure 5**, the system **101** may be adapted to form films concurrently on multiple substrates **120**.

The substrate **120** may be a wafer or other structure formed of the same or a different material than that of the layer to be deposited. The substrate **120** may be formed of, for example, 2H-, 4H- or 6H-SiC. The substrate surface upon which the
20 film is deposited may be a base substrate or a first or subsequent layer superimposed on a base substrate. For example, the surface of the substrate **120** for receiving the deposited film may be a layer previously deposited using the deposition system **101** or an alternative apparatus. As will be appreciated by those of skill in the art in light of the present disclosure, embodiments of the present invention may be advantageously
25 utilized with semiconductor materials other than those specifically mentioned herein.

Generally, the process gas supply **160** supplies a process gas into and through the susceptor assembly **100** as discussed below. The EMF generator **182** inductively heats the susceptor assembly **100** to provide a hot zone in the susceptor assembly **100** where deposition reactions take place. The process gas continues through and out of
30 the susceptor assembly **100** as an exhaust gas that may include remaining components of the process gas as well as reaction by-products, for example. Embodiments of the present invention may use types of deposition systems other than hot wall CVD systems. Other modifications to the systems and methods of the present invention

will be apparent to those of ordinary skill in the art upon reading the description herein.

The process gas may include one or more components such as reagents, reactants, species, carriers and the like. Where it is desired to form a SiC layer on a substrate, the process gas may include precursor gases such as silane (SiH_4) and propane (C_3H_8) along with a carrier gas such as purified hydrogen gas (H_2). The process gas supply 160 may be provided from one or more pressurized containers of the gases with flow control and/or metering devices as needed.

An exemplary conventional susceptor 100 is shown in Figure 5. The susceptor 100 may be used, for example, in a flow through, hot wall, and/or CVD reactor, such as was illustrated in Figure 4. The susceptor 100 has a top susceptor member 100A and a bottom susceptor member 100B. The susceptor 100 also has a top liner 103 and a bottom liner 105 defining a reaction chamber 107 therebetween. A substrate 120, such as a semiconductor wafer, is positioned in the reaction chamber 107 and may be situated on an interior surface of a platter 154 (which may rotate), for example. A process gas P is introduced to the reaction chamber 107 at one end, flowed through the reaction chamber 107 past the substrate 120, and finally exhausted from the reaction chamber 107 at the opposite end. As used herein, the term process gas refers to one or more gases. As indicated by the arrows in the reaction chamber 107 as shown in Figure 5, as the process gas flows through the reaction chamber 107 a portion of the process gas may contact the substrate 120 as intended and thereby deposit the reagents or reactants on the substrate 120 to form a layer thereon. In some systems, the reaction chamber 107 may have a length of between about 0.1 and 1 meter, a width of between about 0.05 and 0.5 meter, and a height of between about 1 and 10 cm. The reaction chamber 107 is not limited to these dimensions, however. The susceptor members may include high quality graphite. Examples of CVD deposition systems including susceptor designs are found in U.S. Patent Publication No. US 2003/0079689 entitled *Induction Heating Devices and Methods for Controllably Heating an Article* and U.S. Patent Application Ser. No. 10/414,787, filed April 16, 2003 entitled *Methods and Apparatus for Controlling Formation of Deposits in a Deposition System and Depositions Systems and Methods Including the Same* both of which are incorporated herein by reference in their entireties.

In certain embodiments, the susceptor members 100A, 100B are formed of a material suitable to generate heat responsive to eddy currents generated therein by the

EMF generator **182**, such materials and inductive heating arrangements being well known to those of skill in the art. The members may be formed of graphite, and more preferably of high purity graphite.

A platter **154** or the like may be situated between the bottom member **100B** and the substrate **120** to support the substrate **120**. According to some embodiments, the platter **154** may be rotatively driven by a suitable mechanism (not shown). For example, the system may include a gas-driven rotation system as described in U.S. Application Serial No. 09/756,548, entitled *Gas Driven Rotation Apparatus and Method for Forming Silicon Carbide Layers*, filed January 8, 2001, and/or as described in U.S. Application Serial No. 10/117,858, entitled *Gas Driven Planetary Rotation Apparatus and Methods for Forming Silicon Carbide Layers*, filed April 8, 2002, the disclosures of which are hereby incorporated herein by reference in their entireties. Alternatively, the platter **154** may be stationary. The platter **154** may be adapted to hold one or multiple substrates **120**. The platter **154** may be formed of any suitable material such as SiC coated graphite, solid SiC and/or solid SiC alloy. The platter **154** may be omitted such that the substrate rests on the susceptor member **100B**, the liner **105**, or other suitable support.

In use, the process gas supply **160** supplies a flow of the process gas **P** to the reaction chamber **107** through the inlet opening **102**. The process gas **P** flows generally in a flow direction **R**. As shown, some portion of the process gas and the reagents therein contact the substrate **120** to form the desired layer (*e.g.*, an epilayer) on the exposed surface of the substrate **120**.

While the foregoing deposition system **101** and methods are described as relating to a horizontal, hot wall, CVD, flow through deposition process, various aspects of the present invention may be used in other types of deposition systems and processes. While particular embodiments have been described with reference to "top", "bottom" and the like, other orientations and configurations may be employed in accordance with the invention. For example, the deposition system and process may be a cold wall and/or non-horizontal flow through system and process. The deposition system and process may be a vapor phase epitaxy (VPE), liquid phase epitaxy (LPE), or plasma enhanced CVD (PECVD) deposition system and process rather than a CVD system or process.

Referring now to **Figure 6**, a single crystal silicon carbide substrate wafer **10** on which one or more epitaxial layers is to be grown has a generally circular

perimeter. A pair of flats has been milled into the wafer to assist in wafer orientation. In particular, the wafer **10** includes a primary flat **12** and a secondary flat **14**. The surface **16** of the wafer corresponds generally to the c-face of the silicon carbide crystal (except that the wafer has been cut at an off-axis angle α towards the $\langle 11\bar{2}0 \rangle$ direction. The off-axis angle α may be about 8° in some embodiments. The primary flat **12** runs along the $\langle 11\bar{2}0 \rangle$ direction, while the secondary flat **14** is oriented along the $\langle 10\bar{1}0 \rangle$ direction.

In some embodiments, prior to epitaxial growth, the surface **16** of the wafer **10** is masked and etched to form a predefined pattern therein. Conventional masks that comprise SiO_2 , Si_3N_4 , Indium Tin Oxide (ITO) and/or other conventional masking materials may be used. The masks may be fabricated and patterned using conventional techniques. The etch process may include a reactive ion etch as described above. In other embodiments, maskless etching and/or selective growth techniques may be used to form the plurality of features in the substrate. In yet other embodiments, laser patterning may be used to form the plurality of features in the substrate. The pattern includes a plurality of features, which include at least one sidewall oriented at an oblique or perpendicular angle (*i.e.*, nonparallel) to the crystallographic direction in which step-flow epitaxial growth will occur. In the illustrated embodiment, the wafer **10** is cut off-axis towards the $\langle 11\bar{2}0 \rangle$ direction; thus, epitaxial growth will occur in the $\langle 11\bar{2}0 \rangle$ direction. Accordingly, in the illustrated embodiment, the wafer includes a plurality of features including at least one sidewall oriented at an oblique or perpendicular angle to the $\langle 11\bar{2}0 \rangle$ crystallographic direction.

An exemplary etch pattern is illustrated in **Figure 7A**, which is an idealized schematic drawing of a magnified view of a portion of the surface of wafer **10** following etching. As illustrated therein, the surface **16** of the wafer **10** includes a plurality of periodically repeating hexagonal pits **20** etched therein. Each pit is surrounded by six sidewalls **22**. In some embodiments including the embodiments illustrated in **Figure 7A**, at least one pit **20**, and in some embodiments each pit **20**, is oriented such that two of its sidewalls run approximately parallel to the crystallographic direction in which epitaxial growth will occur (in this case the $\langle 11\bar{2}0 \rangle$ direction), while the remaining four sides are oblique to the crystallographic direction in which epitaxial growth will occur. In other embodiments, at least one pit

20 is oriented such that two of its sidewalls run approximately perpendicular to the crystallographic direction in which epitaxial growth will occur, while the remaining four sides are oblique to the crystallographic direction in which epitaxial growth will occur.

5 A hexagonal pit **20** is illustrated in detail in **Figure 7B**. The pit **20** includes opposing pairs of sidewalls **22a**, **22b**, and **22c**. The pit **20** is further characterized by a major axis **24**, which runs through the center of the hexagon between opposing vertices and a minor axis **26**, which runs through the center of the hexagon between opposing sides.

10 In some embodiments, the hexagonal pits **20** may have a depth of about 0.1 to about 1 μm and a major axis of about 5 to about 30 μm . In particular embodiments, the pits **20** may have a depth of about 0.5 μm and a major axis of about 10 μm . In some embodiments, the pits **20** may have a ratio of major axis to depth of about 20:1. The sidewalls **22** may have a width of about 0.25 to 5 μm . In particular embodiments,
15 the sidewalls may have a width of about 4 μm .

Figures 8A-8C illustrate an exemplary structure. **Figure 8A** is an interferometry-derived topographic representation of the surface of a silicon carbide wafer that has been patterned in accordance with some embodiments of the invention with a periodic hexagonal pit structure. **Figure 8B** is a depth profile taken along line
20 **B-B**, while **Figure 8C** is a depth profile taken along line **C-C**. The structure illustrated in **Figures 8A-8C** has a major axis of approximately 9.73 μm , a depth of approximately 0.5 μm and a sidewall width of approximately 4 μm .

 Other dimensions may be selected without departing from the scope of the invention. For example, the exemplary dimensions given above assume an off-axis
25 angle α of about 8° and were selected based on present understanding and capabilities. If a different off-axis angle is used, other dimensions may be used to increase or maximize the magnitude of defect reduction.

 Other feature shapes besides hexagons may be used in other embodiments of the invention. The features may for example include lines, herringbone patterns, or
30 other polygons. **Figure 9A** illustrates a portion of a substrate **30** on which a series of trenches **32** separated by mesa stripes **34** have been formed, for example, by reactive ion etching. The trenches **32** include opposing sidewalls **32A**, **32B** which run perpendicular to the to the crystallographic direction in which step-flow epitaxial

growth will occur, in this case the $\langle 11\bar{2}0 \rangle$ direction. In some embodiments, the sidewalls are aligned oblique to the crystallographic direction in which step-flow epitaxial growth will occur.

Figure 9B is a side view of the substrate **30** showing the trenches **32** and the
5 mesas **34** according to other embodiments. In some embodiments, the trenches **32** may have a width of about 10 to about 40 μm . In particular embodiments, the trenches **32** may have a depth of about 0.5 μm and a width of about 18 μm . In some
embodiments, the trenches **32** may have a ratio of width to depth of about 36:1. The
mesas **34** may have a width of about 0.25 to 5 μm . In particular embodiments, the
10 mesas **34** may have a width of about 3 μm . A mask **36** is also illustrated in the side
view of **Figure 9B**.

Sidewalls **32A**, **32B** may be vertical with respect to the floors **32C** of trenches
32 as illustrated in **Figure 9B** or they may be angled with respect to floors **32C** as
illustrated in **Figure 9C**. In addition, the sidewalls **32A**, **32B** may be straight as
15 illustrated or may comprise curved portions. Similarly, with other feature shapes such
as hexagons or other polygons, the sidewalls of the feature may be vertical or angled
with respect to the substrate and may include straight or curved portions. For
example, as shown in **Figure 9C**, the structure may be etched such that sidewalls
32A, **32B** are angled with respect to the trench floors **32C**. In this case, the top
20 portions **34A** of the mesas **34** are narrower than their bases. In some embodiments,
the mesas may have a width of between about 0 and about 5 μm depending on
lithographic and/or other techniques.

After the wafer has been etched to form surface features therein as described
above, and the mask is optionally removed, the wafer is placed into an epitaxial
25 growth reactor, such as reactor **100** as described above, and one or more epitaxial
layers of silicon carbide are grown on the wafer. As discussed above, epitaxial
growth of silicon carbide on an off-axis wafer may proceed in step-flow fashion in the
direction of the off-axis cut. Although the precise mechanism is not fully understood,
it is presently believed that some basal plane dislocations propagating in the substrate
30 crystal are terminated at the etched sidewalls of the surface features or are converted
to a different type of dislocation and are inhibited or discouraged from propagating
into the epitaxial layers as basal plane dislocations. Since some basal plane
dislocations are prevented from propagating into the epitaxial layers as basal plane

dislocations, those dislocations may not be susceptible to decomposing into stacking faults bounded by Shockley partial dislocations, which can form electrically active stacking faults.

Epitaxial growth from a patterned substrate is illustrated in **Figure 10**.

5 Substrate **30** includes a plurality of trenches **32** on the surface thereof. An epitaxial layer **40** is grown in step-flow fashion from the surface of the substrate. In accordance with some embodiments of the invention, regions **42** which nucleate and grow from the sidewalls **32A** of the trenches **32** can have reduced basal plane defect densities compared with regions **44** which do not nucleate and grow from mesa
10 sidewalls. In particular, regions **42** may exhibit a reduction in basal plane defect density by a factor of 10.

As is shown from **Figure 10**, the percentage of the epitaxial layer **40** that may benefit from defect reduction may depend on the geometry of the features. In particular the sidewall height, width and/or spacing may impact the percentage. In
15 order to provide greater reduction in basal plane defect density, it may be desirable to perform a second feature-forming and epitaxial layer growth cycle after growth of an initial epitaxial layer. As illustrated in **Figure 11**, substrate **30** includes trenches **32** etched therein. A first epitaxial layer **40** is grown thereon which includes regions **42** having a reduced basal plane defect density which alternate with regions **44** that may
20 not have reduced basal plane defect density. After growth of the first epitaxial layer **40** to a predetermined thickness, the substrate is masked and etched a second time to form trenches **52** which have sidewalls **52A**, which in some embodiments span the regions **44**. The trenches **52** may have the same dimensions as trenches **42** or at least some of the trenches **52** may have different dimensions than at least some of the
25 trenches **42**. Epitaxial layer **50** is then grown thereon. The basal plane dislocation density of layer **50** may be reduced with respect to the basal plane dislocation density of layer **40**. In the embodiment illustrated in **Figure 11**, the trenches **52** are formed directly above the trenches **32** formed in the substrate **30**. As illustrated in **Figure 12**, the trenches **52** formed in the epitaxial layer **40** may be offset from the trenches **32**
30 formed in the substrate **30**. **Figure 13** is a photograph of a portion of the surface of a silicon carbide wafer that includes mesas **54** that are offset from the underlying mesas **34**.

Figure 14 is a Nomarski micrograph of the surface of an epitaxial layer grown on a hex-etched surface in accordance with embodiments of the invention. **Figure 15**

is a Nomarski micrograph of the surface of an epitaxial layer grown on a line-etched surface in accordance with embodiments of the invention.

After forming the first and/or second epitaxial layer, one or more electronic devices, such as bipolar devices, may be fabricated in the first and/or second epitaxial silicon carbide layers using techniques that are well known to those having skill in the art. The fabrication of electronic devices, such as bipolar devices, is well known to those having skill in the art and need not be described further herein. These devices are not illustrated in **Figures 10-12** for sake of clarity. Moreover, it will be understood that three or more repetitions of the feature -forming and epitaxial-growing steps may be performed.

The techniques referred to herein are, taken individually, generally well-recognized and well-understood in the art and can be practiced without undue experimentation. Single crystal silicon carbide wafers of the type that may be used as starting structures herein are commercially available from Cree, Inc. 4600 Silicon Drive, Durham, North Carolina 27706. The growth of silicon carbide epitaxial layers can be carried out using techniques such as those set forth in U.S. Patents numbers 4,912,063; 4,912,064; 5,679,153; and 6,297,522. Dry and electrolytic etching of silicon carbide are described in U.S. Patents numbers 6,034,001; 5,571,374; 5,227,034; 4,981,551; and 4,865,685. The use of molten potassium hydroxide as an etchant to identify and characterize a semiconductor surface is well-understood, and includes versions expressed as ASTM standards (*e.g.* ASTM F1404.92). Cutting, mechanical polishing and lapping of substrate wafers are also entirely conventional in this art.

In the drawings and specification, there have been disclosed typical embodiments of the invention, and, although specific terms have been employed, they have been used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

That which is claimed is:

1. A method of fabricating an epitaxial silicon carbide layer comprising:
forming a plurality of first features in a surface of a silicon carbide substrate
having an off-axis orientation toward a predetermined crystallographic direction, the
plurality of first features including at least one first sidewall that is oriented
5 nonparallel to the predetermined crystallographic direction;
growing a first epitaxial silicon carbide layer on the surface of the silicon
carbide substrate that includes the plurality of first features therein to a thickness that
is greater than a depth of the at least one first sidewall to form a first planar outer
surface;
10 forming a plurality of second features in the first planar outer surface of the
first epitaxial layer, the plurality of second features including at least one second
sidewall that is oriented nonparallel to the predetermined crystallographic direction;
and
growing a second epitaxial silicon carbide layer on the first planar outer
15 surface of the first epitaxial layer that includes the plurality of second features therein
to a thickness that is greater than a depth of the at least one second sidewall to form a
second planar outer surface.
2. A method according to Claim 1 wherein forming a plurality of first
20 features comprises:
masking the surface of the silicon carbide substrate having an off-axis
orientation toward a predetermined crystallographic direction; and
etching the surface of the silicon carbide substrate that is exposed by the
masking to form the plurality of first features in the surface of a silicon carbide
25 substrate that is masked.
3. A method according to Claim 2 wherein etching comprises dry etching
the surface of the silicon carbide substrate that is masked using NF_3 and/or SF_6 .
- 30 4. A method according to Claim 1 wherein the predetermined
crystallographic direction is a $\langle 11\bar{2}0 \rangle$ direction.

5. A method according to Claim 1 wherein forming a plurality of first features comprises forming a plurality of trenches in the surface of the silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction, the plurality of trenches extending oblique and/or perpendicular to the predetermined crystallographic direction and including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction.

6. A method according to Claim 1 wherein forming a plurality of first features comprises forming a plurality of depressions in the surface of the silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction and including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction.

7. A method according to Claim 6 wherein the plurality of depressions comprises a periodically repeating pattern of hexagonal pits.

8. A method according to Claim 1 wherein forming a plurality of second features comprises:
masking the first planar outer surface of the first epitaxial layer; and
etching the first planar outer surface of the first epitaxial layer that is exposed by the masking to form the plurality of second features in the first epitaxial layer that is masked.

9. A method according to Claim 8 wherein etching comprises dry etching the first epitaxial layer that is masked using NF_3 and/or SF_6 .

10. A method according to Claim 1 wherein forming a plurality of second features comprises forming a plurality of trenches in the first planar outer surface of the first epitaxial layer, the plurality of trenches extending oblique and/or perpendicular to the predetermined crystallographic direction and including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction.

11. A method according to Claim 1 wherein forming a plurality of second features comprises forming a plurality of depressions in the first planar outer surface of the first epitaxial layer and including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction.

5

12. A method according to Claim 11 wherein the plurality of depressions comprises a periodically repeating pattern of hexagonal pits.

13. A method according to Claim 1:

10 wherein growing the first epitaxial silicon carbide layer comprises growing the first epitaxial silicon carbide layer on the surface of the silicon carbide substrate that includes the plurality of first features therein such that the first epitaxial silicon carbide layer contains lower basal plane dislocation density than the silicon carbide substrate; and

15 wherein growing the second epitaxial silicon carbide layer comprises growing the second epitaxial silicon carbide layer on the first planar outer surface of the first epitaxial silicon carbide layer that includes the plurality of second features therein such that the second epitaxial silicon carbide layer contains lower basal plane dislocation density than the first epitaxial silicon carbide layer.

20

14. A method according to Claim 1 wherein the first and second features are laterally offset from one another.

15. A method according to Claim 1 further comprising:

25 forming a semiconductor device in the second epitaxial silicon carbide layer.

16. A silicon carbide semiconductor structure comprising:

30 a silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction and including a plurality of first features in a surface thereof, the plurality of first features including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction;

a first epitaxial silicon carbide layer on the surface of the silicon carbide substrate that includes the plurality of first features therein, the first epitaxial layer being thicker than a depth of the at least one first sidewall and including a plurality of

second features in a surface thereof that is remote from the silicon carbide substrate, the plurality of second features including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction; and

5 a second epitaxial silicon carbide layer on the surface of the first epitaxial layer that includes the plurality of second features therein and that is thicker than a depth of the at least one second sidewall.

10 17. A structure according to Claim 16 wherein the predetermined crystallographic direction is a $\langle 11\bar{2}0 \rangle$ direction.

18. A structure according to Claim 16 wherein the plurality of first features comprises a plurality of trenches extending oblique and/or perpendicular to the predetermined crystallographic direction and including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction.

15 19. A structure according to Claim 16 wherein the plurality of first features comprises a plurality of depressions including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction.

20 20. A structure according to Claim 19 wherein the plurality of depressions comprises a periodically repeating pattern of hexagonal pits.

21. A structure according to Claim 16 wherein the plurality of second features comprises a plurality of trenches in the surface of the first epitaxial layer, the plurality of trenches extending oblique and/or perpendicular to the predetermined crystallographic direction and including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction.

22. A structure according to Claim 16 wherein the plurality of second features comprises a plurality of depressions in the surface of the first epitaxial layer, the plurality of depressions including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction.

23. A structure according to Claim 22 wherein the plurality of depressions comprises a periodically repeating pattern of hexagonal pits.

24. A structure according to Claim 16 wherein the epitaxial silicon carbide layer contains lower basal plane dislocation density than the silicon carbide substrate.

25. A structure according to Claim 16 wherein the first epitaxial silicon carbide layer contains lower basal plane dislocation density than the silicon carbide substrate and wherein the second epitaxial silicon carbide layer contains lower basal plane dislocation density than the first epitaxial silicon carbide layer.

26. A structure according to Claim 16 wherein the first and second features are laterally offset from one another.

27. A structure according to Claim 16 further comprising:
a semiconductor device on the second epitaxial silicon carbide layer.

28. A method of fabricating an epitaxial monocrystalline layer comprising:
forming a plurality of first features in a surface of a monocrystalline substrate having an off-axis orientation toward a predetermined crystallographic direction, the plurality of first features including at least one first sidewall;

growing a first epitaxial layer on the surface of the monocrystalline substrate that includes the plurality of features therein to a thickness that is greater than a depth of the at least one first sidewall to form a first planar outer surface;

forming a plurality of second features in the first planar outer surface of the first epitaxial layer, the plurality of second features including at least one second sidewall; and

growing a second epitaxial layer on the first planar outer surface of the first epitaxial layer that includes the plurality of second features therein to a thickness that is greater than a depth of the at least one second sidewall to form a second planar outer surface.

29. A method according to Claim 28 wherein forming a plurality of first features comprises:

masking the surface of the monocrystalline substrate having an off-axis orientation toward a predetermined crystallographic direction; and

etching the surface of the monocrystalline substrate that is masked to form the plurality of first features in the surface of a monocrystalline substrate that is masked.

5

30. A method according to Claim 28 wherein forming a plurality of second features comprises:

masking the first planar outer surface of the first epitaxial layer; and

10 etching the first planar outer surface of the first epitaxial layer that is masked to form the plurality of second features in the surface of a first epitaxial layer that is masked.

31. A method according to Claim 28:

15 wherein growing the first epitaxial layer comprises growing the first epitaxial layer on the surface of the monocrystalline substrate that includes the plurality of first features therein such that the first epitaxial layer contains lower basal plane dislocation density than the monocrystalline substrate; and

20 wherein growing the second epitaxial layer comprises growing the second carbide layer on the first planar outer surface of the first layer that includes the plurality of second features therein such that the second epitaxial layer contains lower basal plane dislocation density than the first epitaxial layer.

32. A method according to Claim 28 wherein the monocrystalline substrate comprises silicon carbide.

25

33. A method according to Claim 28 wherein the first and second features are laterally offset from one another.

34. A semiconductor structure comprising:

30 a monocrystalline substrate having an off-axis orientation toward a predetermined crystallographic direction and including a plurality of first features in a surface thereof, the plurality of first features including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction;

a first epitaxial layer on the surface of the monocrystalline substrate that includes the plurality of first features therein, the first epitaxial layer being thicker than a depth of the at least one first sidewall and including a plurality of second features in a surface thereof that is remote from the monocrystalline substrate, the
5 plurality of second features including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction; and

a second epitaxial layer on the surface of the first epitaxial layer that includes the plurality of second features therein and that is thicker than a depth of the at least one second sidewall.

10

35. A structure according to Claim 34 wherein the first epitaxial layer contains lower basal plane dislocation density than the monocrystalline substrate.

36. A structure according to Claim 34 wherein the first epitaxial layer
15 contains lower basal plane dislocation density than the monocrystalline substrate and wherein the second epitaxial layer contains lower basal plane dislocation density than the first epitaxial layer.

37. A structure according to Claim 34 wherein the monocrystalline
20 substrate comprises silicon carbide.

38. A structure according to Claim 34 wherein the first and second features are laterally offset from one another.

39. A method of fabricating an epitaxial silicon carbide layer comprising:
25 epitaxially growing from at least one first sidewall of a plurality of first features in a surface of a silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction to a thickness that is greater than a depth of the at least one first sidewall to form a first epitaxial silicon carbide layer, the
30 at least one first sidewall being oriented nonparallel to the predetermined crystallographic direction; and

epitaxially growing at least one second sidewall of a plurality of second features in a surface of the first epitaxial layer to a thickness that is greater than a depth of the at least one second sidewall to form a second epitaxial silicon carbide

layer, the at least one second sidewall being oriented nonparallel to the predetermined crystallographic direction.

40. A method according to Claim 39 wherein the predetermined
5 crystallographic direction is a $\langle 11\bar{2}0 \rangle$ direction.

41. A method according to Claim 39 wherein the plurality of first features comprises a plurality of trenches in the surface of the silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction, the plurality
10 of trenches extending perpendicular to the predetermined crystallographic direction and including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction.

42. A method according to Claim 39 wherein the plurality of first features
15 comprises a plurality of depressions in the surface of the silicon carbide substrate having an off-axis orientation toward a predetermined crystallographic direction, the plurality of depressions including at least one first sidewall that is oriented nonparallel to the predetermined crystallographic direction.

20 43. A method according to Claim 42 wherein the plurality of depressions comprises a periodically repeating pattern of hexagonal pits.

44. A method according to Claim 39 wherein the plurality of second features comprises a plurality of trenches in the surface of the first epitaxial layer, the
25 plurality of trenches extending perpendicular to the predetermined crystallographic direction and including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction.

45. A method according to Claim 39 wherein the plurality of second
30 features comprises a plurality of depressions in the surface of the first epitaxial layer, the plurality of depressions including at least one second sidewall that is oriented nonparallel to the predetermined crystallographic direction.

46. A method according to Claim 45 wherein the plurality of depressions comprises a periodically repeating pattern of hexagonal pits.

47. A method according to Claim 39 wherein the epitaxial silicon carbide
5 layer contains lower basal plane dislocation density than the silicon carbide substrate.

48. A method according to Claim 39:
wherein the first epitaxial silicon carbide layer contains lower basal plane
dislocation density than the silicon carbide substrate; and
10 wherein the second epitaxial silicon carbide layer contains lower basal plane
dislocation density than the first epitaxial silicon carbide layer.

49. A method according to Claim 39 wherein the first and second features
are laterally offset from one another.

1/7

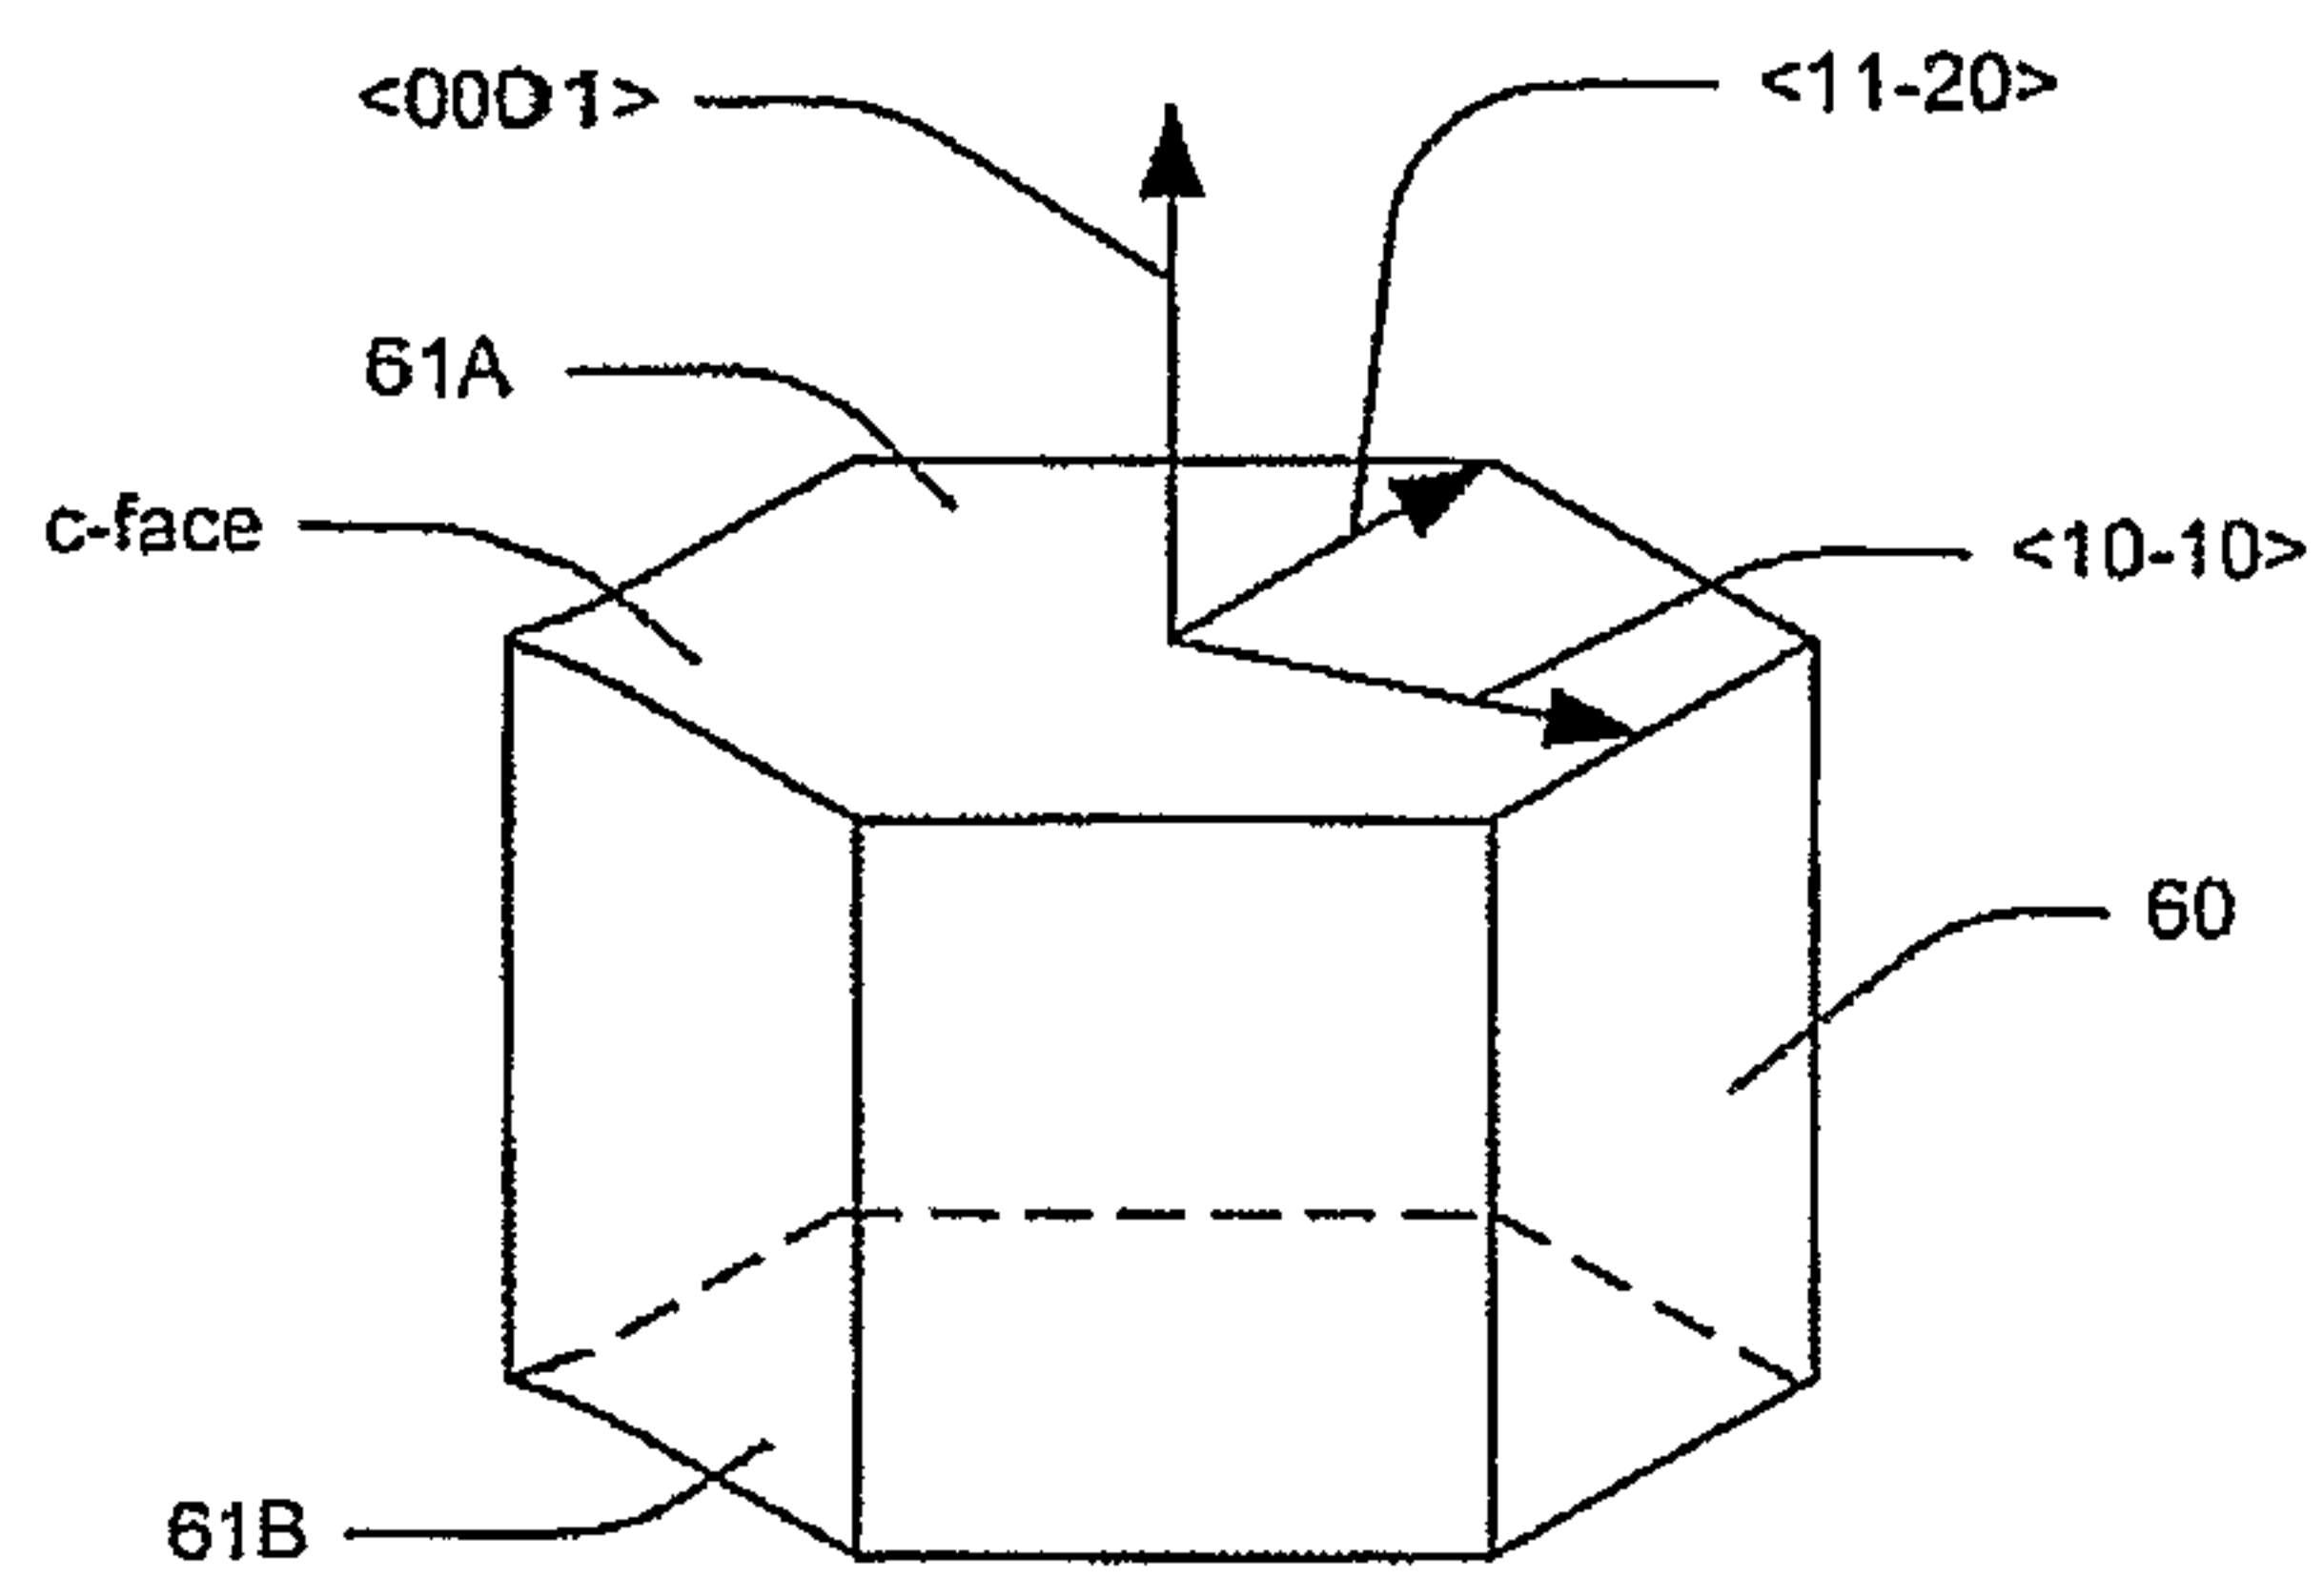


FIGURE 1

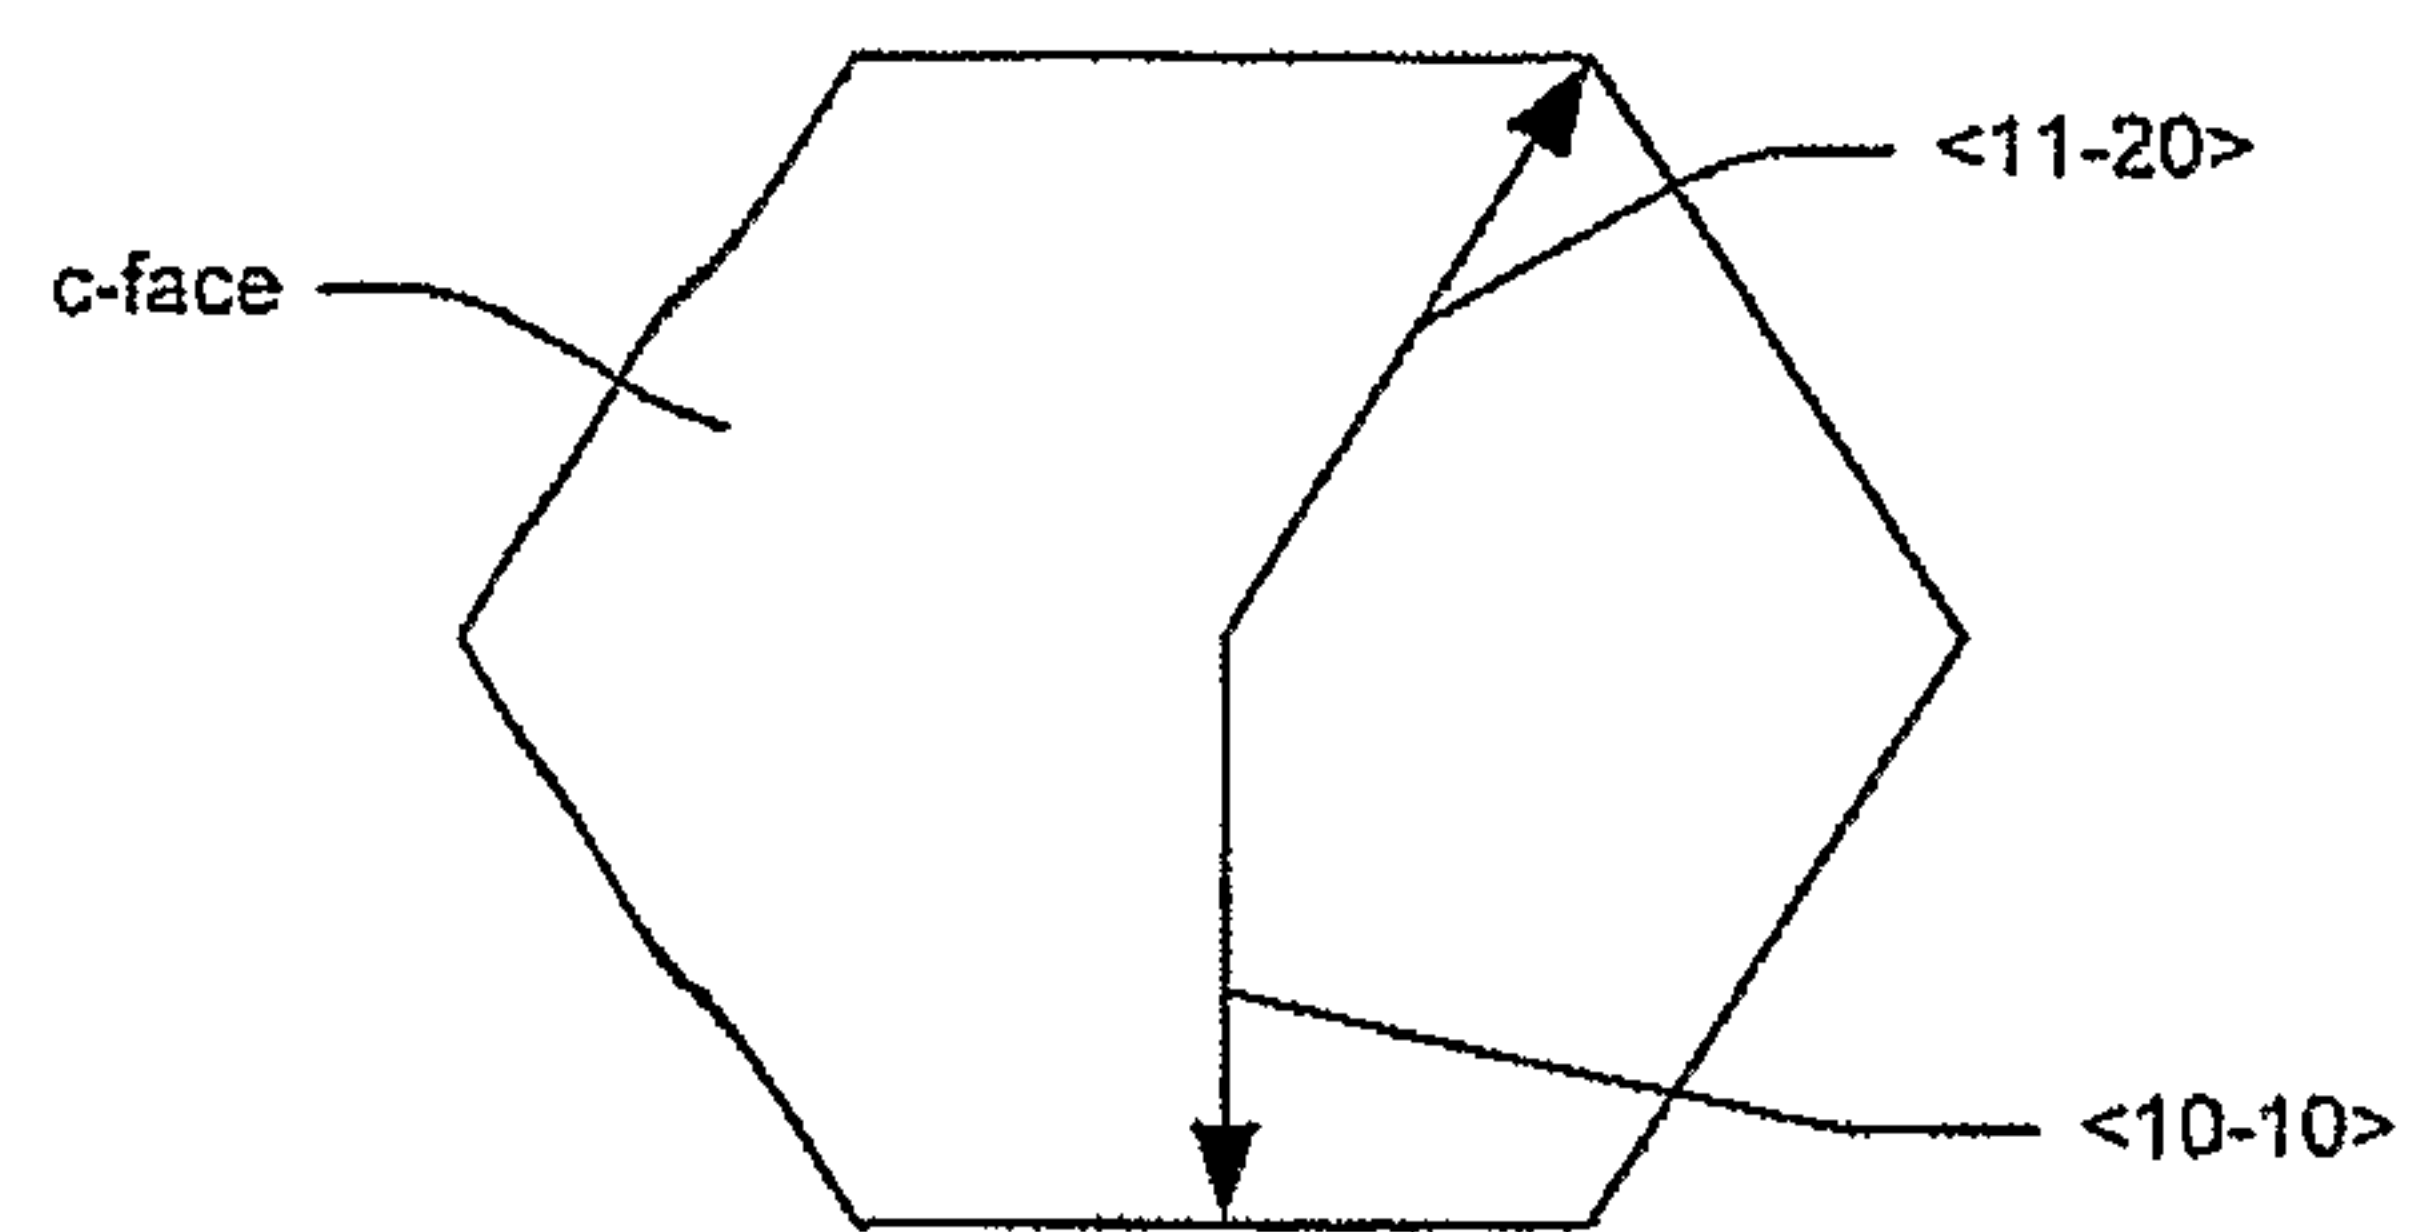


FIGURE 2

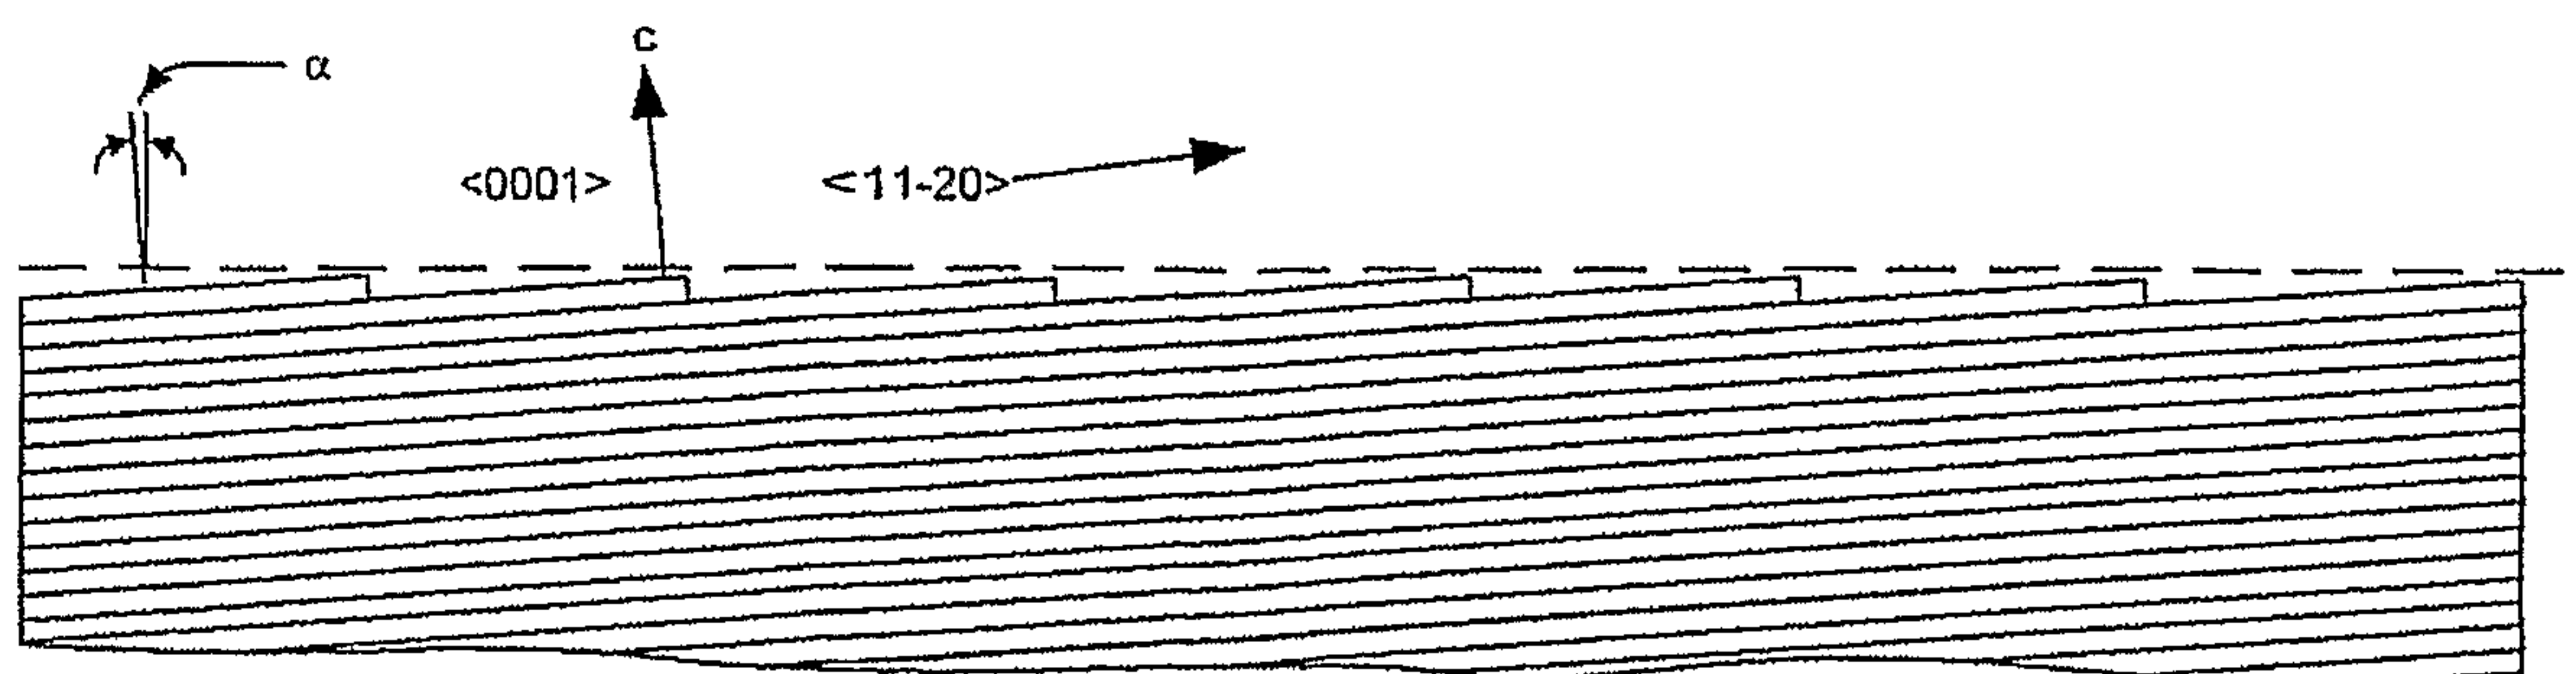


FIGURE 3

2/7

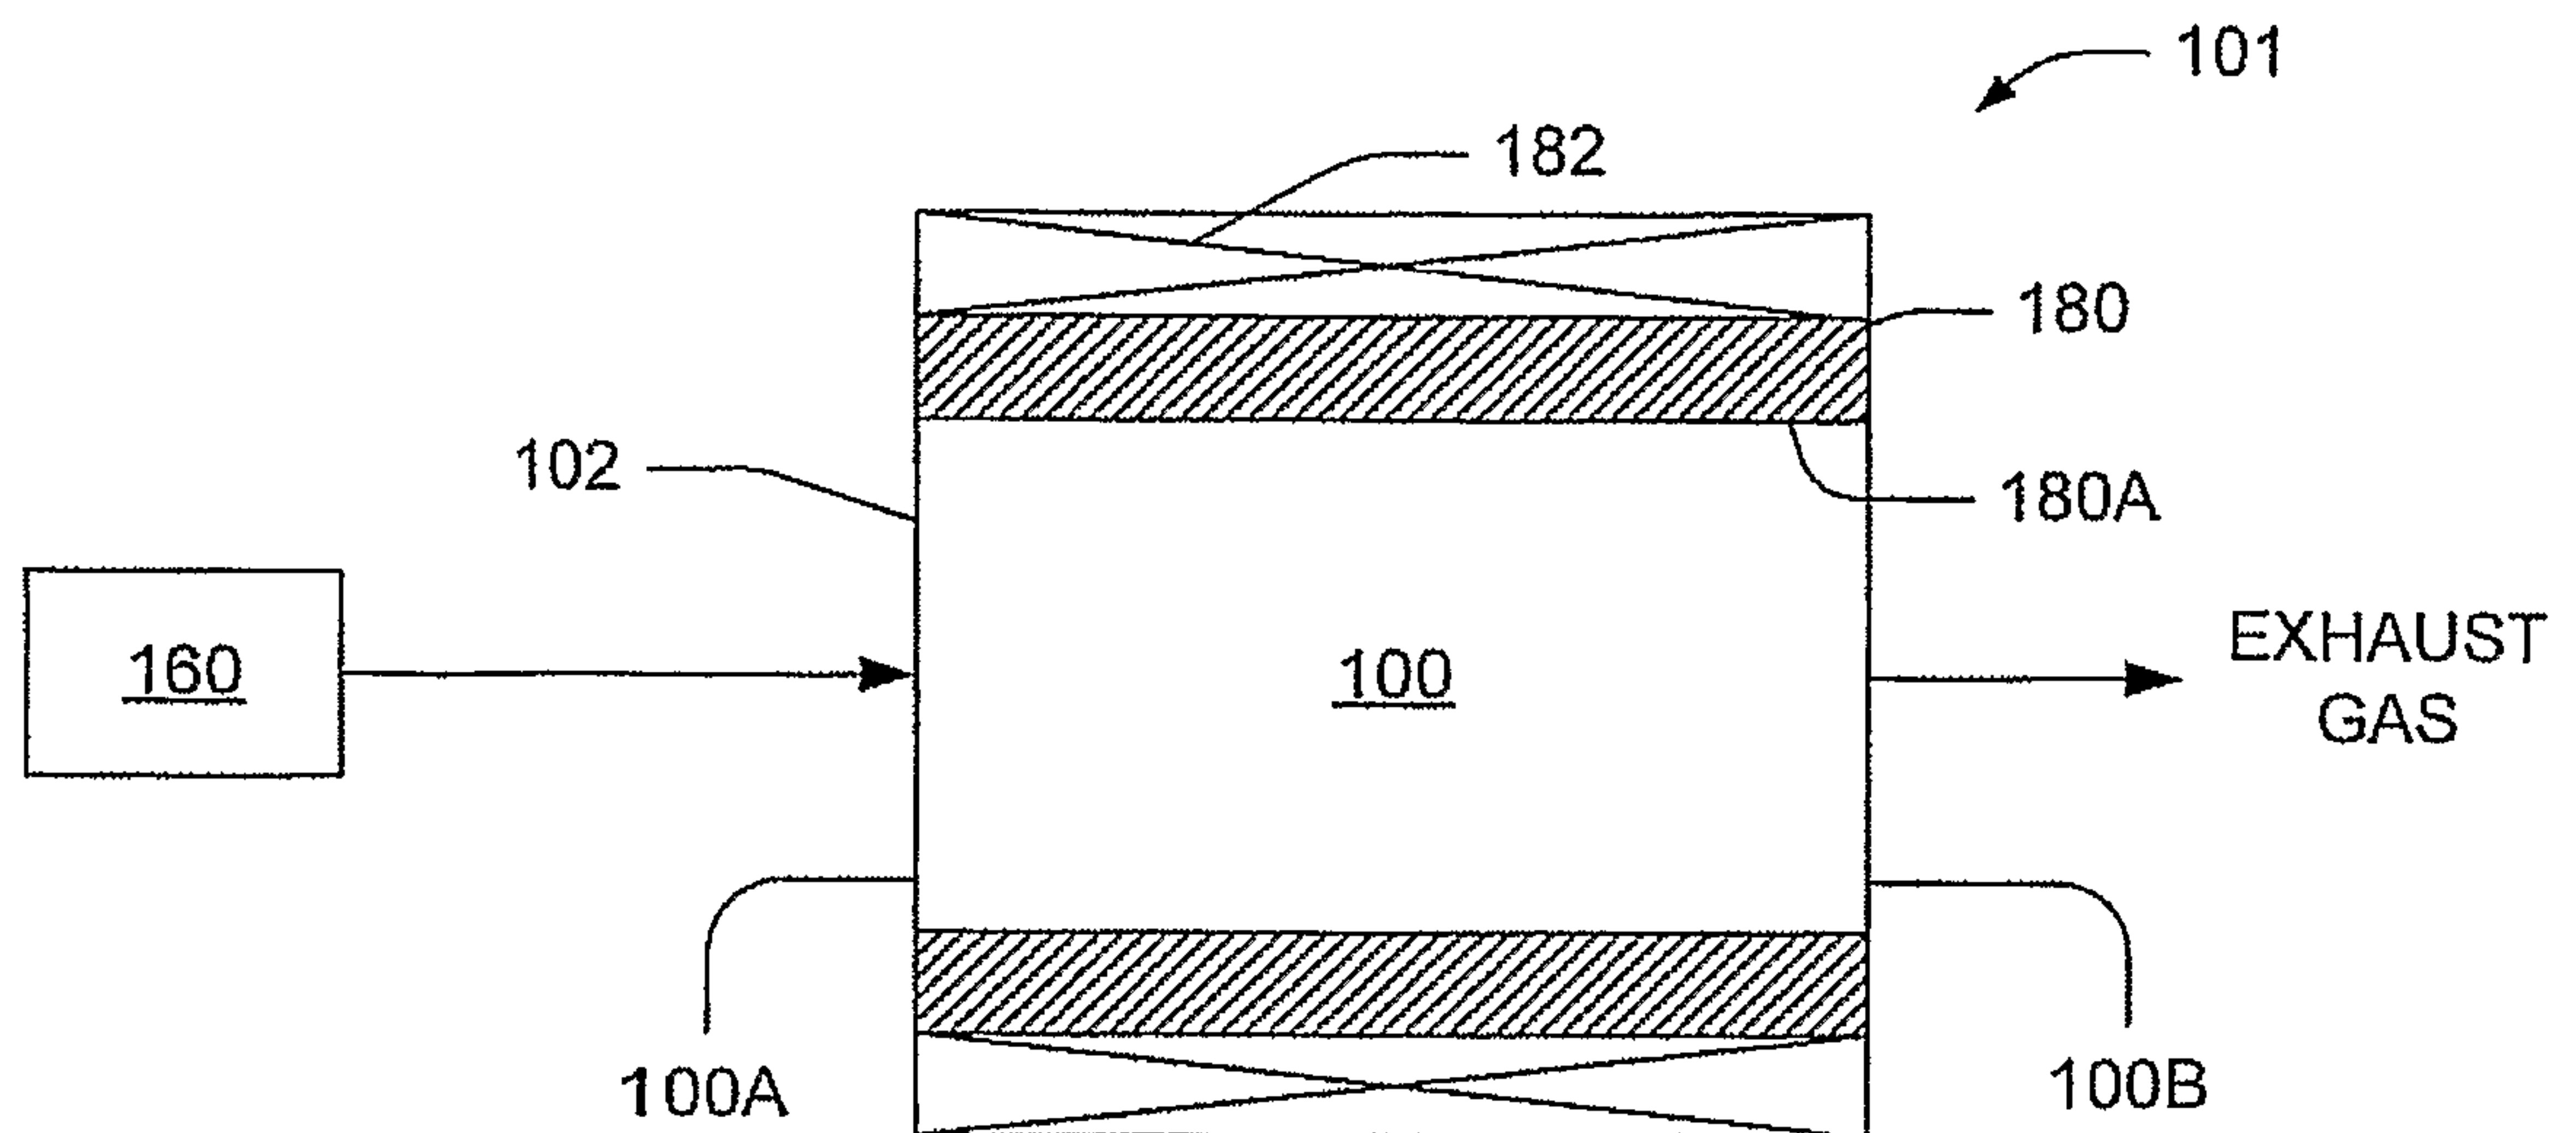


FIGURE 4

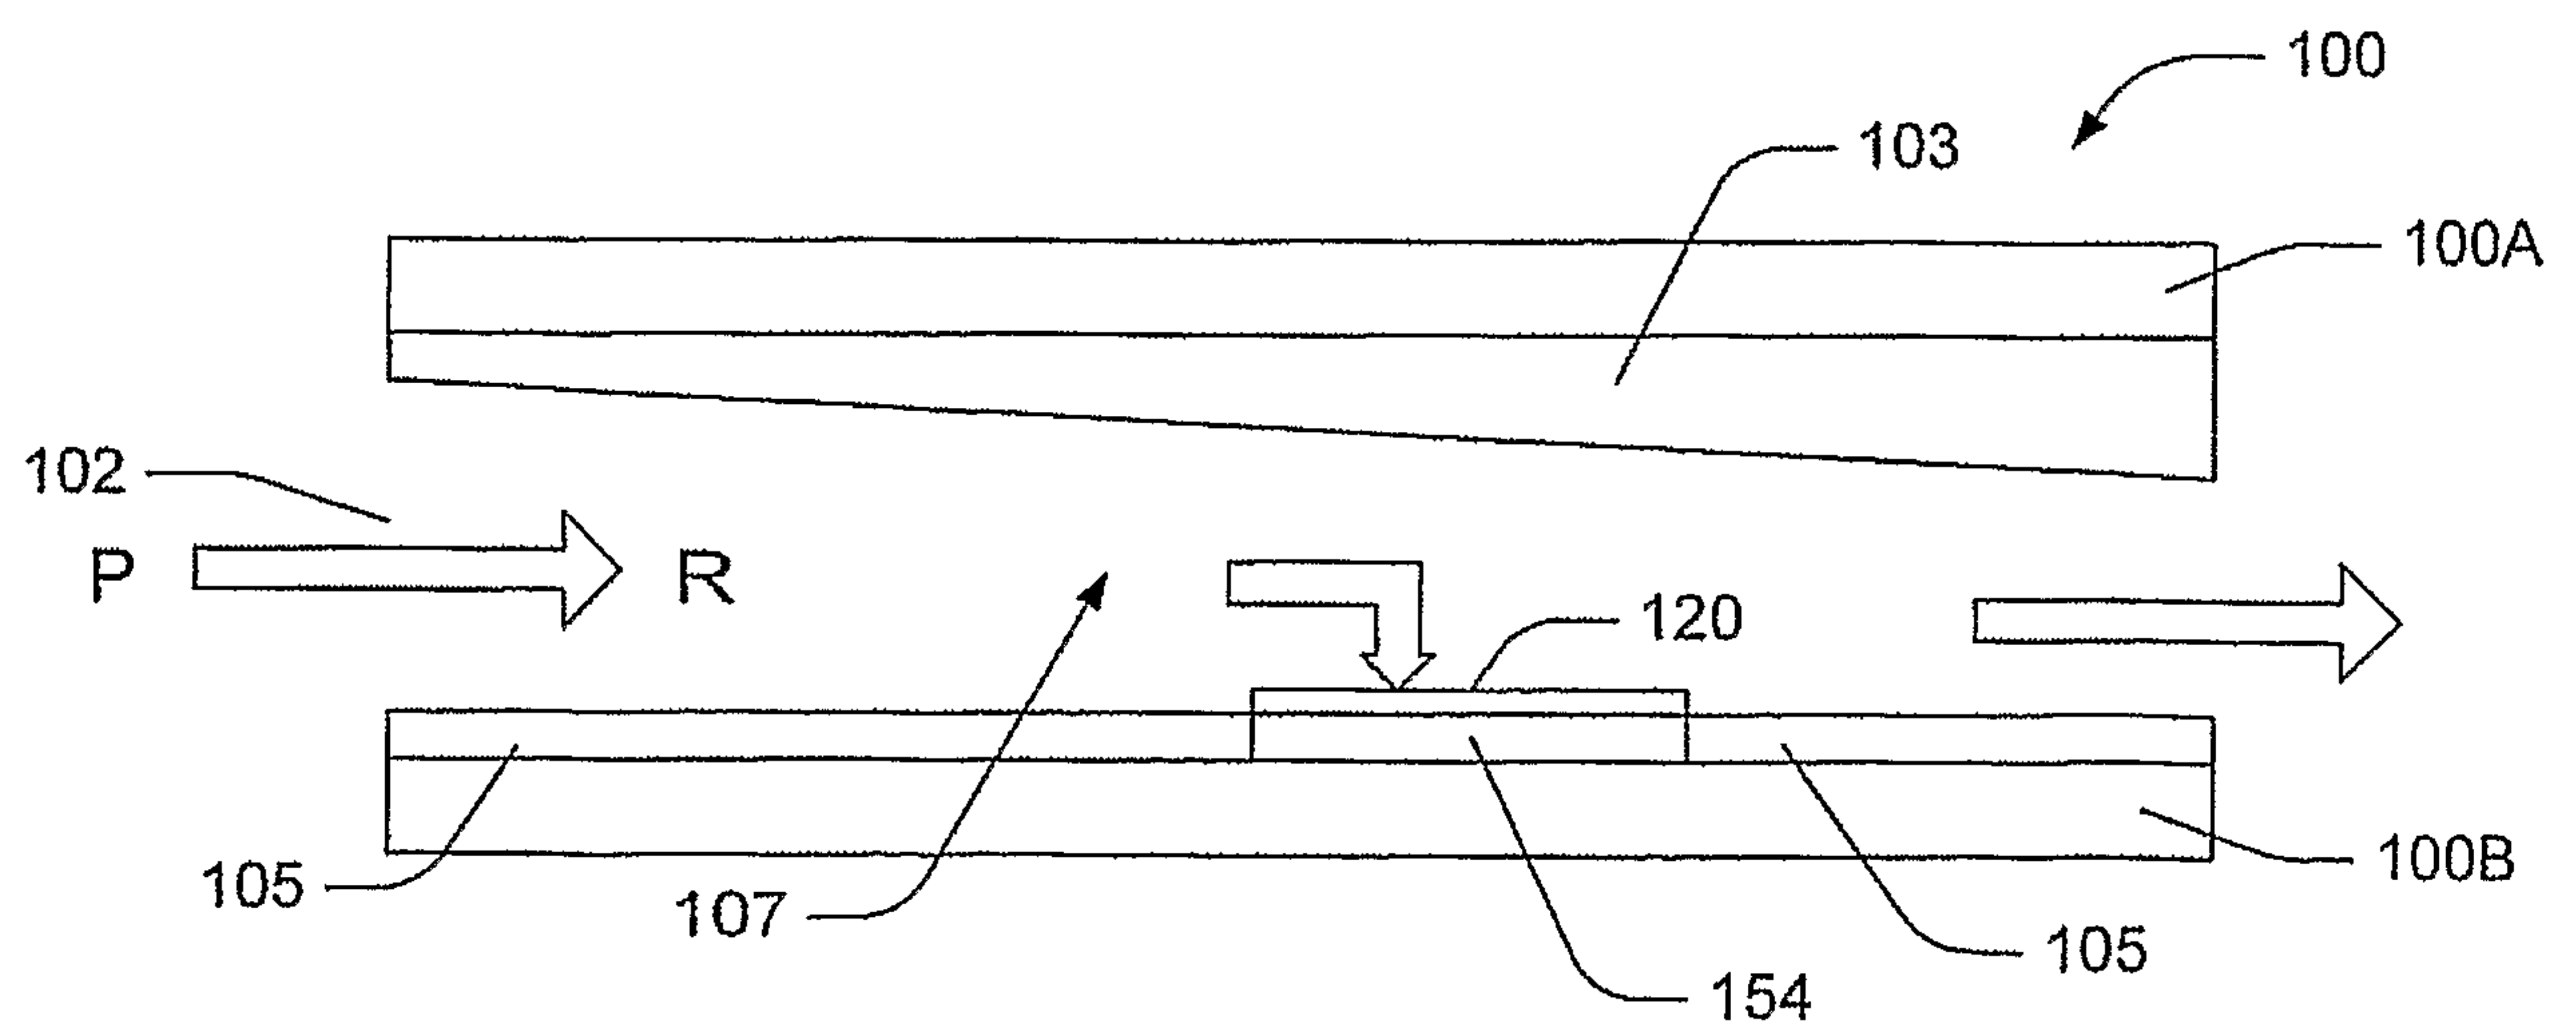


FIGURE 5

3/7

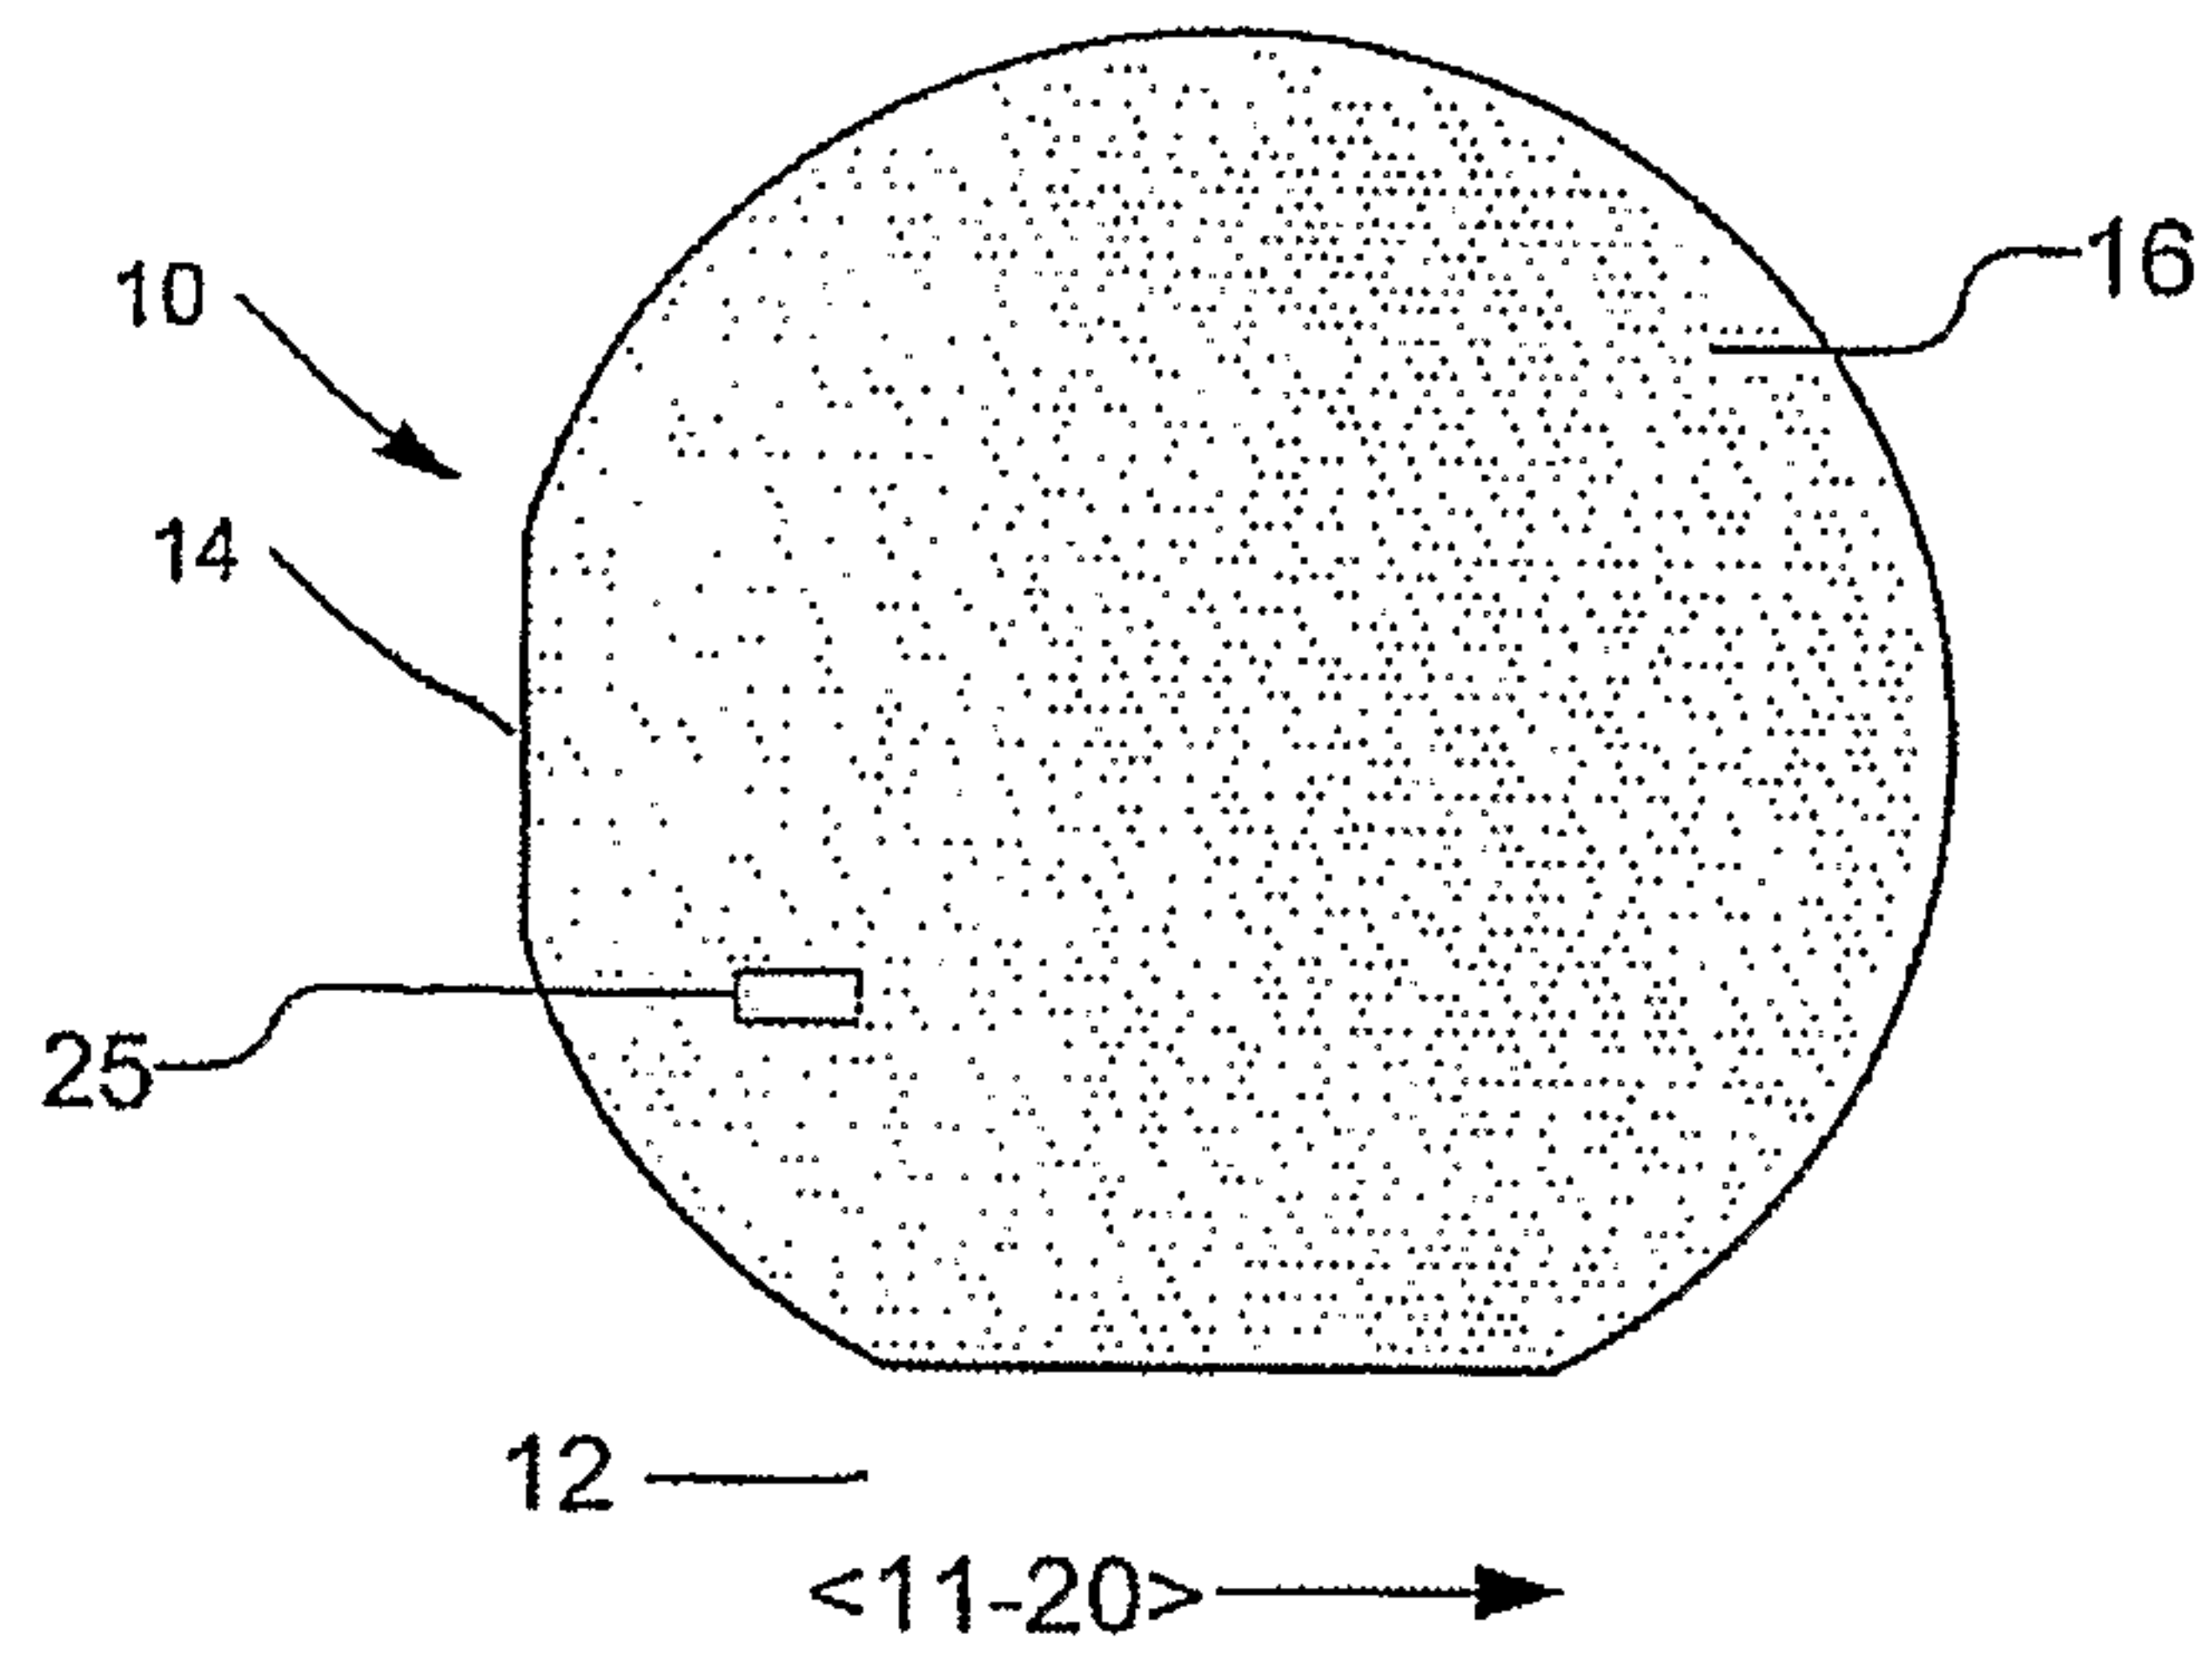


FIGURE 6

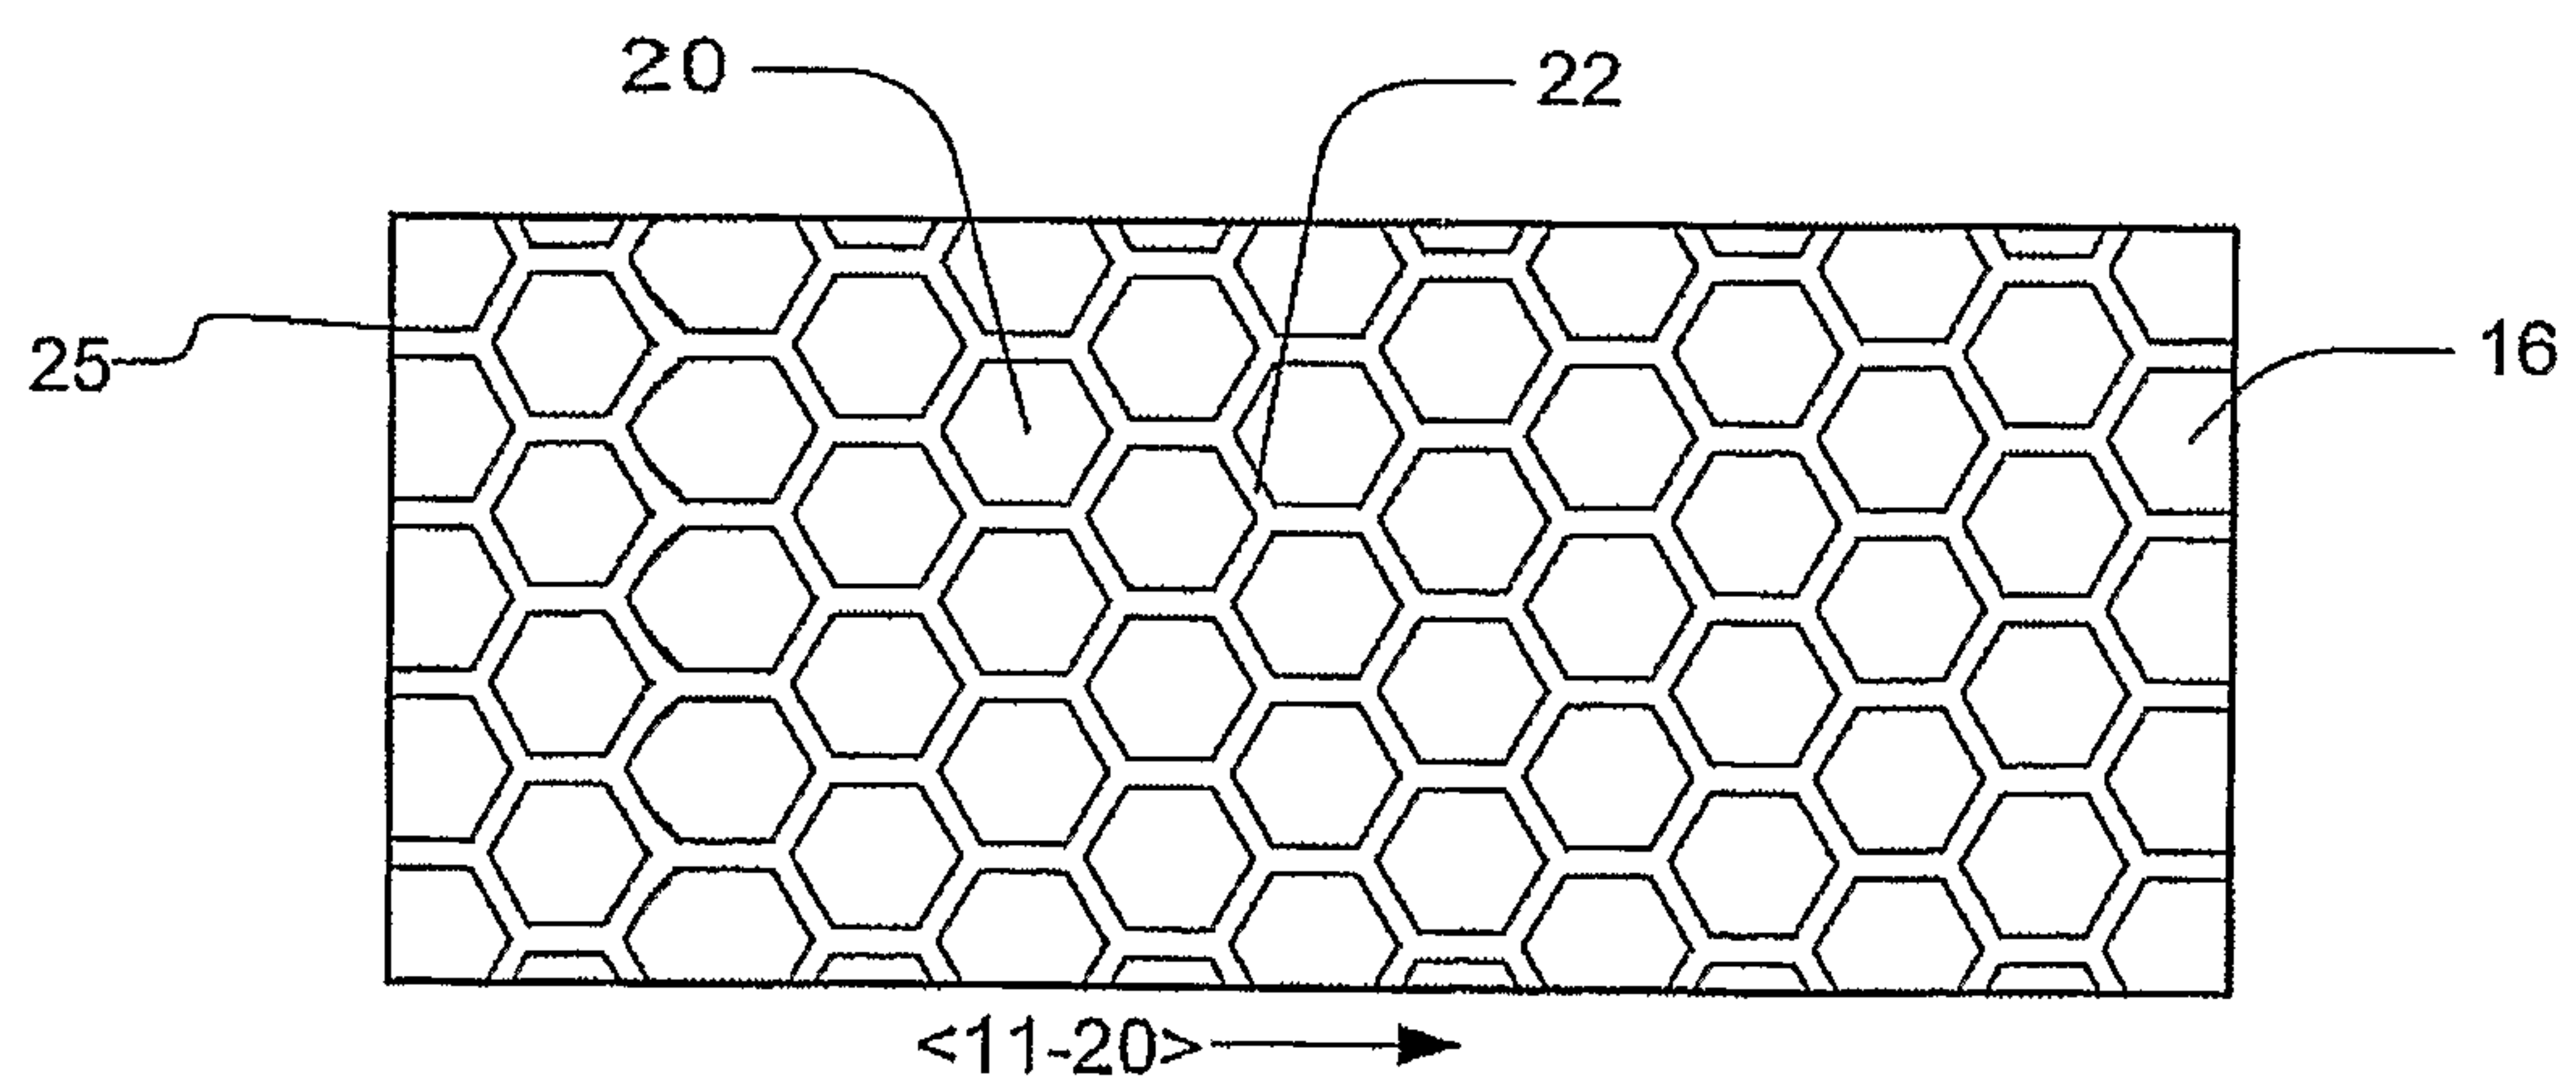


FIGURE 7A

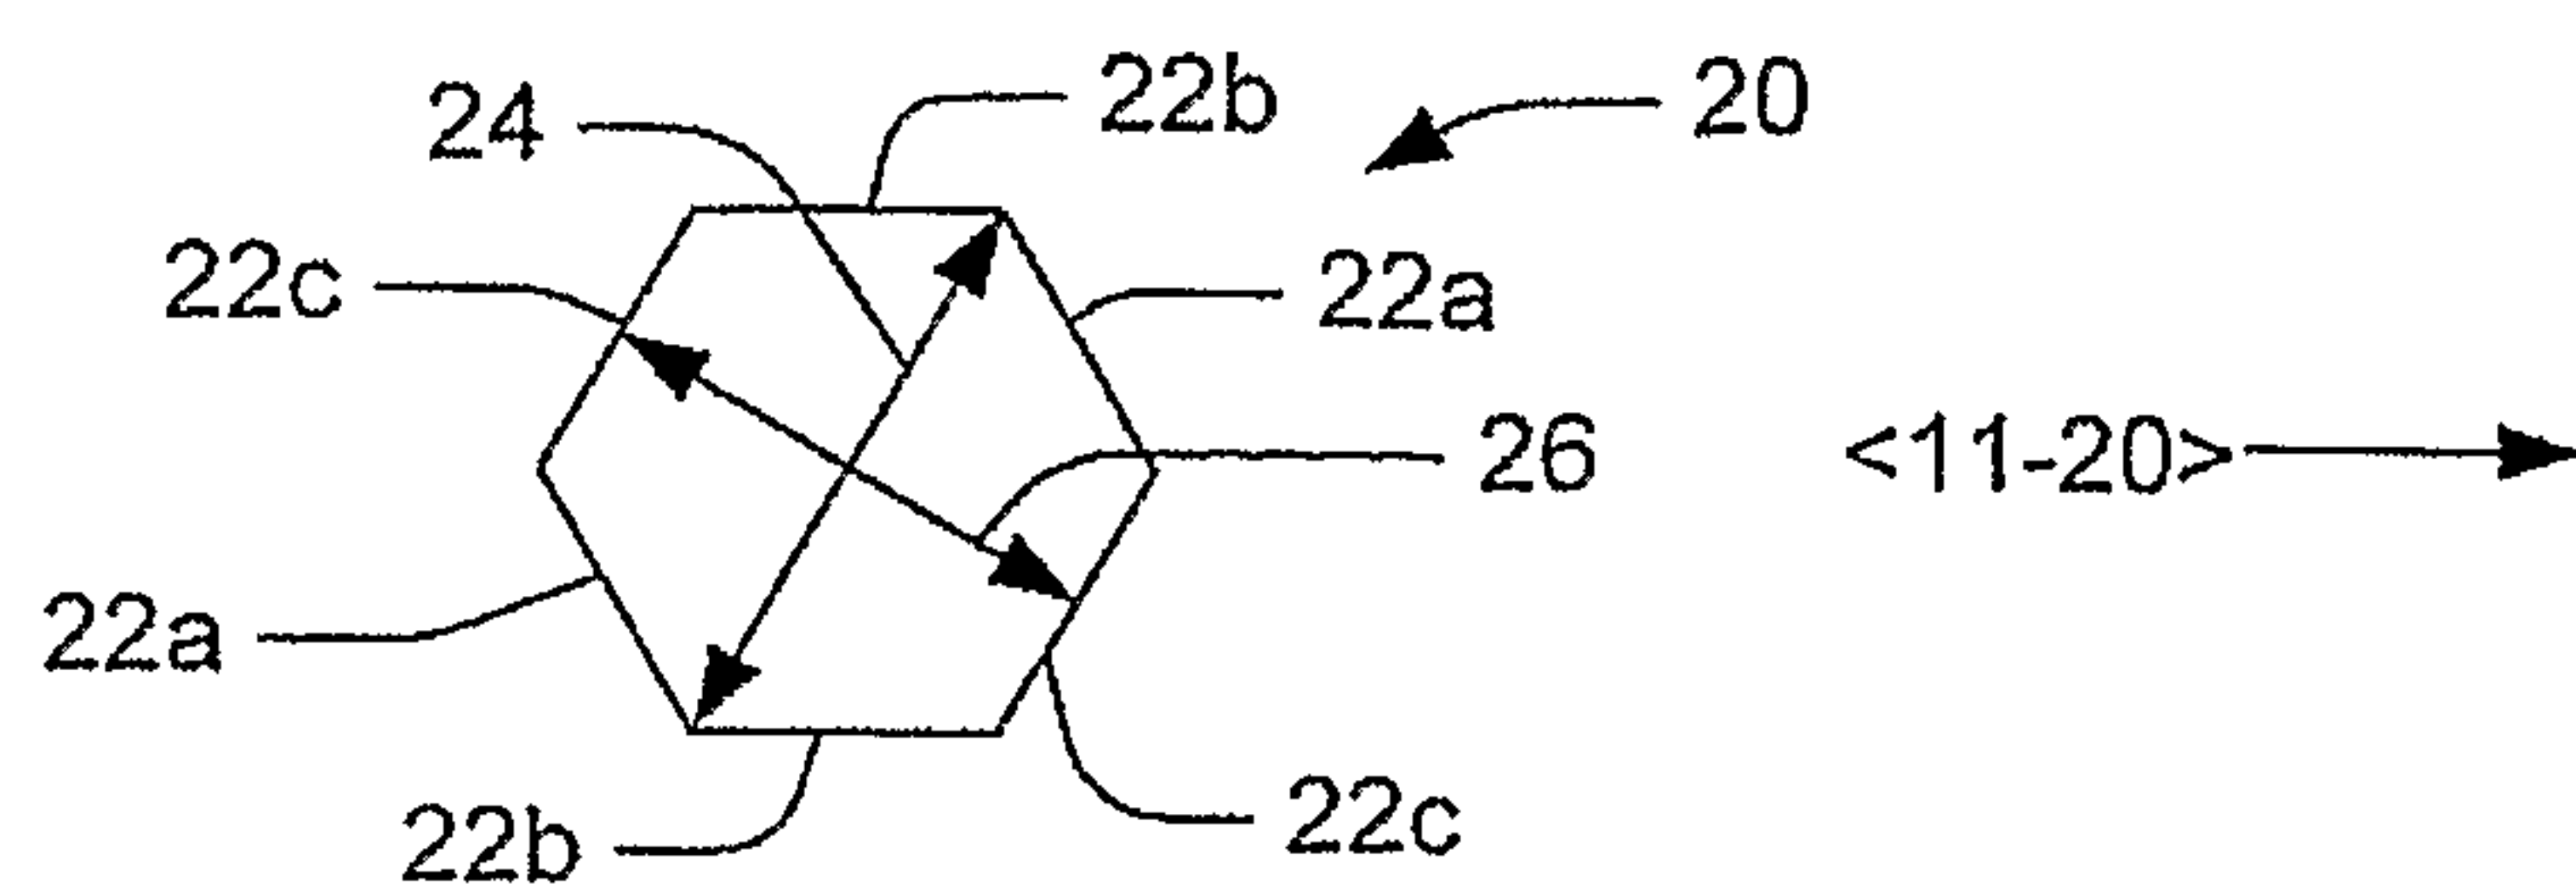


FIGURE 7B

4/7

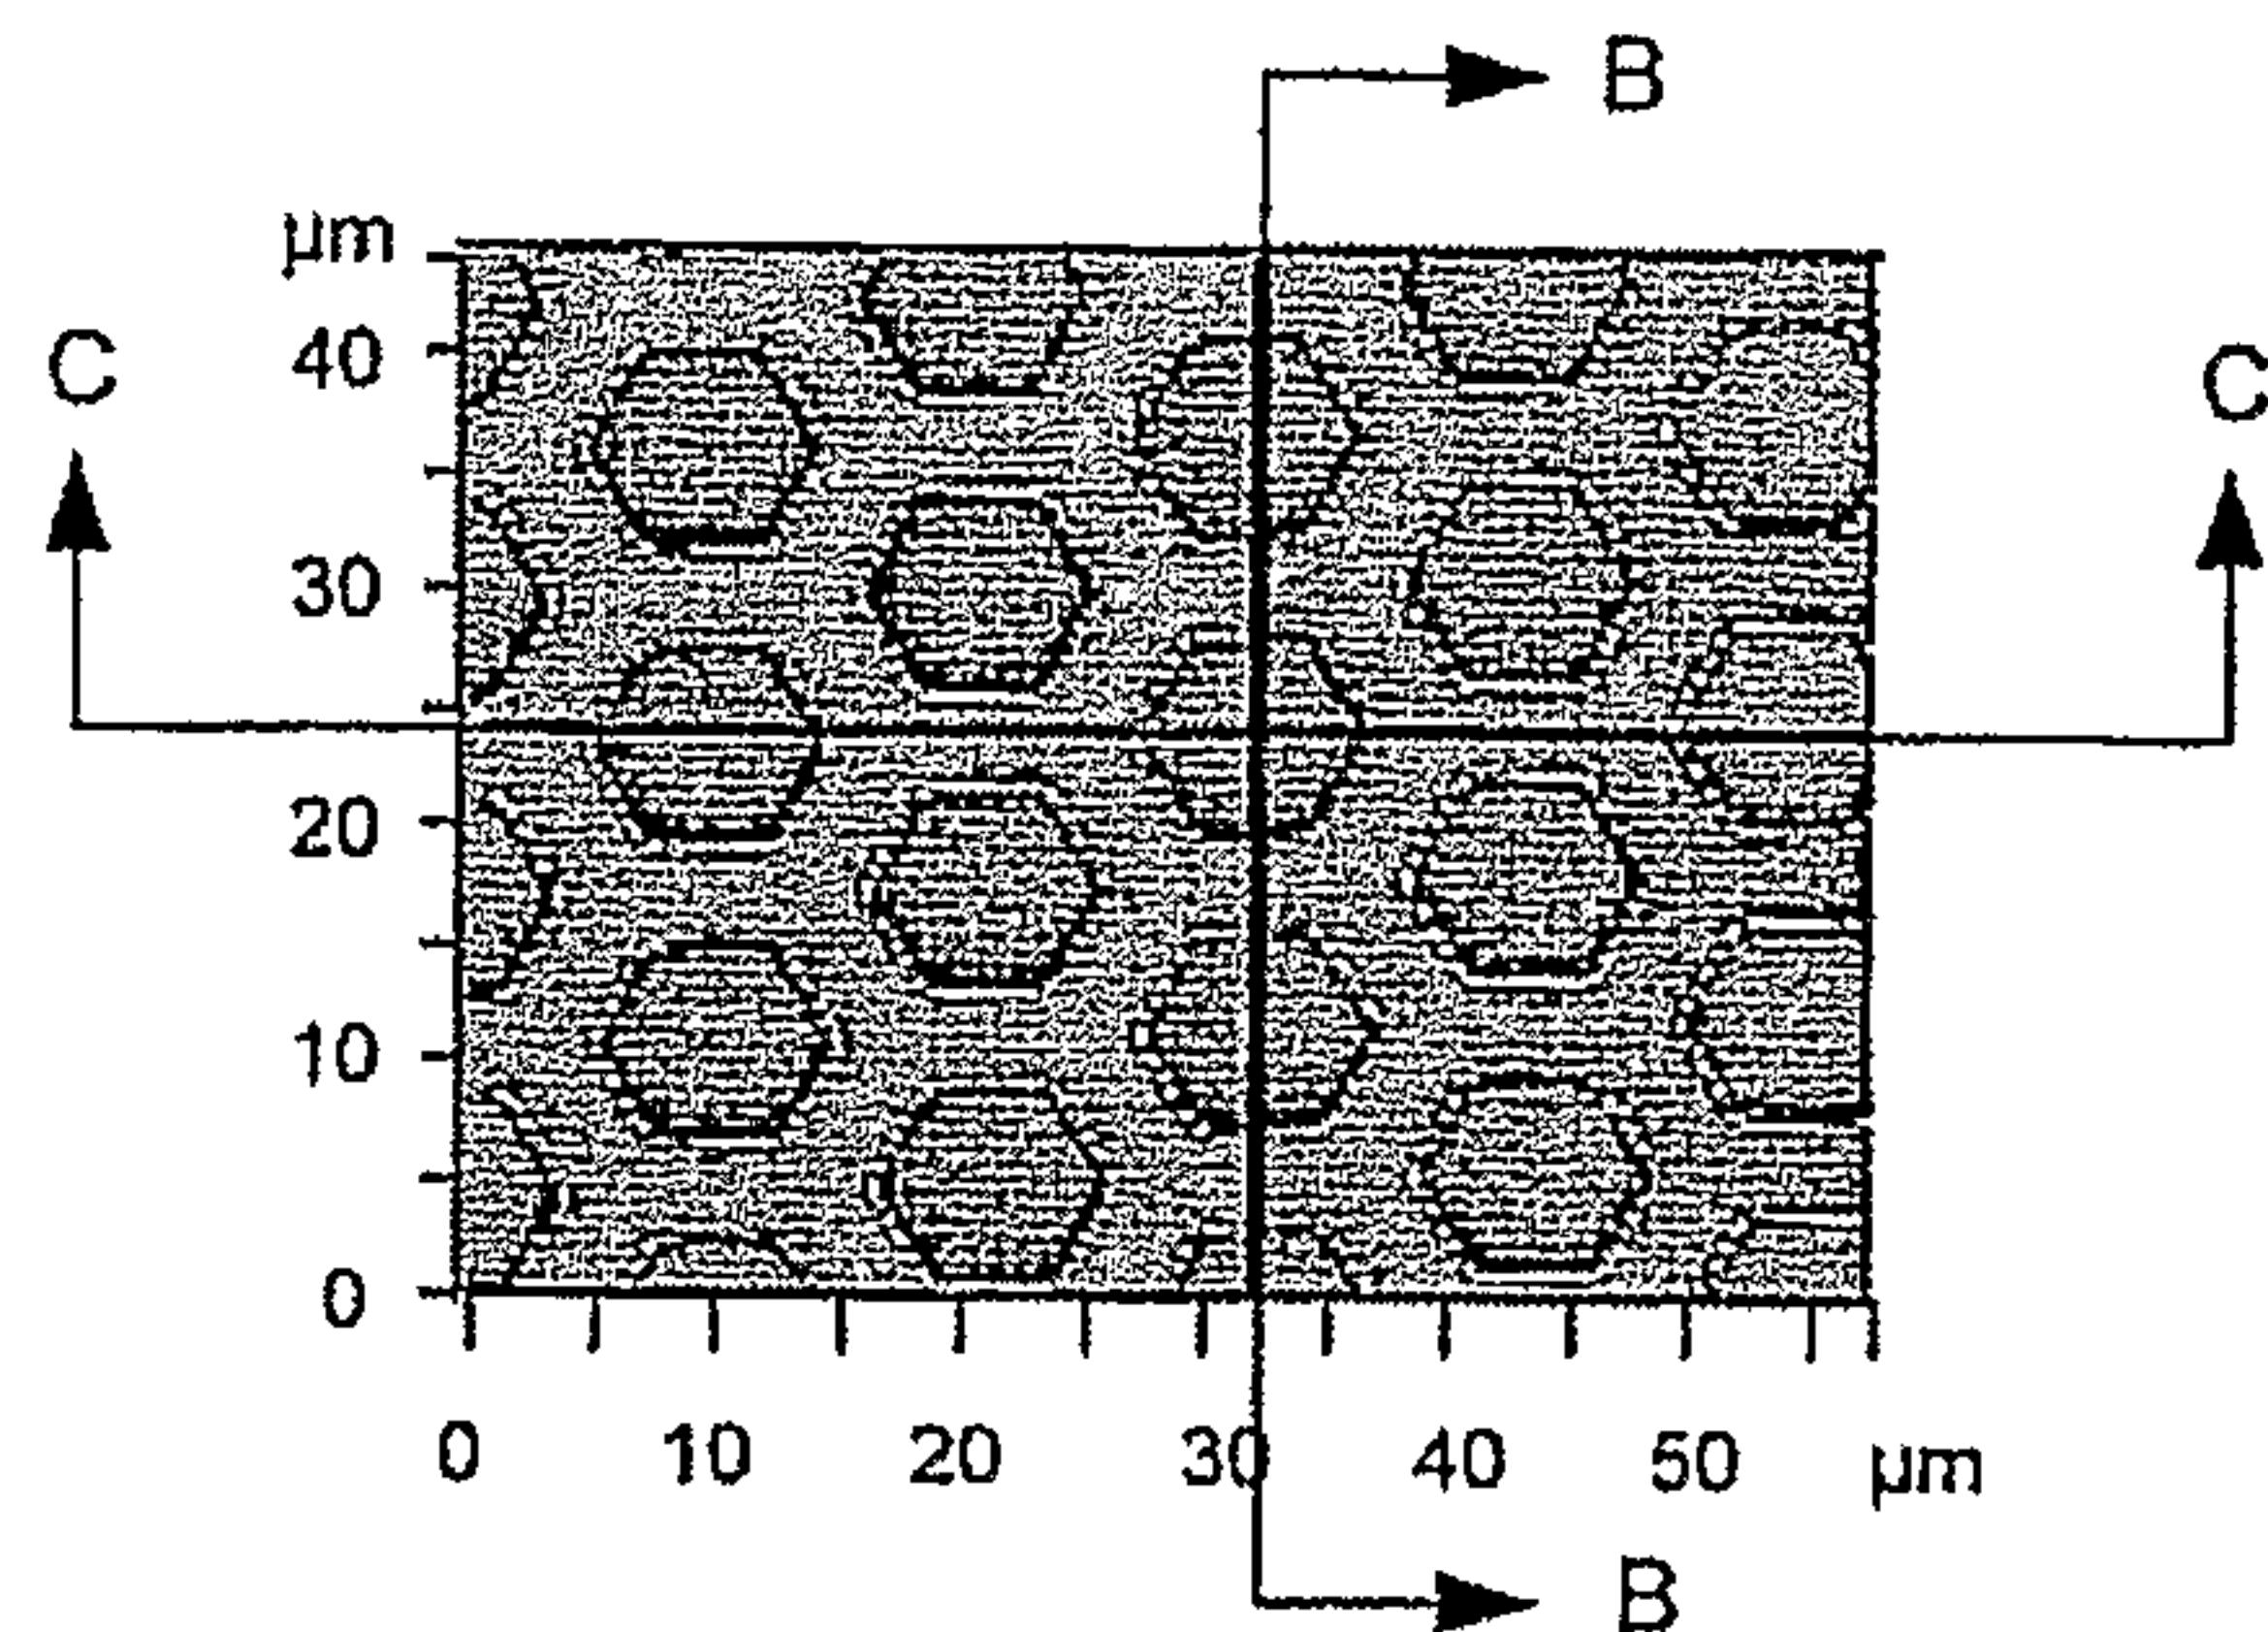


FIGURE 8A

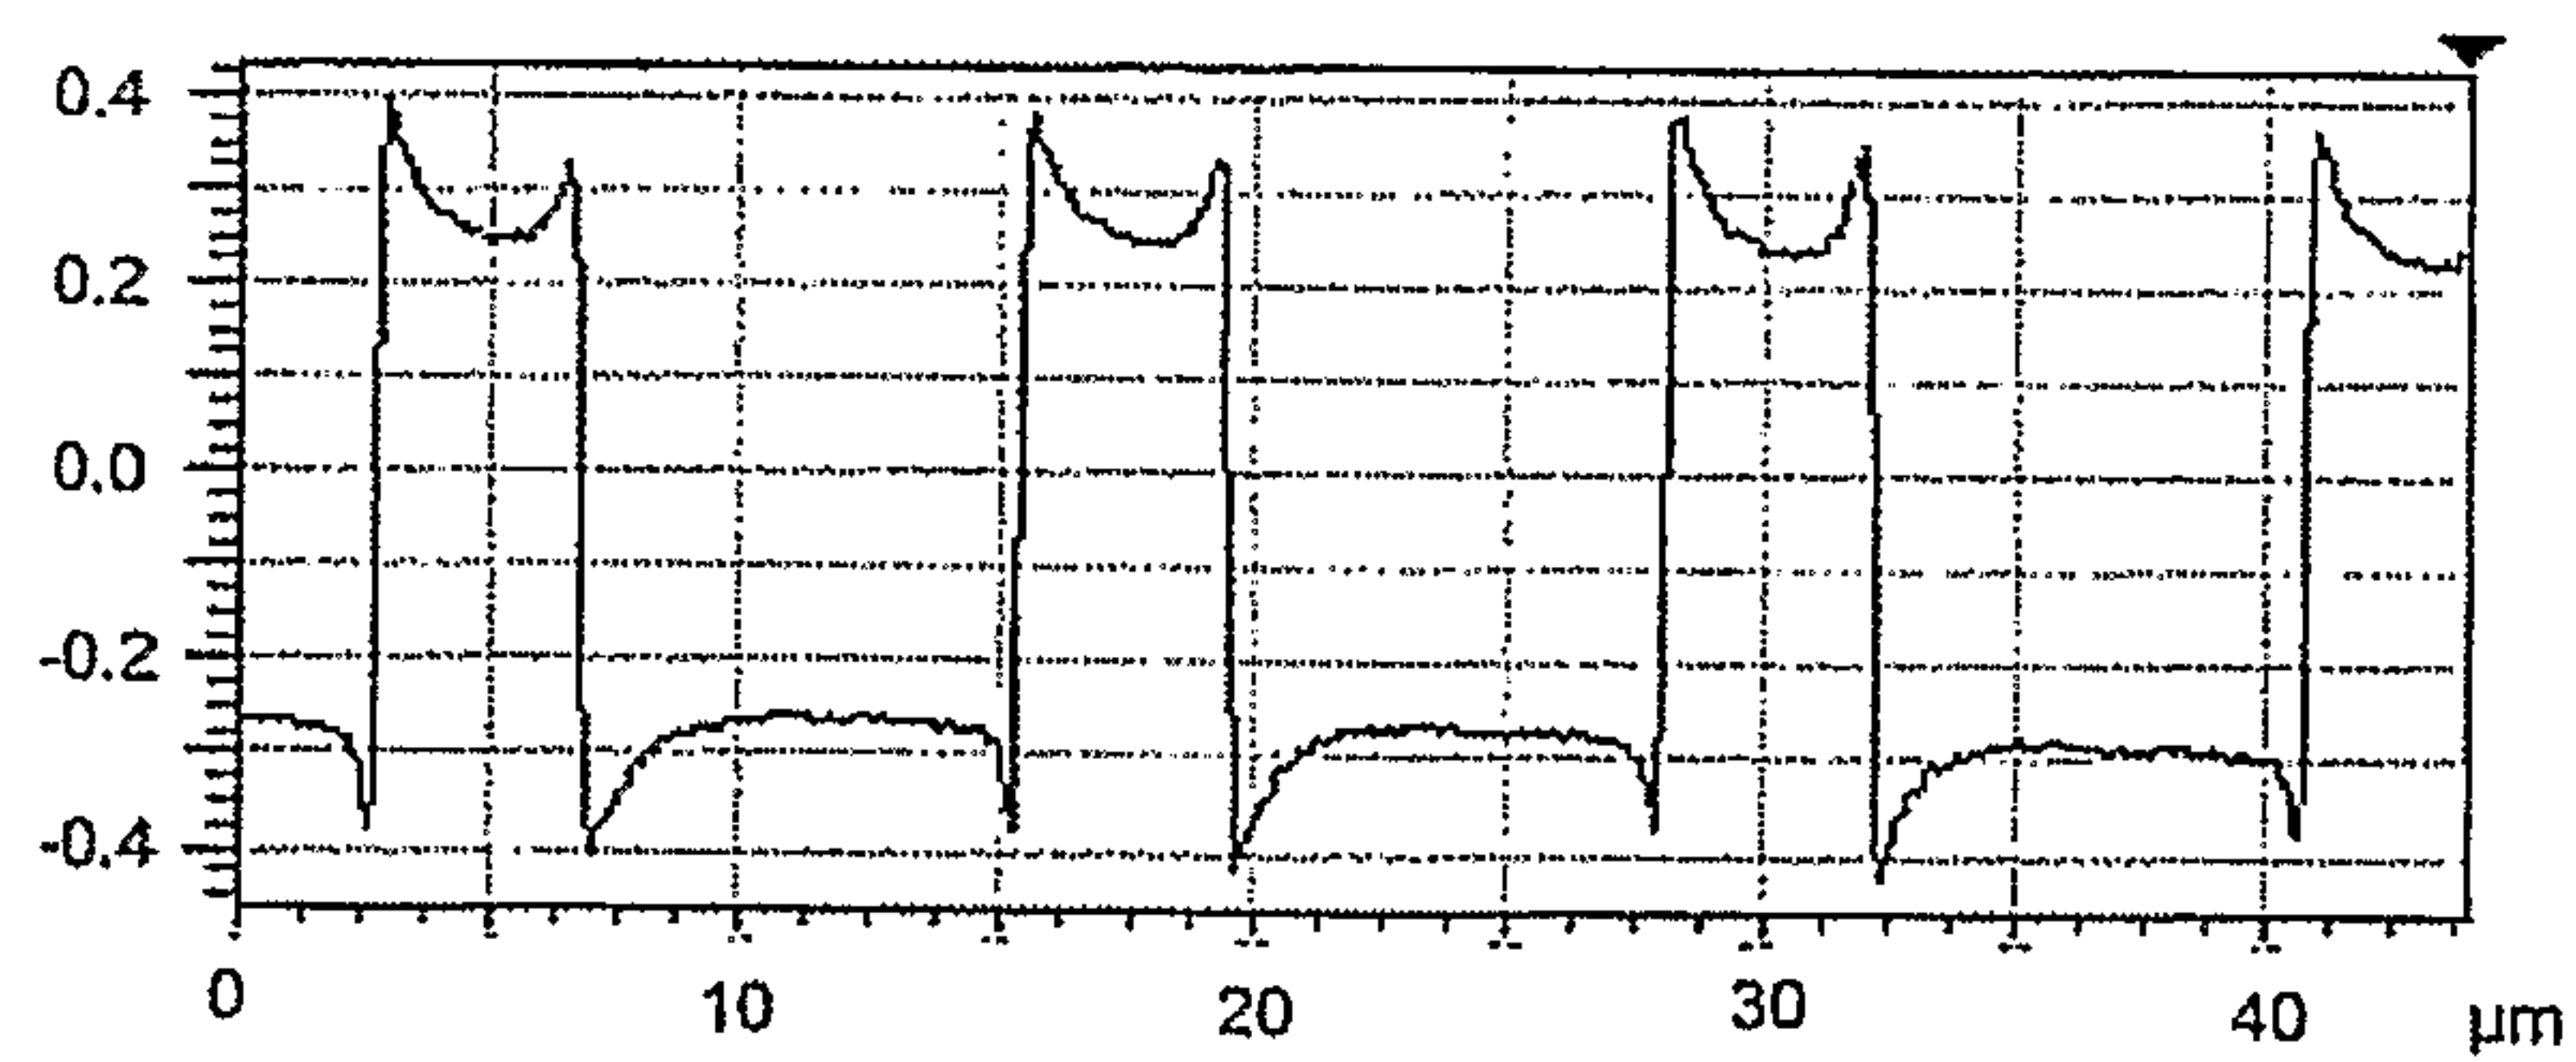


FIGURE 8B

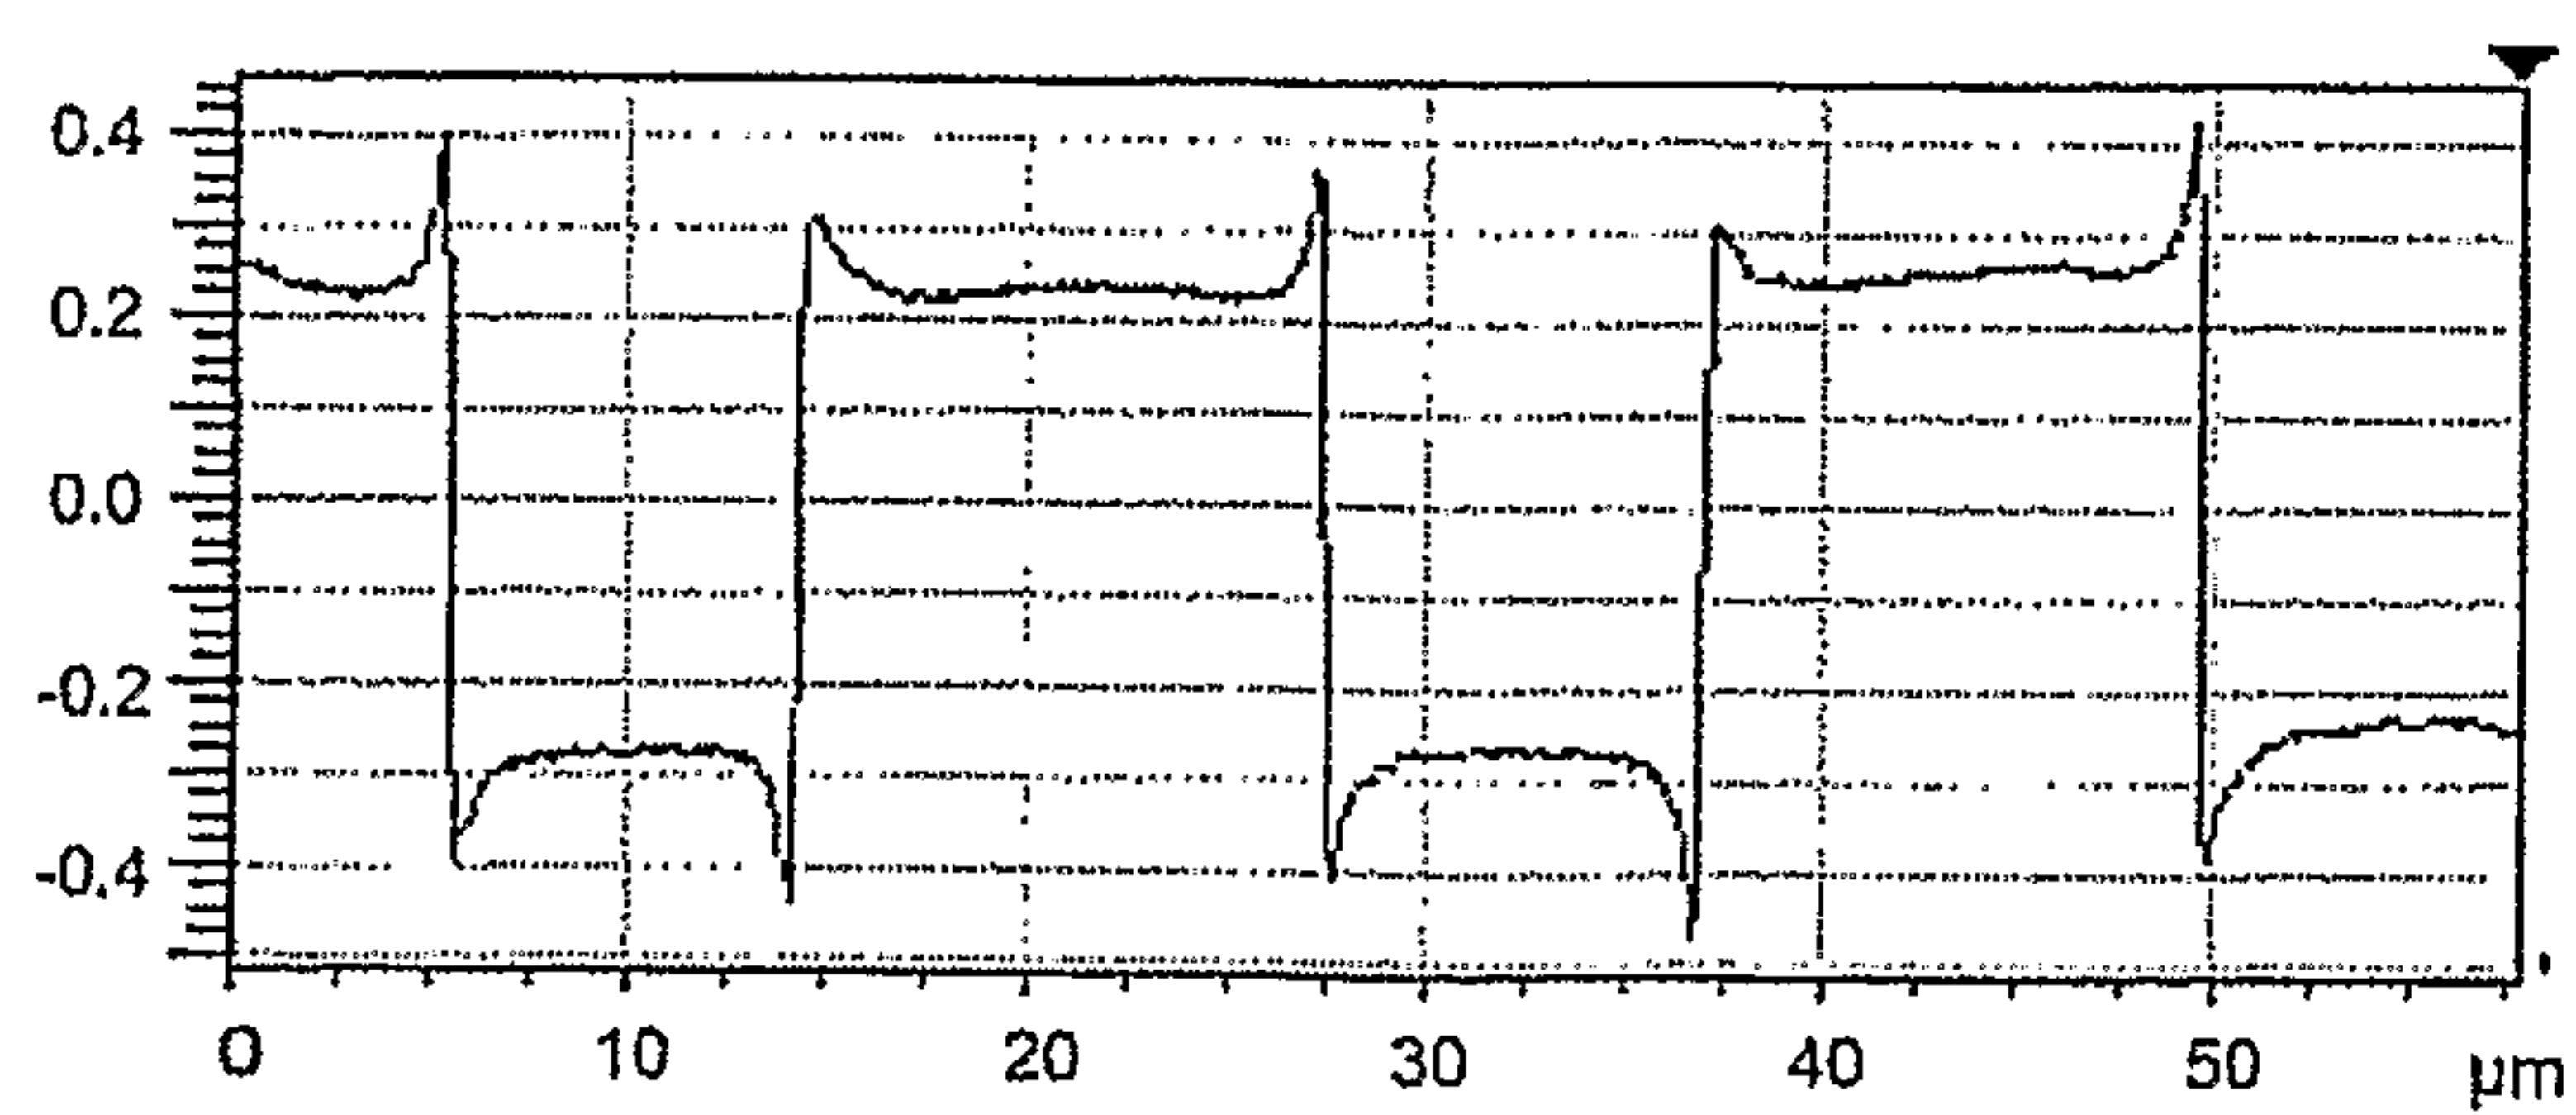


FIGURE 8C

5/7

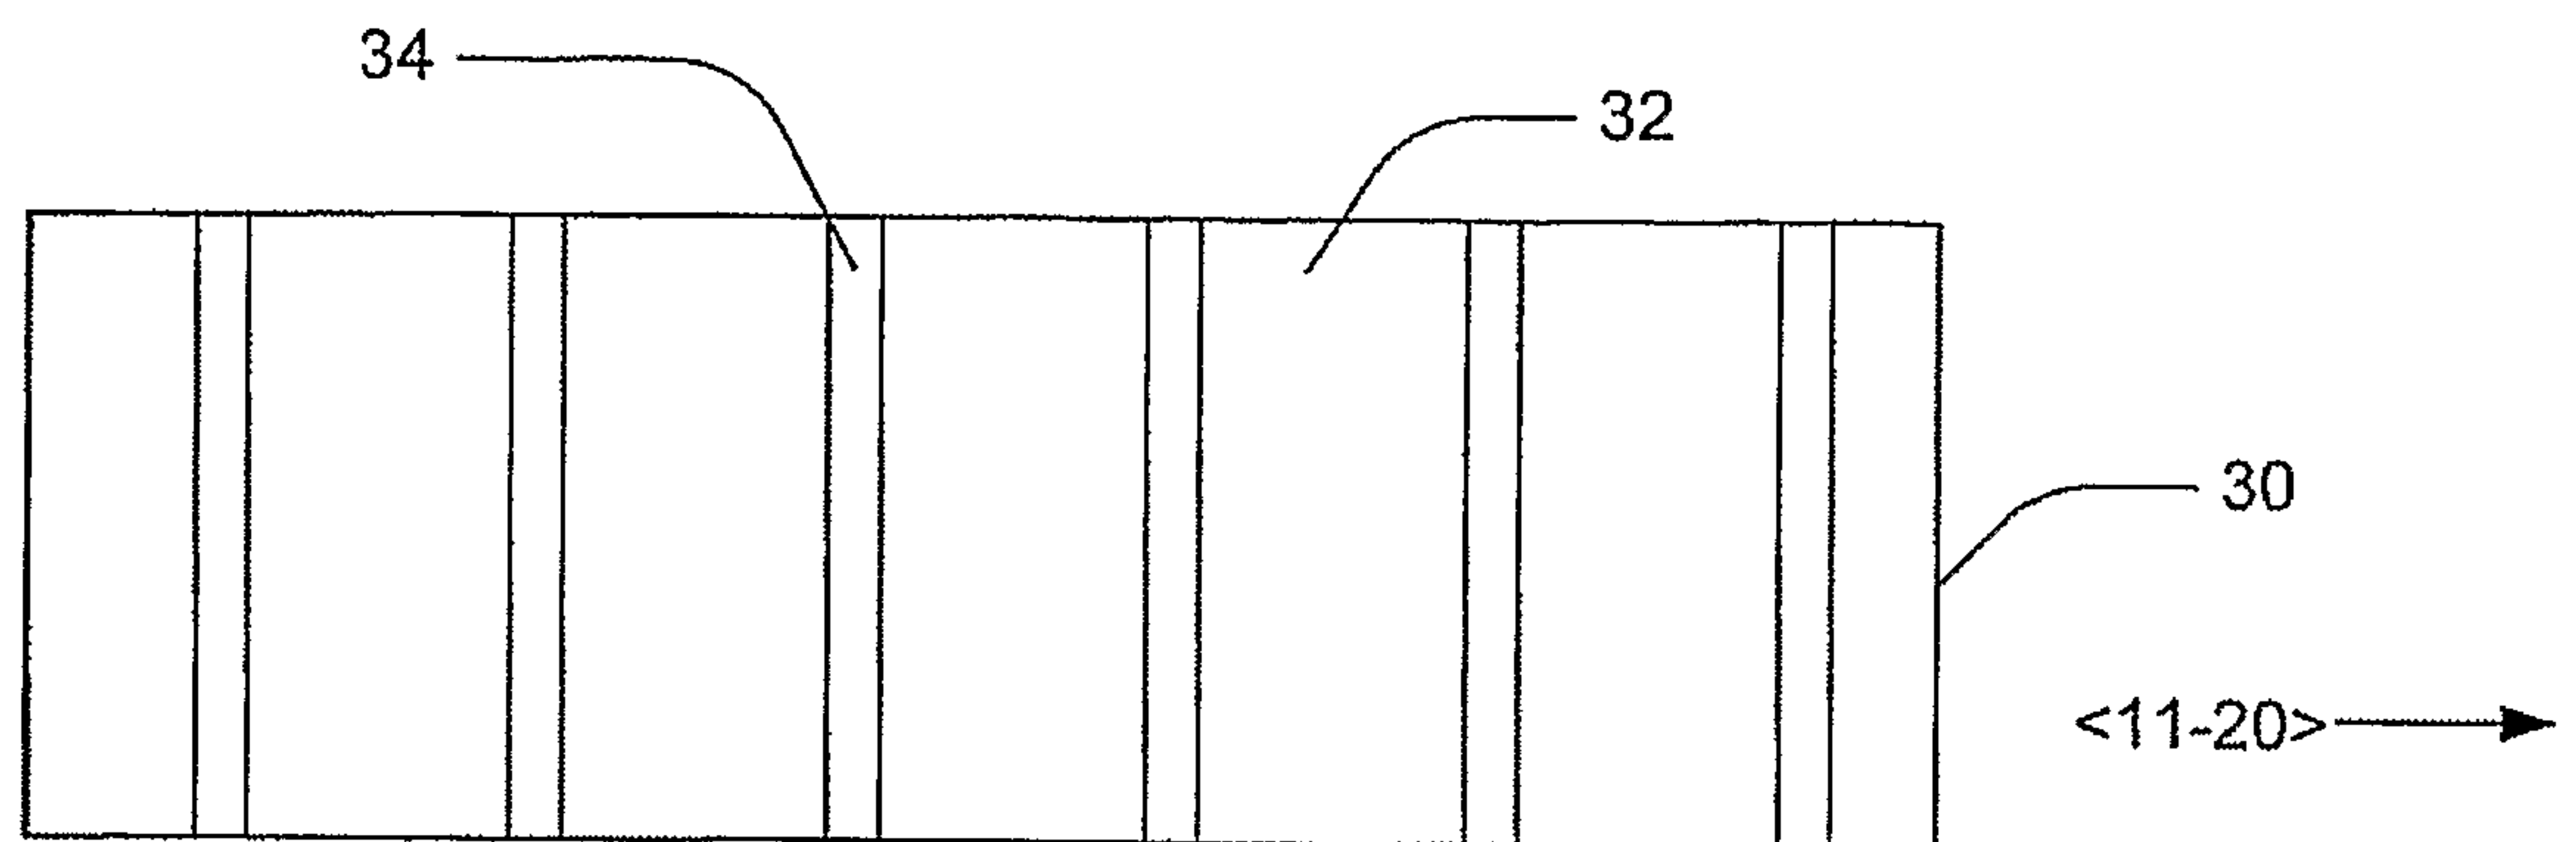


FIGURE 9A

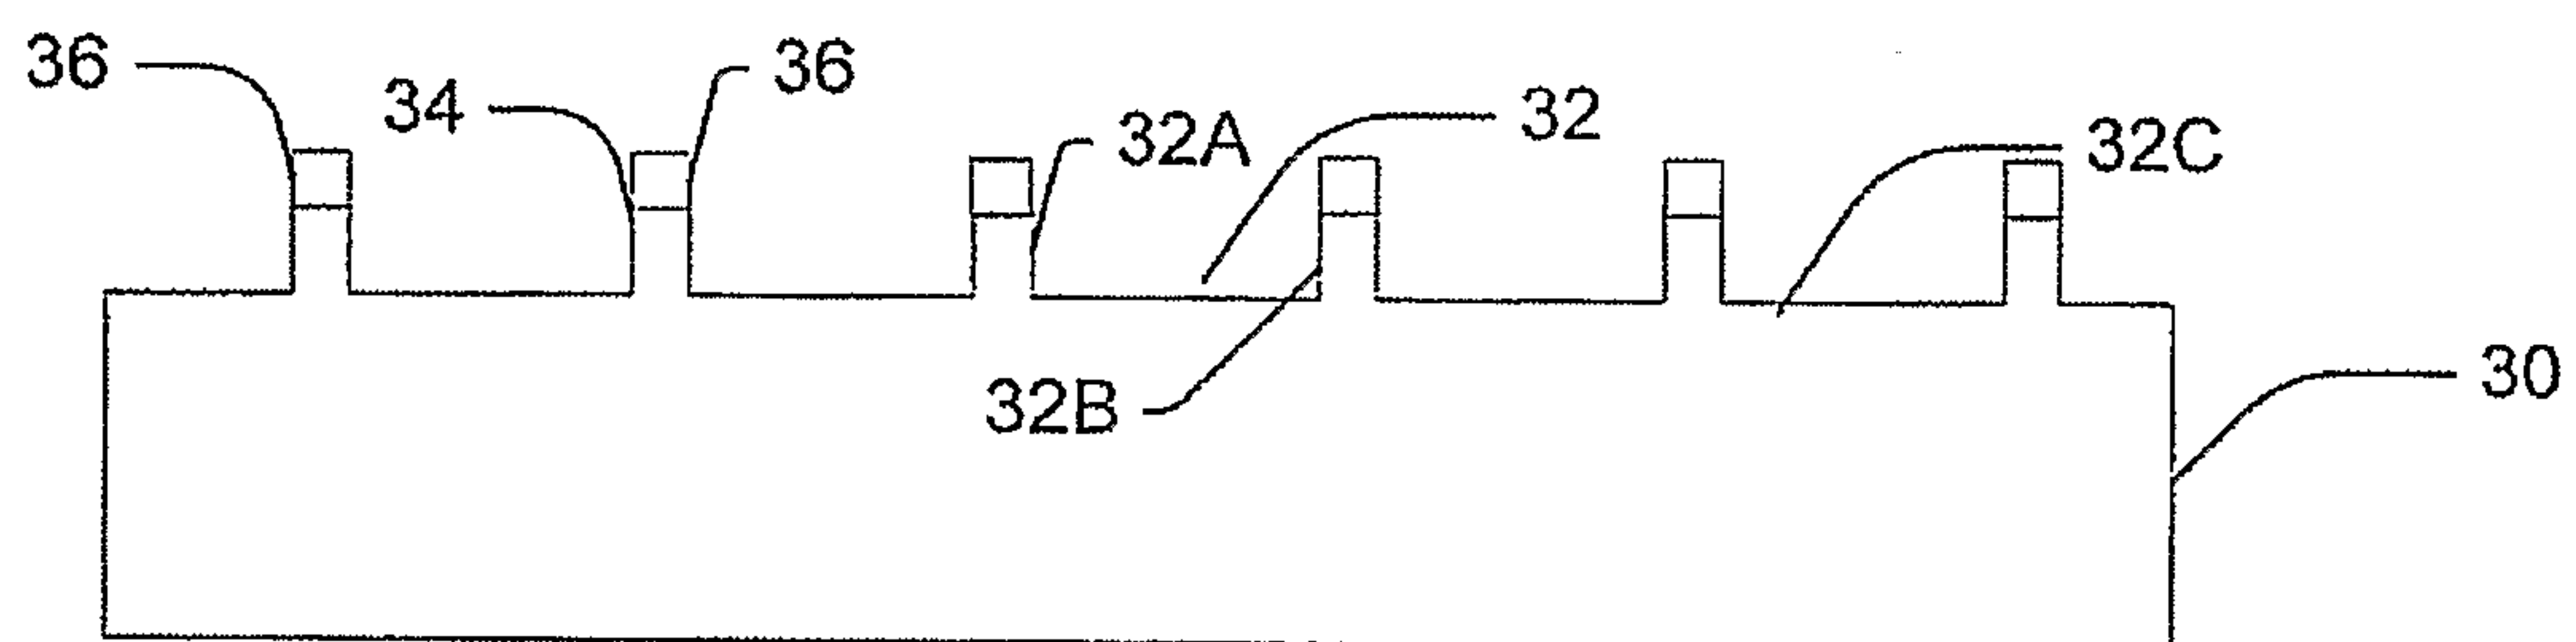


FIGURE 9B

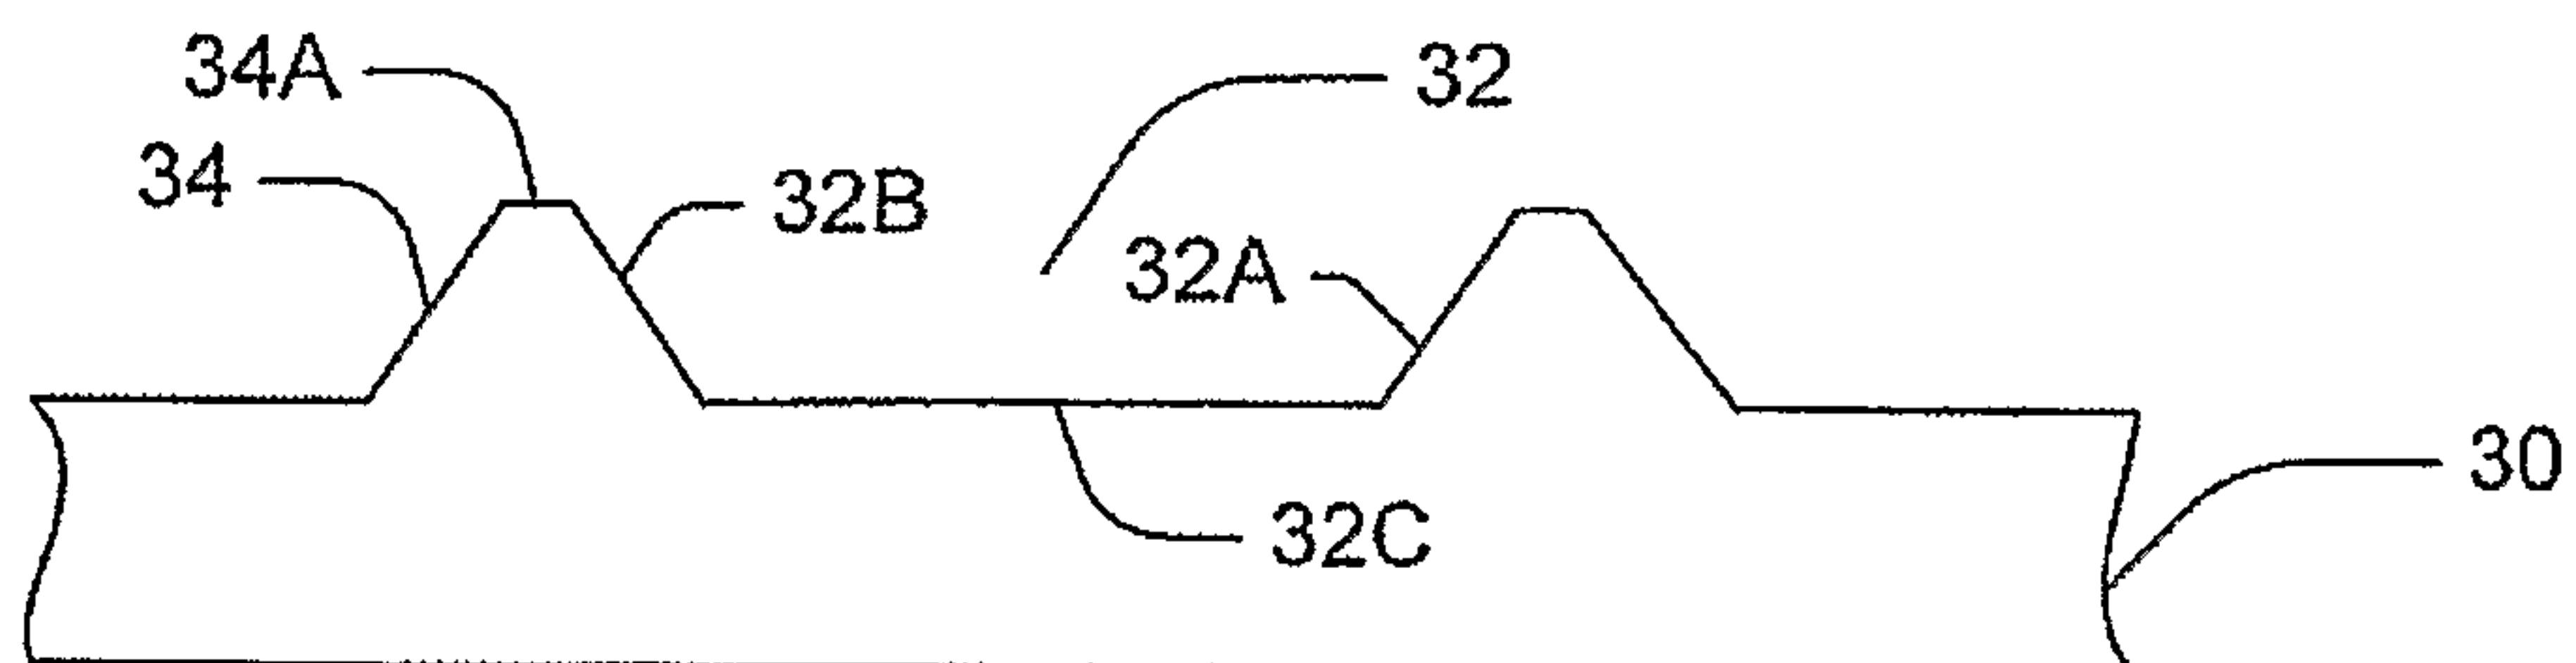


FIGURE 9C

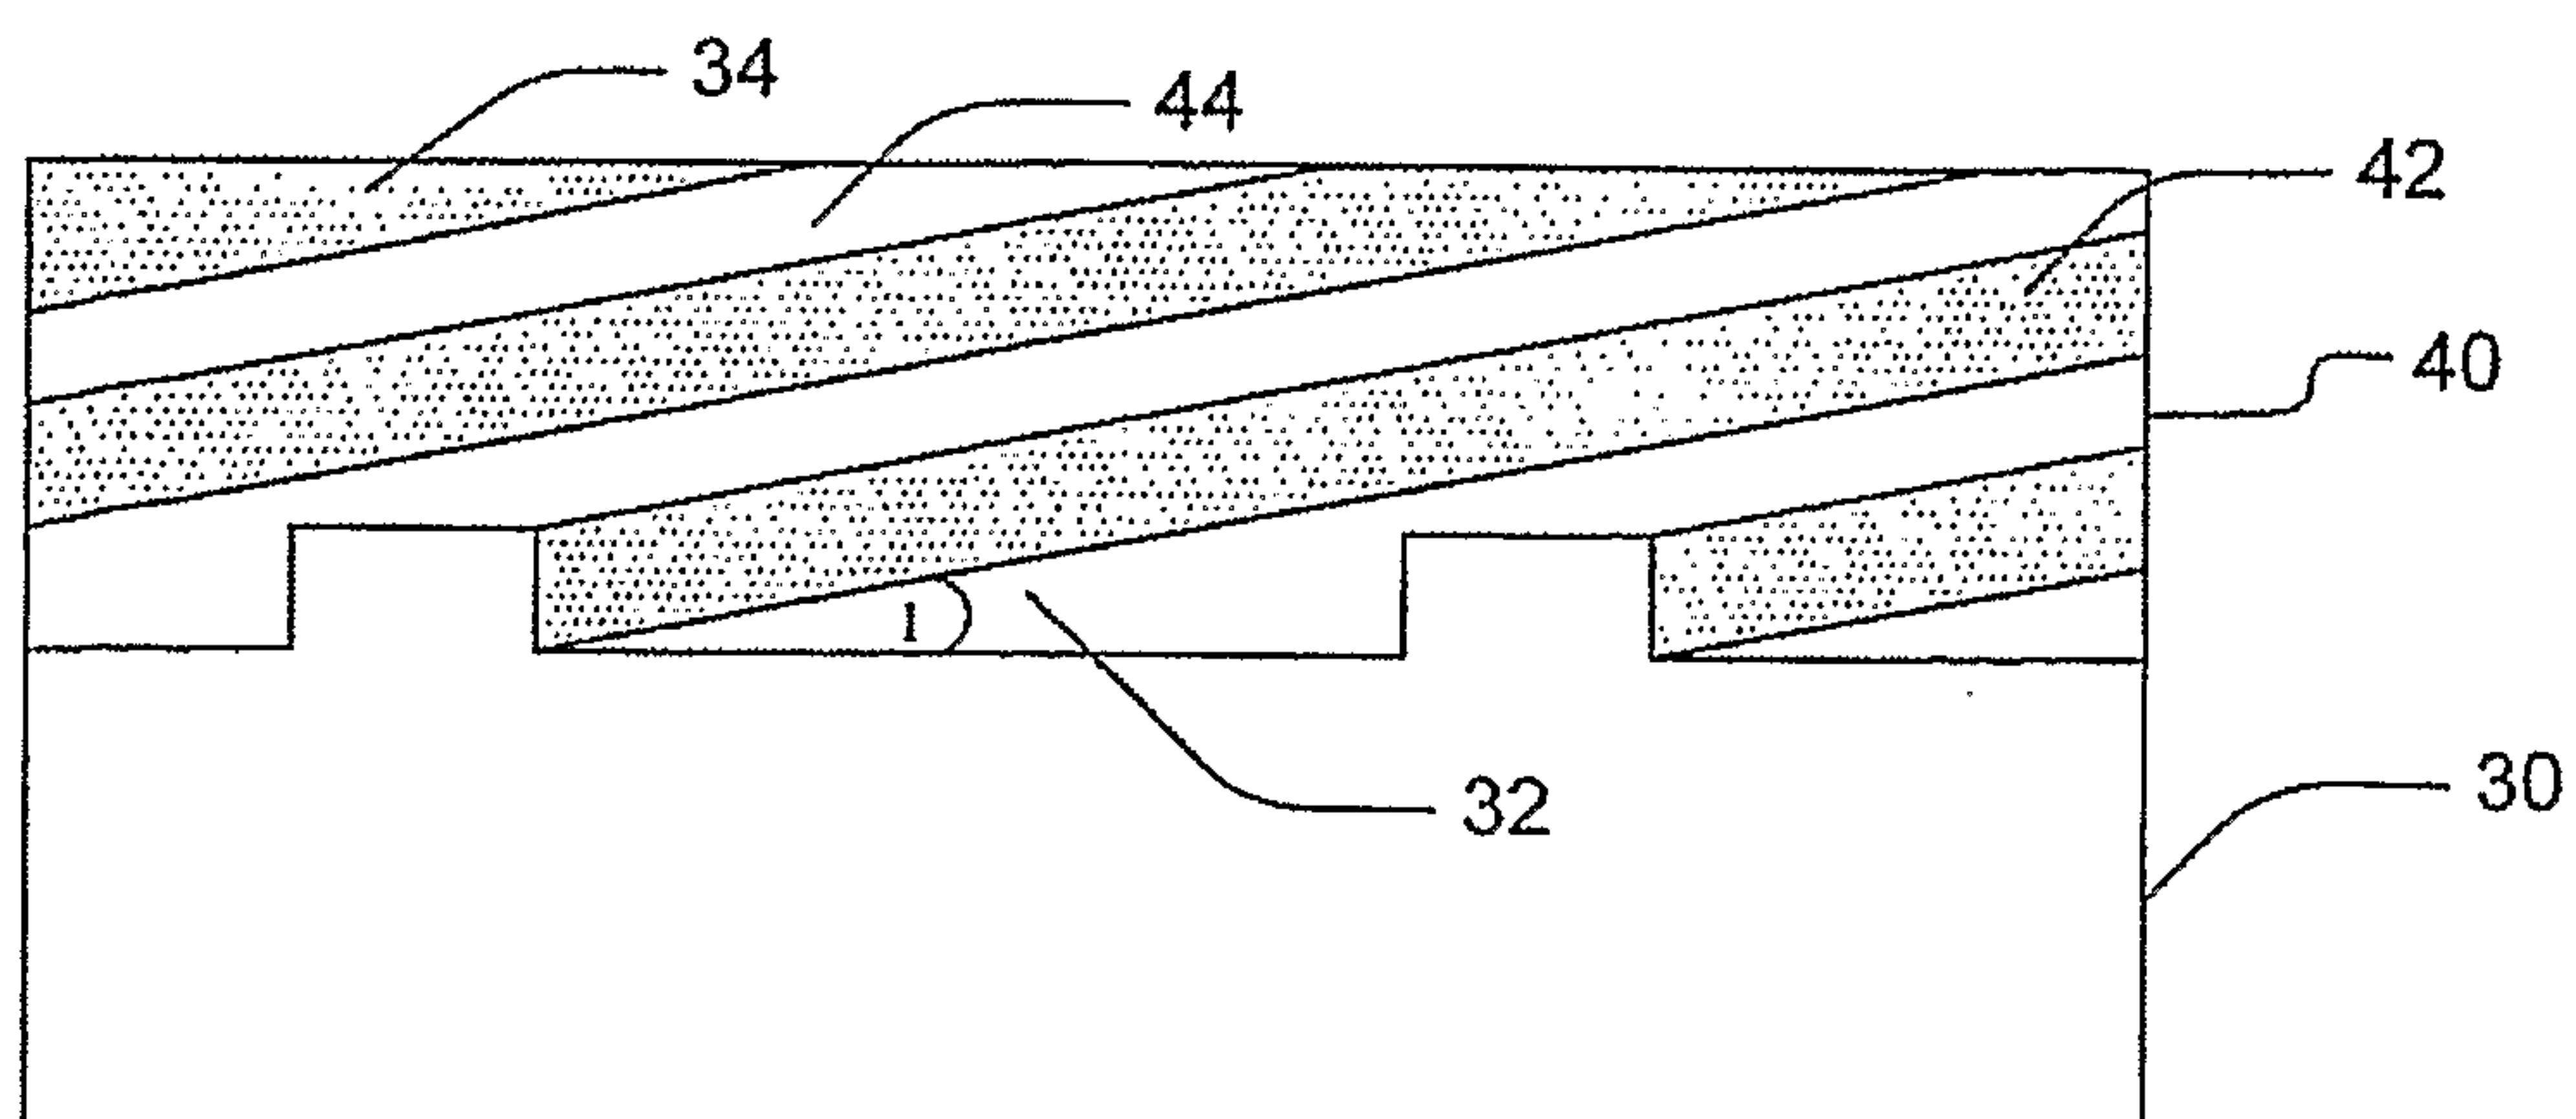


FIGURE 10

6/7

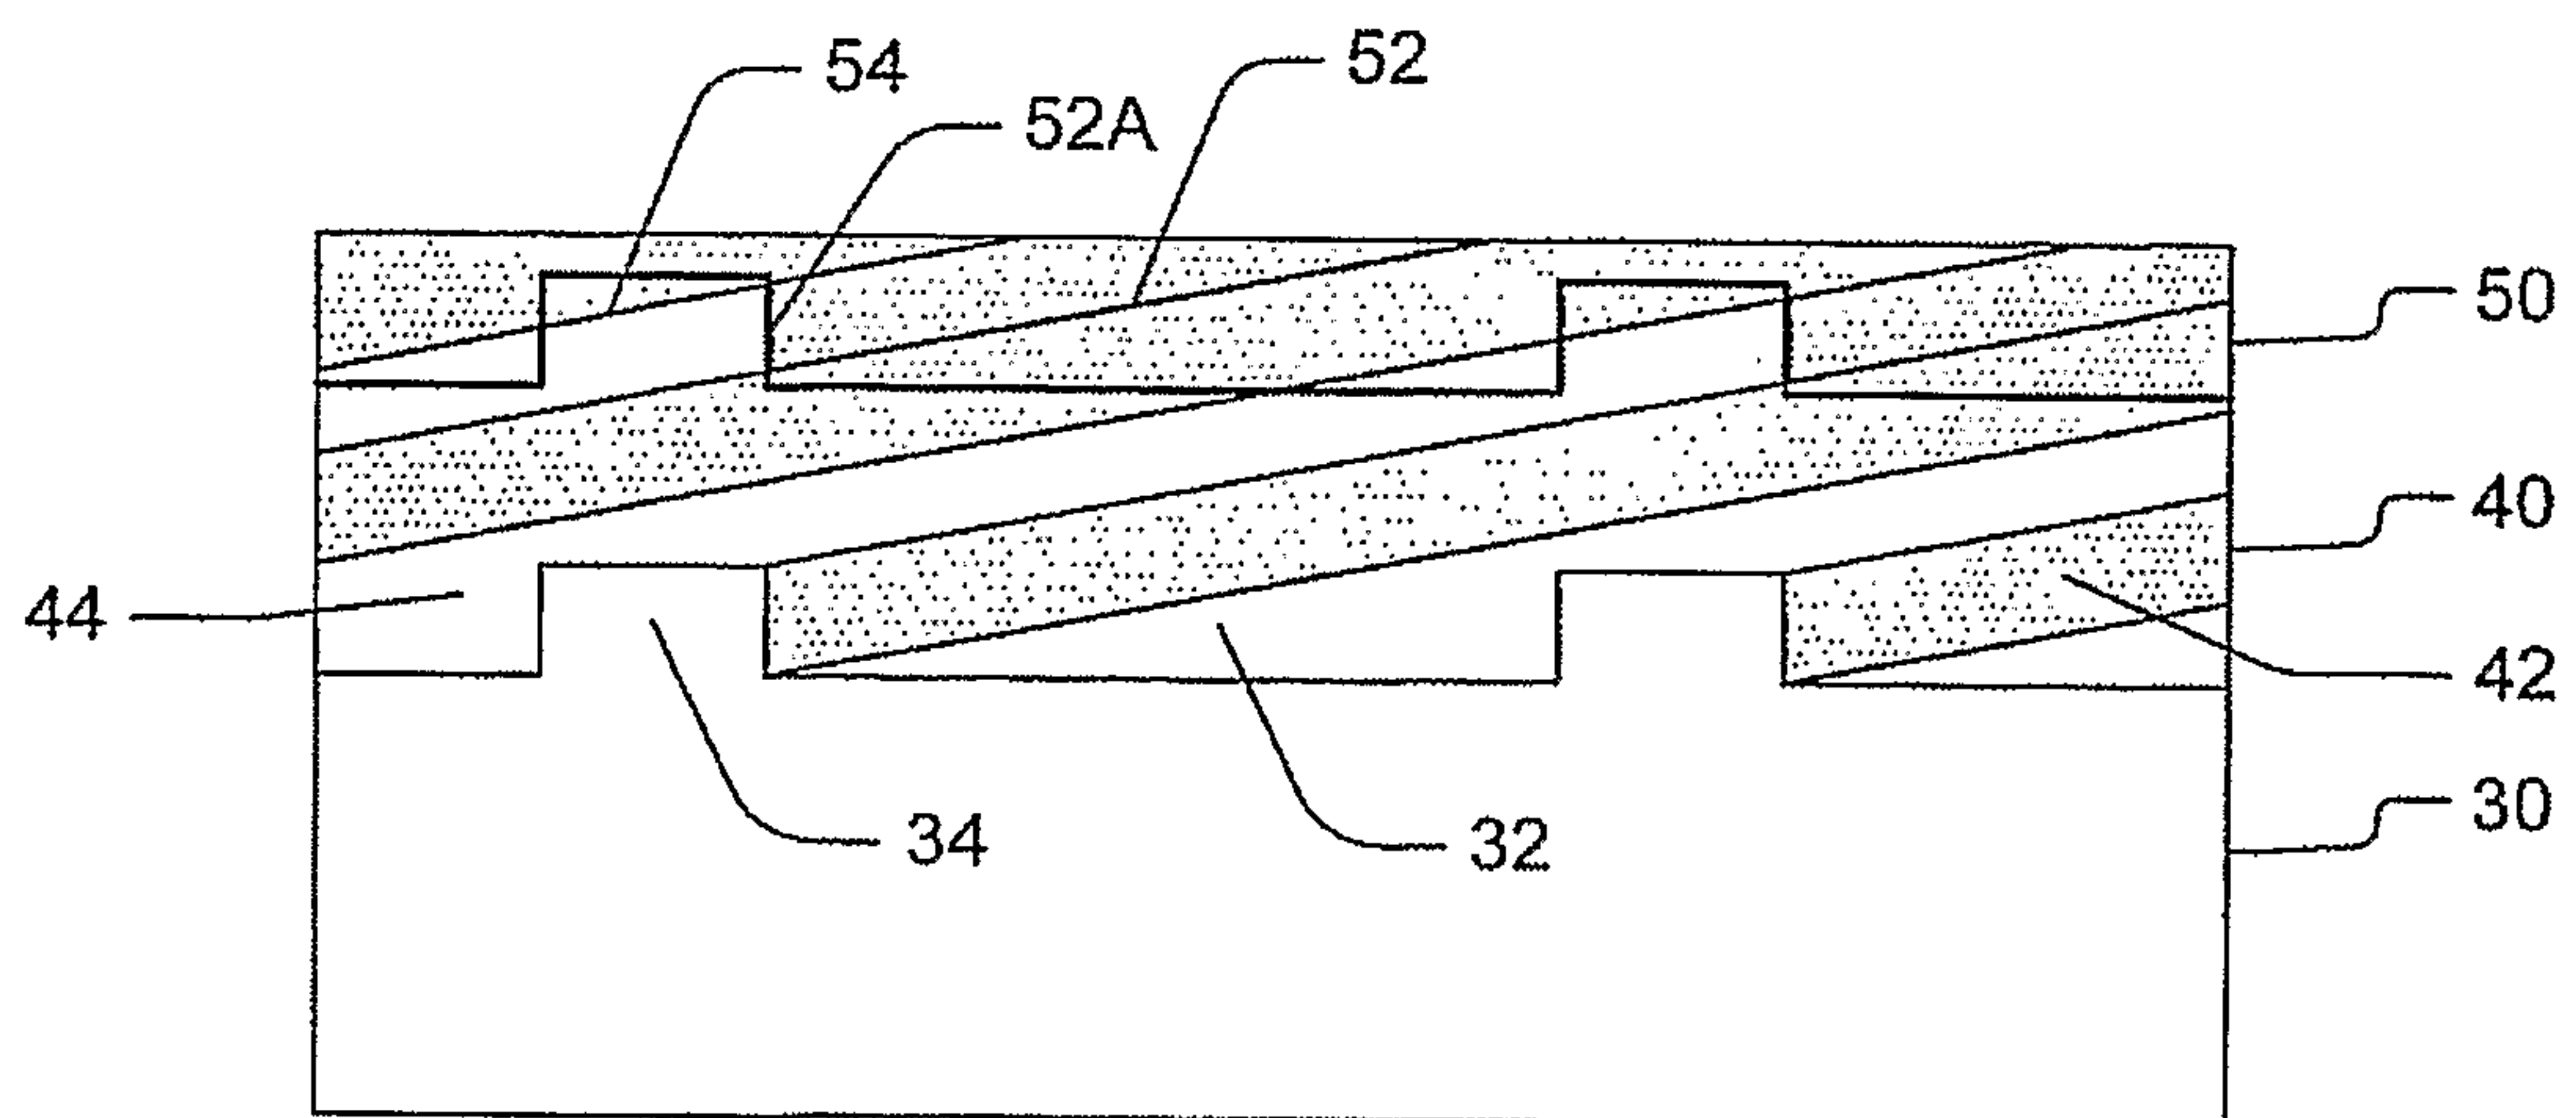


FIGURE 11

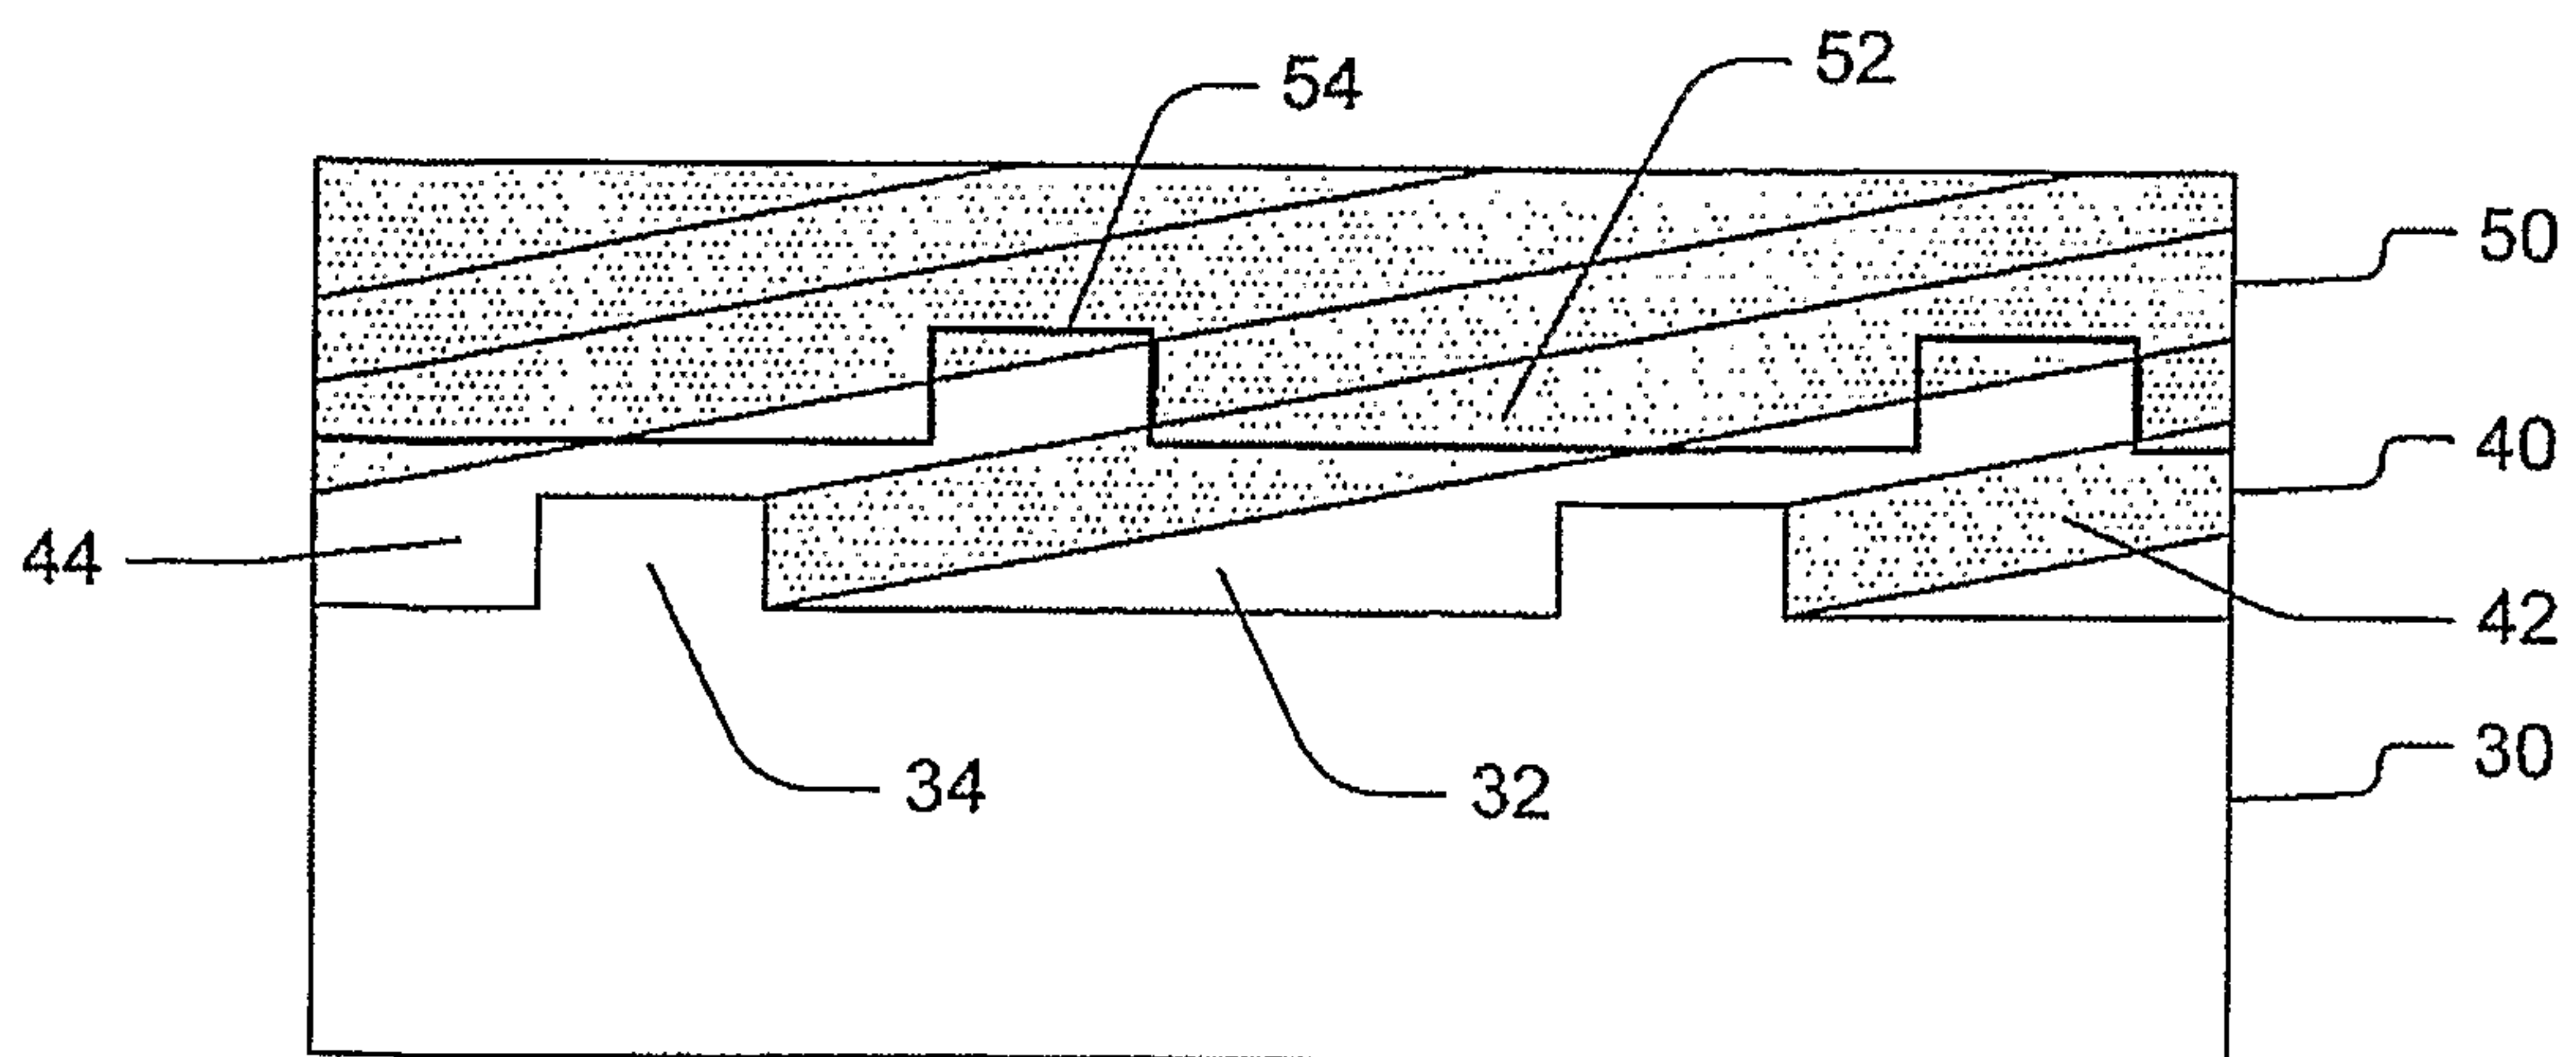


FIGURE 12

7/7

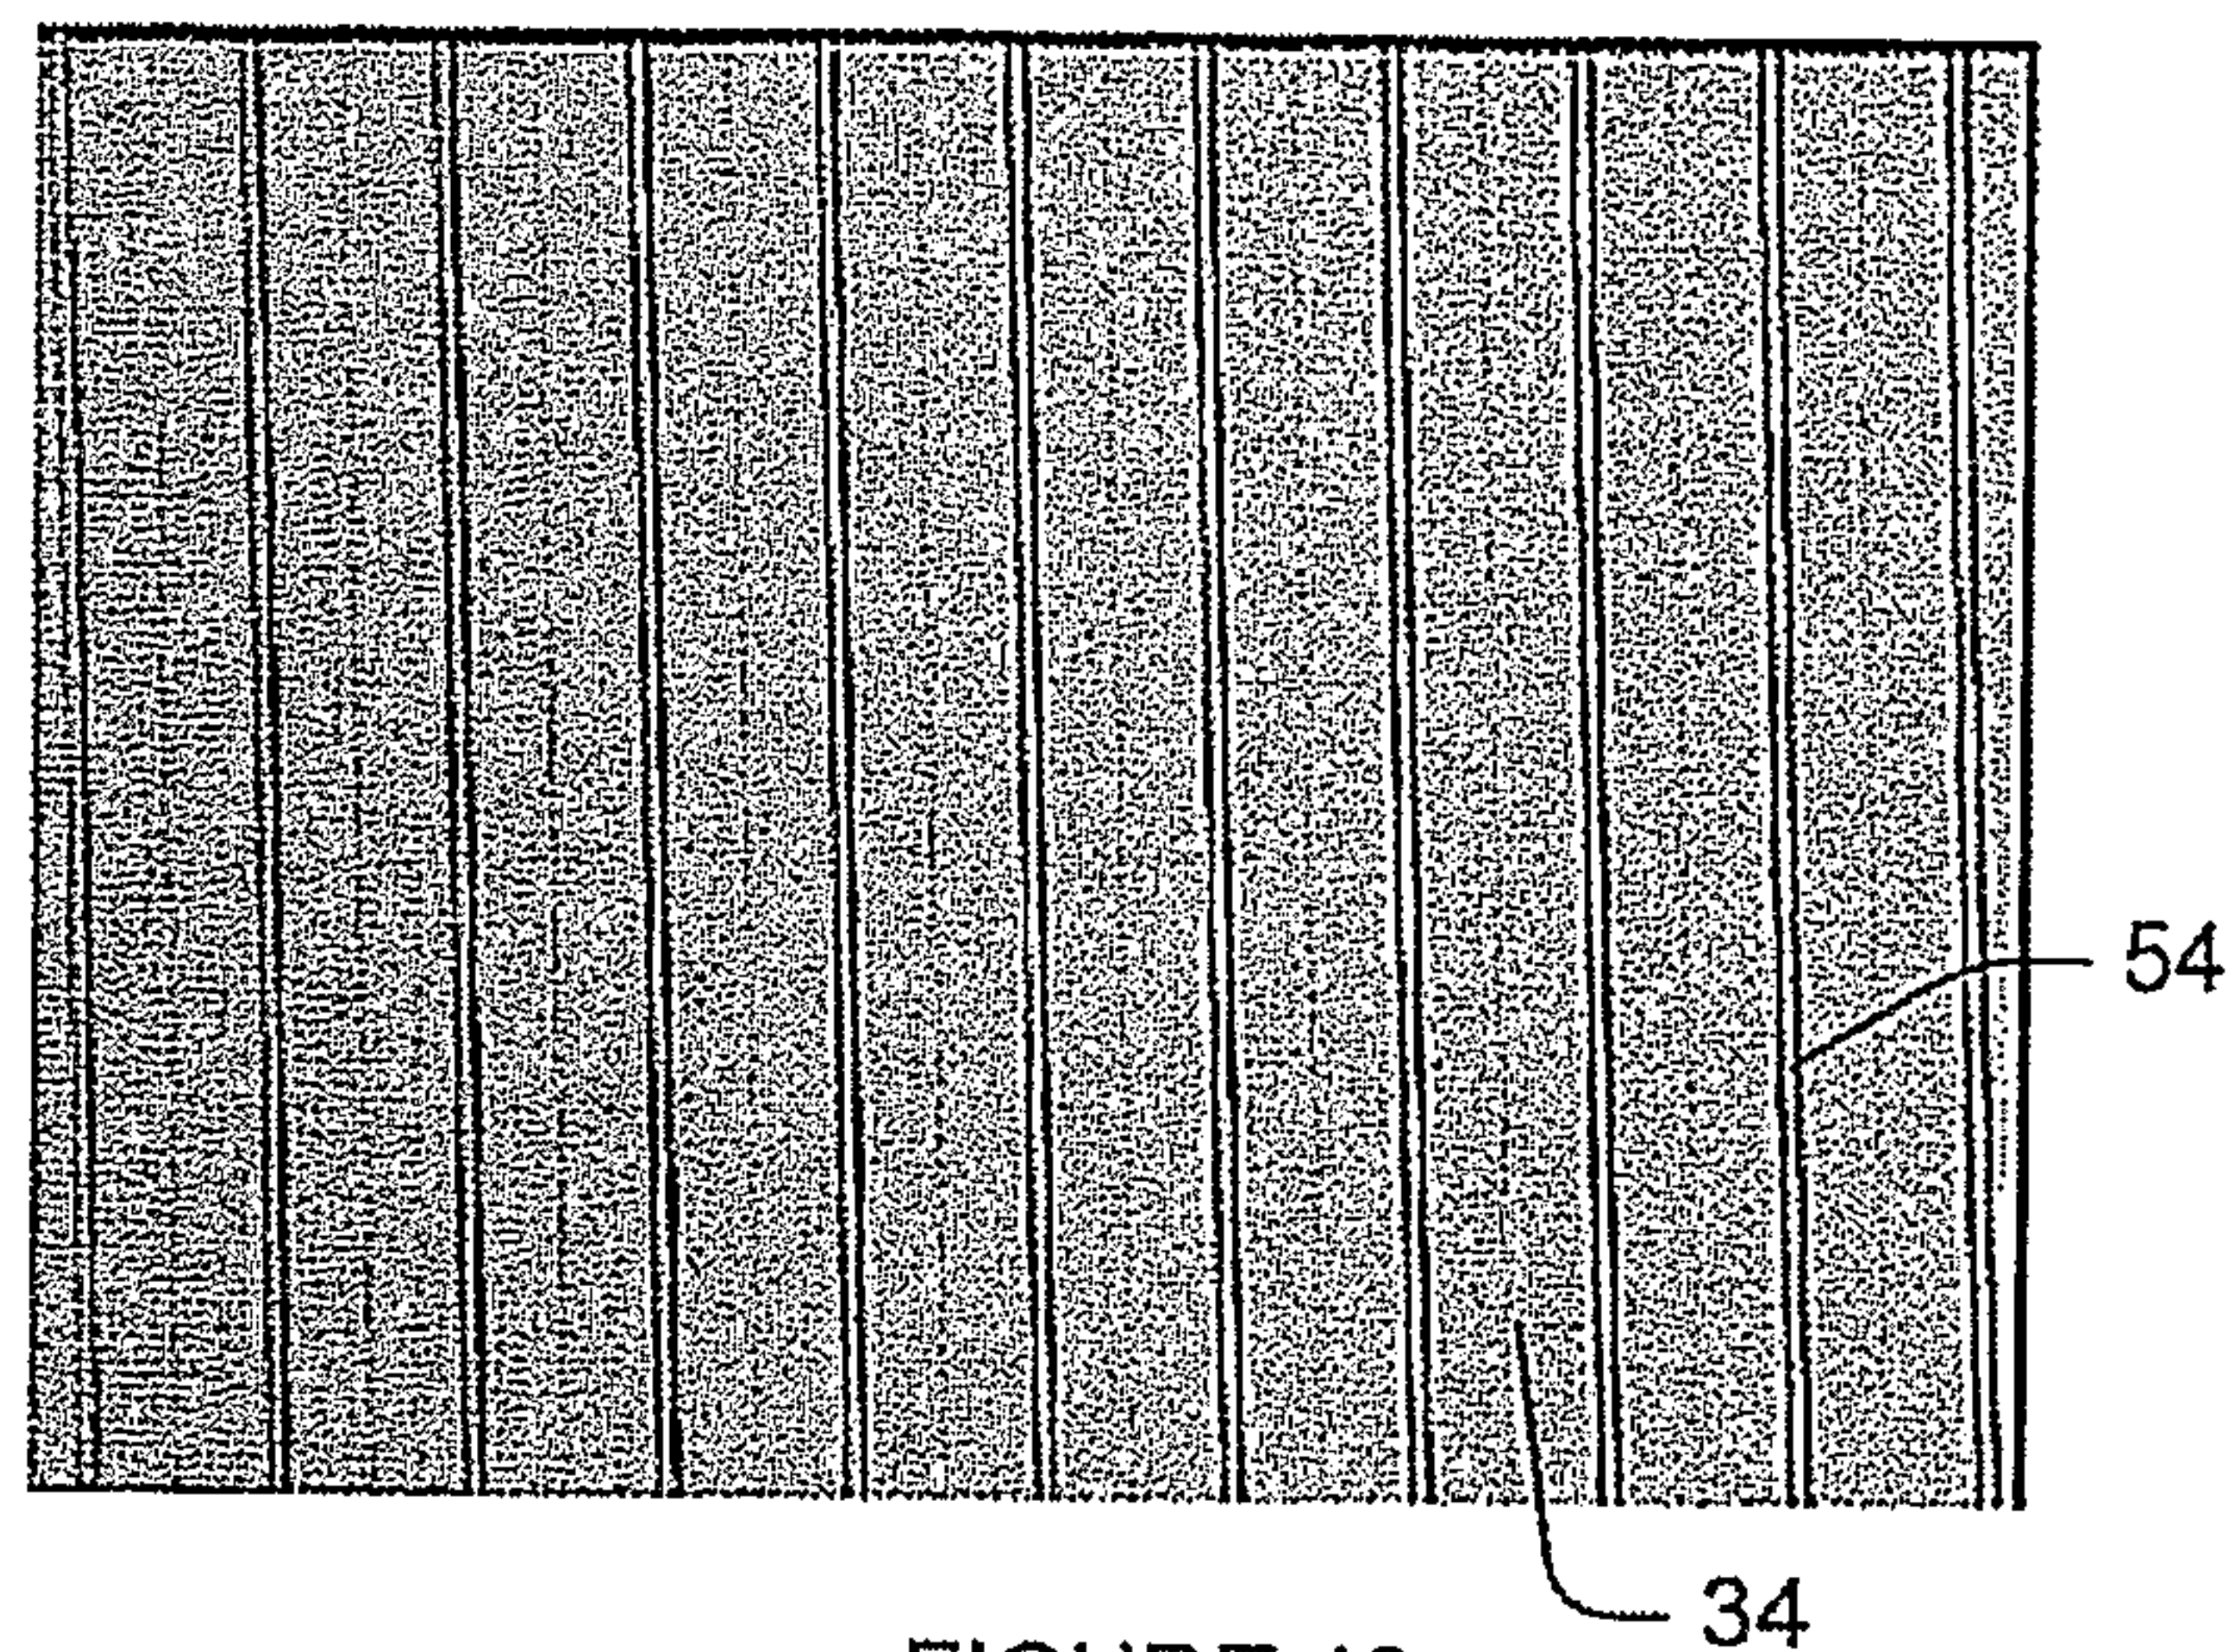


FIGURE 13

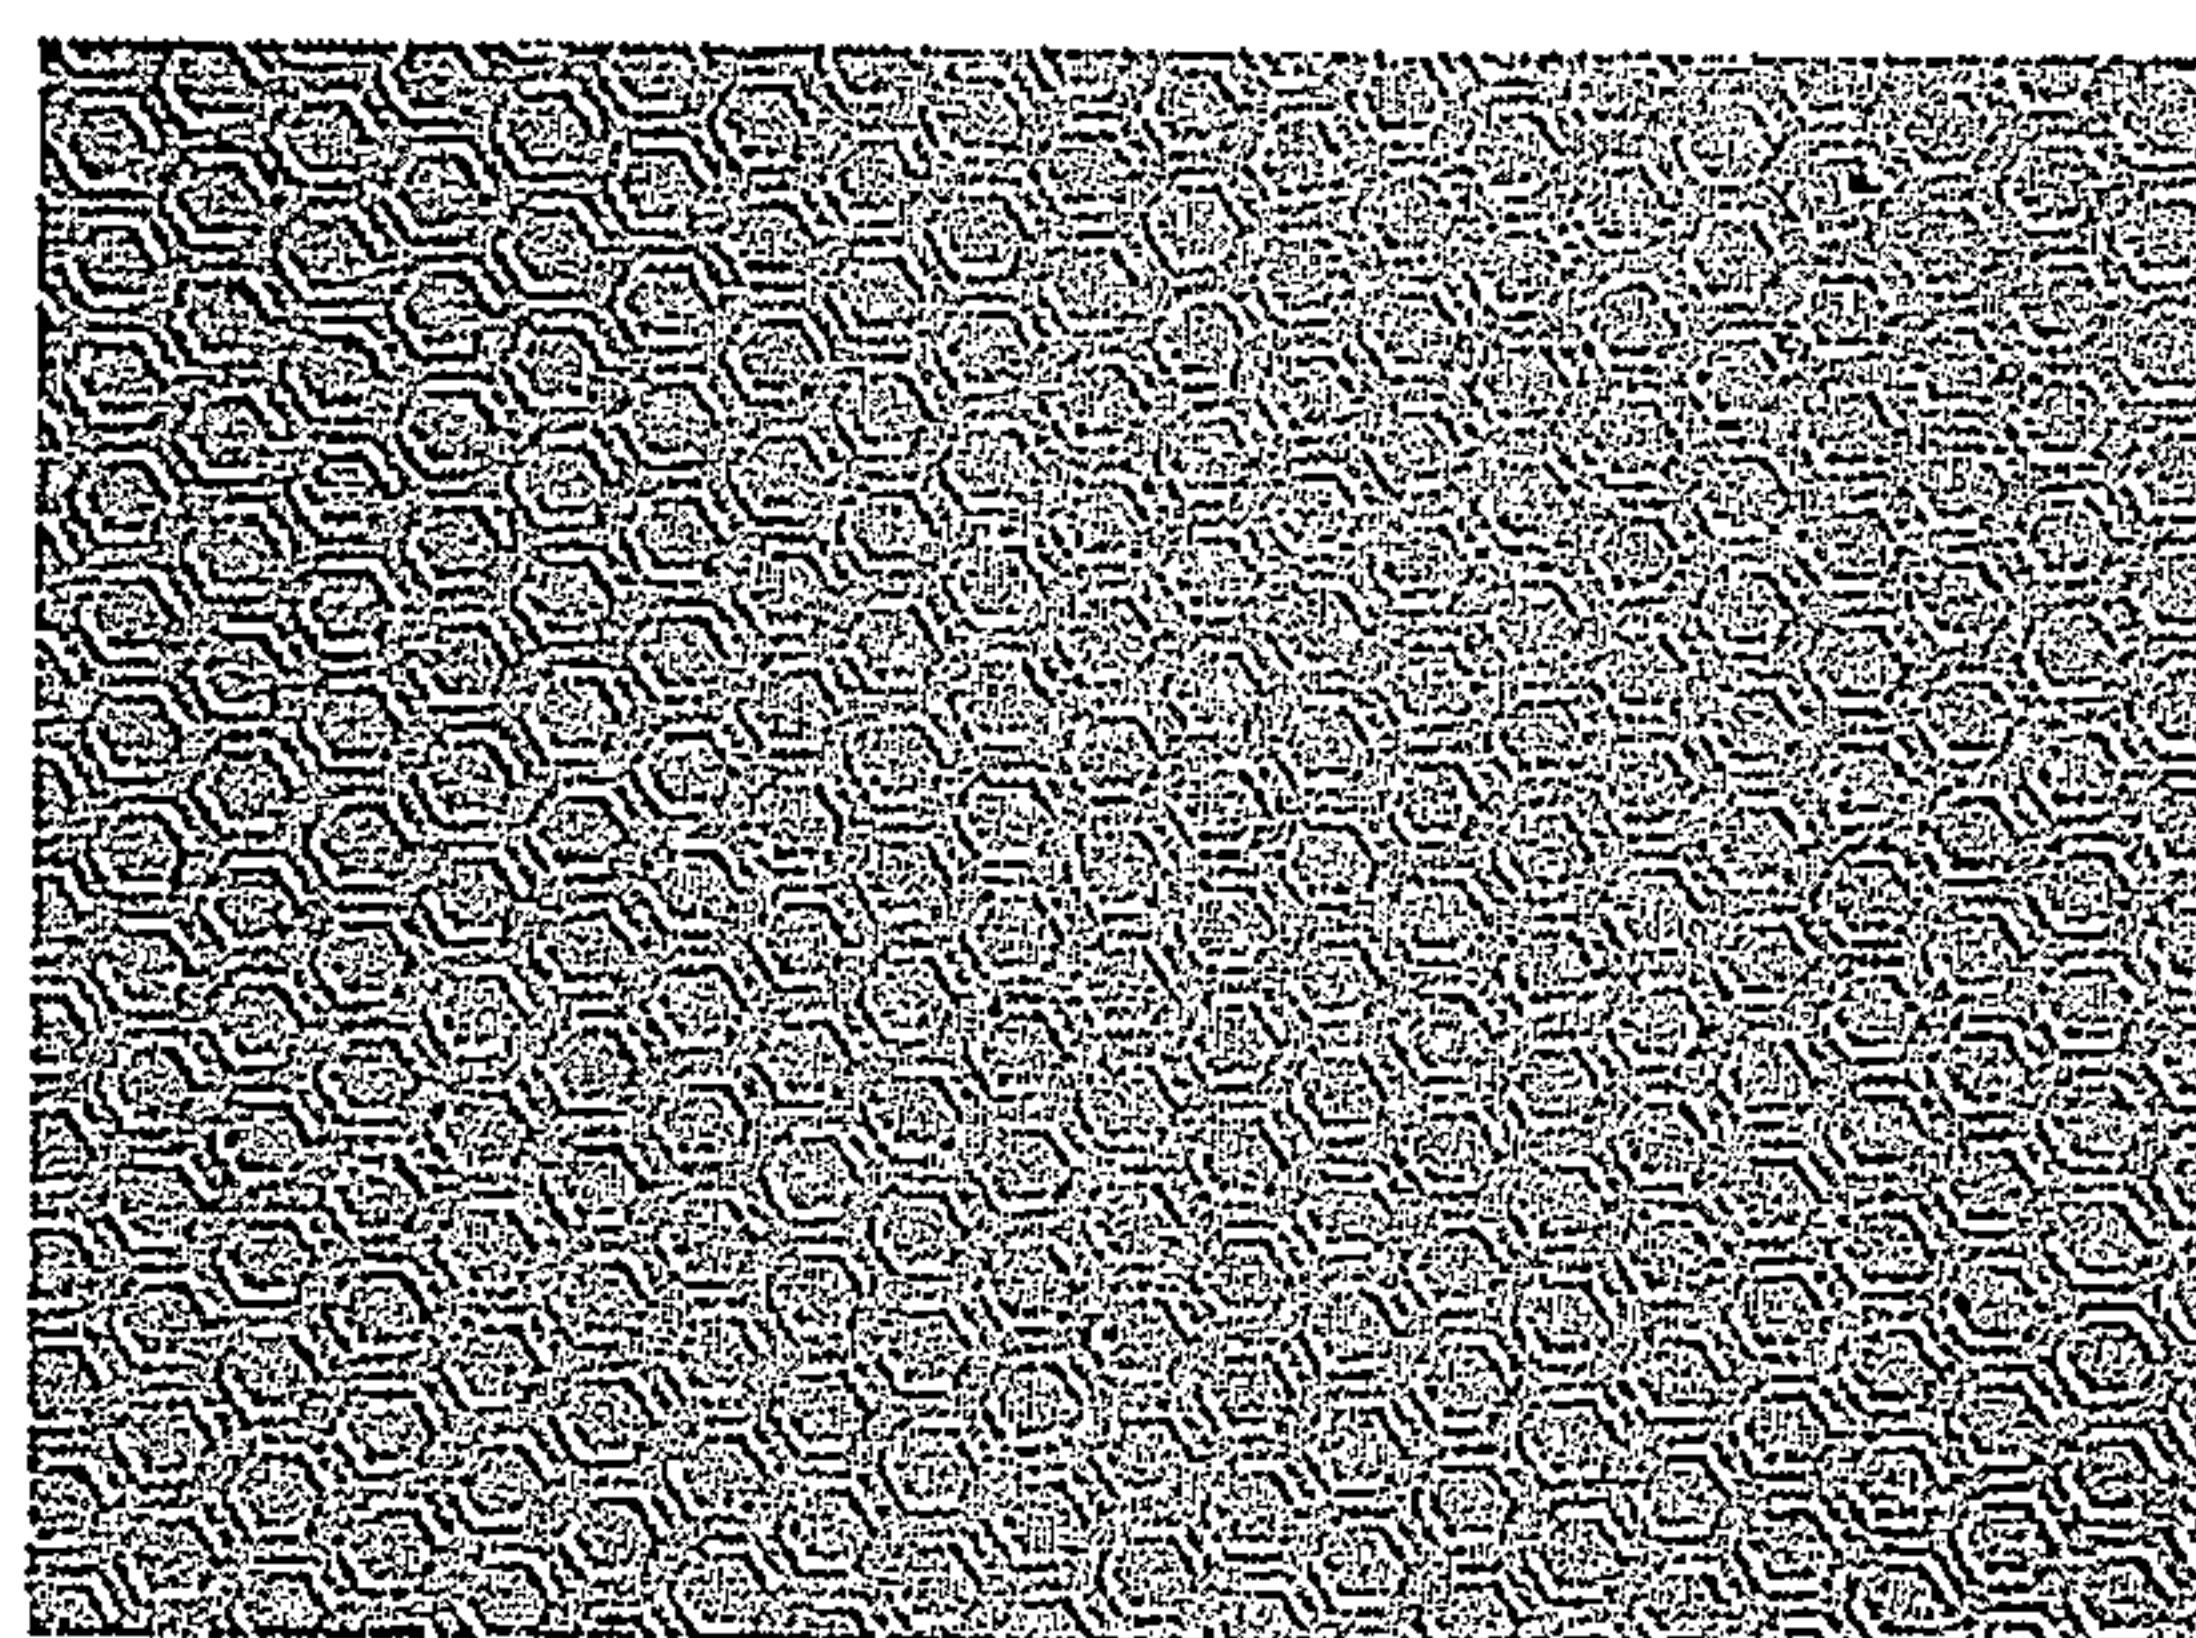


FIGURE 14

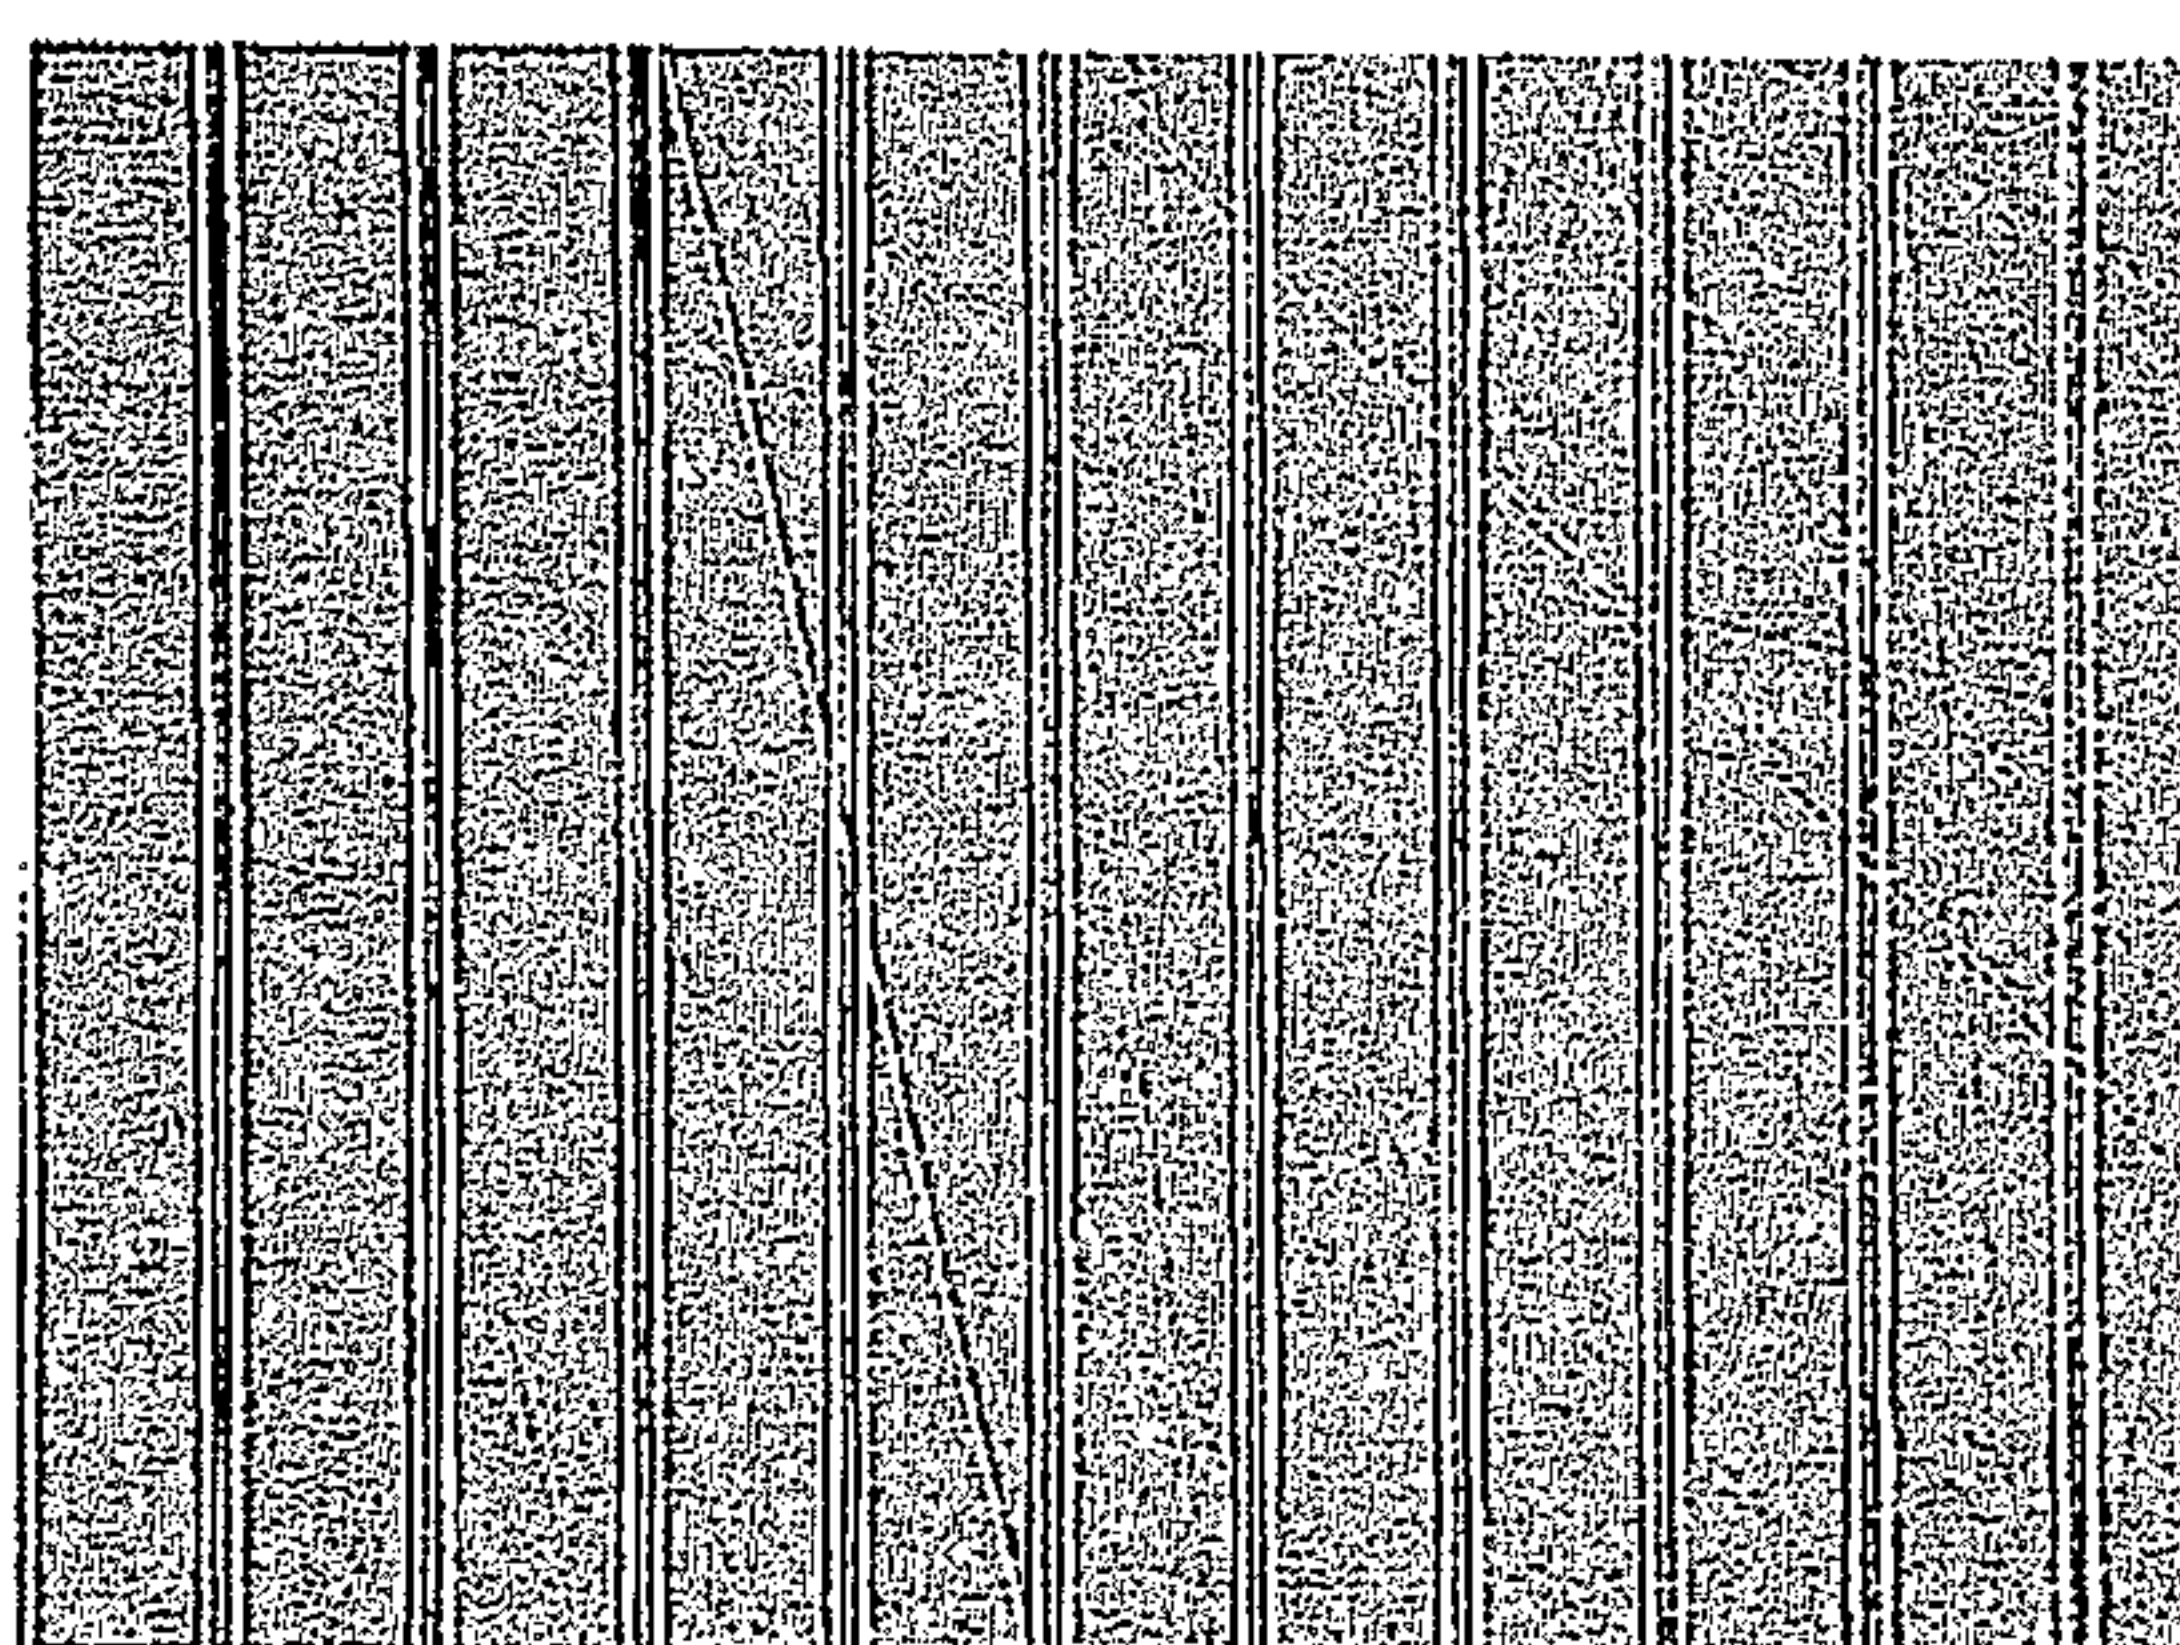


FIGURE 15

