



(22) Date de dépôt/Filing Date: 2002/05/31

(41) Mise à la disp. pub./Open to Public Insp.: 2002/11/30

(45) Date de délivrance/Issue Date: 2008/12/23

(30) Priorité/Priority: 2001/05/31 (JP2001-163864)


(51) Cl.Int./Int.Cl. *F16L 9/02* (2006.01),
B21B 17/14 (2006.01), *B21B 23/00* (2006.01),
B21B 3/00 (2006.01), *B21C 37/06* (2006.01),
B21D 26/02 (2006.01), *C21D 8/10* (2006.01),
C22C 38/02 (2006.01), *C22C 38/04* (2006.01),
C22C 38/06 (2006.01), *C22C 38/24* (2006.01),
C22C 38/26 (2006.01), *C22C 38/28* (2006.01)

(72) Inventeurs/Inventors:
TOYOOKA, TAKAAKI, JP;
ARATANI, MASATOSHI, JP;
KAWABATA, YOSHIKAZU, JP;
HASHIMOTO, YUJI, JP;
...

(73) Propriétaire/Owner:

(54) Titre : TUYAU D'ACIER SOUDE PRESENTANT UNE EXCELLENTE TENUE D'HYDROFORMAGE EXCELLENTE,
ET METHODE DE FABRICATION

(54) Title: WELDED STEEL PIPE HAVING EXCELLENT HYDROFORMABILITY AND METHOD FOR MAKING THE
SAME

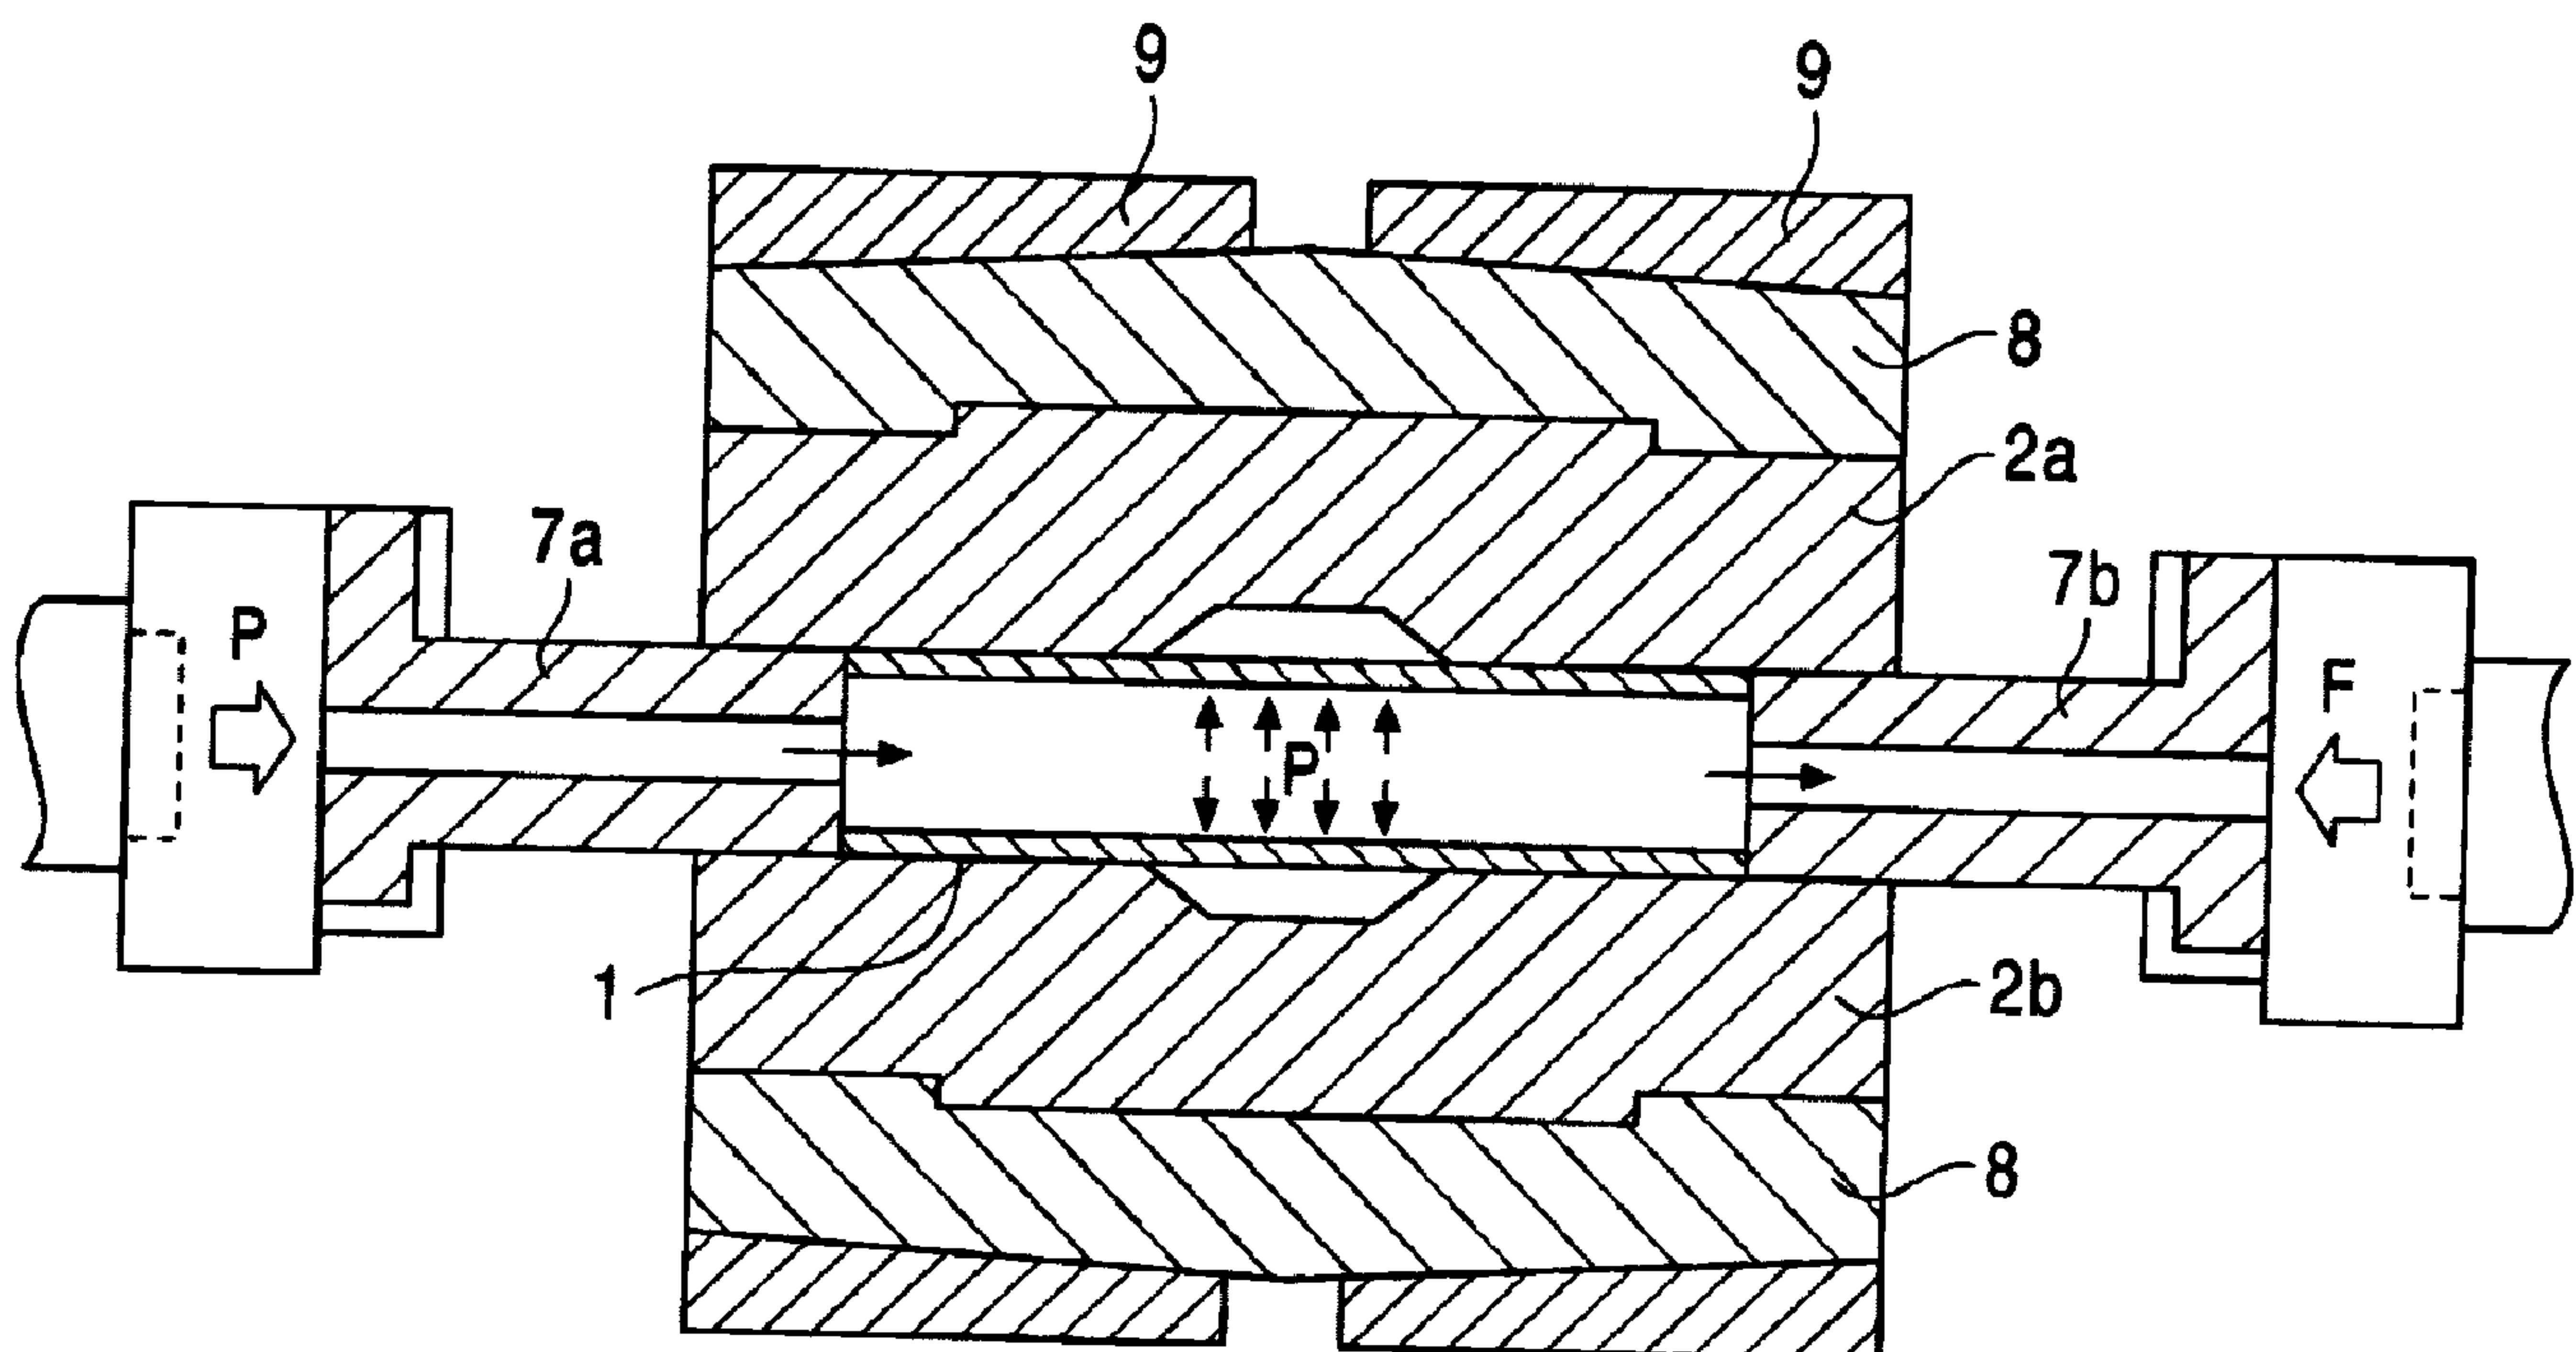

(57) Abrégé/Abstract:

A welded steel pipe is formed by heating or soaking an untreated welded steel pipe having a steel composition containing, on the basis of mass percent: about 0.03% to about 0.2% C, about 2.0% or less of Si, not less than about 1.0% to about 1.5% Mn, about 0.1% or less of P, about 0.01% or less of S, about 1.0% or less of Cr, about 0.1% or less of Al, about 0.1% or less of Nb, about 0.1% or less of Ti, about 0.1% or less of V, and about 0.01% or less of N; and by reduction-rolling the treated steel pipe at a cumulative reduction rate of at least about 35% and a final rolling temperature of about 500°C to about 900°C. The welded steel pipe exhibits excellent hydroformability, i.e., has a tensile strength of at least about 590 MPa and an $n \times r$ product of at least about



(72) **Inventeurs(suite)/Inventors(continued):** YORIFUJI, AKIRA, JP; OKABE, TAKATOSHI, JP; NAGAHAMA, TAKUYA, JP; KIMURA, MITSUO, JP

(73) **Propriétaires(suite)/Owners(continued):**JFE STEEL CORPORATION, JP

(74) **Agent:** SMART & BIGGAR

(57) **Abrégé(suite)/Abstract(continued):**

0.22. The treated steel pipe is preferably reduction-rolled at a cumulative reduction rate of at least about 20% below the Ar_3 transformation point.

ABSTRACT

A welded steel pipe is formed by heating or soaking an untreated welded steel pipe having a steel composition containing, on the basis of mass percent: about 0.03% to about 0.2% C, about 2.0% or less of Si, not less than about 1.0% to about 1.5% Mn, about 0.1% or less of P, about 0.01% or less of S, about 1.0% or less of Cr, about 0.1% or less of Al, about 0.1% or less of Nb, about 0.1% or less of Ti, about 0.1% or less of V, and about 0.01% or less of N; and by reduction-rolling the treated steel pipe at a cumulative reduction rate of at least about 35% and a final rolling temperature of about 500°C to about 900°C. The welded steel pipe exhibits excellent hydroformability, i.e., has a tensile strength of at least about 590 MPa and an $n \times r$ product of at least about 0.22. The treated steel pipe is preferably reduction-rolled at a cumulative reduction rate of at least about 20% below the A_{r3} transformation point.

WELDED STEEL PIPE HAVING EXCELLENT HYDROFORMABILITY AND METHOD FOR MAKING THE SAME

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention relates to welded steel pipes suitable for forming structural components and underbody components of vehicles. In particular, the invention relates to enhancement of hydroformability of welded steel pipes.

2. Description of the Related Art

10 Hollow structural components having various cross-sectional shapes are used in vehicles. Such hollow structural components are typically produced by spot welding parts formed by press working of a steel sheet. Since hollow structural components of current vehicles must have high shock absorbability for collision impact, the steels used as the raw material must have higher mechanical strength. Unfortunately, such high-strength steels exhibit poor press formability. Thus, it is difficult to produce structural components having
15 highly precise shapes and sizes without defects from the high-strength steels by press molding.

 A method that attempts to solve such a problem is hydroforming in which the interior of a steel pipe is filled with a high-pressure liquid to deform the steel pipe into a component having a desired shape. In this method, the cross-sectional size of the steel pipe is changed
20 by a bulging process. A component having a complicated shape can be integrally formed and the formed component exhibits high mechanical strength and rigidity. Thus, the hydroforming attracts attention as an advanced forming process.

 In the hydroforming process, electrically welded pipes composed of low or middle carbon content steel sheet containing 0.10 to 0.20 mass percent carbon are often used due to
25 high mechanical strength and low cost. Unfortunately, electrically welded pipes composed

73461-107

of low or middle carbon content steel have poor hydroformability; hence, the pipes cannot be sufficiently expanded.

A countermeasure to enhance the hydroformability of electric welded pipes is the use of ultra-low carbon content steel sheet containing an extremely low amount of carbon.

5 Electrically welded pipes composed of the ultra-low carbon content steel sheet exhibit excellent hydroformability. However, crystal grains grow to cause softening of the pipe at the seam during the pipe forming process, so that the seam is intensively deformed in the bulging process, thereby impairing the high ductility of the raw material. Thus, welded pipes must have excellent mechanical properties durable for hydroforming at the seam.

10 The invention provides a welded steel pipe having excellent hydroformability durable for a severe hydroforming process.

The invention also provides a method for making the welded steel pipe.

SUMMARY OF THE INVENTION

In the invention, the welded steel pipe has a tensile strength TS of at least about 590
15 MPa, preferably in the range of about 590 MPa to less than about 780 MPa, and a product $n \times r$ of the n-value and the r-value of at least about 0.22 and preferably an n-value of at least about 0.15 and an r-value of at least about 1.5.

We intensively investigated compositions of welded steel pipes and methods for making the welded steel pipes to solve the above problems and discovered that a welded steel
20 pipe that contains about 0.03 to about 0.2 mass percent carbon and that is reduction-rolled at a cumulative reduction rate of at least about 35% and a final rolling temperature of about 500

73461-107

to about 900°C has a high $n \times r$ product (product of an n -value and an r -value) and exhibits excellent hydroformability.

According to a first aspect of the invention, a welded steel pipe having excellent hydroformability has a composition comprising, on the basis of mass percent,
5 about 0.03% to about 0.2% C; about 0.01% to about 2.0% Si; about 1.0% to about 1.5% Mn; about 0.01% to about 0.1% P; about 0.01% to about 0.01% S; about 0.01% to about 1.0% Cr; about 0.01% to about 0.1% Al; about 0.01% to about 0.1% Nb;
10 about 0.01% to about 0.1% Ti; about 0.01% to about 0.1% V; about 0.001% to about 0.01% N; and the balance being Fe and incidental impurities, wherein the tensile strength of the welded steel pipe is at least about 590 MPa, preferably in the range of about 590 MPa to less than about 780 MPa, and
15 the $n \times r$ product of the n -value and the r -value is at least about 0.22. Preferably, the n -value is at least about 0.15 or the r -value is at least about 1.5. Preferably, the composition further comprises at least one group of Group A and Group B, wherein Group A includes at least one element
20 of about 1.0% or less of Cu, about 1.0% or less of Ni, about 1.0% or less of Mo, and about 0.01% or less of B; and Group B includes at least one element of about 0.02% or less of Ca and about 0.02% or less of a rare earth element.

In an embodiment of the first aspect of the
25 invention, there is provided a hydroformable welded steel pipe comprising, on the basis of mass percent:
0.03% to 0.2% C; 0.01% to 1.3% Si; 1.0% to 1.5% Mn;
0.01% to 0.05% P; 0.01% or less of S; 0.01% to 1.0% Cr;
0.01% to 0.04% Al; 0.01% to 0.1% Nb; 0.01% to 0.1% Ti;
30 0.01% to 0.1% V; 0.001% to 0.01% N; and optionally further comprising at least one element of the group consisting of Group A and Group B, wherein Group A consists of at least

73461-107

one element of 0.1% to 1.0% of Cu, 0.1% to 1.0% of Ni,
 0.1% to 1.0% of Mo, and 0.001% to 0.01% of B; and Group B
 consists of at least one element of 0.002% to 0.02% of Ca
 and 0.002% to 0.02% of a rare earth element; with the
 5 balance being Fe and incidental impurities, wherein the
 welded steel pipe has a tensile strength of at least 590 MPa
 and an $n \times r$ product of an n -value and an r -value is at least
 0.22, and wherein the n -value is at least 0.15 or the
 r -value is at least 1.5, wherein $n = (\ln \sigma_{10\%} - \ln \sigma_{5\%}) /$
 10 $(\ln e_{10\%} - \ln e_{5\%})$, wherein: $\sigma_{10\%}$ = a true stress at
 10% elongation; $\sigma_{5\%}$ = a true stress at 5% elongation;
 $e_{10\%}$ = a true strain at 10% elongation; and $e_{5\%}$ = a true
 strain at 5% elongation; and wherein $r = \ln (W_i / W_f) /$
 $\ln (T_i / T_f)$, wherein: W_i = an initial width; W_f = a final
 15 width; T_i = an initial thickness; and T_f = a final thickness.

According to a second aspect of the invention, a
 method for making a welded steel pipe having excellent
 hydroformability comprises: heating or soaking an untreated
 welded steel pipe having a steel composition containing, on
 20 the basis of mass percent: about 0.03% to about 0.2% C,
 about 2.0% or less of Si, not less than about 1.0% to
 about 1.5% Mn, about 0.1% or less of P, about 0.01% or less
 of S, about 1.0% or less of Cr, about 0.1% or less of Al,
 about 0.1% or less of Nb, about 0.1% or less of Ti,
 25 about 0.1% or less of V, and about 0.01% or less of N; and
 reduction-rolling the treated steel pipe at a cumulative
 reduction rate of at least about 35% and a final rolling
 temperature of about 500°C to about 900°C, the welded steel
 pipe thereby having a tensile strength of at least about
 30 590 MPa and an $n \times r$ product of an n -value and an r -value of
 at least about 0.22. Preferably, the treated steel pipe is
 reduction-rolled at a cumulative reduction rate of at least

73461-107

about 20% at a temperature below the Ar_3 transformation point.

Preferably, the composition further comprises at least one group of Group A and Group B, wherein Group A includes at least one element of about 1.0% or less of Cu, about 1.0% or less of Ni, about 1.0% or less of Mo, and about 0.01% or less of B; and Group B includes at least one element of about 0.02% or less of Ca and about 0.02% or less of a rare earth element.

10 In another embodiment of the second aspect of the invention, there is provided a method for making a hydroformable welded steel pipe comprising: heating or soaking an untreated welded steel pipe having a steel composition comprising, on the basis of mass percent:
15 0.03% to 0.2% C; 0.01% to 1.3% Si; 1.0% to 1.5% Mn; 0.01% to 0.05% P; 0.01% or less of S; 0.01% to 0.1% Cr; 0.01% to 0.04% Al; 0.01% to 0.1% Nb; 0.01% to 0.1% Ti; 0.01% to 0.1% V; 0.001% to 0.01% N; and optionally further comprising at least one element of the group consisting of
20 Group A and Group B, wherein Group A consists of at least one element of 0.1% to 1.0% of Cu, 0.1% to 1.0% of Ni, 0.1% to 1.0% of Mo, and 0.001% to 0.01% of B; and Group B consists of at least one element of 0.002% to 0.02% of Ca and 0.002% to 0.02% of a rare earth element; with the
25 balance being Fe and incidental impurities, to obtain a treated steel pipe; and reduction-rolling the treated steel pipe at a cumulative reduction rate of at least 40% and a final rolling temperature of 500°C to 900°C, such that the resulting welded steel pipe has a tensile strength of at
30 least 590 MPa and an $n \times r$ product of an n -value and an r -value of at least 0.22, wherein the treated steel pipe is reduction-rolled at a cumulative reduction rate of at least

73461-107

20% at a temperature below an Ar_3 transformation point, and the heating is performed at 900°C or higher, wherein

$$n = (\ln \sigma_{10\%} - \ln \sigma_{5\%}) / (\ln e_{10\%} - \ln e_{5\%}),$$

wherein: $\sigma_{10\%}$ = a true stress at 10% elongation; $\sigma_{5\%}$ = a true stress at 5% elongation; $e_{10\%}$ = a true strain at 10% elongation; and $e_{5\%}$ = a true strain at 5% elongation; and wherein

$$r = \ln (W_i/W_f) / \ln (T_i/T_f),$$

wherein: W_i = an initial width; W_f = a final width; T_i = an initial thickness; and T_f = a final thickness.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of a mold used in a free bulging test; and

Fig. 2 is a cross-sectional view of a hydroforming apparatus used in the free bulging test.

15 DETAILED DESCRIPTION

The reasons for the limitations in the composition of the welded steel pipe according to the invention will now be described. Hereinafter, mass percent is merely referred to as "%" in the composition.

20 C: about 0.03% to about 0.2%

Carbon (C) contributes to an increase in mechanical strength of the steel. At a content exceeding about 0.2%, however, the pipe exhibits poor formability. At a content of less than about 0.03%, the pipe does not have the desired tensile strength and crystal grains become larger during the welding process, thereby resulting in decreased mechanical strength and irregular deformation. Accordingly, the C content is in the range of about 0.03% to about 0.2%, preferably in the range of about 0.05% to about 0.1% to enhance formability.

Si: about 0.01% to about 2.0%

Silicon (Si) enhances the mechanical strength of the steel pipe at an amount of about 0.01% or more. However, an Si content exceeding about 2.0% causes noticeable deterioration of the surface properties, ductility, and hydroformability of the pipe. Thus, the Si content is about 2.0% or less in the invention.

Mn: about 1.0% to about 1.5%

Manganese (Mn) increases mechanical strength without deterioration of the surface properties and weldability and is added in an amount exceeding about 1.0% to ensure desired strength. On the other hand, an Mn content exceeding about 1.5% causes a decrease in the limiting bulging ratio (LBR) during hydroforming, namely, deterioration of hydroformability. Accordingly, the Mn content in the invention is in the range of not less than about 1.0% to about 1.5%, preferably about 1.0% to about 1.3%.

P: about 0.01% to about 0.1%

Phosphorus (P) contributes to increased mechanical strength at an amount of about 0.01% or more. However, a P content exceeding about 0.1% causes remarkable deterioration of weldability. Thus, the P content in the invention is about 0.1% or less. When reinforcing by P is not necessary or when high weldability is required, the P content is preferably about 0.05% or less.

S: about 0.01% or less

Sulfur (S) is present as nonmetal inclusions in the steel. The nonmetal inclusions function as nuclei for bursting of the steel pipe during hydroforming in some cases, thereby resulting in deterioration of hydroformability. Thus, it is preferable that the S content be reduced as much as possible. At an S content of about 0.01% or less, the steel pipe exhibits the desired hydroformability. Thus, the upper limit of the S content in the invention is about 0.01%. The S content is preferably about 0.005% or less and more preferably about 0.001%

or less in view of further enhancement of hydroformability.

Al: about 0.01% to about 0.1%

Aluminum (Al) functions as a deoxidizing agent and inhibits coarsening of crystal grains when the Al content is about 0.01% or more. However, at an Al content exceeding about 0.1%, large amounts of oxide inclusions are present, thereby decreasing the cleanness of the steel composition. Accordingly, the Al content is about 0.1% or less in the invention. The Al content is preferably about 0.05% or less to reduce nuclei of cracking during hydroforming.

N: about 0.001% to about 0.01%

Nitrogen (N) reacts with Al and contributes to the formation of fine crystal grains when the N content is about 0.001% or more. However, an N content exceeding about 0.01% causes deterioration of ductility. Thus, the N content is about 0.01% or less in the invention.

Cr: about 0.01% to about 1.0%

Chromium (Cr) increases mechanical strength and enhances corrosion resistances at a content of about 0.01% or more. However, a Cr content exceeding about 1.0% causes deterioration of ductility and weldability. Accordingly, the Cr content in the invention is about 1.0% or less.

Nb: about 0.01% to about 0.1%

A small amount of niobium (Nb) contributes to the formation of fine crystal grains and increased mechanical strength. These effects are noticeable at an Nb content of about 0.01% or more. However, an Nb content exceeding about 0.1% causes increased hot deformation resistance, resulting in deterioration of processability and ductility. Thus, the Nb content is about 0.1% or less in the invention.

Ti: about 0.01% to about 0.1%

Titanium (Ti) also contributes to the formation of fine crystal grains and increased mechanical strength. These effects are noticeable at a Ti content of about 0.01% or more. However, a Ti content exceeding about 0.1% causes increased hot deformation resistance, resulting in deterioration of processability and ductility. Thus, the Ti content is about 0.1% or less in the invention.

V: about 0.01% to about 0.1%

Vanadium (V) also contributes to the formation of fine crystal grains and increased mechanical strength. These effects are noticeable at a V content of about 0.01% or more. However, a V content exceeding about 0.1% causes increased hot deformation resistance, resulting in deterioration of processability and ductility. Thus, the V content is about 0.1% or less in the invention.

In the invention, the composition may further comprise at least one group of Group A and Group B, wherein Group A includes at least one element of about 1.0% or less of Cu, about 1.0% or less of Ni, about 1.0% or less of Mo, and about 0.01% or less of B; and Group B includes at least one element of about 0.02% or less of Ca and about 0.02% or less of a rare earth element.

Reasons for limitations of contents of Group A elements

Copper (Cu), nickel (Ni), molybdenum (Mo), and boron (B) increase mechanical strength while maintaining ductility. These elements may be added, if desired. For increased mechanical strength, Cu, Ni, or Mo should be added in an amount of about 0.1% or more or B should be added in an amount of about 0.001% or more. On the other hand, the effects of these elements are saturated at a Cu, Ni, or Mo content exceeding about 1.0% or a B content exceeding about 0.01%. Furthermore, a steel pipe containing excess amounts of these elements exhibits poor hot and cold workability. Thus, the maximum contents of these elements are preferably about 1.0% for Cu, about 1.0% for Ni, about 1.0% for Mo, and about

0.01% for B.

Reasons for limitations of contents of Group B elements

Calcium (Ca) and rare earth elements facilitate the formation of spherical nonmetal inclusions, which contribute to excellent hydroformability. These elements may be added, if desired. Excellent hydroformability is noticeable when about 0.002% or more of Ca or rare earth element is added. However, at a content exceeding about 0.02%, excess amounts of inclusions are formed, thereby resulting in decreased cleanness of the steel composition. Thus, the maximum content for Ca and rare earth elements is preferably about 0.02%. When both Ca and a rare earth element are used in combination, the total amount is preferably about 0.03% or less.

The balance other than the above-mentioned components is iron (Fe) and incidental impurities.

The welded steel pipe having the above composition according to the invention has a tensile strength TS of at least about 590 MPa, preferably in the range of about 590 MPa to less than about 780 MPa, and a product $n \times r$ of at least about 0.22. These values show that this welded steel pipe is suitable for bulging processes. At a product $n \times r$ of less than about 0.22, the welded steel pipe has poor bulging formability. Preferably, the n-value is at least about 0.15 for achieving uniform deformation. Furthermore, the r-value is preferably at least about 1.5 for suppressing local wall thinning.

Furthermore, the welded steel pipe according to the invention preferably exhibits a limiting bulging ratio (LBR) of at least about 40%. The LBR is defined by the equation:

$$\text{LBR (\%)} = (d_{\max} - d_0)/d_0 \times 100$$

wherein $d_{\max}$ is the maximum outer diameter (mm) of the pipe at burst (break) and d_0 is the outer diameter of the pipe before the test.

In the invention, the LBR is measured by a free bulging test with axial compression.

The free bulging test may be performed by bulging the pipe, for example, in a hydroforming apparatus shown in Fig. 2 that uses a two-component mold shown in Fig. 1.

Fig. 1 is a cross-sectional view of the two-component mold. An upper mold component 2a and a lower mold component 2b each have a pipe holder 3 along the longitudinal direction of the pipe. Each pipe holder 3 has a hemispherical wall having a diameter that is substantially the same as the outer diameter d_0 of the pipe. Furthermore, each mold component has a central bulging portion 4 and taper portions 5 at both ends of the bulging portion 4. The bulging portion 4 has a hemispherical wall having a diameter d_c , and each taper portion has a taper angle θ of 45° . The bulging portion 4 and the taper portions 5 constitute a deformation portion 6. The length l_c of the deformation portion 6 is two times the outer diameter d_0 of the steel pipe. The diameter d_c of the hemispherical bulging portion 4 may be about two times the outer diameter d_0 of the steel pipe.

Referring to Fig. 2, a test steel pipe 1 is fixed with the upper mold component 2a and the lower mold component 2b so that the steel pipe 1 is surrounded by the pipe holders 3. A liquid such as water is supplied to the interior of the steel pipe 1 from an end of the steel pipe 1 through an axial push cylinder 7a to impart liquid pressure P to the pipe wall until the pipe bursts by free bulging in a circular cross-section. The maximum outer diameter $d_{\max}$ at burst is determined by averaging the values calculated by dividing the perimeters of the bursting portions by the circular constant π .

The upper and lower mold components have respective mold holders 8 and are fixed with outer rings 9 to fix the steel pipe in the mold.

In the hydroforming process, the pipe may be fixed at both ends or a compressive force (axial compression) may be loaded from both ends of the pipe. In the invention, an appropriate compressive force is loaded from both ends of the pipe to achieve a high LBR. Referring to Fig. 2, the compressive force F in the axial direction is loaded to the axial push

cylinders 7a and 7b.

A method for making the welded steel pipe according to the invention will now be described.

In the invention, the above-mentioned welded steel pipe is used as an untreated steel
5 pipe. The method for making the untreated steel pipe is not limited. For example, strap steel
is cold-, warm-, or hot-rolled or is bent to form open pipes. Both edges of each open pipe are
heated to a temperature above the melting point by induction heating. The ends of the two
open pipes are preferably butt-jointed with squeeze rolls or forge-welded. The strap steel may
preferably be a hot-rolled steel sheet, which is formed by hot rolling a slab produced by a
10 continuous casting process or an ingot-making/blooming process using a molten steel having
the above composition, and a cold-rolled/annealed steel sheet, and a cold-rolled steel sheet.

In the method for making the welded steel pipe according to the invention, the
untreated steel pipe is heated or soaked. The heating condition is not limited and preferably
in the range of about 700 to about 1,100°C to optimize the reduction rolling conditions, as
15 described below. When the temperature of the untreated steel pipe produced by warm- or hot-
rolling is still sufficiently high at the reduction rolling process, only a soaking process is
required to make the temperature distribution in the pipe uniform. Heating is necessary when
the temperature of the untreated steel pipe is low.

The heated or soaked steel pipe is subjected to reduction rolling using a series of
20 tandem caliber rolling stands at a cumulative reduction rate of at least about 35%. The
cumulative reduction rate is the sum of reduction rates for individual caliber rolling stands.
At a cumulative reduction rate of less than about 35%, the n-value and the r-value
contributing to excellent processability and hydroformability are not increased. Thus, the
cumulative reduction rate must be at least about 35% in the invention. The upper limit of the
25 cumulative reduction rate is preferably about 95% to prevent local wall thinning and ensure

high productivity. More preferably, the cumulative reduction rate is in the range of about 35% to about 90%. When a higher r-value is required, the reduction rolling is performed at a high reduction rate in the ferrite zone to develop a rolling texture. Thus, the cumulative reduction rate at a temperature region below the A_{r3} transformation point is preferably at least about 20%.

In the reduction rolling, the final rolling temperature is in the range of about 500 to about 900°C. If the final rolling temperature is less than about 500°C or more than about 900°C, the n-value and the r-value contributing to processability are not increased or the limiting bulging ratio LBR at the free bulging test is not increased, thereby resulting in poor hydroformability.

In the reduction rolling, a series of tandem caliber rolling stands, called a reducer, is preferably used.

In the invention, the untreated steel pipe having the above-mentioned composition is subjected to the above-mentioned reduction rolling process. As a result, the rolled steel pipe as a final product has a tensile strength TS of at least about 590 MPa, and a high $n \times r$ product, indicating significantly excellent hydroformability.

Examples

Each of steel sheets (hot-rolled steel sheets and cold-rolled annealed steel sheets) having compositions shown in Table 1 was rolled at room temperature (cold-rolled) or at a warm temperature (500°C to 700°C) to form open pipes. Edges of two open pipes were but-
 5 jointed by induction heating to form a welded steel pipe having an outer diameter of 146 mm and a wall thickness of 2.6 mm. Each welded steel pipe as an untreated steel pipe was subjected to reduction rolling under conditions shown in Table 2 to form a rolled steel pipe (final product).

Tensile test pieces (JIS No. 12A test pieces) in the longitudinal direction were prepared
 10 from the rolled steel pipe to measure the tensile properties (yield strength, tensile strength, and elongation), the n-value, and the r-value of the rolled steel pipe. The n-value was determined by the ratio of the difference in the true stress (σ) to the difference in the true strain (e) between 5% elongation and 10% elongation according to the equation:

$$n = (\ln \sigma_{10\%} - \ln \sigma_{5\%}) / (\ln e_{10\%} - \ln e_{5\%})$$

15 The r-value was defined as the ratio of the true strain in the width direction to the true strain in the thickness direction of the pipe in the tensile test:

$$r = \ln(W_i/W_f) / \ln(T_i/T_f)$$

wherein W_i is the initial width, W_f is the final width, T_i is the initial thickness, and T_f is the final thickness.

20 Since the thickness measurement included considerable errors, the r-value was determined under an assumption that the volume of the test piece was constant using the following equation:

$$r = \ln(W_i/W_f) / \ln(L_f W_f / L_i W_i)$$

wherein L_i is the initial length and L_f is the final length.

In the invention, strain gauges were bonded to the tensile test piece, and the true strain was measured in the longitudinal direction and the width direction within a nominal strain in the longitudinal direction of 6% to 7% to determine the r-value and the n-value.

Each rolled steel pipe as a final product was cut into a length of 500 mm to use as a hydroforming test piece. As shown in Fig. 2, the cut pipe was loaded into the hydroforming apparatus and water was supplied from one end of the pipe to burst the pipe by circular free bulging deformation. The average $d_{\max}$ of the maximum outer diameters at burst was measured to calculate the limiting bulging ratio LBR according to the following equation:

$$\text{LBR (\%)} = (d_{\max} - d_0)/d_0 \times 100$$

wherein $d_{\max}$ is the maximum outer diameter (mm) of the pipe at burst (break) and d_0 is the outer diameter of the pipe before the test. Regarding the mold sizes shown in Fig. 1, l_c was 127 mm, d_c was 127 mm, r_d was 5 mm, l_0 was 550 mm, and θ was 45°C.

The results are shown in Table 3.

The welded steel pipes according to the invention each have a tensile strength of at least about 590 MPa, a high n-value, a high r-value, and an $n \times r$ product of at least about 0.22, showing excellent processability and hydroformability. In contrast, welded steel pipes according to Comparative Examples each have a low $n \times r$ product and a low LBR, showing poor hydroformability. Thus, the welded steel pipes according to Comparative Examples are unsuitable for components that require hydroforming.

Table 1

Steel No.	Composition (mass%)													Note
	C	Si	Mn	P	S	Al	N	Cr	Ti	Nb	V	Mo,Cu,Ni,B	Ca,REM	
A	0.1	1.3	1.1	0.01	0.001	0.04	0.002	0.3	0.01	-	-	-	-	Example
B	0.08	0.2	1.4	0.01	0.003	0.04	0.003	-	-	0.04	0.04	-	-	Example
C	0.05	0.95	1.4	0.01	0.001	0.03	0.003	0.9	0.015	-	-	-	-	Example
D	0.15	0.15	1.2	0.01	0.003	0.04	0.003	0.3	-	-	-	-	-	Example
E	0.08	0.01	1.5	0.01	0.001	0.04	0.002	-	0.04	0.01	-	B:0.0010	-	Example
F	0.04	1.0	1.4	0.01	0.0008	0.04	0.002	0.9	0.01	-	-	-	Ca:0.0030	Example
G	0.15	0.15	1.2	0.01	0.0007	0.04	0.002	0.3	-	0.005	-	Mo:0.1, Ni:0.2	REM:0.0030	Example
H	0.25	0.01	1.5	0.01	0.001	0.04	0.002	-	0.04	-	-	-	-	Comparative Example
I	0.08	0.01	0.20	0.01	0.001	0.04	0.002	-	0.04	-	-	-	-	Comparative Example
J	0.04	1.0	1.4	0.01	0.015	0.04	0.002	0.01	0.01	-	-	-	-	Comparative Example
K	0.02	1.0	1.4	0.01	0.003	0.04	0.003	0.9	0.01	-	-	-	-	Comparative Example
L	0.15	0.15	1.2	0.01	0.003	0.04	0.003	2.0	0.01	0.015	-	-	-	Comparative Example

Table 2

Pipe No.		Steel No.	Conditions for making Untreated Steel Pipe		Conditions for making Rolled Pipe				
			Type of Steel Sheet	Temperature for Forming Open Pipe °C	Heating (Soaking) °C	Reduction Rolling Conditions			
						Final Rolling Temperature °C	Cumulative Reduction Rate %	Cumulative Reduction Rate below Ar ₃ Transformation Point %	Ar ₃ Transformation Point °C
1		A	Hot-rolled	R.T.*	950	800	50	50	807
2		B	Hot-rolled	R.T.	950	750	55	25	849
3		C	Hot-rolled	R.T.	1000	700	60	40	844
4		D	Hot-rolled	R.T.	900	650	70	45	782
5		E	Cold-rolled	R.T.	950	750	80	80	807
6		F	Hot-rolled	500	900	700	65	30	849
7		G	Cold-rolled	500	900	700	40	25	782
8		H	Hot-rolled	R.T.	950	750	60	50	763
9		I	Hot-rolled	R.T.	950	750	60	50	846
10		J	Hot-rolled	R.T.	950	750	60	50	849
11		K	Hot-rolled	R.T.	950	750	60	50	861
12		L	Cold-rolled	R.T.	950	750	60	50	763
13		A	Hot-rolled	R.T.	950	700	30	10	807
14			Hot-rolled	R.T.	950	700	30	20	807
15			Hot-rolled	R.T.	950	400	50	25	807
16		B	Hot-rolled	500	950	950	50	50	849
17			Hot-rolled	500	950	720	30	10	849
18			Hot-rolled	500	950	720	30	20	849

*) R.T.: Room Temperature

Table 3

Pipe No.	Steel No.	Properties of Rolled Pipe							Free Bulging Test	Note
		Tensile Properties			n-value	r-value	n×r	Limiting Bulging Ratio LBR %		
		Yield Strength YS Mpa	Tensile Strength TS Mpa	Elongation El %						
1	A	488	610	38	0.18	1.8	0.324	60	Example	
2	B	501	630	32	0.18	1.6	0.288	55	Example	
3	C	520	650	29	0.17	1.6	0.272	53	Example	
4	D	602	750	27	0.16	1.6	0.256	56	Example	
5	E	478	610	31	0.18	1.6	0.288	50	Example	
6	F	520	650	30	0.17	1.6	0.272	53	Example	
7	G	577	720	29	0.16	1.6	0.256	48	Example	
8	H	624	780	15	0.09	0.9	0.081	35	Comparative Example	
9	I	420	520	40	0.09	1.4	0.126	33	Comparative Example	
10	J	502	630	25	0.09	1.4	0.126	36	Comparative Example	
11	K	335	420	45	0.15	1.6	0.24	45	Comparative Example	
12	L	624	780	15	0.09	0.8	0.072	35	Comparative Example	
13	A	553	650	24	0.09	1.0	0.09	36	Comparative Example	
14		531	640	25	0.09	0.9	0.081	35	Comparative Example	
15		703	740	23	0.10	0.9	0.09	38	Comparative Example	
16	B	485	600	26	0.11	1.0	0.11	39	Comparative Example	
17		504	630	25	0.09	0.9	0.081	37	Comparative Example	
18		512	640	23	0.09	0.8	0.072	36	Comparative Example	

73461-107

CLAIMS:

1. A hydroformable welded steel pipe comprising, on the basis of mass percent:

0.03% to 0.2% C;

5 0.01% to 1.3% Si;

1.0% to 1.5% Mn;

0.01% to 0.05% P;

0.01% or less of S;

0.01% to 1.0% Cr;

10 0.01% to 0.04% Al;

0.01% to 0.1% Nb;

0.01% to 0.1% Ti;

0.01% to 0.1% V;

0.001% to 0.01% N; and

15 optionally further comprising at least one element of the group consisting of Group A and Group B,

wherein Group A consists of at least one element of 0.1% to 1.0% of Cu, 0.1% to 1.0% of Ni, 0.1% to 1.0% of Mo, and 0.001% to 0.01% of B; and Group B consists
20 of at least one element of 0.002% to 0.02% of Ca and 0.002% to 0.02% of a rare earth element;

with the balance being Fe and incidental impurities,

73461-107

wherein the welded steel pipe has a tensile strength of at least 590 MPa and an $n \times r$ product of an n -value and an r -value is at least 0.22, and

wherein the n -value is at least 0.15 or the
5 r -value is at least 1.5,

wherein $n = (\ln \sigma_{10\%} - \ln \sigma_{5\%}) / (\ln e_{10\%} - \ln e_{5\%})$,

wherein:

$\sigma_{10\%}$ = a true stress at 10% elongation;

$\sigma_{5\%}$ = a true stress at 5% elongation;

10 $e_{10\%}$ = a true strain at 10% elongation; and

$e_{5\%}$ = a true strain at 5% elongation; and

wherein $r = \ln (W_i/W_f) / \ln (T_i/T_f)$,

wherein:

W_i = an initial width;

15 W_f = a final width;

T_i = an initial thickness; and

T_f = a final thickness.

2. The welded steel pipe according to claim 1,
wherein the tensile strength is up to 780 MPa.

20 3. The welded steel pipe according to claim 1 or 2,
wherein the Group A element and the Group B element are both
absent.

73461-107

4. The welded steel pipe according to claim 1 or 2, wherein the Group A element is present and the Group B element is absent.

5. The welded steel pipe according to claim 1 or 2, wherein the Group A element is absent and the Group B element is present.

6. The welded steel pipe according to claim 1 or 2, wherein the Group A element and the Group B element are both present.

10 7. A method for making a hydroformable welded steel pipe comprising:

heating or soaking an untreated welded steel pipe having a steel composition comprising, on the basis of mass percent:

15 0.03% to 0.2% C;

0.01% to 1.3% Si;

1.0% to 1.5% Mn;

0.01% to 0.05% P;

0.01% or less of S;

20 0.01% to 0.1% Cr;

0.01% to 0.04% Al;

0.01% to 0.1% Nb;

0.01% to 0.1% Ti;

0.01% to 0.1% V;

25 0.001% to 0.01% N; and

73461-107

optionally further comprising at least one element of the group consisting of Group A and Group B,

wherein Group A consists of at least one element of 0.1% to 1.0% of Cu, 0.1% to 1.0% of Ni, 0.1% to
 5 1.0% of Mo, and 0.001% to 0.01% of B; and Group B consists of at least one element of 0.002% to 0.02% of Ca and 0.002% to 0.02% of a rare earth element;

with the balance being Fe and incidental impurities, to obtain a treated steel pipe; and

10 reduction-rolling the treated steel pipe at a cumulative reduction rate of at least 40% and a final rolling temperature of 500°C to 900°C, such that the resulting welded steel pipe has a tensile strength of at least 590 MPa and an $n \times r$ product of an n -value and an r -
 15 value of at least 0.22,

wherein the treated steel pipe is reduction-rolled at a cumulative reduction rate of at least 20% at a temperature below an A_{r3} transformation point, and the heating is performed at 900°C or higher,

20 wherein $n = (\ln \sigma_{10\%} - \ln \sigma_{5\%}) / (\ln e_{10\%} - \ln e_{5\%})$,

wherein:

$\sigma_{10\%}$ = a true stress at 10% elongation;

$\sigma_{5\%}$ = a true stress at 5% elongation;

$e_{10\%}$ = a true strain at 10% elongation; and

25 $e_{5\%}$ = a true strain at 5% elongation; and

wherein $r = \ln (W_i/W_f) / \ln (T_i/T_f)$,

73461-107

wherein:

W_i = an initial width;

W_f = a final width;

T_i = an initial thickness; and

5 T_f = a final thickness.

8. The method according to claim 7, wherein the cumulative reduction rate is 90% or less.

SMART & BIGGAR

OTTAWA, CANADA

PATENT AGENTS

FIG. 1

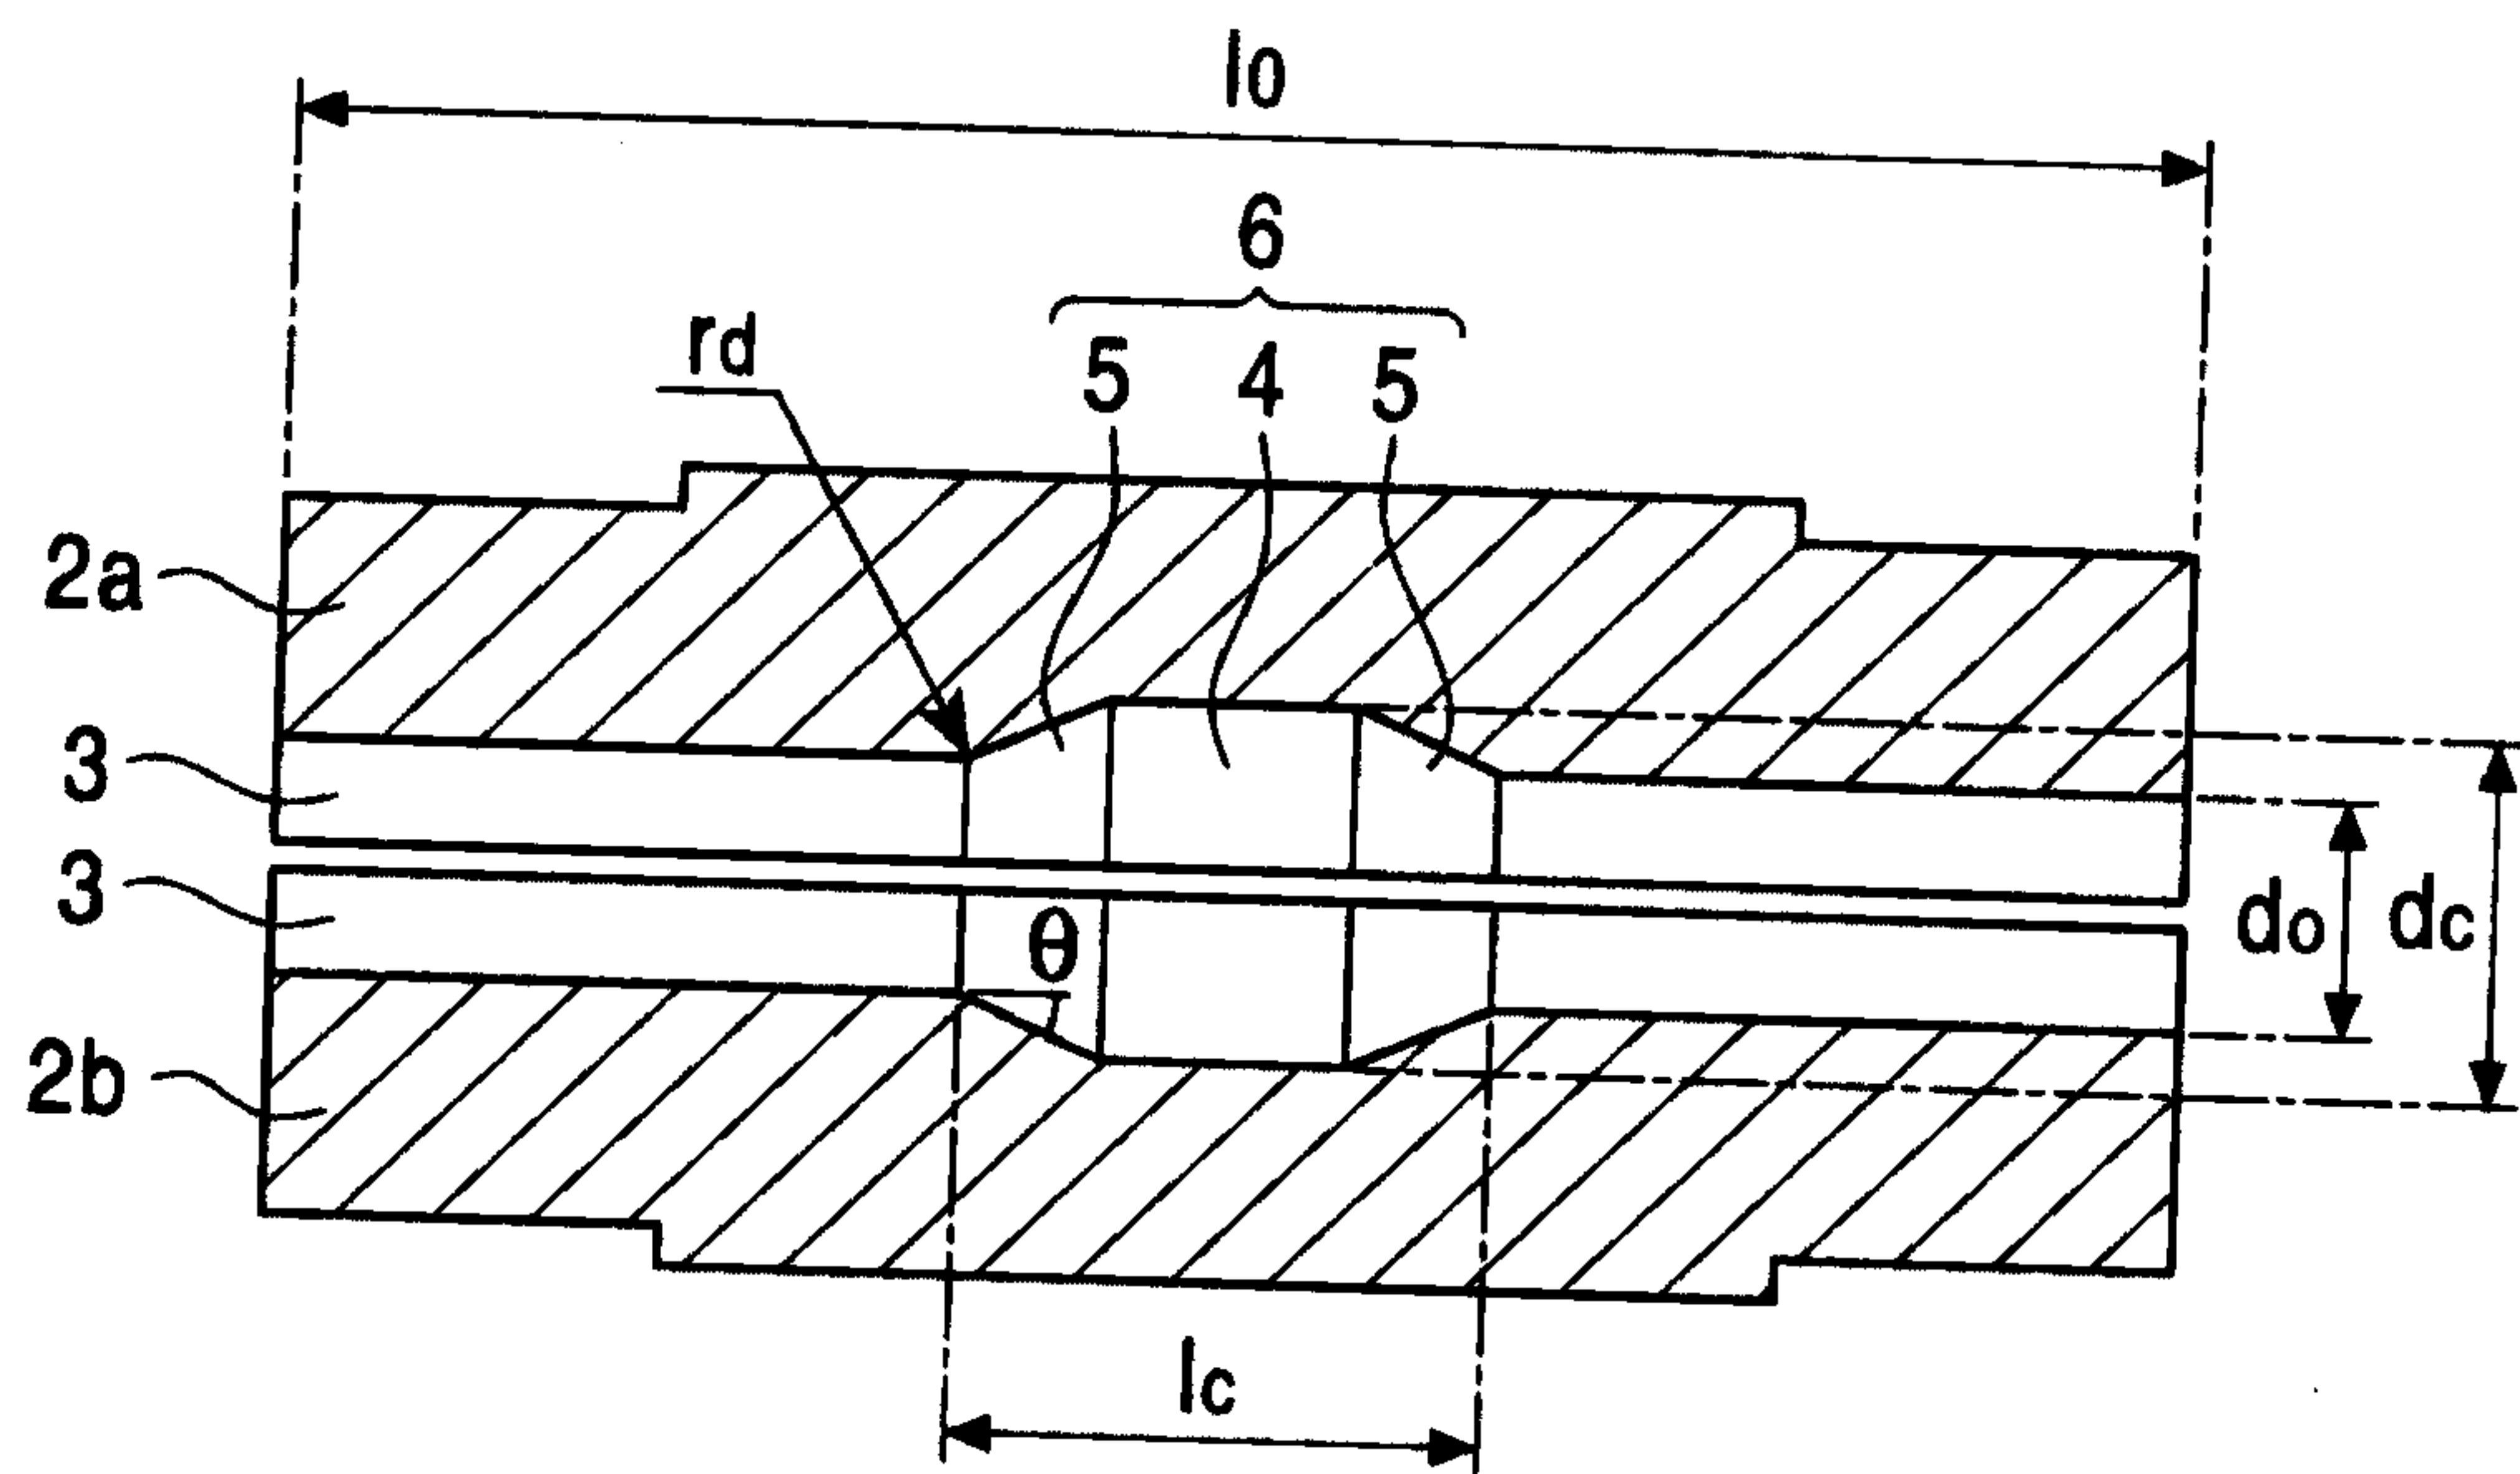


FIG. 2

