



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.11.2016 Bulletin 2016/46

(51) Int Cl.:
H04R 3/00 (2006.01) **H04R 3/04** (2006.01)
H04R 3/14 (2006.01)

(21) Application number: **15167645.9**

(22) Date of filing: **13.05.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(71) Applicant: **Alpine Electronics, Inc.**
Tokyo (JP)
(72) Inventor: **Esser, Timo**
70567 Stuttgart (DE)
(74) Representative: **Klunker . Schmitt-Nilson . Hirsch**
Patentanwälte
Destouchesstraße 68
80796 München (DE)

(54) **AUDIO SIGNAL PROCESSING APPARATUS AND SIGNAL PROCESSING METHOD FOR A SOUND SYSTEM, PARTICULARLY IN A VEHICLE**

(57) An audio signal processing apparatus (10) comprises a signal input section (11) through which in operation at least one audio signal (50) is received, and a splitting section (12) configured to generate a first signal (61) and a second signal (62) from the received at least one audio signal (50), wherein the first signal (61) comprises signal components of a first frequency range of the at least one audio signal and the second signal (62) comprises signal components of a second frequency range of the at least one audio signal, the first frequency range comprising lower frequencies than the second frequency range and the first and second frequency ranges having a cross-over frequency (fxA). A first output section (41) is arranged to generate a first output signal (71) for at least one first loudspeaker (21A) from the first signal

(61), and a second output section (42) is arranged to generate a second output signal (72) for at least one second loudspeaker (22A) from the second signal (62). A processing section (30) receives a volume control signal (70) which is indicative of a user volume input and is configured to determine a first cross-over frequency value (fx1) according to the volume control signal (70) and to determine a second cross-over frequency value (fx2) which comprises a calculation of a power value of signal components over at least one frequency band of the at least one audio signal (50), wherein the processing section (30) is configured to determine the cross-over frequency (fxA) from one of the first and second cross-over frequency values (fx1, fx2).

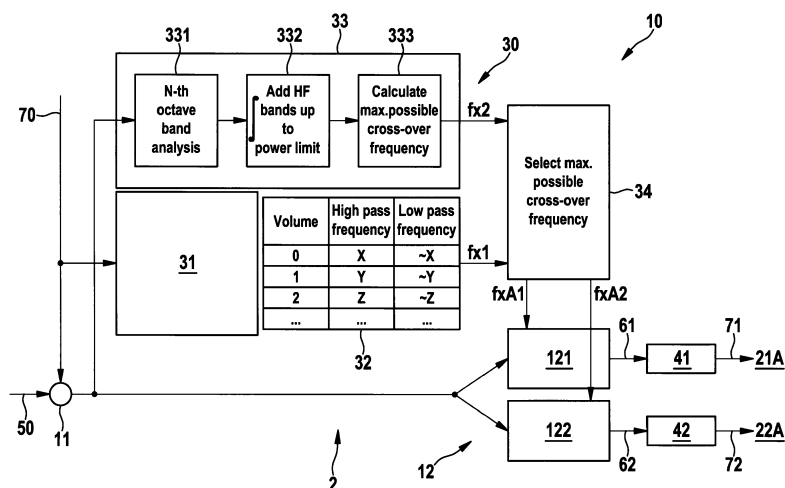


Fig. 5

Description

[0001] The invention relates to an audio signal processing apparatus for generating multiple output signals, particularly for a multi-way loudspeaker system. The invention further relates to a sound system and to a vehicle having such audio signal processing apparatus, and to a signal processing method for a sound system, particularly but not exclusively applicable in a vehicle.

[0002] Generally, in a typical configuration, a multi-way loudspeaker system with so-called active frequency cross-over comprises at least one low frequency (LF) loudspeaker, one or more high frequency (HF) speaker(s), multiple amplifier channels and an active analog or digital cross-over filter which has a high pass filter and a low pass filter to split the input audio signal into at least two bands, one for each speaker or speaker group. Typically, the cross-over frequency between the loudspeakers is defined during set-up or sound tuning of the system and stays fixed.

[0003] Particularly in a vehicle multi-way loudspeaker system, it is advantageous to reproduce mid and high frequencies as much as possible from the higher mounted loudspeakers (i.e. loudspeakers mounted at a higher position with respect to the floor plane of the vehicle) to achieve a high sound stage and a cross-over point below the speech band. This is currently only used in cases where high-cost large mid-band loudspeakers are used in at least a 3 way configuration.

[0004] Current known technology uses fixed cross-over frequencies or sets the cross-over frequency by volume control setting, as disclosed in WO 2010/122441 A1.

[0005] WO 2010/122441 A1 discloses a drive system which comprises a splitter which generates a low frequency signal and high frequency signal from an input signal. A first drive circuit is coupled to the splitter and generates a drive signal for an audio driver from the low frequency signal. A second drive circuit is coupled to the splitter and generates a drive signal for a second audio driver from the high frequency signal. The second drive circuit provides a bass frequency extension for the second audio driver by applying low frequency boost to the low frequency signal. A processor determines a driver excursion indication for the second audio driver and a controller performs a combined adjustment of a cross-over frequency for the high and low frequency signals and a characteristic of the low frequency boost based on the driver excursion indication.

[0006] JP 08-033093 A discloses a multi-way speaker device where rich musicality can be enjoyed even at the time of the reproduction in a low level. In this device, each filter is composed so that a cut-off frequency may be changed. The device is provided with a cross-over frequency control means outputting a variable control signal of the cut-off frequency for each filter according to an input sound signal level. When an input sound signal level is lower than a prescribed level, the cross-over frequency by each filter is made to change to a low-pass side.

[0007] Particularly in two-way active cross-over systems in vehicles, such as cars, the value of the cross-over frequency f_x is a compromise between power handling of the HF speaker(s) and perceived sound stage height. The high-mounted HF speaker(s) (so-called tweeter) should play as much of the mid-band as possible to define a high sound stage, but the power handling sets a lower frequency limit, because the HF speaker(s) typically cannot handle high power.

[0008] If mid frequencies are reproduced from the LF speaker(s), the perceived sound stage is pulled down towards the bottom of the door of the vehicle, as LF speakers are typically installed in a lower area of the door. There, greater installation space is available for the LF speakers which is often necessary for good sound reproduction. In practice this means for a given mid-tweeter that the lower bandwidth limit depends on input power before the high pass filter, or the rated power handling limit depends on the high pass filter.

[0009] In a typical two-way sound system of a car, the cross-over frequency is about 2-3 kHz, inside the upper half of the human speech band. Thus, the lower end comes from the LF speaker and the intelligibility is impaired by the cross-over point, see also Figures 2 and 3.

[0010] Fig. 2 shows a standard configuration of a sound system with active cross-over between a high frequency speaker coupled to an amplifier and a low frequency speaker coupled to another amplifier and a corresponding signal diagram showing an exemplary cross-over frequency. The cross-over frequency is set in a so-called splitter to which an audio source signal as an input signal is applied. Signal components of higher frequency above the cross-over frequency f_x (in this example approx. 100 Hz, see signal diagram in the lower part of Fig. 2) are supplied to the amplifier for the high frequency speaker, and signal components of lower frequency below the cross-over frequency f_x are supplied to the amplifier for the low frequency speaker. As commonly known, the splitter comprises a respective low pass filter and high pass filter which are correspondingly set with the cross-over frequency f_x , as shown in the diagram of Fig. 2.

[0011] Fig. 3 shows a diagram with a spectrum of audio signal components of exemplary associated audio sources in different frequency bands. Typical tweeter loudspeakers operate in a frequency range above roughly 3000 Hz and, as such, mainly reproduce signal components of higher frequencies of male speech or female speech, but other sources like trombone, violin, bass or flute are not or less reproduced. These sources are mainly reproduced by woofer speakers which operate in a frequency range below the cross-over frequency of 3000 Hz. Thus, a sound stage or image reproduced according to Fig. 3 is typically not preferable, at least in a typical loudspeaker configuration of a vehicle.

[0012] It is an object of the invention to provide an audio signal processing apparatus and a signal processing method for a sound system which are capable of increas-

ing the sound stage of a sound system, particularly used in a vehicle.

[0013] The invention relates to an audio signal processing apparatus according to claim 1 and to a signal processing method for a sound system according to claim 14.

[0014] According to an aspect, there is disclosed an audio signal processing apparatus, comprising a signal input section through which in operation at least one audio signal is received, a splitting section coupled to the signal input section and configured to generate a first signal and a second signal from the received at least one audio signal, wherein the first signal comprises signal components of a first frequency range of the at least one audio signal and the second signal comprises signal components of a second frequency range of the at least one audio signal, the first frequency range comprising lower frequencies than the second frequency range and the first and second frequency ranges having a cross-over frequency, a first output section coupled to the splitting section and arranged to generate a first output signal for at least one first loudspeaker from the first signal, a second output section coupled to the splitting section and arranged to generate a second output signal for at least one second loudspeaker from the second signal. A processing section is coupled to the signal input section and receives a volume control signal which is indicative of a user volume input and which controls a volume of the first and second output signals depending on the user volume input. The processing section is configured to determine a first cross-over frequency value according to the volume control signal and to determine a second cross-over frequency value, wherein the determination of the second cross-over frequency value comprises a calculation of at least one power value of signal components over at least one frequency band of the at least one audio signal. The processing section is further configured to determine the cross-over frequency from one of the first and second cross-over frequency values.

[0015] According to another aspect, there is disclosed a signal processing method for a sound system, the method comprising the steps of receiving at least one audio signal, generating a first signal and a second signal from the received at least one audio signal, wherein the first signal comprises signal components of a first frequency range of the at least one audio signal and the second signal comprises signal components of a second frequency range of the at least one audio signal, the first frequency range comprising lower frequencies than the second frequency range and the first and second frequency ranges having a cross-over frequency, generating a first output signal for at least one first loudspeaker from the first signal and a second output signal for at least one second loudspeaker from the second signal, receiving a volume control signal which is indicative of a user volume input and controls a volume of the first and second output signals depending on the user volume input, determining a first cross-over frequency value according

to the volume control signal and determining a second cross-over frequency value, wherein the determination of the second cross-over frequency value comprises a calculation of at least one power value of signal components over at least one frequency band of the at least one audio signal, and determining the cross-over frequency from one of the first and second cross-over frequency values.

[0016] According to the audio signal processing apparatus and the signal processing method for a sound system according to the invention, it is possible to increase the sound stage of a sound system and power handling capabilities of the sound system while preserving a high sound stage. Advantageously, an amount of signal components of the received audio signal that is sent to HF speaker(s) can be derived from a combination of (a) a user volume input setting and (b) a power estimation through frequency analysis, which may be employed for protecting the HF speaker(s) against overload while preserving a high sound stage. For the power estimation, the processing section particularly calculates at least one power value of signal components over at least one frequency band in the second frequency range of the at least one audio signal.

[0017] According to an embodiment, the processing section is configured to determine the cross-over frequency from the greater one of the first and second cross-over frequency values.

[0018] Advantageously, for a multi-way speaker system the audio signal processing apparatus may be configured such that it sends an increased or maximum amount of signal components to HF speaker(s) to keep the sound stage (also called sound image) high or as high as possible (e.g. adjusting the cross-over frequency as low as possible), but limited by maximum power (heat) and excursion (total harmonic distortion, or shortly THD) handling capabilities of the HF speaker(s).

[0019] According to an embodiment, the processing section is configured to determine the cross-over frequency as the first cross-over frequency value if the first cross-over frequency value is greater than the second cross-over frequency value, and as the second cross-over frequency value if the second cross-over frequency value is greater than the first cross-over frequency value.

[0020] According to an embodiment, the determination of the second cross-over frequency value comprises calculation of power values of signal components of the at least one audio signal along at least one frequency band from a first frequency level of the second frequency range to a lower frequency of the second frequency range, summing up the calculated power values from the first frequency level of the second frequency range down to the lower frequency of the second frequency range, and determining whether a sum of the summed up calculated power values reaches a power limit defined for the at least one second loudspeaker, and determining a frequency value that corresponds to a calculated power value at which the defined power limit is reached as the

second cross-over frequency value.

[0021] According to an embodiment, the determination of the second cross-over frequency value comprises performing an n-th octave band analysis for calculating at least one power value in a respective one of multiple n-th octave bands of the second frequency range of the at least one audio signal from a first n-th octave band of the second frequency range to a lower n-th octave band of the second frequency range, summing up the respective calculated power values of the n-th octave bands from the first n-th octave band of the second frequency range down to the lower n-th octave band of the second frequency range, and determining whether a sum of the summed up calculated power values reaches a power limit defined for the at least one second loudspeaker, and determining a lowest one of the n-th octave bands at which the sum of the summed up calculated power values reaches the defined power limit, and determining a frequency of the lowest one of the n-th octave bands as the second cross-over frequency value.

[0022] According to an embodiment, the processing section is configured to determine a first and a second cross-over frequency from one of the first and second cross-over frequency values, wherein the first cross-over frequency is supplied to a low pass filter of the splitting section for generating the first signal and the second cross-over frequency is supplied to a high pass filter of the splitting section for generating the second signal.

[0023] According to an embodiment, the audio signal processing apparatus further includes a storing section for storing a table of multiple cross-over frequency values at multiple volume control signal values, wherein the processing section is configured to determine the first cross-over frequency value according to one of the stored cross-over frequency values.

[0024] According to another aspect, the invention also relates to a sound system comprising an audio signal processing apparatus according to the invention which is coupled to the at least one first and second loudspeakers.

[0025] According to an embodiment, the at least one first loudspeaker comprises at least one low frequency (LF) loudspeaker and the at least one second loudspeaker comprises at least one high frequency (HF) loudspeaker.

[0026] According to an embodiment, the at least one first loudspeaker comprises at least one of the following: a center loudspeaker, a subwoofer, an ambience loudspeaker; and the at least one second loudspeaker comprises at least one tweeter loudspeaker. Typically, a tweeter loudspeaker, or shortly tweeter, is a particular type of loudspeaker that is designed to produce high audio frequencies, typically from around 2,000 Hz to 20,000 Hz (generally considered to be the upper limit of human hearing).

[0027] According to an embodiment, the at least one first loudspeaker comprises at least one low frequency (LF) loudspeaker configured for a frequency range of 50

to 4000 Hz, and the at least one second loudspeaker comprises at least one high frequency (HF) loudspeaker (or mid-HF speaker) configured for a frequency range of 300 to 20,000 Hz.

[0028] According to another aspect, the invention also relates to a vehicle comprising an audio signal processing apparatus or sound system according to the invention which is coupled to the at least one first and second loudspeakers.

[0029] According to an embodiment, the at least one first loudspeaker comprises at least one low frequency loudspeaker and the at least one second loudspeaker comprises at least one high frequency loudspeaker, and the at least one low frequency loudspeaker is installed in the vehicle at a first position, and the at least one high frequency loudspeaker is installed in the vehicle at a second position which is at greater height than the first position relative to a floor plane of the vehicle. Such configuration is advantageous for achieving a high sound stage or image.

[0030] According to an embodiment, the at least one second loudspeaker comprises at least one of a front loudspeaker and a door loudspeaker of the vehicle.

[0031] According to aspects of the invention, as described above, preferably at low to medium volume levels the sound stage may be kept high because the audio signal processing apparatus may be configured such that most of the mid band signal components of the audio signal are sent to higher mounted mid-tweeter speaker(s). Such configuration is particularly advantageous in a vehicle where installation space for higher mounted mid-tweeter speaker(s) is limited. Due to power estimation through frequency analysis, small mid-tweeter speaker(s) with limited power may be protected from overload and heat at higher volume levels.

[0032] At higher volume levels the cross-over frequency is preferably shifted up to higher values in order to not overload any employed mid-tweeter speaker(s). The sound stage height is degraded at high power levels of the audio signal, but the power handling capability of the overall system may be increased significantly. For example, a highly compressed pop song has much more energy (or power) than quiet classical music at the same volume step, wherein this may be taken into account according to aspects of the invention.

[0033] All embodiments as described herein with respect to the apparatus, sound system or vehicle, may equally be applied in connection with the method as described herein.

[0034] Embodiments of the invention are described in greater detail below with reference to the Figures, in which:

Fig. 1 shows a perspective schematic view of an exemplary vehicle having an exemplary sound system in accordance with an embodiment of the invention installed therein,

- Fig. 2 shows a standard configuration of a sound system with active cross-over between a high frequency speaker and a low frequency speaker and a corresponding signal diagram showing an exemplary cross-over frequency,
- Fig. 3 shows a diagram with a spectrum of audio signal components in different frequency bands with exemplary associated audio sources,
- Fig. 4 shows two diagrams with a respective spectrum of audio signal components and different cross-over frequencies,
- Fig. 5 shows a block diagram of an exemplary audio signal processing apparatus in accordance with an embodiment of the invention,
- Fig. 6 shows an exemplary signal diagram of the cross-over frequency values fx_1 , fx_2 according to Fig. 5 and a cross-over frequency fx_A as input for the splitting section 12 according to Fig. 5 according to an embodiment with an exemplary volume control signal 70.

[0035] Fig. 1 shows a perspective schematic diagram of a vehicle 1 provided with a sound system 2 in accordance with an exemplary embodiment of the invention.

[0036] The sound system 2 comprises a multi-way loudspeaker system with a plurality of loudspeakers 21-24. It should be noted that the invention can be applied with any number of loudspeakers, and that a typical vehicle sound system, for which the invention may be employed, includes more than the number of loudspeakers shown in Fig. 1. In particular, the exemplary sound system 2 comprises a lower left door speaker 21A, a lower right door speaker 21B, an upper left door speaker 22A, an upper right door speaker 22B, and a left front speaker 23 and right front speaker 24. The sound system may further comprise, e.g., rear speakers and a subwoofer (not shown). All of these speakers are coupled to an audio signal processing apparatus 10 by respective signal lines (shown in dashed lines in Fig. 1). It is also possible that the speakers 21-24 and the audio signal processing apparatus 10 are coupled via a bus architecture or any other means of signal communication, e.g. by wire and/or wirelessly.

[0037] According to an embodiment, the lower left door speaker 21A (and lower right door speaker 21B) is a low frequency (LF) speaker, and the upper left door speaker 22A (and upper right door speaker 22B) is a high frequency (HF) speaker. For example, the lower left door LF speaker 21A can have larger dimensions and thus has higher maximum power than the upper left door HF speaker 22A, which may be quite small and may have limited installation space, e.g. in the back region of the rear-view mirror of the door. The HF speaker 22A may be configured for reproduction at lower or mid volume

levels. The speakers 23, 24 may be HF speakers with similar or different frequency band as the speaker 22A. According to an embodiment, the LF speaker 21A is configured for a frequency range of 50 to 4000 Hz, and the HF speaker (or mid-HF speaker) 22A is configured for a frequency range of 300 to 20,000 Hz.

[0038] According to an embodiment, the speaker 21A is installed in the vehicle 1 at a first position, e.g. in a lower area of the vehicle front door where more installation space is available. The speaker 22A is installed in the vehicle 1 at a second position, e.g. in an upper area of the vehicle front door, which is at a greater height than the position of the speaker 21A relative to the floor plane 3 of the vehicle. Particularly, the floor plane of the vehicle is the bottom plane where the seats of the vehicle are mounted. With such arrangement of speakers, a high sound stage may be achieved. Particularly, in a vehicle with such multi-way loudspeaker system, it is advantageous to reproduce mid and high frequencies as much as possible from higher mounted loudspeakers.

[0039] It should be noted that a sound system and an audio signal processing apparatus according to the invention, such as the sound system 2 and audio signal processing apparatus 10, are applicable in a vehicle, but may also be applied in a different environment.

[0040] Generally, a sound system according to the invention may comprise an audio signal receiving apparatus, such as a tuner, for receiving wireless audio source signals, such as radio broadcast waves or any other kind of source signal. Additionally or alternatively, it is possible that the sound system is coupled to an audio source reading apparatus, such as a CD player or a DVD player or a hard disk drive or any other kind of signal / data storage device, e.g. via a data connection such as USB. The audio signal receiving apparatus and/or the audio source reading apparatus may be coupled to the audio signal processing apparatus for providing the audio source signal(s) to the audio signal processing apparatus. No matter what the audio source is, the audio signal processing apparatus according to the invention is adapted to receive the audio source signal(s) as audio signal(s) and to generate respective output signals for the respective speakers.

[0041] Fig. 5 shows an audio signal processing apparatus 10 in accordance with an exemplary embodiment of the invention. Particularly, Fig. 5 shows an implementation with a 2-way speaker system and an embodiment of a digital sound processor (DSP) block diagram. The audio signal processing apparatus 10 comprises a signal input section 11, a splitting section 12, a first output section 41, a second output section 42, and a processing section 30. The audio signal processing apparatus 10, or one or several of its components or sections, such as the signal input section, the splitting section, the first output section, the second output section, and/or the processing section, may be implemented in any appropriate manner. They may be implemented in hardware, such as in one or more digital sound processors and/or

in digital signal processing components. They may also be implemented at least in part using analog components. They may also be implemented (partly) in software in a digital sound processor, or in any appropriate combination of hardware and software.

[0042] According to the embodiment of Fig. 5, with the signal input section 11 at least one audio signal 50 is received in operation, for example from an audio source as described above. The audio signal 50 may be a stereo signal or any single or multi channel audio signal. The splitting section 12 is coupled to the signal input section 11 and configured to generate from the received audio signal 50 a first signal 61 via a respective low pass filter 121, and a second signal 62 via a respective high pass filter 122. The first signal 61 comprises signal components of a first frequency range of the audio signal 50 and the second signal 62 comprises signal components of a second frequency range of the audio signal 50. The first frequency range comprises lower frequencies than the second frequency range. For example, the first frequency range is a low frequency range, and the second frequency range is a high frequency range. The first and second frequency ranges have at least one cross-over frequency.

[0043] Such cross-over frequency is shown in Fig. 4A and 4B, respectively depicting a cross-over frequency fx_A in Fig. 4A and fx_B in Fig. 4B between a respective low frequency range and high frequency range (the x-axis designating increasing frequency values f , and the y-axis designating increasing volume levels V of reproduced audio signals).

[0044] The first output section 41 is coupled to the splitting section 12, particularly to the low pass filter 121, and is arranged to generate from the first signal 61 provided by the low pass filter 121 at least one first output signal 71 for at least one first loudspeaker, such as one or more LF speakers like the lower left door speaker 21A shown in Fig. 1 and/or the lower right door speaker. The second output section 42 is also coupled to the splitting section 12 and is arranged to generate from the second signal 62 provided by the high pass filter 122 at least one second output signal 72 for at least one second loudspeaker, such as one or more HF speakers like the upper left door speaker 22A shown in Fig. 1 and/or the upper right door speaker.

[0045] The processing section 30 is coupled to the signal input section 11 and receives a volume control signal 70 which is indicative of a user volume input and controls a volume of the first and second output signals 71, 72 depending on the user volume input. For example, the volume control signal 70 may be provided from an input section of a human machine interface where the user can input a volume setting for adjusting the volume of reproduced audio signals. The input section may output a volume control signal which is indicative of such volume setting. For example, the volume control signal may be provided to respective amplifiers in the output sections 41, 42.

[0046] The processing section 30 comprises a preselection section 31 and a storing section 32 with which the processing section determines a first cross-over frequency value fx_1 according to the volume control signal 70 input to the preselection section 31. For example, in the storing section 32 a table of multiple cross-over frequency values (such as X, Y, Z shown in Fig. 5) at multiple volume control signal values (such as 0, 1, 2 shown in Fig. 5) is stored. Depending on the respective volume control signal value input to the preselection section 31, the preselection section 31 retrieves the corresponding values from the table in storing section 32 and determines the first cross-over frequency value fx_1 according to one of the stored cross-over frequency values X, Y, Z which corresponds to the received volume control signal value at the input of preselection section 31.

[0047] For example, the high pass filter 122 may be set with a cross-over frequency value of X, Y, Z, whereas the low pass filter 121 may be set with the same cross-over frequency value X, Y, Z, or with roughly the same (i.e. a slightly different) cross-over frequency value (expressed in Fig. 5 by $\sim X$, $\sim Y$, $\sim Z$). For example, X may be 1020 Hz, whereas $\sim X$ may be 970 Hz. Particularly in the latter case, the preselection section 31 sets a respective cross-over frequency value fx_1 for the high pass filter 122 and the low pass filter 121, which need not be the same.

[0048] According to an embodiment, the optimal cross-over frequency is set by a set of parameters in one or several tables. This may be calculated during a system tuning by using design knowledge of speaker system and knowledge of the source and gain structure of the audio signal sources in the system (such as maximum input levels to cross-over frequency). Using the user volume input to preselect a cross-over frequency has the advantage that the changes in the cross-over frequency are normally not audible to the user, because the cross-over frequency is mostly changed at a time when there is a volume change by the user volume input.

[0049] The processing section 30 further comprises a calculation section 33 having calculation blocks 331, 332 and 333, as explained in more detail below. In calculation section 33, which works in parallel to the preselection section 31, the processing section 30 determines a second cross-over frequency value fx_2 . The determination of the second cross-over frequency value fx_2 performed in calculation section 33 comprises a calculation of a power value of signal components over at least one frequency band of the audio signal 50, which is input into calculation section 33. From this calculation, the processing section 30 determines a cross-over frequency value fx_2 for both high pass filter 122 and low pass filter 121, or a respective cross-over frequency value fx_2 for the high pass filter 122 and the low pass filter 121, which need not be the same, analogously as explained above for setting the cross-over frequency value fx_1 .

[0050] In the selection section 34, the processing section 30 determines a cross-over frequency fx_A for setting the high pass filter 122 and low pass filter 121, respec-

tively, from one of the first and second cross-over frequency values fx_1 , fx_2 . The cross-over frequency fx_A is supplied as a control value to the low pass filter 121 and high pass filter 122 for setting their respective cross-over frequency to be the cross-over frequency fx_A .

[0051] For example, referring to Fig. 4A, a cross-over frequency fx_A of 300 Hz may be set. According to Fig. 4B, in another scenario with a different volume control signal 70 having a higher volume level V , for example, a cross-over frequency fx_B of 2500 Hz may be set instead of fx_A , thus protecting the HF speaker(s) against overload.

[0052] In a case where different cross-over frequencies are set for the high pass filter 122 and low pass filter 121, respectively, the processing section 30 in the selection section 34 determines a first and a second cross-over frequency fx_{A1} , fx_{A2} from the received first and second cross-over frequency values fx_1 , fx_2 . The first cross-over frequency fx_{A1} is supplied as a control value to the low pass filter 121 for setting its cross-over frequency to be the first cross-over frequency fx_{A1} , and the second cross-over frequency fx_{A2} is supplied as a control value to the high pass filter 122 for setting its respective cross-over frequency to be the second cross-over frequency fx_{A2} .

[0053] The processing section 30 determines the cross-over frequency fx_A (or fx_{A1} , fx_{A2}) from the greater one of the first and second cross-over frequency values fx_1 , fx_2 . Particularly, the processing section 30 determines the cross-over frequency fx_A (or fx_{A1} , fx_{A2}) as the first cross-over frequency value fx_1 if the first cross-over frequency value fx_1 is greater than the second cross-over frequency value fx_2 , and as the second cross-over frequency value fx_2 if the second cross-over frequency value fx_2 is greater than the first cross-over frequency value fx_1 .

[0054] According to an embodiment, in blocks 331 to 333, the determination of the second cross-over frequency value fx_2 is done as follows:

In block 331, power values of signal components of the audio signal 50 are calculated along at least one frequency band from a first frequency level of the second frequency range to a lower frequency of the second frequency range. Particularly, it is performed an n -th octave band analysis for calculating at least one power value in a respective one of multiple n -th octave bands of the second frequency range of the audio signal 50 from a first n -th octave band of the second frequency range to a lower n -th octave band of the second frequency range.

[0055] In block 332, the calculated power values are summed up from the first frequency level of the second frequency range down to the lower frequency of the second frequency range, and it is determined whether a sum of the summed up calculated power values reaches a power limit defined for the at least one second loudspeaker

(such as speaker 22). Particularly, the respective calculated power values of the n -th octave bands from the first n -th octave band of the second frequency range down to the lower n -th octave band of the second frequency range are summed up, and it is determined whether a sum of the summed up calculated power values reaches a power limit defined for the at least one second loudspeaker (i.e. speaker 22).

[0056] In block 333, as the second cross-over frequency value fx_2 a frequency value is determined that corresponds to a calculated power value at which the defined power limit is reached. Particularly, there is determined a lowest one of the n -th octave bands at which the sum of the summed up calculated power values reaches the defined power limit, and a frequency of the lowest one of the n -th octave bands is determined as the second cross-over frequency value fx_2 .

[0057] In other words, according to an embodiment of the invention, any steps performed by the cross-over frequency calculation section 33 comprise the following steps:

In a first step, an n -th octave band analysis is performed which calculates the power (energy) in every n -th octave band of the source audio signal 50. In a second step, from a top end (typically 20 kHz) of the second frequency range down, calculated power values (corresponds to quadrature of the signal voltages of the respective signal components) of the n -th octave bands are summed up (integrated) until the maximum total power limit of the HF loudspeaker is reached. The n -th octave bands might be weighted in this sum. In a third step, the lowest n -th octave band that is still included within the power limit calculation in the second step determines the cross-over frequency fx_2 .

[0058] According to an embodiment, the calculation performed in calculation section 33 (which functions as a prediction algorithm) continuously or intermittently calculates a minimum possible cross-over frequency value fx_2 . If the current preselected cross-over frequency value fx_1 is too low due to unusually high power content in the source audio signal 50, the cross-over frequency fx_A is shifted higher following the cross-over frequency value fx_2 to protect the speakers. Thus, the prediction algorithm performed in calculation section 33 has always priority over preselection performed in the preselection section 31.

[0059] Referring to Fig. 4A and 4B, according to aspects of the invention, the cross-over frequency determined by the processing section 30 may be varied, e.g. between fx_A of 300 Hz and fx_B of 2500 Hz.

[0060] As shown in Fig. 4A, at low listening level, i.e. at low volume level of the volume control signal 70, most signal components are reproduced by the speaker(s) which reproduces signal components in the second frequency range, i.e. the higher frequency range. Thus,

more signal components may be reproduced by mid-tweeter speakers or HF speakers, such as speaker 22. Since the frequency range reproduced by such mid-tweeter speakers is quite large, e.g. reaches down to cross-over frequency fx_A of 300 Hz, a high sound stage may be achieved. This can save the use of a separate mid-range speaker and, thus, reduces costs.

[0061] As shown in Fig. 4B, at higher listening level, i.e. at higher volume level of the volume control signal 70, the cross-over frequency determined by the processing section 30 shifts towards a higher cross-over frequency fx_B (here, e.g., 2500 Hz), thus the first frequency range is extended and more signal components are reproduced by the speaker(s) which reproduces signal components in the first frequency range, i.e. the lower frequency range, such as speaker 21A. In other words, at high listening level, the cross-over frequency is increased to protect the mid-tweeters and more signal components are reproduced by LF speakers(s) which are capable of handling higher power. In both diagrams of Fig. 4A and 4B, the areas A1 and A2, respectively, are indicative of the total power sent to the mid-tweeter speakers or HF speakers, and are roughly equal.

[0062] Fig. 6 shows an exemplary signal diagram of the cross-over frequency values fx_1 , fx_2 according to Fig. 5 and a cross-over frequency fx_A as input for the splitting section 12 according to Fig. 5 according to an embodiment of the invention with an exemplary volume control signal 70. With increasing the volume control signal 70 towards higher volume levels, the cross-over frequency value fx_1 (volume based) increases accordingly (see characteristics between the two vertical lines). In a region R where the cross-over frequency value fx_2 (based on power calculation) is greater than the cross-over frequency value fx_1 , the cross-over frequency fx_A as an input to the splitting section 12 is higher than the cross-over frequency value fx_1 and is based on fx_2 . In other regions, the cross-over frequency fx_A follows the cross-over frequency value fx_1 according to the user volume setting and volume control signal 70. In region R, due to high calculated power of the audio signal 50, any HF speaker(s) configured for lower or mid volume levels are protected by increasing the cross-over frequency fx_A following the cross-over frequency value fx_2 .

[0063] Thus, according to aspects of the invention, for a multi-way speaker system, the audio signal processing apparatus can be configured to always send a maximum amount of output signal components to the HF speaker(s) to keep the sound image as high as possible (cross-over frequency as low as possible), but limited by the maximum power (heat) and excursion (THD) handling capabilities of the HF speaker(s). At low to medium volume levels, the sound stage is high because most of the mid-band signal is reproduced from the high mounted HF speaker(s). At high volume levels, the cross-over frequency is shifted up to not overload the HF speaker(s). The amount of signal components that is sent to the HF speaker(s) is derived from a combination of a user vol-

ume setting and power estimation through frequency analysis. The sound stage height at high output volume levels is degraded at high power levels, but the power handling capability of the overall system is increased significantly.

Claims

1. An audio signal processing apparatus (10), comprising
 - a signal input section (11) through which in operation at least one audio signal (50) is received,
 - a splitting section (12) coupled to the signal input section (11) and configured to generate a first signal (61) and a second signal (62) from the received at least one audio signal (50), wherein the first signal (61) comprises signal components of a first frequency range of the at least one audio signal and the second signal (62) comprises signal components of a second frequency range of the at least one audio signal, the first frequency range comprising lower frequencies than the second frequency range and the first and second frequency ranges having a cross-over frequency (fx_A),
 - a first output section (41) coupled to the splitting section (12) and arranged to generate a first output signal (71) for at least one first loudspeaker (21A) from the first signal (61),
 - a second output section (42) coupled to the splitting section (12) and arranged to generate a second output signal (72) for at least one second loudspeaker (22A) from the second signal (62);
 - a processing section (30) coupled to the signal input section (11) and receiving a volume control signal (70) which is indicative of a user volume input and controls a volume of the first and second output signals (71, 72) depending on the user volume input,
 - wherein the processing section (30) is configured to determine a first cross-over frequency value (fx_1) according to the volume control signal (70) and to determine a second cross-over frequency value (fx_2), wherein the determination of the second cross-over frequency value (fx_2) comprises a calculation of at least one power value of signal components over at least one frequency band of the at least one audio signal (50),
 - wherein the processing section (30) is configured to determine the cross-over frequency (fx_A) from one of the first and second cross-over frequency values (fx_1 , fx_2).

2. The audio signal processing apparatus (10) according to claim 1, wherein the processing section (30) is configured to determine the cross-over frequency (fxA) from the greater one of the first and second cross-over frequency values (fx1, fx2). 5
3. The audio signal processing apparatus (10) according to claim 1 or 2, wherein the processing section (30) is configured to determine the cross-over frequency (fxA) as the first cross-over frequency value (fx1) if the first cross-over frequency value (fx1) is greater than the second cross-over frequency value (fx2), and as the second cross-over frequency value (fx2) if the second cross-over frequency value (fx2) is greater than the first cross-over frequency value (fx1). 10
4. The audio signal processing apparatus (10) according to one of claims 1 to 3, wherein the determination of the second cross-over frequency value (fx2) comprises 15
 - calculation of power values of signal components of the at least one audio signal (50) along at least one frequency band from a first frequency level of the second frequency range to a lower frequency of the second frequency range, 25
 - summing up the calculated power values from the first frequency level of the second frequency range down to the lower frequency of the second frequency range, and determining whether a sum of the summed up calculated power values reaches a power limit defined for the at least one second loudspeaker (22), and 30
 - determining a frequency value that corresponds to a calculated power value at which the defined power limit is reached as the second cross-over frequency value (fx2). 35
5. The audio signal processing apparatus (10) according to one of claims 1 to 4, wherein the determination of the second cross-over frequency value (fx2) comprises 40
 - performing an n-th octave band analysis for calculating at least one power value in a respective one of multiple n-th octave bands of the second frequency range of the at least one audio signal (50) from a first n-th octave band of the second frequency range to a lower n-th octave band of the second frequency range, 45
 - summing up the respective calculated power values of the n-th octave bands from the first n-th octave band of the second frequency range down to the lower n-th octave band of the second frequency range, and determining whether a sum of the summed up calculated power values reaches a power limit defined for the at least one 50
- second loudspeaker (22), and
 - determining a lowest one of the n-th octave bands at which the sum of the summed up calculated power values reaches the defined power limit, and determining a frequency of the lowest one of the n-th octave bands as the second cross-over frequency value (fx2).
6. The audio signal processing apparatus (10) according to one of claims 1 to 5, wherein the processing section (30) is configured to determine a first and a second cross-over frequency (fxA1, fxA2) from one of the first and second cross-over frequency values (fx1, fx2), wherein the first cross-over frequency (fxA1) is supplied as a control value to a low pass filter (121) of the splitting section (12) for generating the first signal (61) and the second cross-over frequency (fxA2) is supplied as a control value to a high pass filter (122) of the splitting section (12) for generating the second signal (62).
7. The audio signal processing apparatus (10) according to one of claims 1 to 6, further including a storing section (32) for storing a table of multiple cross-over frequency values (X, Y, Z) at multiple volume control signal values, wherein the processing section (30) is configured to determine the first cross-over frequency value (fx1) according to one of the stored cross-over frequency values (X, Y, Z).
8. A sound system (2) comprising an audio signal processing apparatus (10) according to one of claims 1 to 7 coupled to the at least one first and second loudspeakers (21A, 22A).
9. The sound system (2) according to claim 8, wherein the at least one first loudspeaker (21A) comprises at least one low frequency loudspeaker and the at least one second loudspeaker (22A) comprises at least one high frequency loudspeaker.
10. The sound system (2) according to claim 8 or 9, wherein the at least one first loudspeaker (21A) comprises at least one of the following: a center loudspeaker, a subwoofer, an ambience loudspeaker; and the at least one second loudspeaker (22A) comprises at least one tweeter loudspeaker.
11. A vehicle (1) comprising an audio signal processing apparatus (10) according to one of claims 1 to 7 coupled to the at least one first and second loudspeakers (21A, 22A).
12. The vehicle (1) according to claim 11, wherein the at least one first loudspeaker (21A) comprises at least one low frequency loudspeaker which is installed in the vehicle (1) at a first position, and the at least one second loudspeaker (22A) comprises at

least one high frequency loudspeaker which is installed in the vehicle (1) at a second position which is at greater height than the first position relative to a floor plane (3) of the vehicle.

5

13. The vehicle (1) according to claim 11 or 12, wherein the at least one second loudspeaker (22A) comprises at least one of a front loudspeaker and a door loudspeaker of the vehicle.

10

14. A signal processing method for a sound system (2), the method comprising the steps of:

- receiving at least one audio signal (50),
- generating a first signal (61) and a second signal (62) from the received at least one audio signal (50), wherein the first signal (61) comprises signal components of a first frequency range of the at least one audio signal and the second signal (62) comprises signal components of a second frequency range of the at least one audio signal, the first frequency range comprising lower frequencies than the second frequency range and the first and second frequency ranges having a cross-over frequency (fxA),
- generating a first output signal (71) for at least one first loudspeaker (21A) from the first signal (61) and a second output signal (72) for at least one second loudspeaker (22B) from the second signal (62);
- receiving a volume control signal (70) which is indicative of a user volume input and controls a volume of the first and second output signals (71, 72) depending on the user volume input,
- determining a first cross-over frequency value (fx1) according to the volume control signal (70) and determining a second cross-over frequency value (fx2), wherein the determination of the second cross-over frequency value (fx2) comprises a calculation of at least one power value of signal components over at least one frequency band of the at least one audio signal (50), and
- determining the cross-over frequency (fxA) from one of the first and second cross-over frequency values (fx1, fx2).

50

55

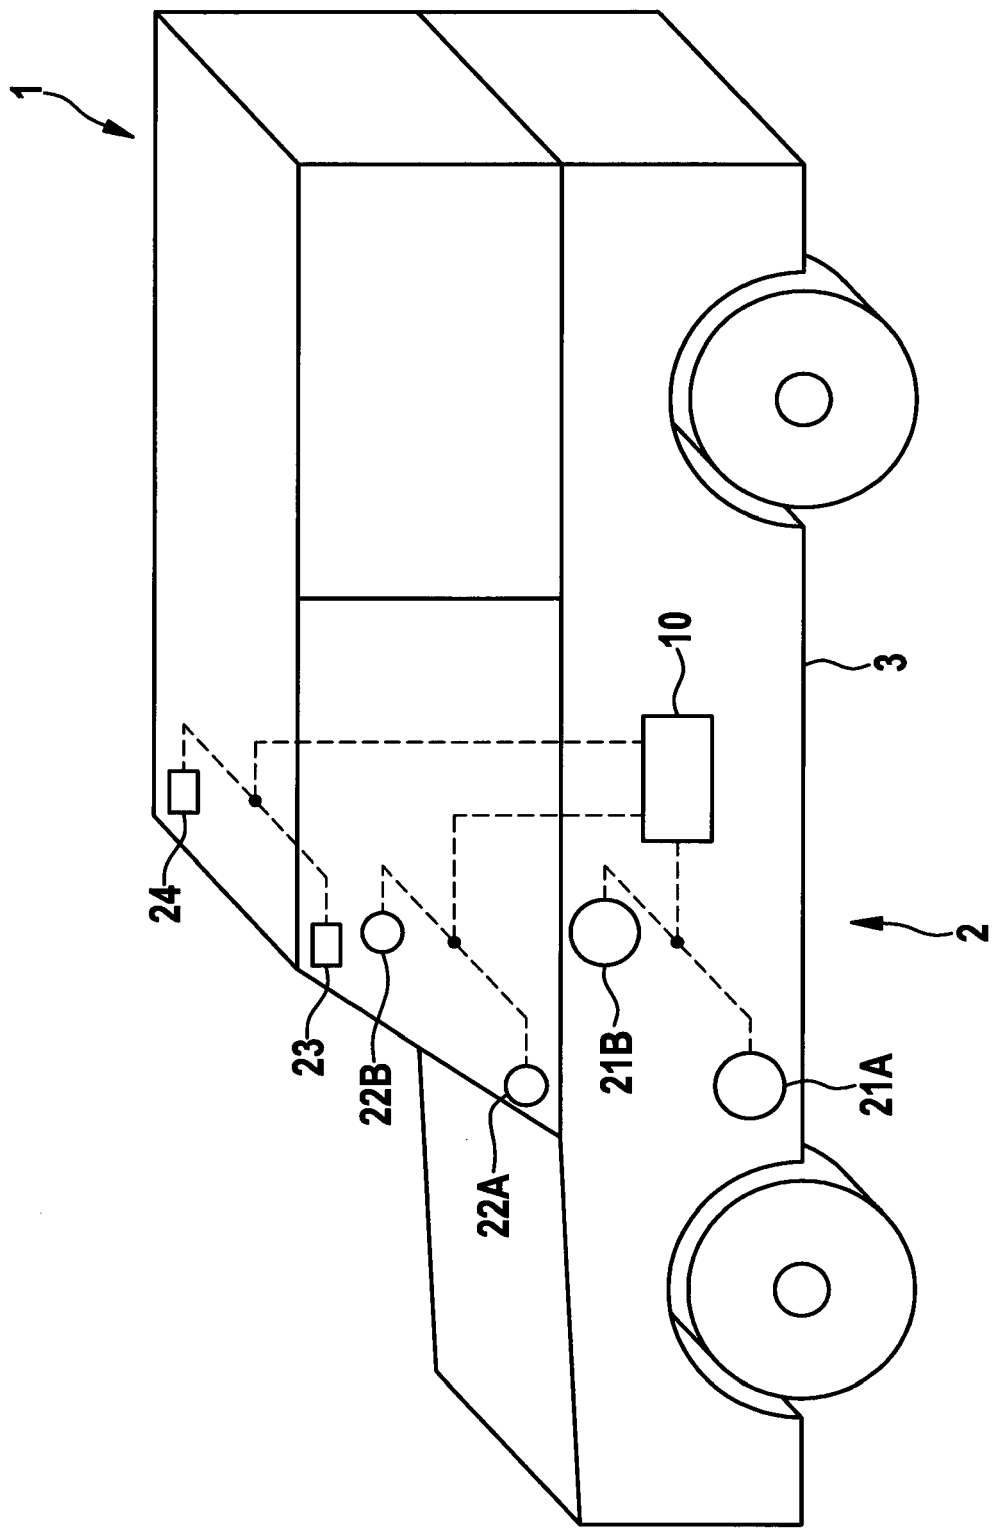


Fig. 1

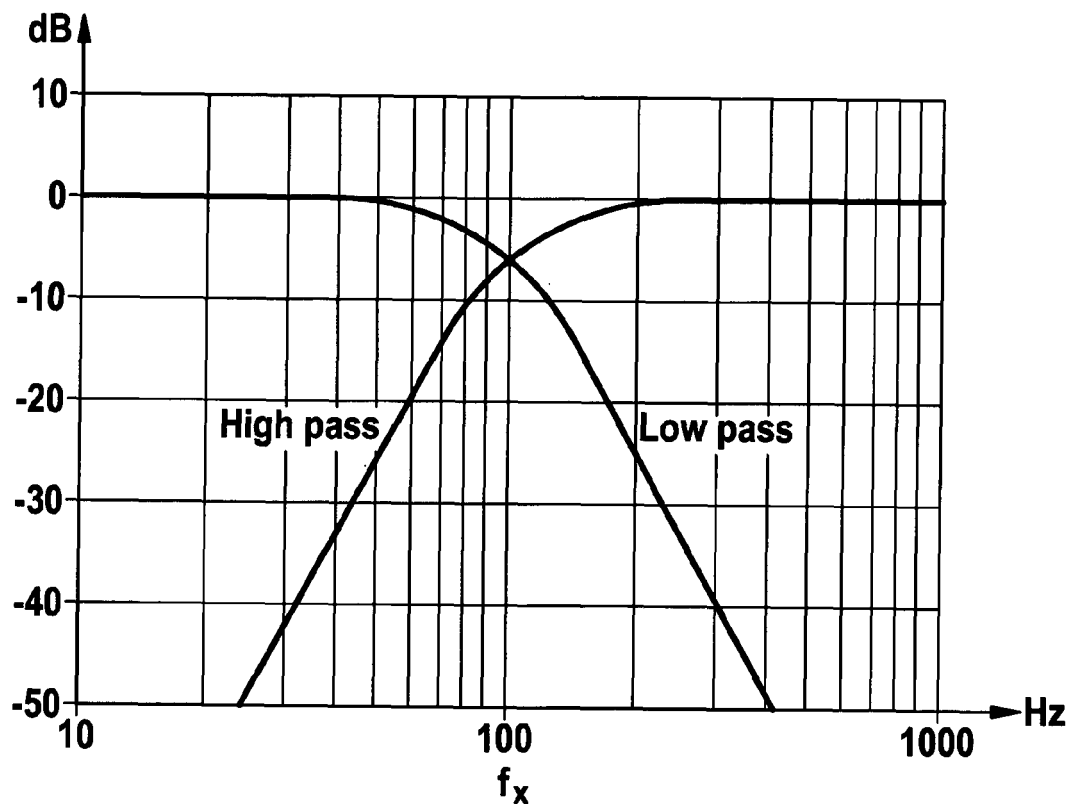
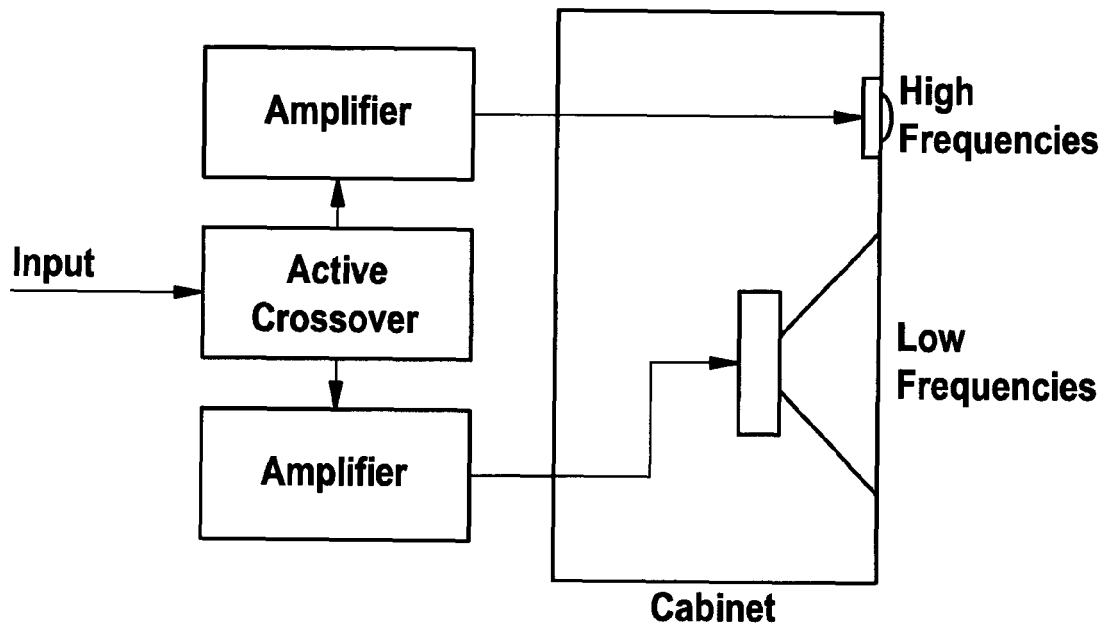


Fig. 2

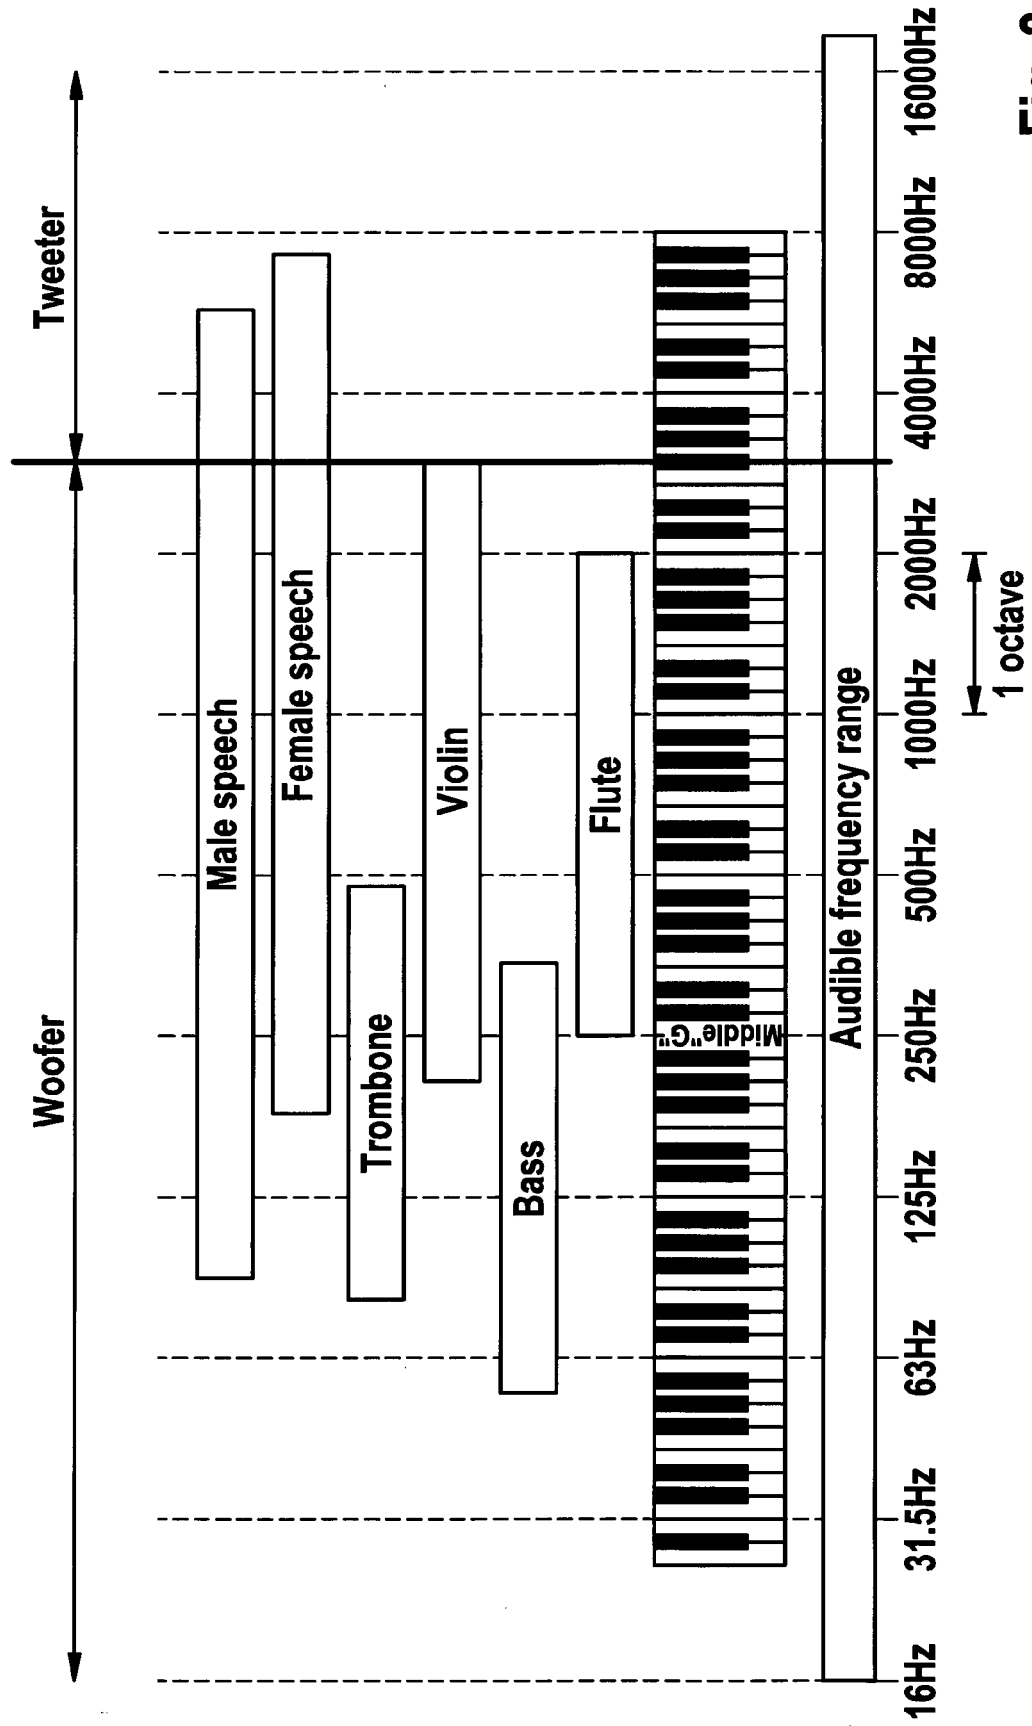


Fig. 3

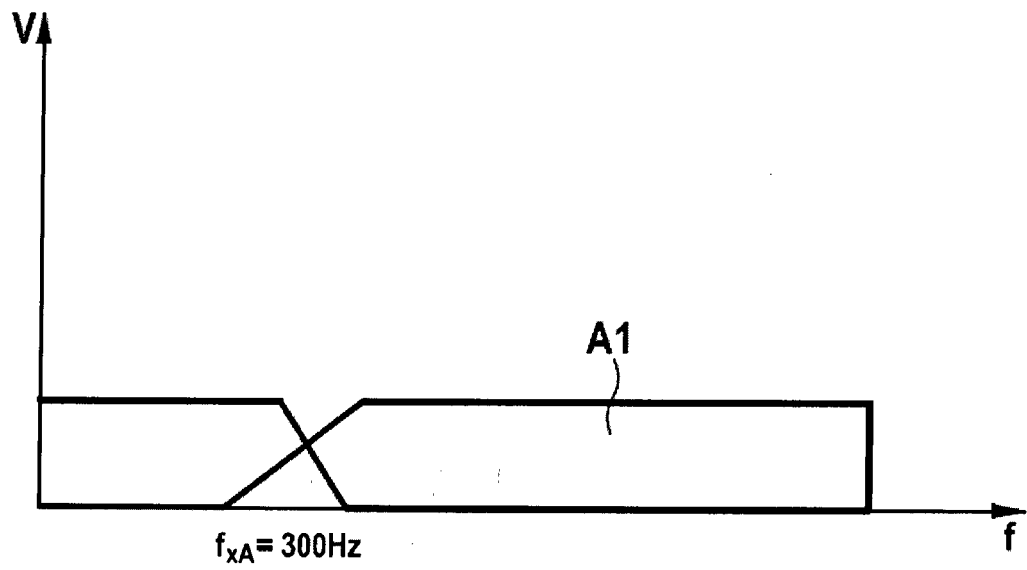


Fig. 4A

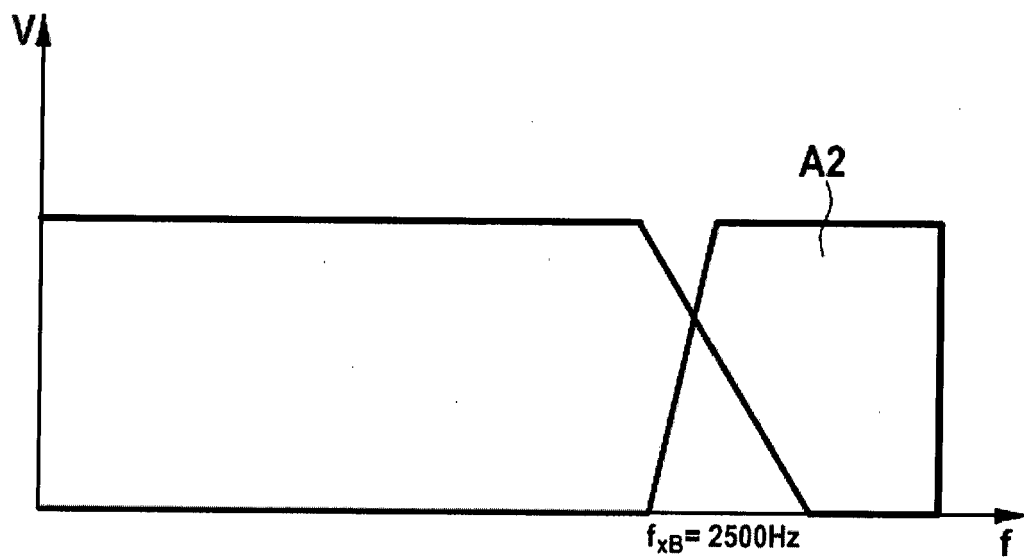


Fig. 4B

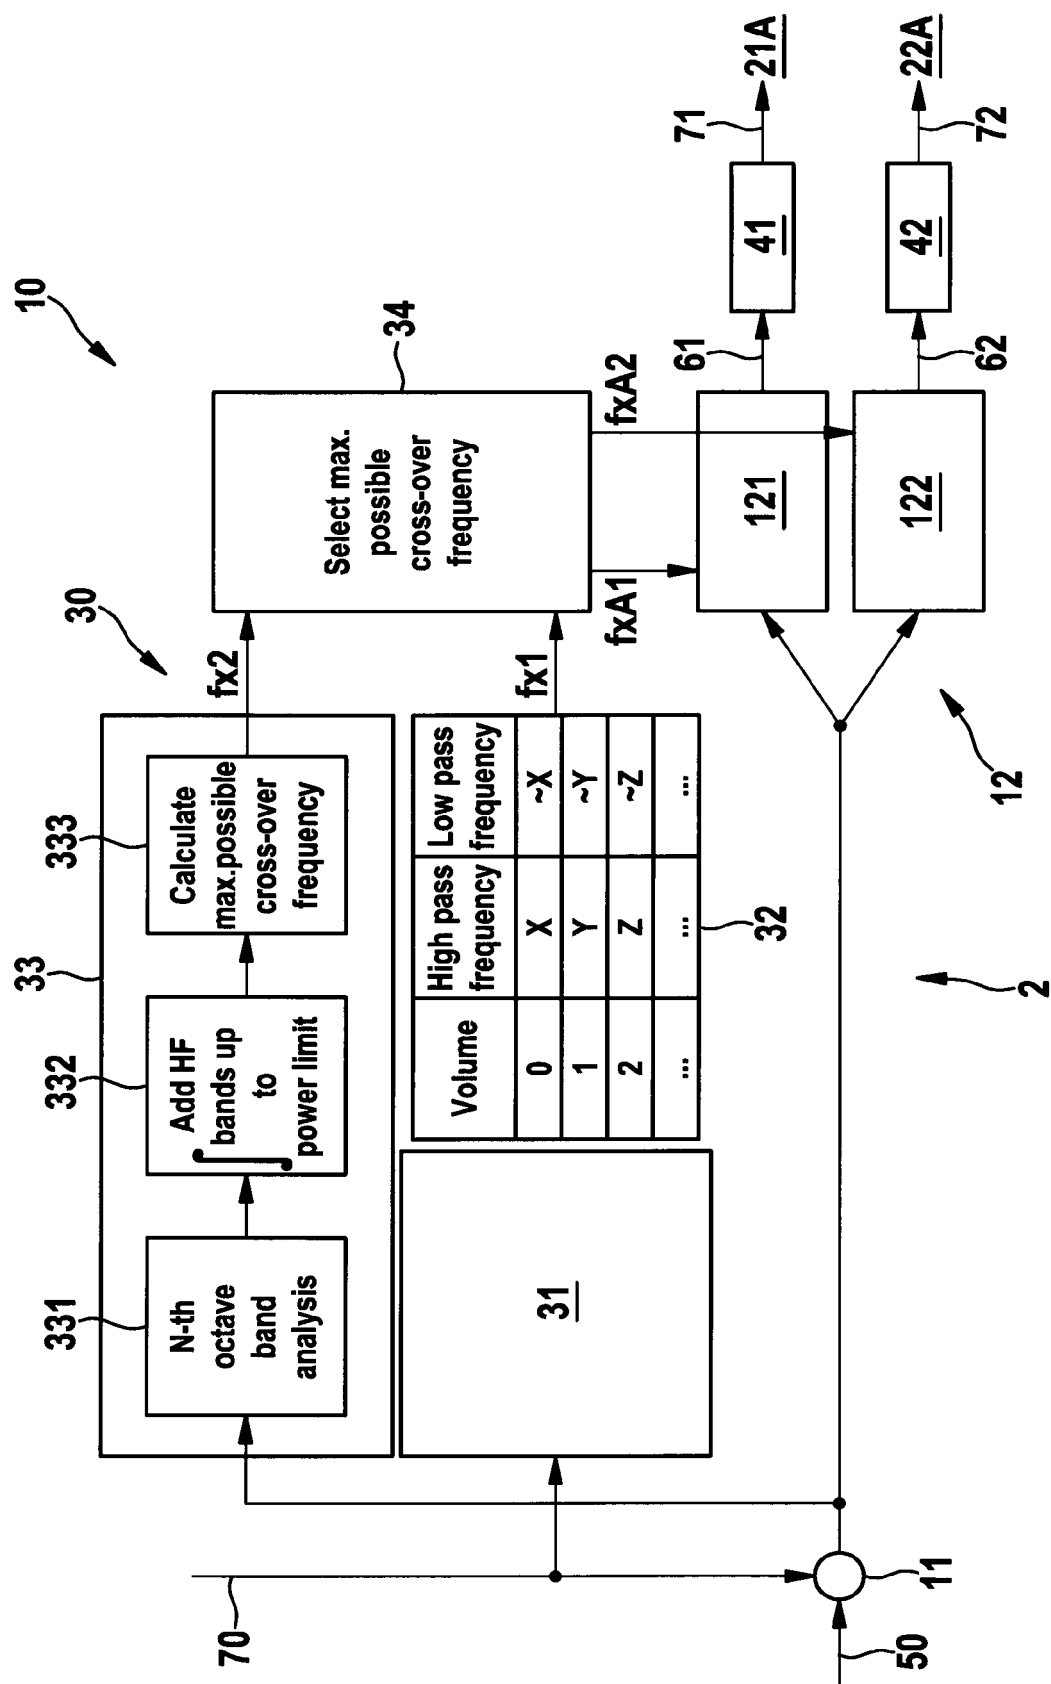


Fig. 5

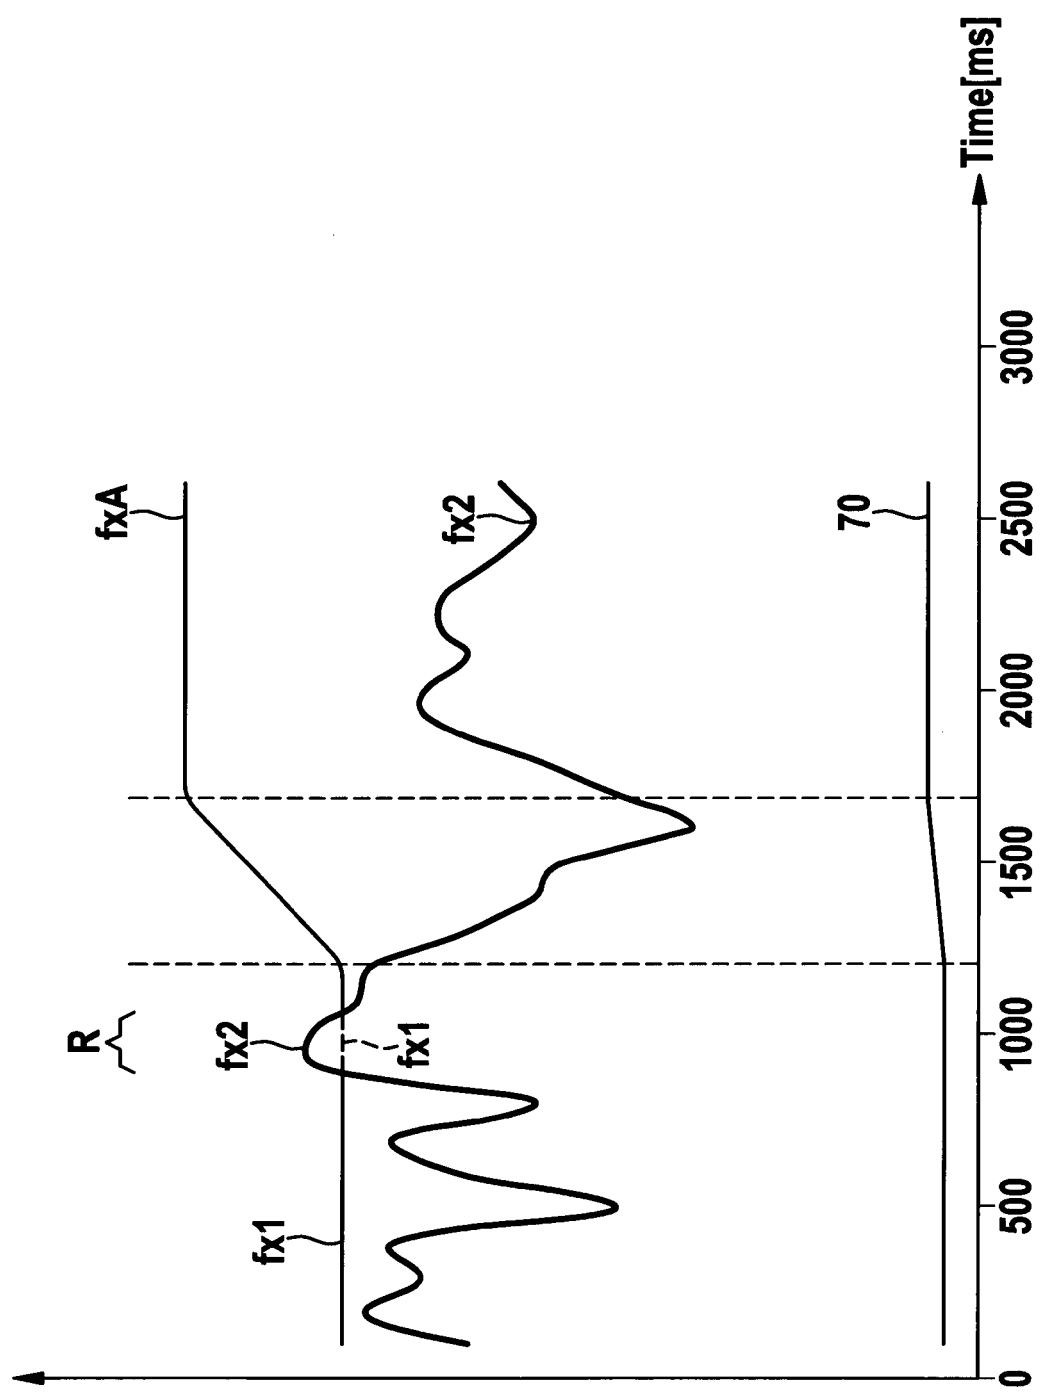


Fig. 6



EUROPEAN SEARCH REPORT

Application Number
EP 15 16 7645

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	US 2014/093096 A1 (SHEEN TIMOTHY W [US] ET AL) 3 April 2014 (2014-04-03) * abstract * * paragraphs [0074] - [0111] * * figures 8,9 *	1,8-14	INV. H04R3/00 H04R3/04 H04R3/14
Y	GB 2 181 626 A (CANON KK) 23 April 1987 (1987-04-23) * abstract * * page 2, lines 13-26 * * page 2, lines 46-50 * * page 3, line 41 - page 4, line 3 * * page 5, lines 6-9 * * figures 2,5-7 *	1,8-14	
A	US 4 583 245 A (GELOW WILLIAM J [US] ET AL) 15 April 1986 (1986-04-15) * abstract * * column 4, line 60 - column 6, line 61 * * column 11, line 24 - column 14, line 7 * * figures 1-3,5,6 *	1,14	
			TECHNICAL FIELDS SEARCHED (IPC)
			H04R
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 16 November 2015	Examiner Sucher, Ralph
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 16 7645

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-11-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014093096 A1	03-04-2014	US 2014093096 A1	03-04-2014
		US 2015163596 A1	11-06-2015
GB 2181626 A	23-04-1987	DE 3630692 A1	30-04-1987
		GB 2181626 A	23-04-1987
		US 4870690 A	26-09-1989
US 4583245 A	15-04-1986	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2010122441 A1 [0004] [0005]
- JP 8033093 A [0006]