US 20030112795A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0112795 A1**

Wilkes et al. (43) **Pub. Date: Jun. 19, 2003**

(54) **VOICE INTERNET TRANSMISSION SYSTEM**

(76) Inventors: **T. Clay Wilkes**, Austin, TX (US); **Alex Radulovic**, Round Rock, TX (US)

Correspondence Address:
MORRISS, BATEMAN, O'BRYANT & COMPAGNI
136 SOUTH MAIN STREET
SUITE 700
SALT LAKE CITY, UT 84101 (US)

(21) Appl. No.: **10/208,660**

(22) Filed: **Jul. 30, 2002**

Related U.S. Application Data

(63) Continuation of application No. 09/120,665, filed on Jul. 22, 1998, now Pat. No. 6,438,124.

Publication Classification

(51) **Int. Cl.**[7] **H04L 12/66**

(52) **U.S. Cl.** **370/352**; 370/495

(57) **ABSTRACT**

A voice Internet transmission system which enables a person to have a conversation via the Internet without having to use a computer at either end of the conversation, and without incurring long distance telephone charges regardless of the distance between those having the conversation. In a preferred embodiment, the apparatus consists of two non-Internet capable devices being enabled to connect to the Internet and either in duplex or simplex mode transmit packets of Internet formatted data comprising digitized, compressed and encrypted conversation between the devices. In other words, a person can pick up an ordinary telephone and converse with another person, regardless of the distance between them, without incurring long distance telephone charges. No special telephone is required, nor is a computer running special software. The apparatus which makes this possible is a system of Internet access nodes or VoiceEngines. These local Internet VoiceEngines provide digitized, compressed, and encrypted duplex or simplex Internet voice/sound communication services.

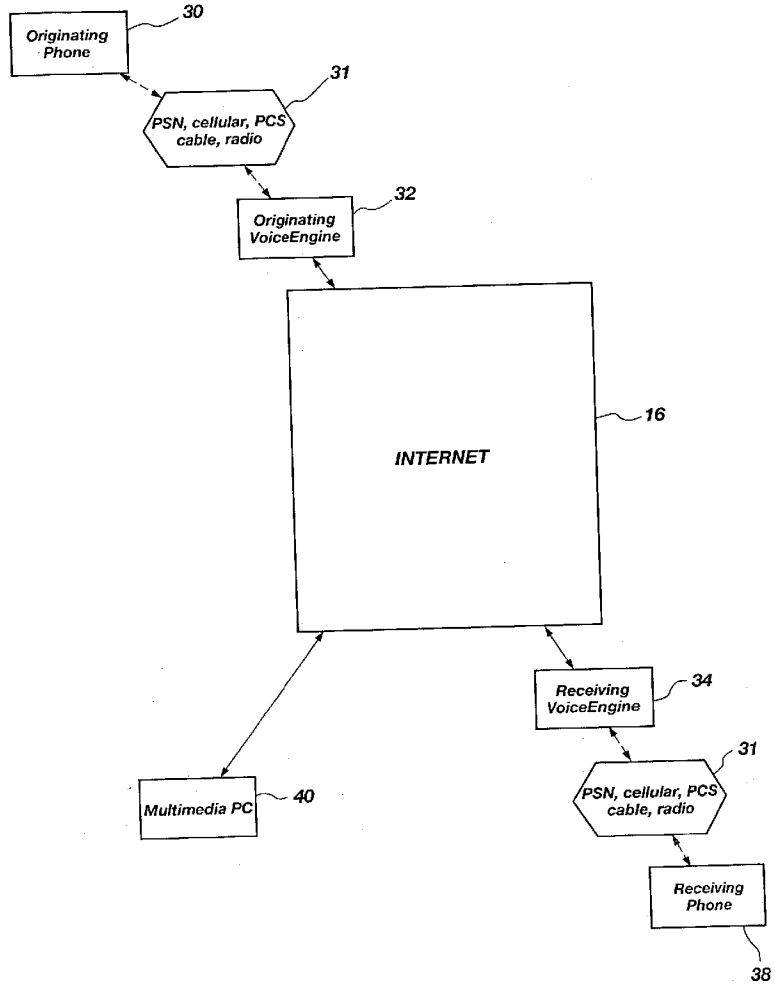

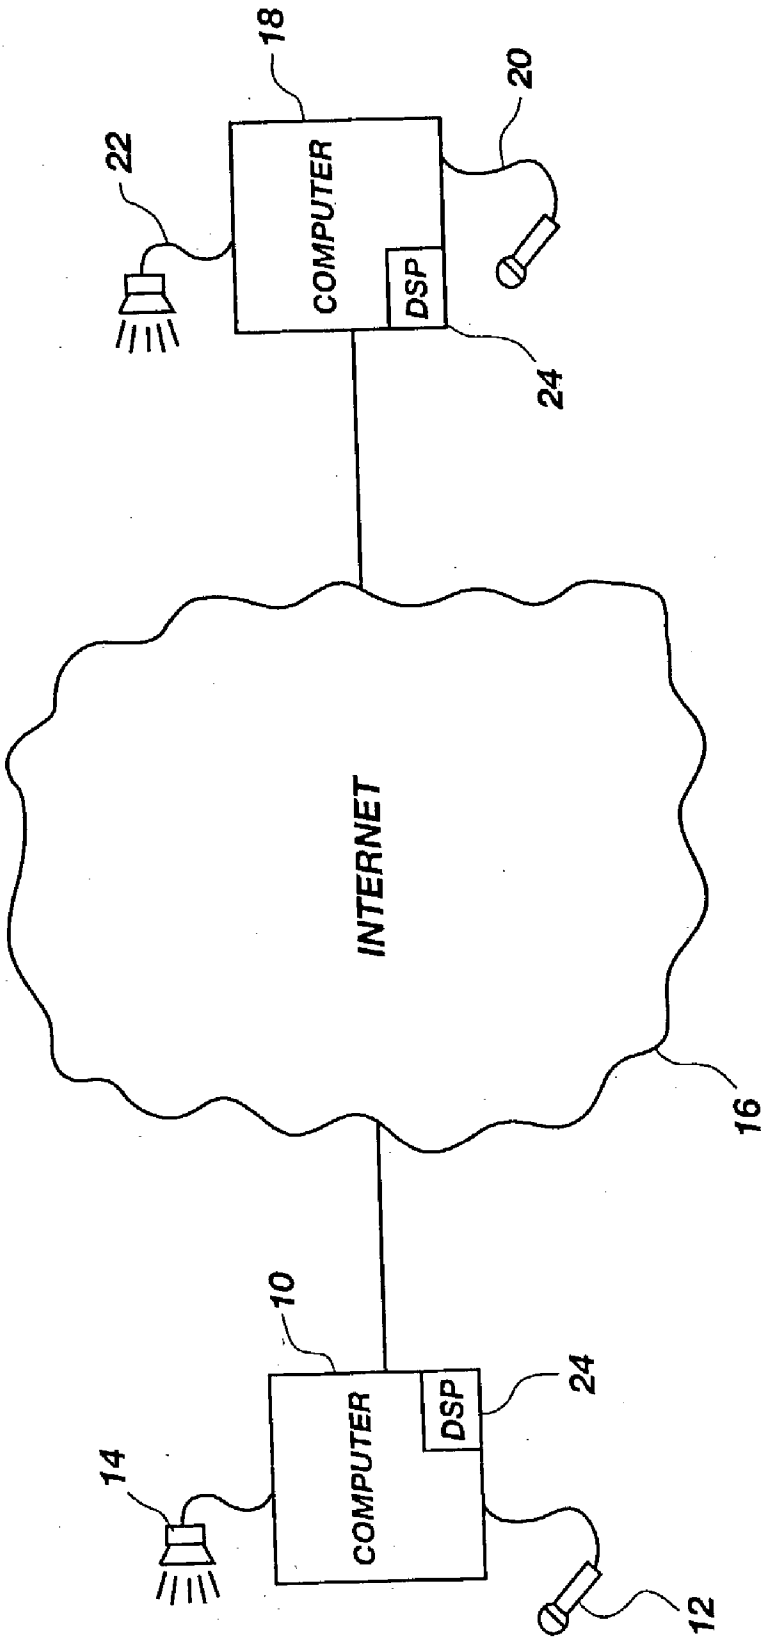

Fig. 1
(PRIOR ART)

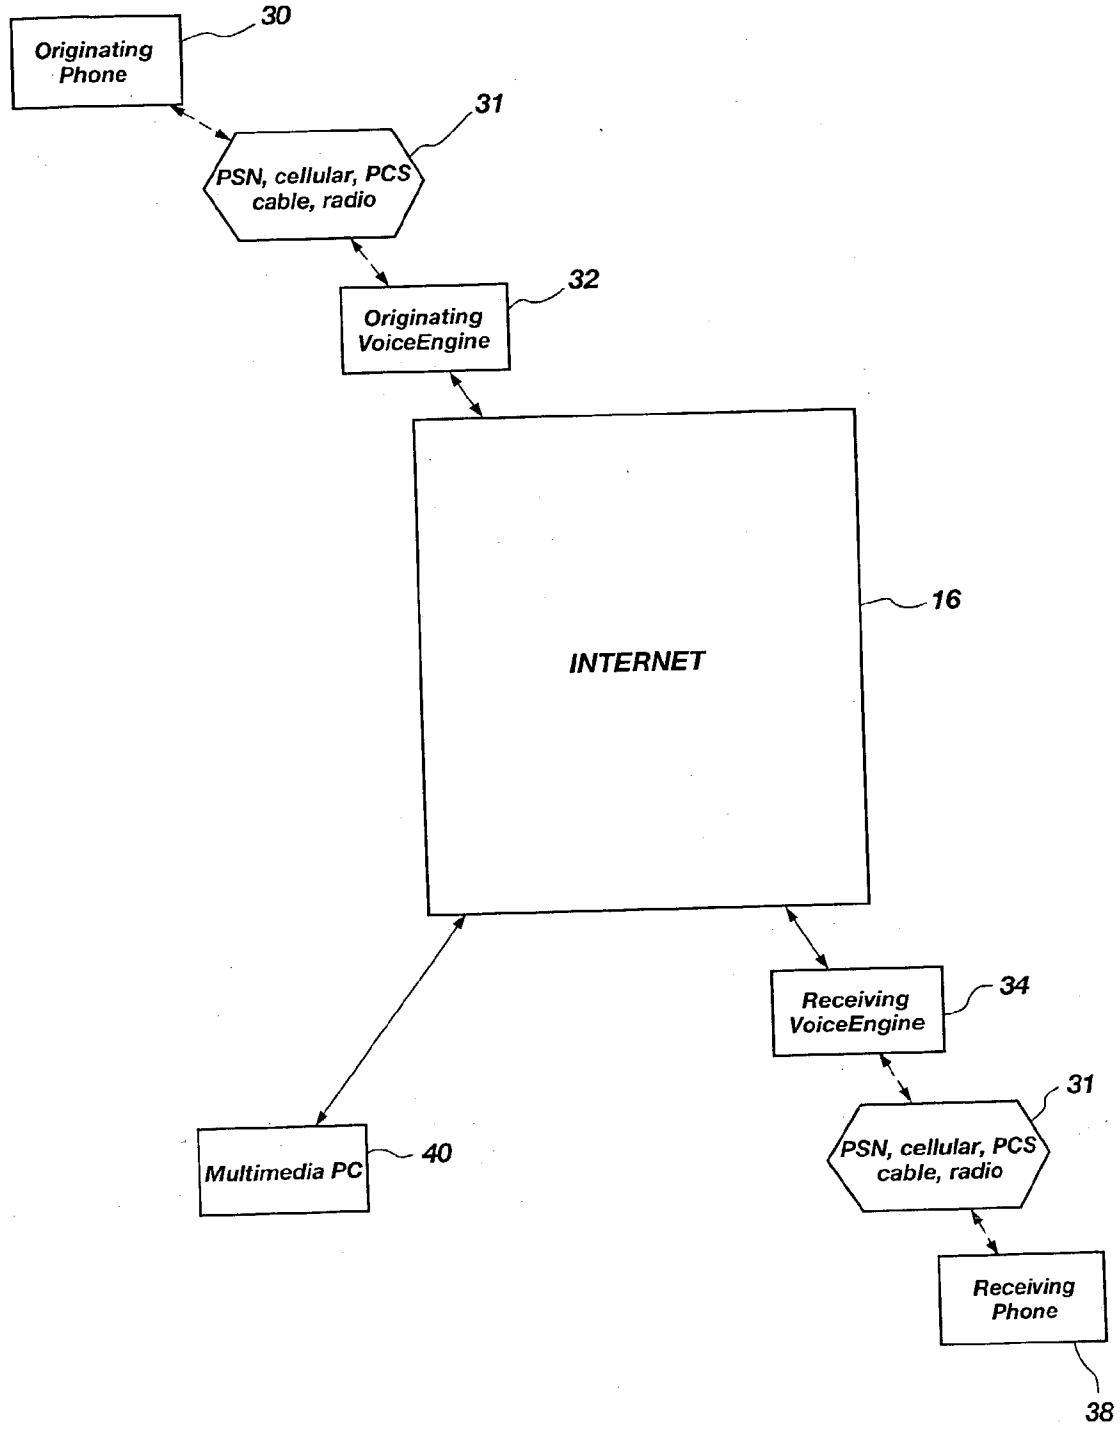
Originating Phone
30
PSN, cellular, PCS cable, radio
31
Originating VoiceEngine
32
INTERNET
16
Receiving VoiceEngine
34
PSN, cellular, PCS cable, radio
31
Multimedia PC
40
Receiving Phone
38

Fig. 2

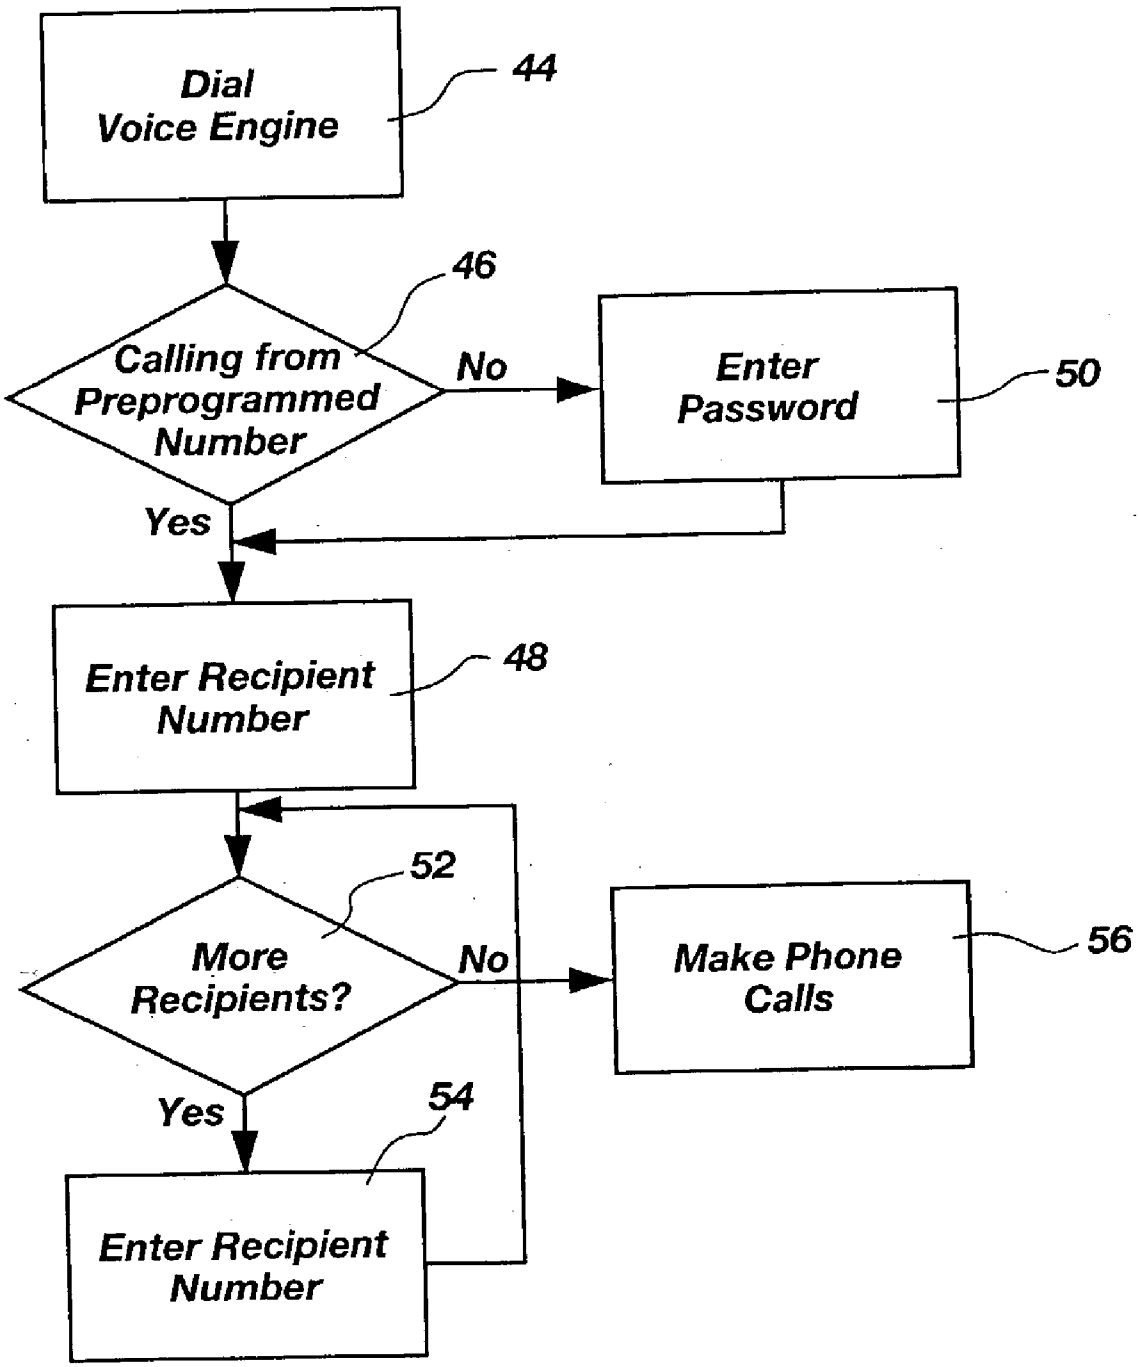
Dial
Voice Engine
44
Calling from
Preprogrammed
Number
46
No
Enter
Password
50
Yes
Enter Recipient
Number
48
More
Recipients?
52
No
Make Phone
Calls
56
Yes
54
Enter Recipient
Number

Fig. 3

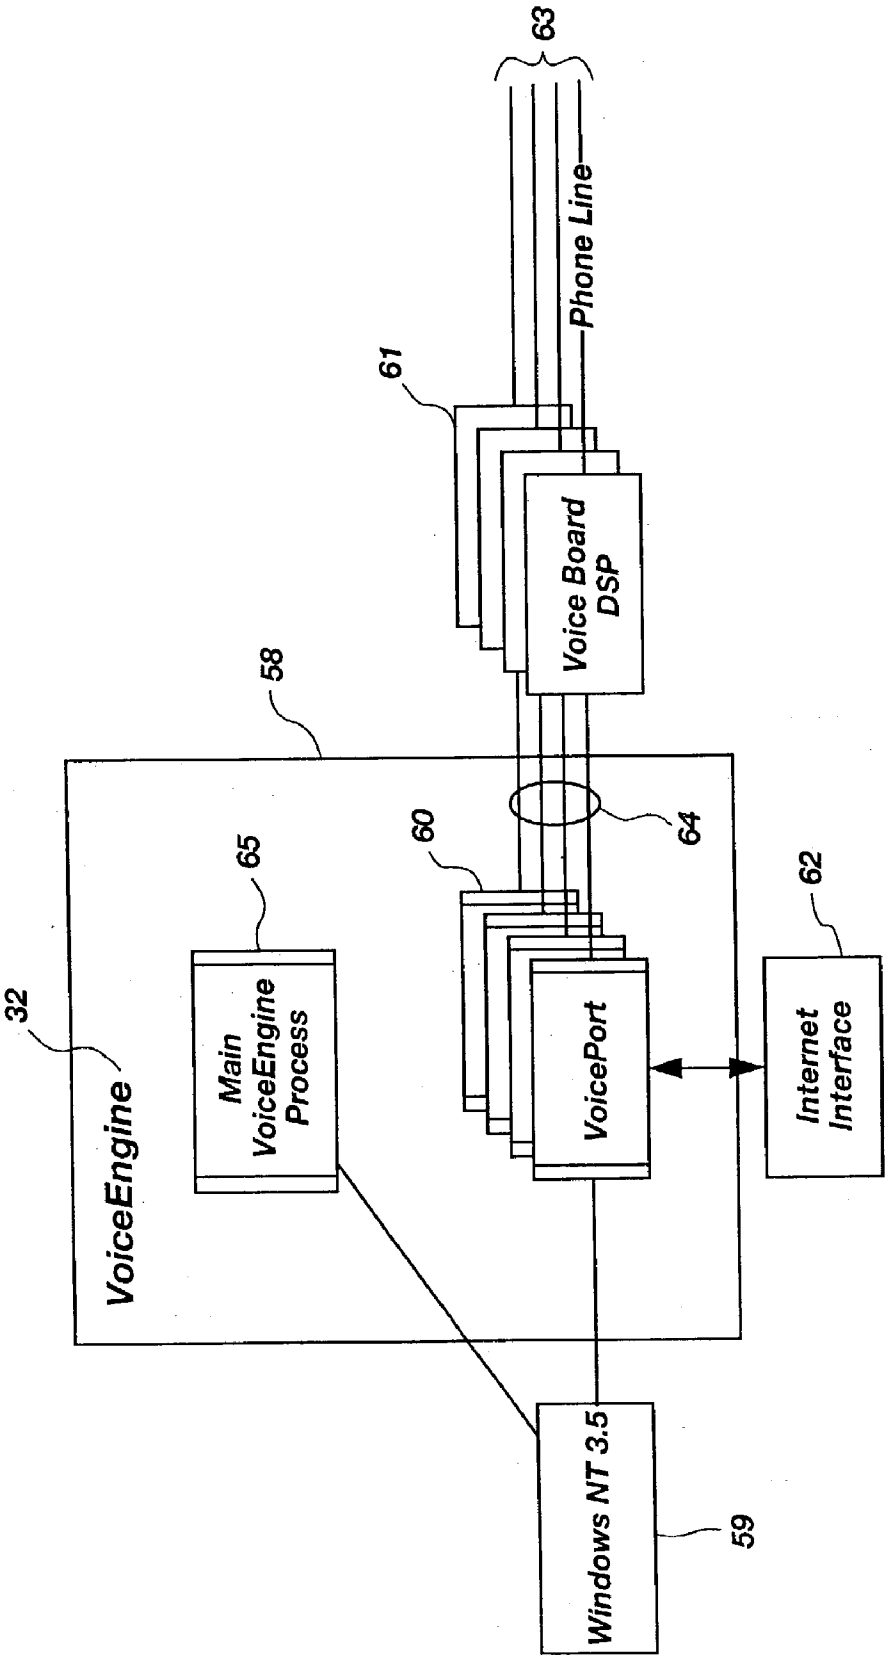
63
Phone Line
61
Voice Board DSP
58
64
60
65
62
32
Main VoiceEngine Process
VoicePort
Internet Interface
VoiceEngine
Windows NT 3.5
59

Fig. 4

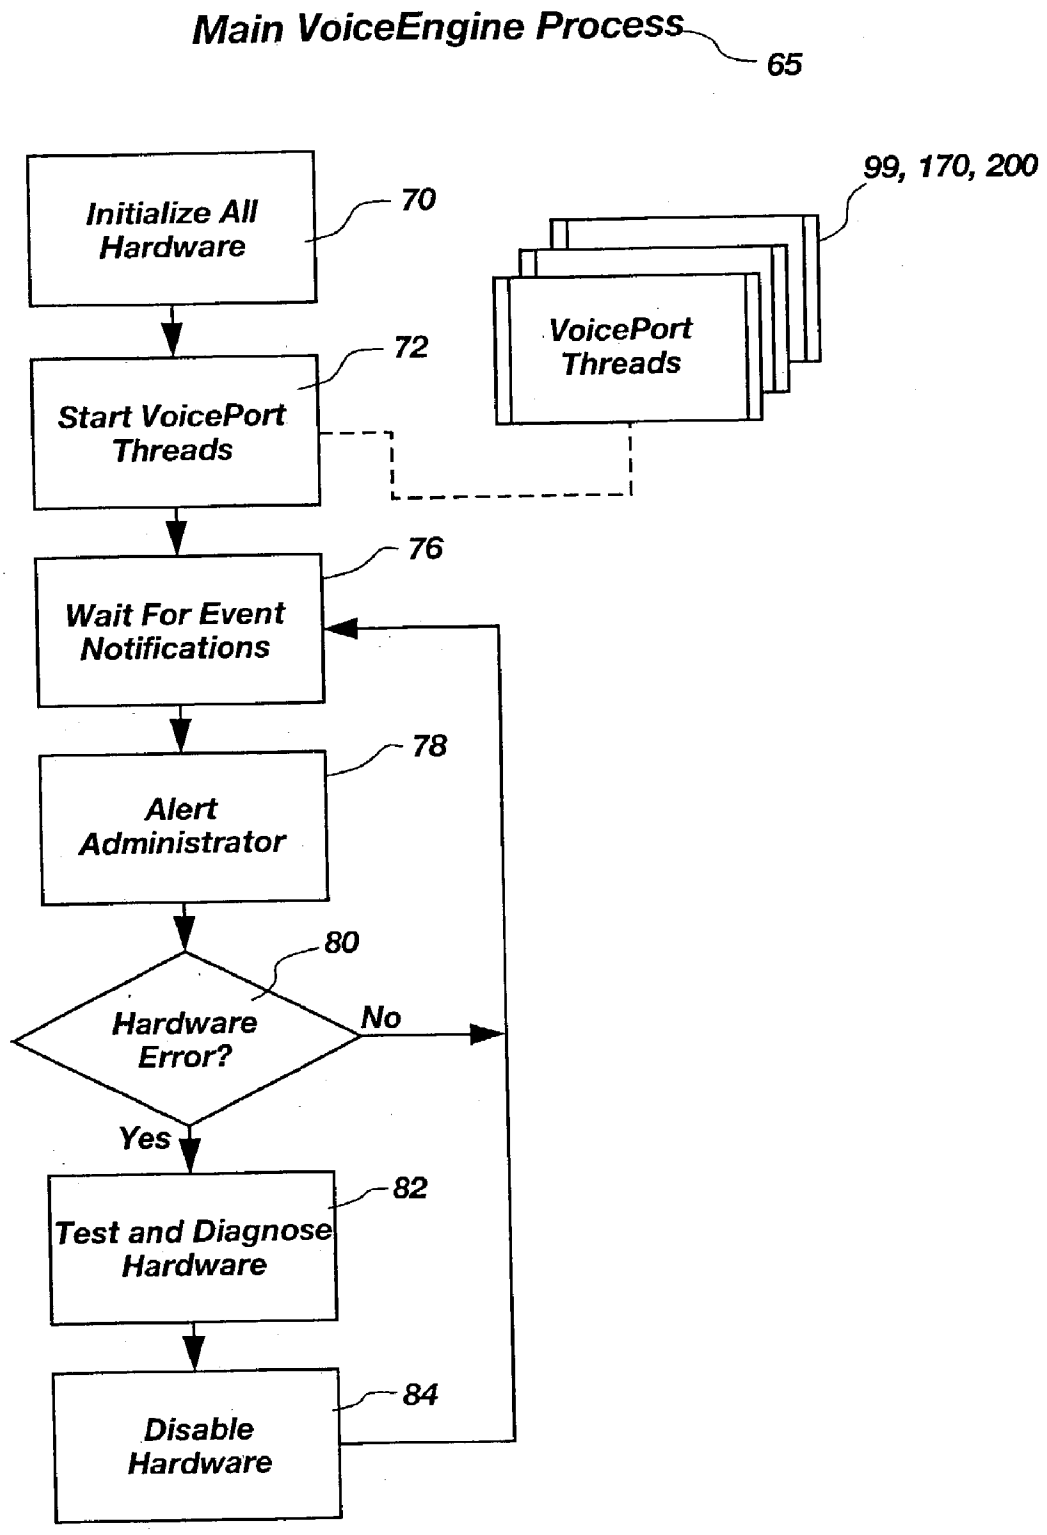
Main VoiceEngine Process
65
Initialize All Hardware
70
99, 170, 200
VoicePort Threads
Start VoicePort Threads
72
Wait For Event Notifications
76
Alert Administrator
78
Hardware Error?
80
No
Yes
Test and Diagnose Hardware
82
Disable Hardware
84

Fig. 5

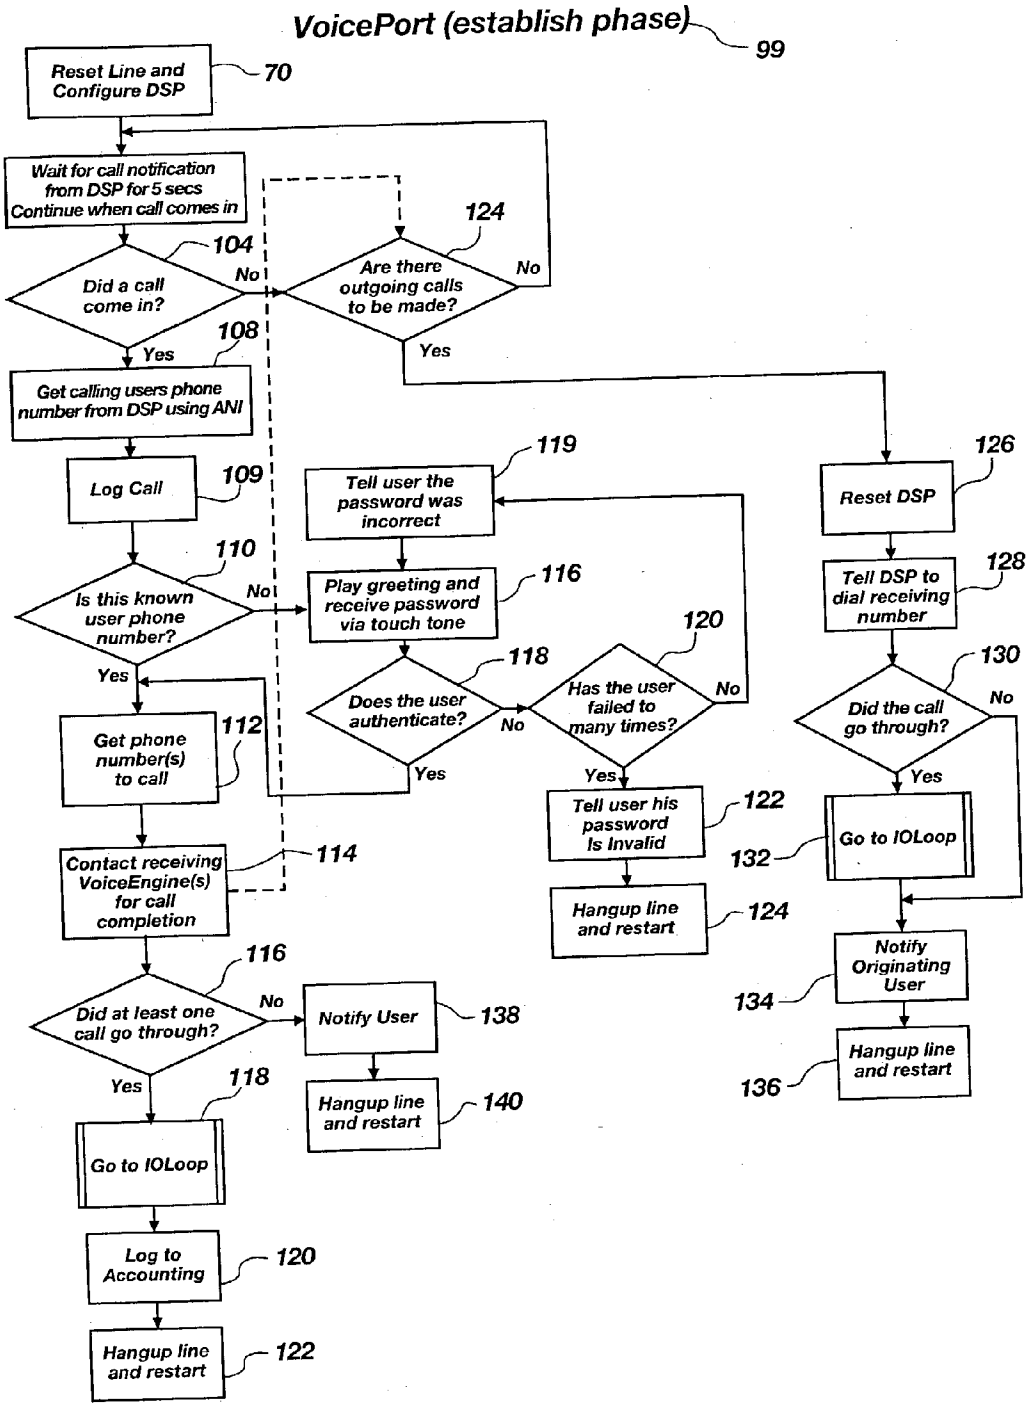
VoicePort (establish phase)
99
Reset Line and Configure DSP
70
Wait for call notification from DSP for 5 secs Continue when call comes in
Did a call come in?
104
No
Yes
Are there outgoing calls to be made?
124
No
Yes
Get calling users phone number from DSP using ANI
108
Log Call
109
Is this known user phone number?
110
No
Yes
Get phone number(s) to call
112
Contact receiving VoiceEngine(s) for call completion
114
Did at least one call go through?
116
No
Yes
Notify User
138
Hangup line and restart
140
Go to IOLoop
118
Log to Accounting
120
Hangup line and restart
122
Tell user the password was incorrect
119
Play greeting and receive password via touch tone
116
Does the user authenticate?
118
No
Yes
Has the user failed to many times?
120
No
Yes
Tell user his password Is Invalid
122
Hangup line and restart
124
Reset DSP
126
Tell DSP to dial receiving number
128
Did the call go through?
130
No
Yes
Go to IOLoop
132
Notify Originating User
134
Hangup line and restart
136

Fig. 6

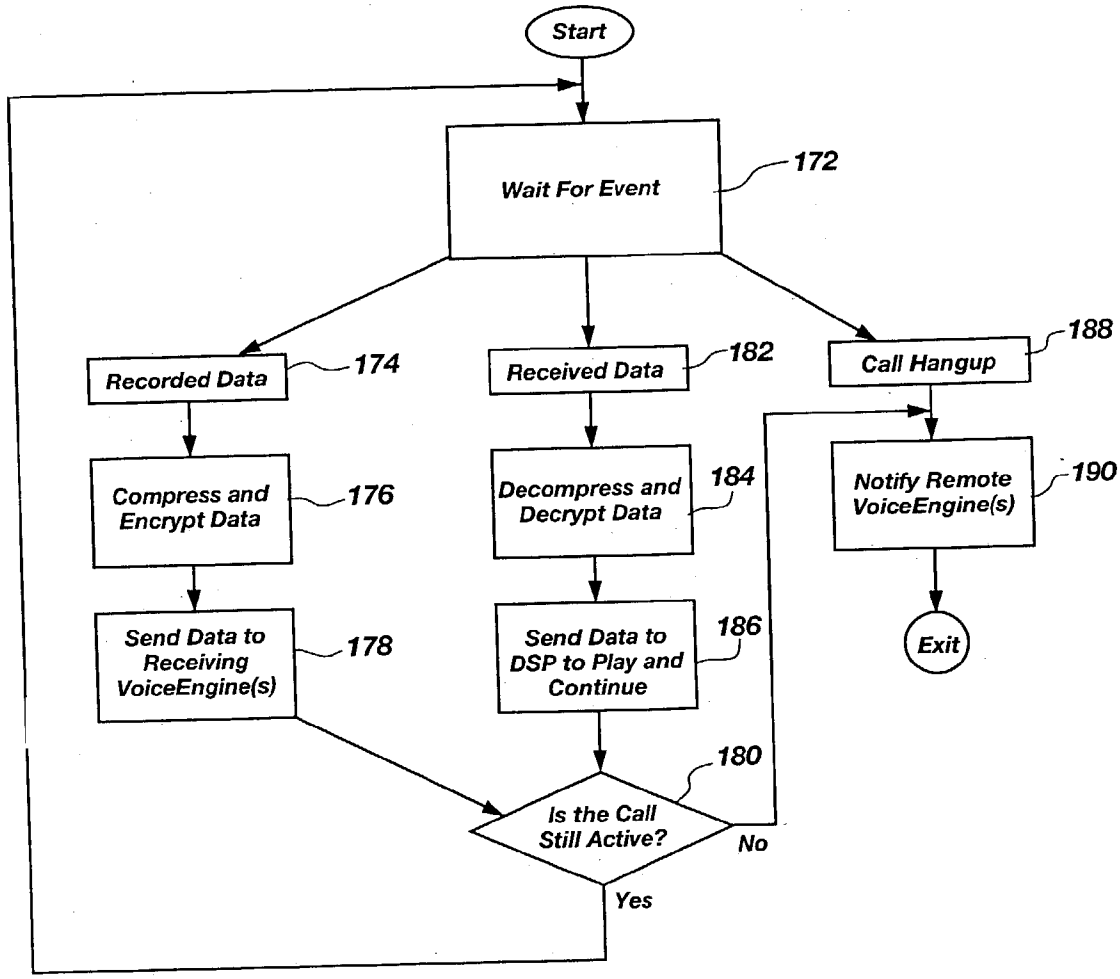
Start
Wait For Event
172
Recorded Data
174
Received Data
182
Call Hangup
188
Compress and Encrypt Data
176
Decompress and Decrypt Data
184
Notify Remote VoiceEngine(s)
190
Send Data to Receiving VoiceEngine(s)
178
Send Data to DSP to Play and Continue
186
Exit
180
Is the Call Still Active?
No
Yes

Fig. 7

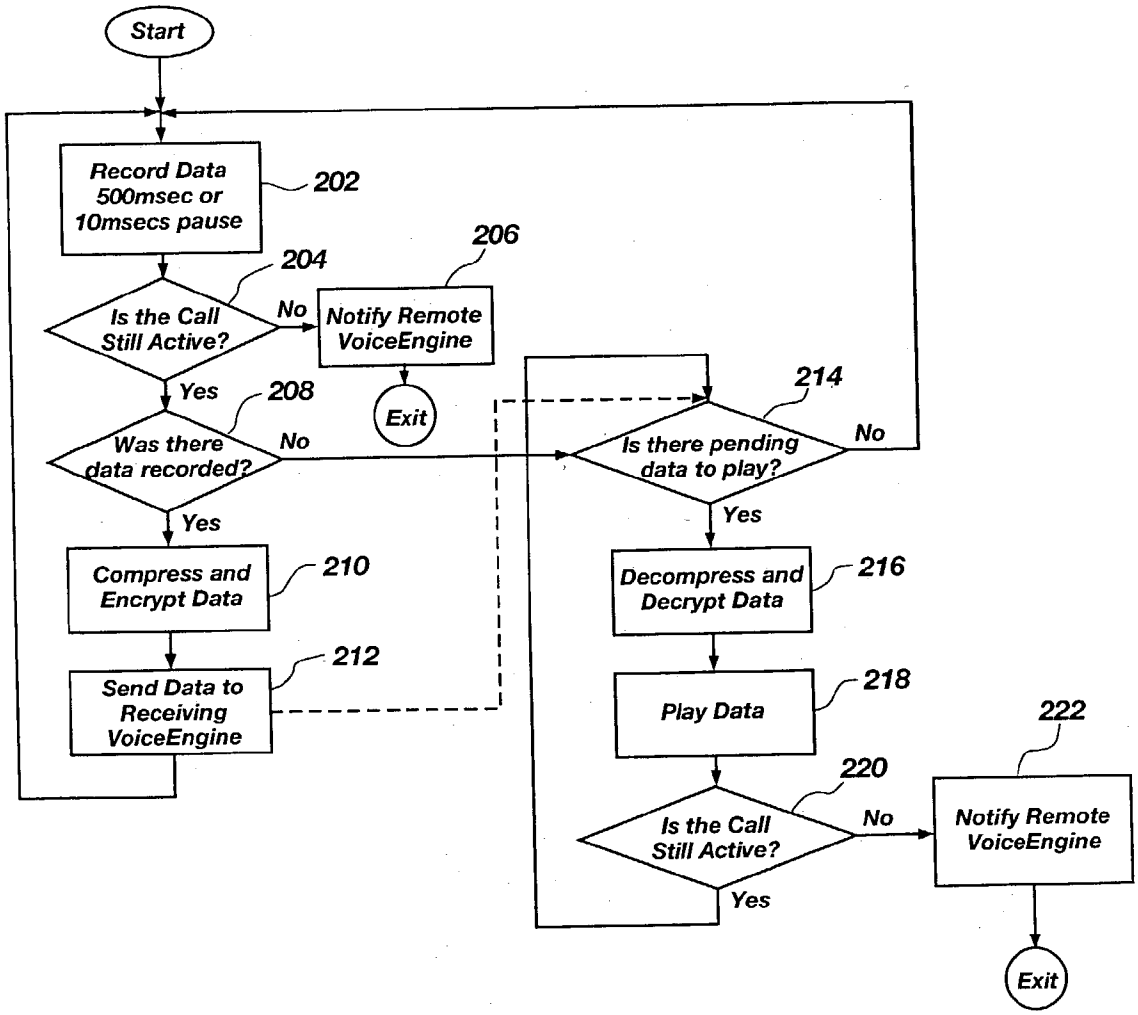
Start
Record Data 500msec or 10msecs pause
202
204
Is the Call Still Active?
No
206
Notify Remote VoiceEngine
Exit
Yes
208
Was there data recorded?
No
Yes
Compress and Encrypt Data
210
Send Data to Receiving VoiceEngine
212
214
Is there pending data to play?
No
Yes
Decompress and Decrypt Data
216
Play Data
218
220
Is the Call Still Active?
No
Yes
222
Notify Remote VoiceEngine
Exit

Fig. 8

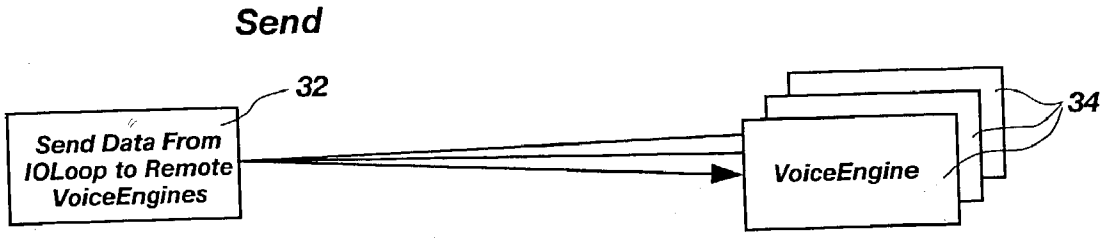
Send
32
Send Data From IOLoop to Remote VoiceEngines
34
VoiceEngine

Fig. 9A

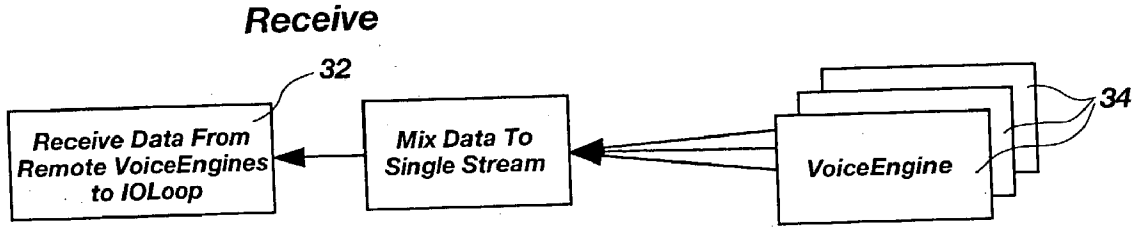
Receive
32
Receive Data From Remote VoiceEngines to IOLoop
Mix Data To Single Stream
34
VoiceEngine

Fig. 9B

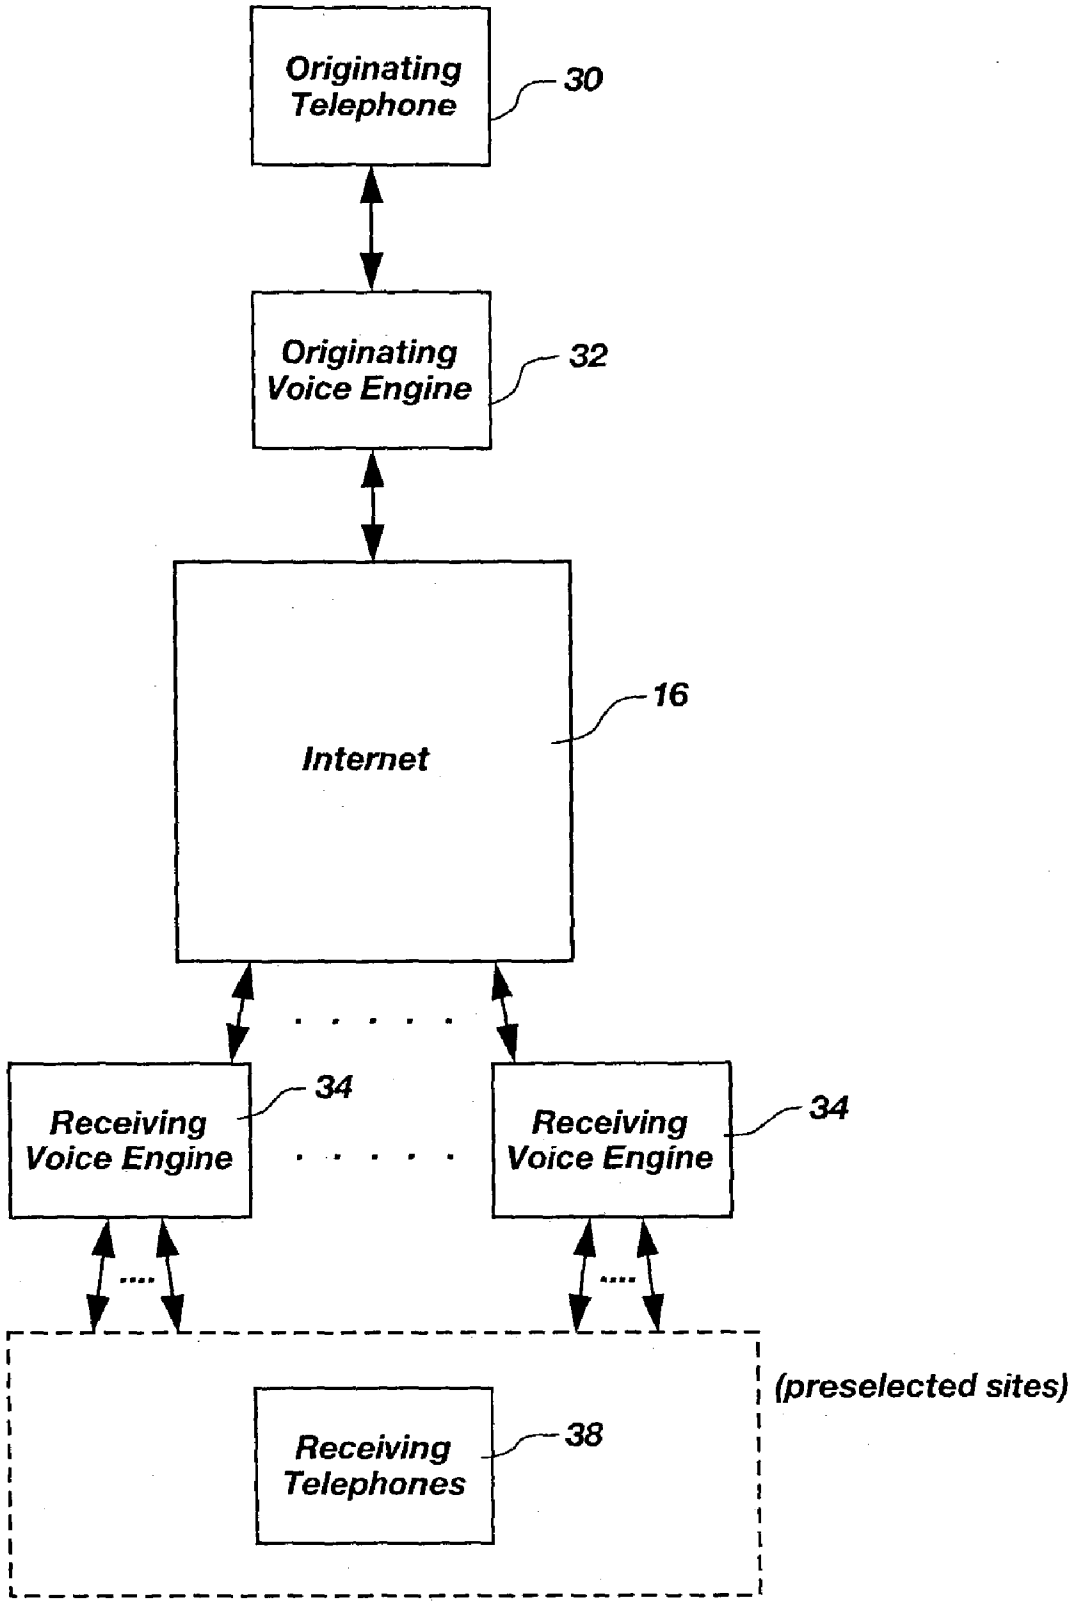
Originating Telephone
30
Originating Voice Engine
32
Internet
16
Receiving Voice Engine
34
Receiving Voice Engine
34
(preselected sites)
Receiving Telephones
38

Fig. 10

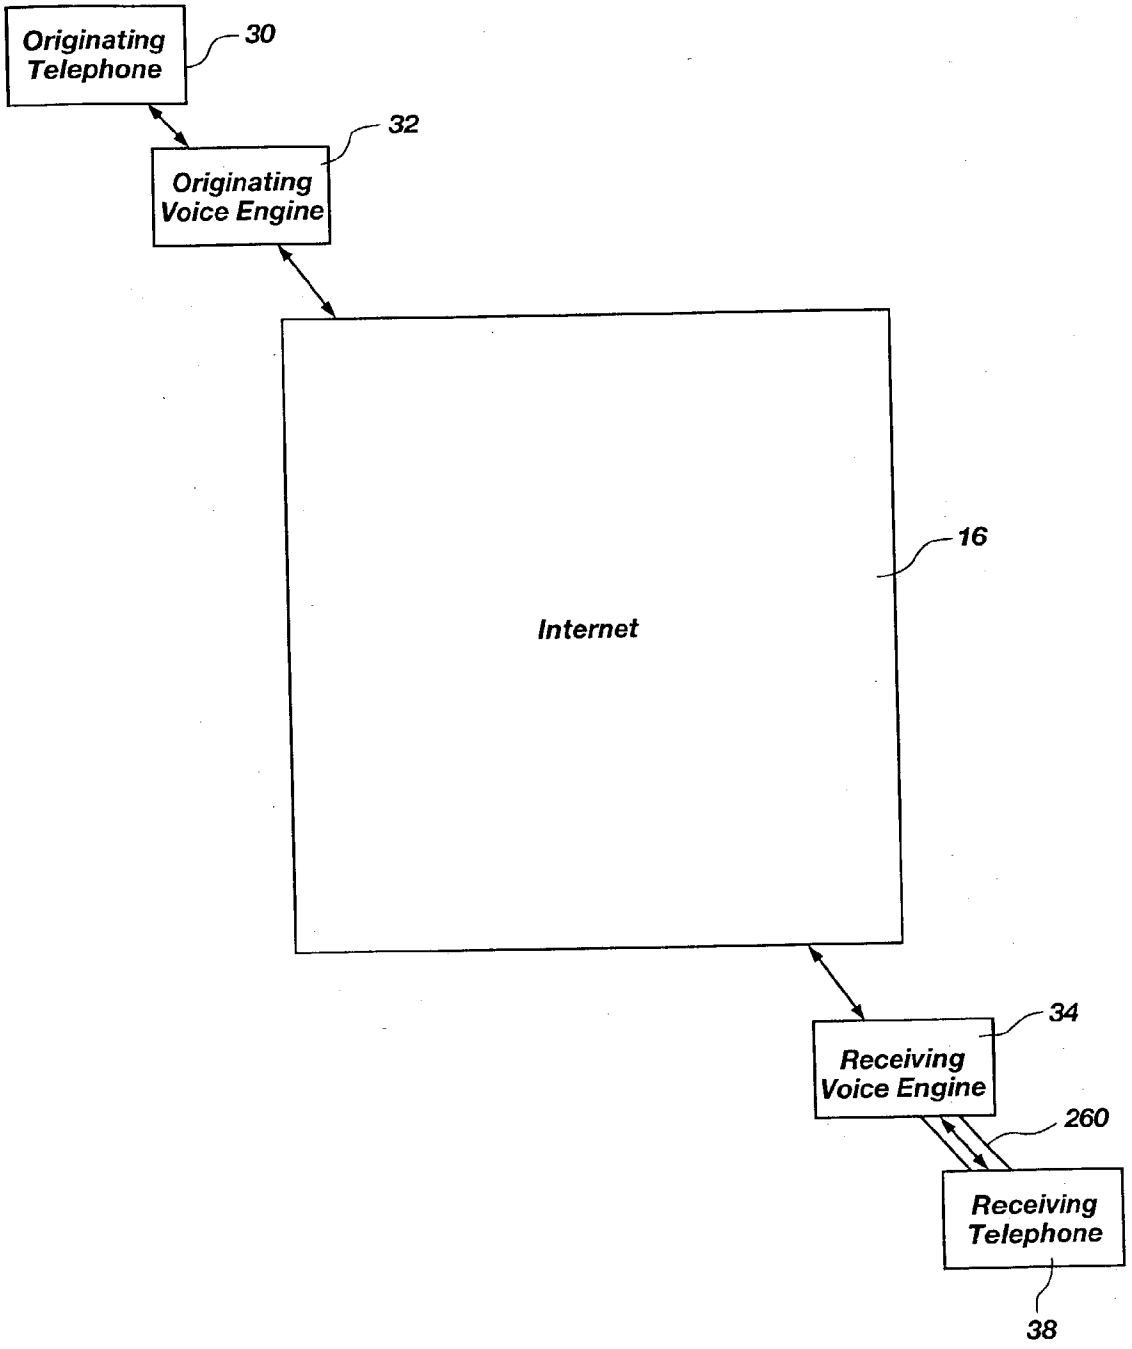
Originating Telephone
30
32
Originating Voice Engine
16
Internet
34
Receiving Voice Engine
260
Receiving Telephone
38

Fig. 11

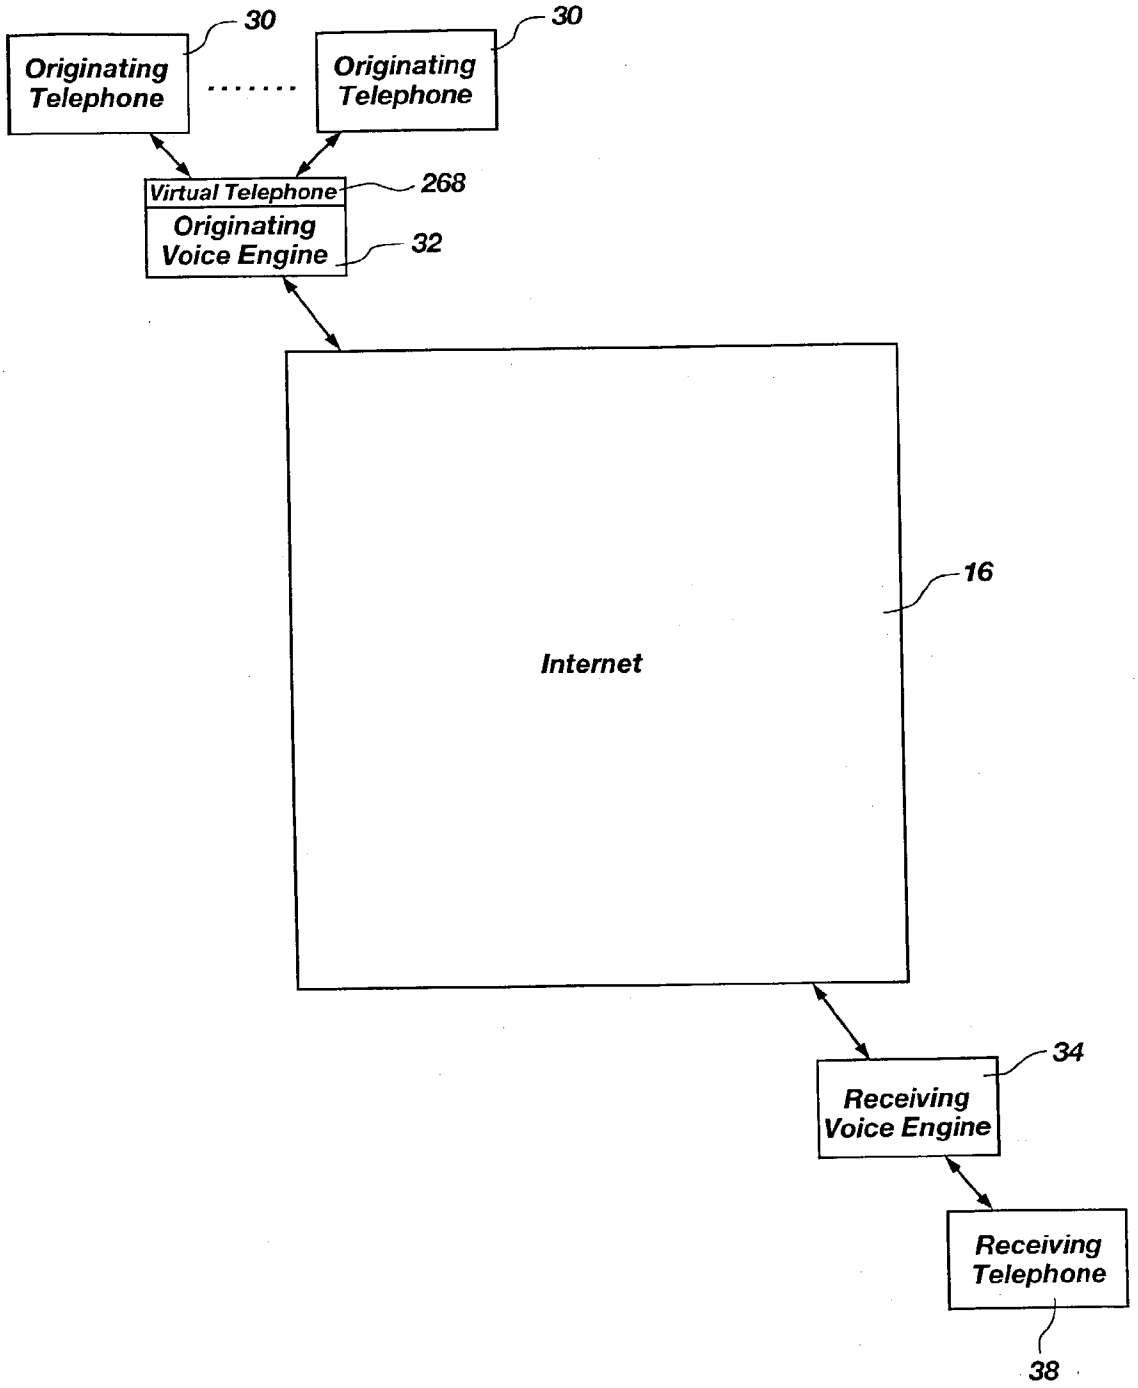
30
30
Originating Telephone
Originating Telephone
Virtual Telephone
268
Originating Voice Engine
32
16
Internet
34
Receiving Voice Engine
Receiving Telephone
38

Fig. 12

VOICE INTERNET TRANSMISSION SYSTEM

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention pertains generally to communication between devices which are not Internet-ready because they lack the ability to transmit information using the required Internet communication protocols. More specifically, this invention enables voice communication using a telephone where the voice signals are transmitted via the Internet as opposed to using conventional long-distance switched telephone network lines.

[0003] 2. State of the Art

[0004] One of the drawbacks of trying to bring diverse technologies together is that they often do not share a common hardware foundation for their structure. This is especially true in communication technologies which typically have proprietary protocols by which data is formatted for transmission, as well as an incompatible hardware structure over which the data travels. Yet it can be the case where each of the diverse technologies offers advantages over others.

[0005] Two technologies which share the common goal of providing a conduit for communication are publicly switched telephone networks (PSTNs) and the Internet. It is well known that a telephone is typically a voice communication device, but there have been successful attempts to meld facsimile and modem data communication over the same telephone lines. In contrast, the Internet until recently has been dedicated to computer data communication exclusively. Yet these technologies both have desirable characteristics (reliable and simple voice communication versus reliable and rapid computer data transmission around the world with no long-distance telephone charges) which the other technology is being crafted to crudely exploit despite the drawbacks inherent in forcing a communication technology upon a transmission medium for which it was not specifically designed.

[0006] For example, computer data transmission via a PSTN is successfully if not slowly accomplished via a computer equipped with a modem coupled to a PSTN line. Such a computer can access another computer so equipped in order to exchange information directly. The extreme disadvantage is that the caller must bear long distance telephone charges if the computers are located further apart than a local telephone call away from each other.

[0007] A slight improvement in computer data transmissions via PSTNs occurred when large services which are accessed via modem began to provide local telephone access. This was accomplished by providing local telephone numbers around many major population centers which would in turn access the service. By negotiating bulk contracts for long distance telephone rates, the service provided a way by which it could be reached without incurring the long distance telephone charges.

[0008] Despite this improvement, however, there are several drawbacks in using PSTNs to transfer computer data. For example, one of the most important limitations is that speed of data transmission is inherently inferior to dedicated computer network speeds.

[0009] As stated earlier, however, the Internet provides some unique advantages which PSTNs cannot because of the very nature of the physical transmission medium which comprises the Internet. To understand these advantages, it helps to understand some of the background behind the development of the Internet.

[0010] The military has always recognized the importance of maintaining communication lines open in all circumstances, especially in times of war. The interest of the government was so keen that it launched the DARPA project. DARPA consisted of a computer network which did not rely on any single node or cable for its existence. On the contrary, it was specifically designed to provide multiple pathways for communication to flow from a source to a destination. In this way, data can be routed along a large variety of pathways. Successful transmission of a message does not have to rely on any single pathway for the majority of the message to reach its destination. The successor to the DARPA project is now the better known and widely used Internet.

[0011] One more important distinction between a PSTN and the Internet which should be recognized is that a PSTN is typically an analog data transmission medium, whereas the Internet only transmits digital data. Despite the fact that a PSTN can in some circumstances transmit digital data, transmitting digital computer data via a PSTN typically requires translation of the data into frequency modulated analog signals. Likewise, transmitting analog voice data via the Internet requires translation of the data a digital format.

[0012] Transmitting voice data via the Internet is feasible not only because voice data can be digitized, but like PSTNs, it is a global transmission medium which substantially duplicates the PSTNs area of coverage. The motivating factor providing impetus for improving voice transmission via the Internet, however, originates with the cost structure associated with using the Internet. As is well known, a long distance telephone call incurs long distance telephone charges. In contrast, the Internet does not have long distance communication charges associated with it. This is the key to the desirability of expanding the capabilities of the Internet.

[0013] This simple cost/benefit analysis has not escaped the attention of various commercial entities trying to exploit the Internet. It is only recently, however, that commercial efforts have become viable. The reason for this viability is that the growth in the number of Internet users has grown substantially in a very short time. Our television advertising and printed media sponsors and commercial entities now often bear World Wide Web URL addresses which an Internet user can access with sophisticated but easy to use software tools. The Internet is increasingly pervasive in every-day life because the number of people using it has increased as the ability to use and access the Internet has also increased.

[0014] Providing voice transmission capabilities via the Internet has focused exclusively to date on computer users running software on a computer which has the essential accessories. These accessories are software to digitize sound and a microphone for receiving the sound to be digitized. It seems only logical that a computer serve as the conduit by which the Internet is accessed because that is the only way that the Internet is useable. The importance of that statement lies in the specific communication requirements for a device

which is to communicate with other devices via the Internet. That is to say, all devices which communicate via the Internet do so using Internet communication protocols. Internet communication protocols are methods of creating packets of digital data suitable for transmission via the Internet. A person skilled in the art will recognize that the most common Internet communication protocol is the Transport Connect Protocol/Internet Protocol, or TCP/IP. In essence, a device which communicates via the Internet is a TCP/IP capable device.

[0015] In light of this background, it would be an advantage over the state of the art to be able to provide a method and apparatus for transmitting voice data via the Internet without having to have a computer which is TCP/IP capable. That is to say, it would be an advantage to talk to another person who is normally a long distance telephone call away without incurring long distance telephone charges and without requiring a computer at either end of the transmission.

OBJECTS AND SUMMARY OF THE INVENTION

[0016] It is an object of the present invention to provide a method and apparatus for transmitting digitized sound between devices via the Internet even the devices are not capable of digitizing sound or transmitting the sound using the appropriate Internet communication protocols.

[0017] It is another object of the invention to provide a method and apparatus for transmitting digitized sound between devices, either of which is not capable of digitizing sound or transmitting the sound using the appropriate Internet communication protocols.

[0018] Still another object of the present invention is to provide a method and apparatus for talking via the Internet over a distance which would normally incur long distance telephone charges.

[0019] A further object of the invention is to avoid the complexity of present voice Internet transmissions system which require the use of a computer and specialized software.

[0020] Yet another object of the present invention is to provide a method and apparatus for conversing long distances which is available to anyone with a telephone.

[0021] Still yet another object is to provide the method and apparatus at a reduced cost as compared to present long distance telephone rates for a conversation between parties.

[0022] Another object of the method and apparatus is to create a system whereby the limitations of computer implemented voice Internet transmissions is avoided, such as reduced sound quality.

[0023] These and other objects of the present invention are provided in a voice Internet transmission system which enables a person to have a conversation via the Internet without having to use a computer at either end of the conversation, and without incurring long distance telephone charges regardless of the distance between those having the conversation. Worded in its broadest terms, the apparatus consists of two non-TCP/IP devices being enabled to connect to the Internet and bi-directionally transmit packets of TCP/IP data comprising digitized conversation between the devices. In other words, a person can pick up an ordinary telephone and converse with another person, regardless of the distance between them, without incurring long distance telephone charges. No special telephone is required, nor a computer running special software. The apparatus which makes this possible is a system of Internet access nodes or engines. These local Internet access engines provide digitizing and bi-directional Internet communication services.

[0024] Preferably, a user dials the telephone number of an Internet access engine which is local to the user. If not local, the user dials an Internet access engine which incurs the smallest long distance telephone charge. After connecting to the engine, the user then inputs the destination telephone number as if dialing direct. The local Internet access engine locates and then communicates with a second Internet access engine which is local to the destination telephone number, or locates an engine which will incur the smallest long distance telephone charges when completing the call. This second Internet access engine dials the destination telephone number, and a conversation can commence. The voices are digitized and transmitted via the Internet. This method and apparatus avoids any complexity for the user. Furthermore, it substantially increases the number of users which can take advantage of the present invention. Instead of limiting voice communication to those who have computers with microphones, anyone with a telephone can now avoid long distance telephone charges.

[0025] These and other objects, features, advantages and alternative aspects of the present invention will become apparent to those skilled in the art from a consideration of the following detailed description taken in combination with the accompanying drawings.

DESCRIPTION OF THE DRAWINGS

[0026] **FIG. 1** is a block diagram of the components of a state of the art voice Internet transmission system.

[0027] **FIG. 2** is a block diagram of the apparatus arranged in accordance with the principles of the present invention.

[0028] **FIG. 3** is a flowchart illustrating the process of sending a voice transmission according to a preferred embodiment of the present invention.

[0029] **FIG. 4** is a block diagram of the components of a VoiceEngine constructed in accordance with the principles of the present invention.

[0030] **FIG. 5** is a flowchart of the Main VoiceEngine process.

[0031] **FIG. 6** is a flowchart of the VoicePort establish phase process.

[0032] **FIG. 7** is a flowchart of the VoicePort (I/O Duplex) send and receive process.

[0033] **FIG. 8** is a flowchart of the VoicePort (I/O Simplex) send and receive process.

[0034] **FIG. 9A** is a block diagram of the components where the VoicePort acts as a multiplexer for simultaneously sending a signal to a plurality of VoiceEngines from a single VoiceEngine.

[0035] **FIG. 9B** is a block diagram of the components where the VoicePort acts as a multiplexer for simultaneously receiving a signal from a plurality of VoiceEngines at a single VoiceEngine.

[0036] **FIG. 10** is a flowchart of the Call Conferencing service provided by the present invention.

[0037] **FIG. 11** is a flowchart of the Long Distance Delivery Service provided by the present invention.

[0038] **FIG. 12** is a flowchart of the Virtual Telephone service provided by the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0039] Reference will now be made to the drawings in which the various elements of the present invention will be given numerical designations and in which the invention will be discussed so as to enable one skilled in the art to make and use the invention.

[0040] When describing the present state of the art, it invariably involves a user running software on a personal computer which is connected to the Internet. As shown in **FIG. 1**, the state of the art comprises a computer **10** having a microphone **12** and speaker **14**. The computer **10** is typically connected to the Internet **16** via a local access provider (not shown). The other party to the conversation must have a similar computer system **18** also having a microphone **20** and speaker **22**, and coupled to the Internet through its Internet provider (not shown). These computers **10**, **18** come equipped to communicate over the Internet using specification communication protocols designed for Internet use. That is, they communicate via the Internet by creating small packets of digital information. These packets are transmitted to a destination where the packets are integrated into cohesive data identical to the original data before being split into packets.

[0041] Internal to the computers **10**, **18** is a digital signal processor **24** (DSP) for translating analog voice data into digital data, and vice versa. The DSP **24** is implemented in software because a general purpose computer is being used to run the program. Therefore, no specialized hardware to increase the throughput for the process is implemented.

[0042] There are several significant drawbacks which presently plague the state of the art and prevent more ubiquitous usage of the Internet as a telephone transmission medium. For example, the state of the art requires planning ahead of time. This is because present systems such as the one illustrated in **FIG. 1** do not allow a phone call to any other device except another computer. Therefore, the person you want to call must not only have the same telephone software running on a computer, but must also call into the Internet at the same time in order to complete the connection. Therefore, the system cannot alert the intended receiver of an incoming call. The call must be anticipated. For this reason, it is often the case that to get both parties on the Internet at the same time, the first caller must place a regular long distance telephone call to the person with whom the first caller desires to speak.

[0043] As can be seen, this process quickly degenerates into an inconvenience for the users. The fact that a regular phone call must be placed also works against the calling party because the most expensive minute of a long distance telephone call is the first. Even if the call is only 2 seconds in length and the caller says nothing more than, "Get on the Net", the costs of the first minute are incurred. While for most calls this is not terribly significant, calls to locations around the globe can be more than trivial.

[0044] Another drawback to the state of the art is that the sound quality is poor at best. This is owing to the compression which must always be performed on the digitized voice data. Compression is required to speed up the process so the amount of data to be transferred can be handled by a typical 14.4 modem so that the voice transmission occurs in real time.

[0045] Still another drawback is that because both computers must be on the Internet. If for some reason their Internet provider is down or more likely all the ports into a computer are busy, the call cannot be completed until a line becomes free.

[0046] Some voice Internet systems also require both parties to have an email address. The email address serves as a unique identifier of the person to be called which is also known to the Internet. This limits use of this particular system strictly to people who already have Internet access through their own Internet access provider.

[0047] As a recent newspaper article says, at present, the state of the art is relegated mainly to hobbyists who like to take advantage of the novelty of making telephone calls for free using their computer and Internet access. However, regular usage of Internet phone software appears to be limited to around 20,000 people at present.

[0048] Stated succinctly, the present invention enables a subscriber of the present invention to avoid long distance telephone charges which are normally incurred when having a spoken conversation over long distances via a switched telephone network. However, unlike the systems described above, the present invention is much less complicated for the user, is more convenient, improves sound quality, and doesn't require advance notice of use.

[0049] These objectives are accomplished by the apparatus shown in **FIG. 2**. The present invention diverges significantly from the other systems in that non-Internet capable devices are able to communicate via the Internet. Thus, the present invention provides a very different and more advantageous telephone services as opposed to the computer telephones of the state of the art.

[0050] The advantages become apparent after walking through the system components of a preferred embodiment. At the caller's side, a typical telephone **30** is used. This is in stark contrast to the state of the art which has only implemented the calling device as another computer with microphone and speaker. The advantages are immediately obvious. No complicated software to set up and run. No external microphone or speakers to purchase for a computer.

[0051] The telephone **30** is used to call an originating VoiceEngine **32** (audio engine) via, for example but not limited to, a publicly or privately switched telephone network (PSTN), a cellular switch, PCS, cable telephone or radio **31**. Preferably, the originating VoiceEngine **32** is located within the range of a local telephone call. The VoiceEngine **32** is the heart of the present invention and makes possible the attainment of the majority of the present invention's objectives. The VoiceEngine **32** is similar in function to the FaxEngine of U.S. patent application Ser. No. 08/585,628, incorporated herein by reference.

[0052] The VoiceEngine **32** accomplishes several tasks which can run concurrently in software and hardware. For example, the VoiceEngine **32** might be local to the caller, or it might be local to the receiver of the call. One task is to receive an incoming call from the originating telephone **30**. The originating VoiceEngine **32** can either prompt the caller to input the number of a receiving telephone **38**, or wait for the caller to input the number without prompting. The originating VoiceEngine **32** then calculates the location of a receiving VoiceEngine **34** using the area code and first three digits of the receiving telephone **38** which are entered by the caller. After calculating the location, the originating VoiceEngine **32** must contact the receiving VoiceEngine **34** which is preferably local to the receiving telephone **38**.

[0053] It is important to distinguish between a receiving VoiceEngine **34** which is physically closest to the receiving telephone **38**, and a receiving VoiceEngine **34** which will incur the smallest long distance telephone charge if no receiving VoiceEngine **34** is a local telephone call to the receiving telephone **38**. This distinction is important because the closer VoiceEngine **34** can be more expensive to use. Therefore, determining the location of the receiving VoiceEngine **34** from the area code and first three digits is the best way to insure the lowest charge possible to the caller.

[0054] After the originating VoiceEngine **32** contacts the receiving VoiceEngine **34** in anticipation of establishing the telephone call, the complete number of the receiving telephone is passed via the Internet to the receiving VoiceEngine **34**. The receiving VoiceEngine **34** then dials the receiving telephone number via, for example, a publicly or privately switched telephone network (PSTN), a cellular switch, PCS, cable telephone or radio **31**. At this point in time, the VoiceEngines **32, 34** are prepared to transmit speech or other sounds using simplex or preferably duplex communication between the telephones **30, 38**.

[0055] The receiving telephone **38** will have no indication that the call is not originating from a telephone strictly via a PSTN **31**. However, a service such as caller identification on the receiving telephone **38** will only identify a VoiceEngine **32, 34** instead of the originating telephone **30**. This is because the ANI information is not transmitted via the Internet **16**. However, it is possible that caller identification information also be transmitted along with the voice transmissions. This would enable the receiving telephone to display the correct caller identification information about the originating telephone **30**.

[0056] Assuming that the receiving telephone **38** is answered, the VoiceEngines **32, 34** are executing several functions simultaneously to enable voice communication to flow between the caller and the person receiving the call in real time. This differs from the state of the art in two distinct aspects. These are overall bandwidth and latency limitations.

[0057] For example, a computer typically has the limitation of a 14.4 or perhaps a 28.8 kbaud modem for transmitting compressed data because the data is transmitted via the PSTN as well as via the Internet. In contrast, the VoiceEngines **32, 34** have no such limitation. Because they are dedicated nodes on the Internet, the VoiceEngines are capable of much higher rates of transfer without the typical 14.4 kbaud limitation. What this does is relax the requirements of data compression. Typically, data compression is necessary in order to meet the requirements of real-time conversation speeds. But with the present invention, compression does not have to be as severe, thus resulting in a higher quality audio throughput. Because the VoiceEngines **32, 34** are dedicated devices, they can also implement compression using dedicated digital signal processing hardware instead of relying on software as is typical of many computer telephone services. Depending upon cost constraints and the number of calls being processed, it is a viable although typically more costly alternative to software compression. Nevertheless, the advantages of faster and more costly hardware compression often outweigh slower software compression speeds.

[0058] Latency is a problem for the computer telephones of the state of the art because there are longer built-in delays when the transmission speed is limited to 14.4 kbaud. Typically there can be as much as one and a half seconds of delay between when a person speaks and the other person hears what was said. This can result in choppy, halting sentences because a speaker doesn't know if the other party is about to speak or not. The present invention is clearly at an advantage because only a voice analog signal is traveling via the PSTN instead of digitized data.

[0059] The method of the present invention proceeds in the following manner if assuming that duplex communication will occur between the parties. When a person talks into a telephone **30, 38**, the analog voice transmission or signal from the originating telephone **30** is transferred via the PSTN **31** to a VoiceEngine **32, 34**. The VoiceEngine **32, 34** digitizes the typically analog voice signals via digital signal processing (DSP) means (software or hardware). The digitized signal is then compressed by compression means (software or hardware). The VoiceEngine **32, 34** then prepares the compressed data for transmission via the Internet by creating discrete packets using the TCP/IP protocol. These packets are transmitted via various routes along the Internet to a complementary (the originating or the receiving) VoiceEngine **32, 34**. The complementary VoiceEngine **32, 34** then reconstructs the original compressed and digitized message by arranging the packets in the order in which they were transmitted, decompresses the transmitted data and executes a digital to analog conversion in the digital signal processing means to recreate the transmitted audio data.

[0060] The process described above is further complicated by the time constraint of making it occur, as far as the caller and receiver can discern, in real time. This is probably why the market has been slow to overcome the technical problems which the method and apparatus of the present invention solves. However, the key to the system which makes the present invention a reality is the creation of VoiceEngines. A dedicated VoiceEngine is able to take incoming audio data (typically a human voice), digitize the sound, compress it for transfer, decompress the data at another VoiceEngine, convert the digitized sound back into an analog signal, and play it back with an insignificant delay. In a preferred embodiment, the VoiceEngine also encrypts the data so that when the conversation is being transmitted via the Internet, it is protected and private.

[0061] The VoiceEngines are also capable of multiplexing many voice connections on a single Internet connection.

Therefore, a signal is only transmitted via the Internet when speech or other audio data is actually being transmitted to the VoiceEngines.

[0062] It should be observed that the receiving telephone **38** need not be a subscriber to the system. It is only necessary to create a database of predefined originating telephone numbers, or enable any telephone number with an accompanying authorized password to make a call.

[0063] In summary, the preferred embodiment above describes a system where a non-Internet protocol communicating device is able to transmit analog data via the Internet to another non-Internet protocol communicating device (hereinafter referred to as a non-TCP/IP capable device). The system is able to transmit the data anywhere in the world without incurring long distance telephone charges, and without a complicated calling process typical of state of the art computer telephones. In addition, only the caller must be a subscriber to the Internet telephone system described.

[0064] The present invention modifies the preferred embodiment as well. In addition to enabling a person to use a telephone on a switched telephone network **31** to call another telephone on the switched telephone network **31**, the caller can also make a call to a computer **40** on the Internet. The method and apparatus for this process differs slightly from that already described. However, it should be apparent that the process requires mapping a location of a computer on the Internet such that an originating VoiceEngine **32** can make contact.

[0065] For example, when a caller desires to call a computer on the Internet (actually a person sitting at the computer who can hear the caller's voice), the caller again makes a call to an originating VoiceEngine **32**. However, instead of inputting the area code and number of a receiving telephone to the VoiceEngine **32** when prompted, the caller can select from a menu which provides the option of dialing a computer. The computer's location must be determinable in order to successfully complete the call. This can be done by any method known to those skilled in the art. One method is to use an Internet Protocol (IP) address. Most computers are nodes on the Internet. All nodes have an IP address, even if it is a temporary one allocated to a computer when it connects to the Internet via an Internet provider. Therefore, the method begins by requiring the caller to call the originating VoiceEngine **32**. The caller can then be prompted to input an IP address. The VoiceEngine **32** then accesses the node at the designated IP address and establishes a link with previously distributed software on the node which is compatible with the originating VoiceEngine **32**. Therefore, this process differs from the state of the art in that only one party, the receiving computer **40**, must run software and have the necessary accessories for the computer **40** to digitally process, compress and decompress, and encrypt signals. In effect, a non-TCP/IP device **30** (the telephone) is advantageously able to communicate seamlessly with a TCP/IP capable device **40** (the computer).

[0066] Another method might be to take advantage of the Domain Name Service (DNS) which is already in place on the Internet for identifying the address of any computer node on the Internet. In this way, the native address mapping abilities of the Internet are used without having to reinvent an existing service.

[0067] Specific to a TCP/IP device such as a multimedia computer **40**, the VoiceEngines **32**, **34** are capable of encoding the data in the Adaptive Differential Pulse code Modulation (ADPCM) format which can be easily understood by most other multimedia computers **40** which are coupled to the Internet **16**. This enables a call to be placed from or to a computer **40** on the Internet **16** which has a sound card, microphone and the software necessary for communicating with a VoiceEngine **32**, **34**.

[0068] There are also variations of the process described above which are provided in alternative embodiments. For example, instead of inputting an IP address of the receiving computer **40**, the caller could input an email address. As is known to those skilled in the art, an email address can be queried to determine if the owner of the email address is on the Internet at that time. If the user is at a computer node on the Internet, a telephone call is then initiated between the computer **40** and the origination VoiceEngine **32**. It should be observed that there are other ways known to those skilled in the art for the telephone call to be initiated between a person on a switched telephone network and a computer user on the Internet, and these are to be considered to be within the scope of this specification.

[0069] The implication of the processes above is that a computer **40** node on the Internet **16** can also make a telephone call via the Internet **16** to a telephone **38** on a switched telephone network **31**. This process is even less complicated than the reverse situation already described. This is because it is very simple to locate the receiving telephone **38**. For example, the computer node **40** accesses a receiving VoiceEngine **34** by running software which connects the computer to a VoiceEngine database. The software prompts the user to input the area code and telephone number of the receiving telephone **38**, and the VoiceEngine database determines which VoiceEngine will act as the receiving VoiceEngine **34** for the call. The receiving VoiceEngine **34** is then instructed to complete the telephone call via the switched telephone network **31** to which it is coupled.

[0070] The present invention thus enables communication via the Internet **16** between two non-TCP/IP devices, between a non-TCP/IP device and a TCP/IP device where the non-TCP/IP device initiates the telephone call, or where the TCP/IP device initiates the call. All of the communication will occur without having to pay for long distance telephone charges if both the originating and the receiving VoiceEngines **32**, **34** are within a local telephone call of the originating and receiving telephones **30**, **38** respectively. This is also true when only a single telephone **30**, **38** is part of the process, and the caller or receiver is a computer **40** on the Internet **16**.

[0071] Of course, there will be times when long distance telephone charges will be unavoidable if an originating or receiving VoiceEngine **32**, **34** is not within local telephone calling distance. However, the VoiceEngines **32**, **34** will ideally be distributed such that the majority of callers can take advantage of the services provided by the present invention.

[0072] While the disclosure has provided overall detail such that someone skilled in the art can practice the invention, there are details specific to the present invention which are advantageous to know in order that the preferred embodiment can be implemented. The detail will be pro-

vided by way of flowcharts and block diagrams which mainly describe the internal VoiceEngine processes which are executed during a call.

[0073] Beginning with **FIG. 3**, the flowchart describes the processes for the subscriber to follow when dialing a telephone number of a receiving telephone means. As can be seen, the process is only slightly more involved than a direct dialed telephone call today. In fact, with the numerous long distance telephone companies with their complex access codes which have appeared since deregulation of the long distance telephone industry, the process is relatively simple in comparison.

[0074] VoiceEngines **32** are accessed by dialing a preferably local VoiceEngine access number which provides switched telephone network access to a VoiceEngine, as shown in step **44**. Step **46** is necessary for determining if the subscriber is calling from a preprogrammed and authorized subscriber. If the subscriber is calling from a preprogrammed number, the subscriber only has to enter the receiving telephone number as in step **48**. For increased security, the process of the present invention requires password verification if the originating telephone number is not one which the VoiceEngine **32** recognizes, as shown in step **50**. After password verification, the subscriber continues to step **48**. The process advantageously enables a subscriber to select the option of simultaneously communicating with a plurality of different telephones in steps **52** and **54**. If desired, the subscriber simply continues to enter additional destination (receiving) telephone numbers in step **54**. This process of adding destination numbers continues until all desired numbers are entered and the phone call(s) are made in step **56**.

[0075] The entire process differs from regular direct long distance dialing in the best case scenario in that at least two telephone numbers are dialed. The first number a local VoiceEngine access number which is preferably local. The second number is the destination number.

[0076] **FIG. 4** is a breakdown in block diagram form of the main hardware components of a VoiceEngine **32** built in accordance with the objects of the present invention. The VoiceEngine **32** can be the originating VoiceEngine **32** as well as the receiving VoiceEngine **34** shown in **FIG. 2**.

[0077] A box **58** is shown drawn around components of the VoiceEngine **32** to illustrate divisions in function. The VoiceEngine itself is a dedicated interrupt driven computer system. In a preferred embodiment, the computer is an Intel-based Complex Instruction Set Computer (CISC) computer system. However, this does not mean that a Reduced Instruction Set Computer (RISC) based system could not be used.

[0078] The computer system is controlled by an Operating System, and has been implemented in this invention under Windows NT Version 3.5 (**59**). Again, this does not preclude the use of other Operating Systems such as UNIX or any of its variant forms. What is important to the present invention is that the Operating System have the capability of providing a multitasking operating environment.

[0079] The software which implements the method of the present invention is not to be considered in and of itself as using code structure which is the subject of this patent. Rather, it is the specific functions implemented by the software which are important and are explained hereinafter. The VoiceEngine **32** may be functionally considered as being comprised of at least one VoicePort (Audio Port) **60**, at least one Voice Board (Digital Signal Processor DSP) **61**, and an Internet Interface **62**. The VoicePort **62** provide the VoiceEngine **32** with communication access to switched telephone network lines **63** via the at least one Voice Board **61** for both transmitting and receiving signals (audio data representing such sounds as speech). The VoicePort **60** also provides the VoiceEngine **32** with Internet access for transmitting and receiving signals which are encapsulated as Internet packets for travel via the Internet **16**.

[0080] The VoicePorts **60** have a dual function as mentioned above. They both send and receive signals via a switched telephone network **31**, as well as communicate with the Internet **16** via the Internet interface **62**. Communication to a VoicePort **60** from the telephone lines **63** occurs on a thread **64**, each thread **64** being capable of both sending and receiving data. The specific processes which take place internal to the VoiceEngine **32** will be described in later flowcharts.

[0081] The VoiceEngine **32** is controlled by a Main VoiceEngine Process **65** as shown in **FIG. 5**. This process **65** enables the VoiceEngine **32** to act as a central processor for the control and management of the VoiceEngine **32** and the requisite sub-processes to be described. Upon startup, the Main VoiceEngine Process **65** initializes all of the hardware as required and is shown as step **70**. Step **72** involves activation of the VoicePort threads **64**. These threads **64** manage all interface connections **62**, **61**.

[0082] The Main VoiceEngine Process **65** remains in a loop waiting for event notification **76**. After receiving notification from any of the processes that have begun, a signal **78** is sent to initiate verification of the notification signal. First, the computer system verifies in step **80** that the notification is valid and not a hardware induced error. This verification **80** can be done in many ways as is known to those skilled in the art and is not the subject of this patent. If there is no error, the process **65** goes back into a loop to wait for another event notification **76**.

[0083] For example, an event notification alarm might be a system alert indicating that diagnostic software is to be executed. The next step **82** is to test and diagnose hardware. Step **82** could either be accomplished automatically by the system with automatic diagnostic software, or a message or other indicator could alert a computer system administrator that the system needs servicing. If the diagnostic step **82** is automatic, the failed hardware is disabled in step **84** by the computer system so as not to interfere with the computer system operation.

[0084] As **FIG. 5** indicates, step **72** activates the I/O Loop establish phase **99**, the I/O Loop Duplex phase **170** and the I/O Loop Simplex phase **200**. The establish phase **99** shown in **FIG. 6** is defined as the steps which occur in the receiving VoiceEngine **34** when the VoiceEngine **34** must answer an incoming call from the originating telephone **30**, as well as place a call to the receiving telephone **38**. Upon notification from the DSP **61** of an incoming call in step **104**, the VoicePort thread **64** authenticates the user to the network. To authenticate, the VoicePort thread **64** retrieves the number of the originating telephone **30** from the DSP **61** using ANI in step **108** and the call is logged in step **109**. If the number of

the originating telephone **30** is a preprogrammed number in a VoiceEngine database as determined in step **110**, then the caller is prompted for the destination number of the receiving telephone(s) **38** in step **112**.

[**0085**] Alternatively, the process of obtaining the number of the originating telephone **30** by attaching a device to the telephone line **31** of the originating telephone **30**. The device would transmit the number of the originating telephone **30** automatically. If the originating telephone **30** is not in the predefined database, then the VoicePOrt thread **64** would play a greeting in step **116** and request a password from the user via, for example, touch tone (DTMF) signals, and the caller would be authenticated using this password. If the caller authenticates properly in step **118**, the process continues to step **112**. Otherwise the caller is notified that the password is invalid in step **119** and requested to reenter the password. If there are too many failures as determined in step **120**, the caller is told that the password is invalid in step **122**, and the line is hung up and the process restarted in step **124**. However, if no call was successfully completed, the call is notified in step **138** and the telephone line **63** is hung up and the process resets in step **140**.

[**0086**] If the caller authenticates properly, the VoicePort thread **64** then retrieves the number or numbers of the destination telephone(s) in step **112**. The user may enter more than one number in order to complete a conference call. The VoiceEngine **32** would then call all the parties to be linked together simultaneously. The receiving VoiceEngine **34** is then contacted in step **114** to complete the call. If at least one call was completed successfully to a receiving telephone **38** as determined in step **116**, the process goes to one of the I/O Loop phases **170**, **200** in step **118**. The call is logged to accounting in step **120** and the line hangs up and the process restarts when the call is complete. In step **122**.

[**0087**] The originating VoiceEngine **32** as described above can also act as a receiving VoiceEngine **34**. In this case, upon notification of an outgoing call in step **124**, the VoiceEngine **32** tells the DSP **61** to reset in step **126** and then to dial the number of the receiving telephone **38** in step **128**. If the call is answered as determined in step **130**, and a connection is successfully completed, the call enters one of the I/O Loop phases **170**, **200** in step **132**. Otherwise, the VoiceEngine **32** notifies the originating telephone **30** that the call was not completed in step **134**, the information is logged to accounting and the telephone line **31** is hung up and the VoicePOrt establish phase begins anew in step **136**.

[**0088**] The I/O Loop phase is separable into two different types of processes, duplex **170** and simplex **200**, and controls the input and output of data from the DSP **61** and the Internet **16**. This is accomplished by controlling the DSP for both record and play. Thus, the I/O Loop phases **170**, **200** can operate the DSP **61** in either a duplex mode to record and play simultaneously, or a simplex mode where data is either recorded or played, but not simultaneously.

[**0089**] The Duplex mode illustrated in **FIG. 7** is the preferred mode of operation of the system and is selectable by requesting the VoicePort thread **64** to operate in duplex. In this mode, the user may both play and record voice/sound data simultaneously from the originating telephone **30** if the VoiceEngine is the originating VoiceEngine **32**, or from the receiving telephone **38** if the VoiceENgine is the receiving VoiceEngine **34**. Duplex is accomplished by issuing non-blocking calls to the DSP **61** such that it may record data while waiting for data from the PSTN **31**. The I/O Loop phase **170** waits for a record or play event to occur and processes accordingly.

[**0090**] The I/O Loop Duplex process **170** begins by waiting for an event to occur as in step **172**. There are three events to which it will respond. The first event path is when data is received via the PSTN **31**. In this event, the I/O Loop **170** requests the DSP **60** to record data received via the PSTN **31** in step **174**. The data is digitized, compressed and encrypted in step **176**. At this point, the data can be transmitted after encapsulation using an appropriate Internet protocol and then sent to the receiving VoiceEngine **34** in step **178**. After transmission, the process **170** determines whether the call is still active (and therefore further processing will occur) as shown in step **180**. If the call is active, the process loops back to step **172** to wait for an event notification. On the other hand, if the call is inactive, the process terminates and the remote VoiceENgine is notified of the break in the connection. In step **190**.

[**0091**] The second event path is when the data is being received via the PSTN **31** from a telephone **30**, **38**. The data is received via the Internet interface **62** and passed to the DSP **61** where it is recorded as shown in step **182**. The DSP **61** must decrypt and decompress the data, and finally reverse the digitizing process in step **184** to obtain the original signal. The signal is then played by the DSP **61** by transferring the signal to a telephone **30**, **38** via the PSTN **31** in step **186** by issuing a non-blocking call to the DSP **61**.

[**0092**] The other event path which can occur is the party on the local telephone hanging up as shown in step **188**. When this event occurs, the remote VoiceEngine is notified and the process is reset.

[**0093**] The Simplex mode illustrated in **FIG. 8** is not the preferred mode of operation of the system, but is also selectable by requesting the VoicePort thread **64** to operate in simplex. In this mode, the user may either play or record voice/sound data from the originating telephone **30** if the VoiceEngine is the originating VoiceEngine **32**, or from the receiving telephone **38** if the VoiceENgine is the receiving VoiceEngine **34**. Simplex is accomplished by not issuing non-blocking calls to the DSP **61** such that it may only record or play data. The I/O Loop Simplex process **200** waits for a record or play event to occur and processes accordingly.

[**0094**] The I/O Loop Simplex process **200** begins by either recording data for 500 milliseconds and received from a telephone **30**, **38** via the PSTN **31** as shown in step **202**, or having no activity occur (silence on the line) for 10 milliseconds. The process then determines whether the call is still active in step **204**. If not, the remote VOIceEngine is notified in step **206**.

[**0095**] However, if the call is active, the process determines whether data was recorded in step **208**. If data was recorded by the DSP **61**, the data is digitized, compressed and encrypted in a preferred embodiment as shown in step **210**. The data is then transmitted via the Internet **16** to the remote (receiving or originating) VoiceEngine in step **212**.

[**0096**] If no data was recorded in step **208**, the process verifies whether or not there is any data waiting to be played by the DSP **61** in step **214**. If not, the process loops back to

step **202**. However, if there is data to be played, the data is decrypted, decompressed and the digitizing process is reversed in step **216**. The DSP **61** then plays the data in step **218** by sending the signal via the PSTN **31** to the telephone **30, 38**. If the call is still active as determined in step **220**, the process loops back to step **214** and more data is played. Otherwise, the remote VoiceEngine is notified in step **222** and the process resets.

[**0097**] It should be observed that the VoicePort **60** is a multiplexer which gives it the ability to take advantage of a multitasking operating system **59** and execute processes simultaneously. Therefore, in a send mode as shown in **FIG. 9A, a** plurality of VoiceEngines **34** can receive voice data from a single originating VoiceENgine **32**.

[**0098**] Likewise, in **FIG. 9**B, the single originating VoiceEngine **32** can receive data simultaneously from a plurality of receiving VoiceEngines **34** which are not operating as originating VoiceEngines **32**. The data is mixed to comprise a single stream of data and then sent to the remote VoiceEngine **32**.

[**0099**] While the detailed description above has focused on the main feature of the present invention of signal transmission from non-TCP/IP devices via the Internet, there are several other services which the present invention makes both feasible and desirable besides transmission of data between non-TCP/IP devices and TCP/IP devices. These are call forwarding via the Internet, long distance delivery, and the virtual telephone.

[**0100**] The Call Conferencing service is illustrated in **FIG. 10**, and provides the ability to carry on a conversation with more than one party via the Internet. The VoiceEngine **32** is tasked with distributing the signal to the multiple destinations as entered by the subscriber from the originating telephone **30**. The Figure is illustrated as shown to indicate that there may be more than one receiving VoiceEngine **34** in order to reach the plurality of different receiving telephones **38**.

[**0101**] The Long Distance Delivery service illustrated in **FIG. 11** is for those receiving telephones **38** which are located further than a local switched telephone network call away from all receiving VoiceEngines **34**. While this circumstance will ideally be rare, it is certainly possible. Therefore, the present invention will compensate by determining the location of the receiving VoiceEngine **34** which will be billed the lowest rate for making the long distance call **260** to the receiving telephone **38**. The long distance telephone charge is further reduced by contracting with long distance telephone providers to obtain a lower cost, high volume contract than can be obtained by single parties. This guarantees to the caller that the signal will be transmitted at a cost that is always less than if the caller were to dial directly, bypassing the Internet **16**.

[**0102**] The virtual telephone as illustrated in **FIG. 12** provides a subscriber with the ability to be accommodating to clients or other people who either lack the resources for making expensive or significant numbers of long distance telephone calls, or to just provide another convenience. Specifically, a subscriber "creates" a virtual telephone **268** which is a local telephone call from an originating telephone **30**. The new telephone **268** is actually just a local VoiceEngine **32**. However, instead of requiring the sender to input a long distance telephone number for the receiving telephone **38**, the originating VoiceEngine **32** has a system for mapping a telephone phone called by an originating telephone **30** to access the originating VoiceEngine **32**. The originating VoiceEngine **32** will then have instructions associated with the telephone by which it was accessed such that it will connect to the subscriber's receiving telephone **38** via the Internet. This way, the originating VoiceEngine **32** does not require pre-programming with every client's originating telephone number.

[**0103**] For example, Business in New York wants to allow a number of small clients in Los Angeles to be able to call by dialing a local Los Angeles telephone number. The local Los Angeles virtual telephone **268** can be called by dialing 555-0123. The VoiceEngine **32** maps any calls to the number as being directed to Business's receiving telephone **38**. Thus, when the client's originating telephone **30** calls the virtual telephone **268**, the VoiceEngine **32** immediately forwards the signal to Business's receiving telephone **38** in New York. Advantageously, the client only makes a local telephone call, and Business is not charged for the long distance signal transmission.

[**0104**] It is to be understood that the above-described embodiments are only illustrative of the application of the principles of the present invention. Numerous modifications and alternative arrangements may be devised by those skilled in the art without departing from the spirit and scope of the present invention. The appended claims are intended to cover such modifications and arrangements.

What is claimed is:

1. An audio transmission system for transmitting voice/sound via the Internet, said system comprising:

at least one originating telephone means for transmitting an analog signal representing sound via a first switched telephone network;

at least one originating audio engine means for receiving the analog signal via the first switched telephone network, digitizing said signal, compressing the signal, encapsulating the signal within at least one Internet packet using an Internet protocol such that the message is suitable for transmission via the Internet, and transmitting the signal via the Internet;

at least one receiving audio engine means for receiving the at least one Internet packet transmitted by the originating audio engine means, de-encapsulating the at least one Internet packet to retrieve the signal, decompressing the signal, converting the signal back to an analog form, and transmitting the analog signal via a second switched telephone network; and

at least one receiving telephone means for receiving the analog signal via the second switched telephone network.

2. The system as defined in claim 1 wherein the at least one originating telephone means and the at least one receiving telephone means are telephones designed to bi-directionally communicate audio information via a switched telephone network in a duplex or simplex mode.

3. The system as defined in claim 2 wherein the at least one originating telephone means and the at least one receiving telephone means are telephones which are incapable of

encapsulating an analog signal within Internet packets suitable for transmission via the Internet in accordance with an Internet protocol.

4. The system as defined in claim 1 wherein the at least one originating and the at least one receiving telephone means are located at remote distances from each other such that long distance telephone rates would apply for a direct call between them.

5. The system as defined in claim 1 wherein the at least one originating audio engine means has at least one audio port coupled by an audio port thread to the first switched telephone network.

6. The system as defined in claim 1 wherein the at least one receiving audio engine means has at least one audio port coupled by a audio port thread to the second switched telephone network.

7. The system as defined in claim 1 wherein the at least one originating audio engine means has an audio port coupled by an audio port thread to an Internet interface which is coupled to the Internet via a dedicated connection.

8. The system as defined in claim 1 wherein the at least one receiving audio engine means has an audio port coupled by an audio port thread to an Internet interface which is coupled to the Internet via a dedicated connection.

9. The system as defined in claim 1 wherein the at least one originating telephone means and the at least one receiving telephone means are selected from the group consisting of a switched telephone network telephone, a cellular telephone, and a cable telephone.

10. The system as defined in claim 1 wherein the at least one originating audio engine means and the at least one receiving audio engine means are functionally interchangeable.

11. The system as defined in claim 10 wherein there are a plurality of originating and receiving audio engine means distributed at various dedicated Internet sites.

12. The system as defined in claim 1 wherein the at least one originating and the at least one receiving audio engine means are comprised of:

at least one audio port having at least one audio port thread, said at least one audio port thread providing access to a switched telephone network, and having at least a second audio port threat for providing access to an Internet interface means; and

an audio processing means for processing a plurality of first signals received via the switched telephone network and for processing a plurality of second signals received via the Internet in order to prepare the plurality of first signals for transmission via the Internet, and in order to prepare the plurality of second signals for transmission via the switched telephone network; and

a main audio engine process operating in audio engine memory which coordinates operation of said audio engine means components.

13. The system as defined in claim 12 wherein the audio processing means comprises a digital signal processor capable of digitizing an analog signal received via the switched telephone network and compressing the digitized signal for transmission via the Internet.

14. The system as defined in claim 13 wherein the audio processing means comprises a digital signal processor capable of de-compressing a digitized signal received via the Internet and converting the digitized signal to an analog signal for transmission via the switched telephone network.

15. The system as defined in claim 14 wherein said audio engine means is a computer executing a multitasking operating system.

16. The system as defined in claim 15 wherein said multitasking operating system is selected from the group of operating systems such as Windows NT, UNIX and variations of UNIX.

17. An audio transmission system for transmitting voice/sound via the Internet, said system comprising:

at least one originating telephone means for transmitting an analog signal representing sound via a first switched telephone network;

at least one originating audio engine means for receiving the analog signal via the first switched telephone network, digitizing said signal, compressing the signal, encapsulating the signal within at least one Internet packet using an Internet protocol such that the message is suitable for transmission via the Internet, and transmitting the signal via the Internet; and

a receiving computer means for receiving the at least one Internet packet transmitted by the originating audio engine means, de-encapsulating the at least one Internet packet to retrieve the signal, de-compressing the signal, converting the signal back to an analog signal, and playing the analog signal.

18. An audio transmission system for transmitting voice/sound via the Internet, said system comprising:

an originating computer means for processing an analog signal by digitizing said signal, compressing the signal, encapsulating the signal within at least one Internet packet using an Internet protocol such that the message is suitable for transmission via the Internet, and transmitting the signal via the Internet;

at least one receiving audio engine means for receiving the at least one Internet packet transmitted by the originating audio engine means, de-encapsulating the at least one Internet packet to retrieve the signal, de-compressing the signal, and converting the signal back to an analog signal, and transmitting the analog signal via a second switched telephone network; and

at least one receiving telephone means for receiving the analog signal via the second switched telephone network.

19. A system for transmitting information via the Internet using communication devices which do not transmit information using Internet communication protocols, said system comprising:

at least one originating communication means for transmitting non-Internet encapsulated data via a first switched telephone network;

at least one originating Internet translation engine means for receiving the non-Internet encapsulated data via the switched telephone network, encapsulating said data into Internet packets using an Internet protocol such that said data is suitable for transmission via the Internet, and transmitting the Internet packets via the Internet;

at least one receiving Internet engine means for receiving the Internet packets transmitted by the originating Internet translation engine means, de-encapsulating the Internet packet, and transmitting the non-Internet data via a second switched telephone network; and

at least one receiving communication means for receiving said data via the second switched telephone network.

20. The system as defined in claim 19 wherein the at least one originating communication means and the at least one receiving communication means are selected from non-Internet protocol transmission devices designed to simultaneously transmit and receive data via a switched telephone network.

21. The system as defined in claim 20 wherein the at least one originating communication means and the at least one receiving communication means are telephones.

22. The system as defined in claim 19 wherein the at least one originating communication means and the at least one receiving communication means are located at remote distances from each other such that long distance telephone rates would apply for a direct telephone call between them.

23. The system as defined in claim 19 wherein the at least one originating Internet translation engine means and the at least one receiving Internet translation engine means are functionally interchangeable.

24. The system as defined in claim 19 wherein there are a plurality of originating and receiving Internet translation engines distributed at various dedicated Internet connection sites.

25. The system as defined in claim 19 wherein the at least one originating Internet translation engine means comprises a digital signal processor capable of digitizing an analog signal received via the switched telephone network and compressing the digitized signal for transmission via the Internet.

26. The system as defined in claim 25 wherein the at least one receiving Internet translation means comprises a digital signal processor capable of de-compressing a digitized signal received via the Internet and converting the digitized signal to an analog signal for transmission via the switched telephone network.

27. A method for transmitting voice/sound via the Internet, the method comprising the steps of:

a) providing an originating telephone means for transmitting an analog signal representing sound via a first switched telephone network;

b) providing an originating audio engine means for receiving the signal via the first switched telephone network and transmitting the signal via the Internet;

c) providing a receiving audio engine means for receiving the signal via the Internet and transmitting the signal via a second switched telephone network; and

d) providing a receiving telephone means for receiving the signal via the second switched telephone network.

28. The method as defined in claim 27 wherein the step of providing an originating audio engine means for receiving the signal via the first switched telephone network and transmitting the signal via the Internet comprises the more specific step of initiating a main audio engine process, said process including the steps of:

a) initializing all audio engine means hardware including audio engine means receive hardware;

b) activating an audio engine means receive event loop which provides an event notification signal when a signal is being received;

c) waiting for the event notification signal;

d) verifying that the audio engine means hardware is not malfunctioning when the event notification signal is received; and

e) disabling malfunctioning audio engine means hardware if verification of the audio engine means hardware fails.

29. The method as defined in claim 28 wherein the step of activating the audio engine receive loop which provides an event notification signal indicating a signal is being received from the switched telephone network and is to be transmitted via the Internet includes the further steps of:

a) verifying that the signal being received is coming from an authorized audio engine subscriber;

b) obtaining at least one number for the receiving telephone from the originating telephone;

c) digitizing the signal;

d) compressing the signal;

e) encapsulating the signal within at least one Internet packet such that the signal can be transmitted via the Internet; and

f) transmitting the signal via the Internet to a receiving audio engine means.

30. The method as defined in claim 29 wherein the method comprises the additional step of encrypting the signal before transmitting the signal via the Internet.

31. The method as defined in claim 30 wherein the step of verifying that the signal being received is from an authorized audio engine subscriber includes the steps of:

a) obtaining a telephone number of the originating telephone means;

b) comparing the telephone number of the originating telephone means to a predefined list of authorized audio engine subscribers; and

c) requesting a password from the subscriber if the telephone number of the originating telephone means is not on the predefined list, such that audio engine subscribers can use the system from any switched telephone network location.

32. The method as defined in claim 31 wherein the step of obtaining the telephone number of the originating telephone means is determined using automatic number identification (ANI) or DTMF signals.

33. The method as defined in claim 29 wherein the step of obtaining at least one number for a receiving telephone means includes the step of prompting a subscriber at the originating telephone means for additional numbers of receiving telephones such that the signal may be transmitted to a plurality of different receiving telephone means simultaneously.

34. The method as defined in claim 29 wherein the step of encrypting the signal comprises the more specific step of encrypting the signal using an RSA encryption algorithm to protect the confidentiality of the signal.

35. The method as defined in claim 29 wherein the step of encapsulating the signal within at least one Internet packet such that the signal can be transmitted via the Internet includes the step of encapsulating the signal within at least one Internet packet which is prepared in accordance with an accepted Internet protocol.

36. The method as defined in claim 35 wherein the step of encapsulating the signal within at least one Internet packet prepared in accordance with an accepted Internet protocol comprises the more specific step of using Transport Connect Protocol/Internet Protocol (TCP/IP).

37. The method as defined in claim 29 wherein the step of transmitting the signal via the Internet to a receiving audio engine means includes the further step of determining which receiving audio engine means should receive the signal by locating a receiving audio engine means which is preferably a local telephone call from the destination telephone means.

38. The method as defined in claim 37 wherein the step of locating a receiving audio engine means which is preferably a local telephone call from the receiving telephone means comprises the additional step of location an audio engine means which can make the least expensive long distance telephone call to the receiving telephone means if no receiving audio engine means can be located which is a local telephone call from the receiving telephone means.

39. The method as defined in claim 29 wherein the step of providing a receiving audio engine means for transmitting the signal from the receiving audio engine means to the receiving telephone means via the second switched telephone network comprises the more specific step of initiating a main audio engine process, said process including the steps of:

a) initializing all audio engine means hardware including audio engine means transmission hardware;

b) activating an audio engine send event loop which provides an event notification signal when a signal is to be transmitted;

c) waiting for the event notification signal;

d) verifying that the audio engine means hardware is not malfunctioning when the event notification signal is received; and

e) disabling malfunctioning audio engine means hardware if verification of the hardware fails.

40. The method as defined in claim 39 wherein the step of activating the audio engine send event loop which provides an event notification signal indicating a signal is to be transmitted from the receiving audio engine means to the receiving telephone means via the switched telephone network includes the further steps of:

a) verifying that the signal being received via the Internet is coming from an authorized audio engine subscriber;

b) reassembling the at least one Internet packet into the signal;

c) obtaining at least one receiving telephone number from the signal;

d) opening a connection to the receiving telephone means via the second switched telephone network;

e) decrypting the signal if the connection to the receiving telephone means is successful; and

f) transmitting the signal to the receiving telephone means.

41. The method as defined in claim 29 wherein the step of obtaining at least one receiving telephone number from the originating telephone means includes the further step of obtaining a plurality of numbers for receiving telephone means provided by the subscriber at the originating telephone means such that the signal is transmitted simultaneously to all the receiving telephone means whose telephone numbers are provided by the subscriber.

42. The method as defined in claim 29 wherein the step of obtaining at least one receiving telephone number from the originating telephone means includes the further step of pre-programming the originating audio engine means such that the signal is transmitted to a plurality of receiving telephone means whose telephone numbers have been previously provided to the originating audio engine means.

43. The method as defined in claim 27 wherein the steps of providing a receiving audio engine means for receiving the signal via the Internet and transmitting the signal via a second switched telephone network to a receiving telephone means via the second switched telephone network includes the further step of redirecting the signal from the receiving telephone means to a new receiving telephone means when the system is directed to reroute signal temporarily to a new receiving telephone means.

44. The method as defined in claim 27 wherein the step of providing an originating telephone means for transmitting a signal via a first switched telephone network and providing an originating audio engine means for receiving the signal via the first switched telephone network and transmitting the signal via the Internet comprises the further step of creating a virtual telephone means such that a subscriber using the originating telephone means calls a mapped telephone number of the originating audio engine means and the receiving audio engine means automatically transmits all signals transmitted to the mapped telephone number to a predefined receiving telephone means via the Internet.

45. A method for transmitting data from a device which transmits data via a switched telephone network, but which does not encapsulate data within Internet packets for transmission via the Internet, said method comprising the steps of:

a) providing an originating communication means which communicates via a first switched telephone network;

b) providing a transmitting Internet engine means for receiving data from the originating communication means via the first switched telephone network and for transmitting said data;

c) providing a receiving Internet engine means for receiving the data from the Internet and for transmitting said data via a second switched telephone network; and

d) providing a receiving communication means which typically communicates via the second switched telephone network, and receiving the data from the receiving Internet engine means.

46. The method as defined in step **45** wherein the step of transmitting the data via the Internet includes the step of encapsulating the data within at least one Internet packet in accordance with an Internet protocol such that the signal can be transmitted via the Internet.

47. A method for transmitting voice/sound via the Internet, the method comprising the steps of:

a) providing an originating telephone means for transmitting an analog signal representing sound via a first switched telephone network;

b) providing an originating audio engine means for receiving the signal via the first switched telephone network and transmitting the signal via the Internet; and

c) providing a receiving computer means for receiving the signal via the Internet and audibly playing the signal.

48. A method for transmitting voice/sound via the Internet, the method comprising the steps of:

a) providing an originating computer means for transmitting an analog signal representing sound via the Internet;

b) providing a receiving audio engine means for receiving the signal via the Internet and transmitting the signal via a switched telephone network; and

c) providing a receiving telephone means for receiving the signal via the switched telephone network.

* * * * *