



(51) International Patent Classification:

D06F 75/06 (2006.01) **D06F 75/24** (2006.01)
A47L 11/40 (2006.01) **D06F 87/00** (2006.01)
D06F 75/12 (2006.01)

(21) International Application Number:

PCT/US2015/010302

(22) International Filing Date:

6 January 2015 (06.01.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/148,296 6 January 2014 (06.01.2014) US

(71) Applicant: **TECHTRONIC FLOOR CARE TECHNOLOGY LIMITED**; P.O. Box 957, Offshore Incorporations Centre, Road Town, Tortola (VG).

(72) Inventor; and

(71) Applicant (for US only): **CHARLTON, Christopher, M.** [US/US]; 4453 Lakeview Glen Drive, Medina, OH 44256 (US).

(74) Agents: **CHESLOCK, Alan, C.** et al.; Michael Best & Friedrich LLP, 100 East Wisconsin Avenue, Suite 3300, Milwaukee, WI 53202-4108 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PORTABLE GARMENT STEAMER

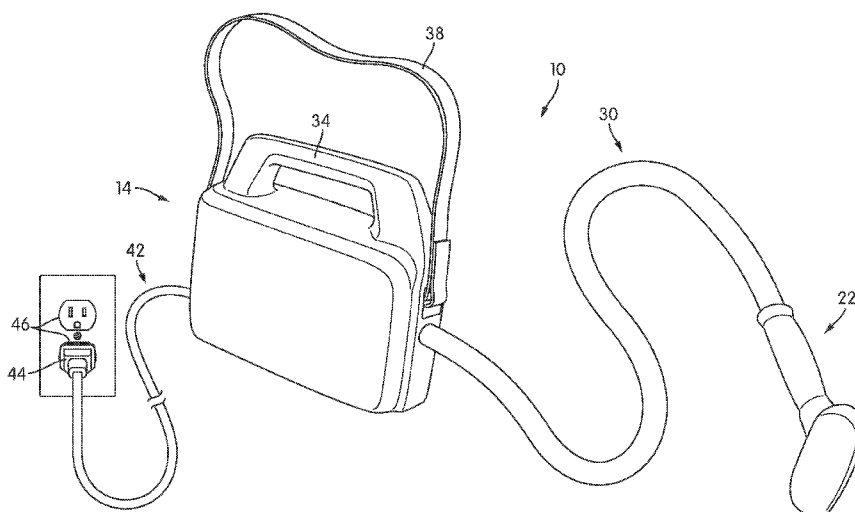


FIG. 1

(57) Abstract: A steamer (10) includes a housing (14), a power cord (42) configured to be selectively coupled to an external power source, a battery (58), a fluid reservoir (50) positioned in the housing, a reservoir heating element (54) configured to preheat fluid in the fluid reservoir (50), a heating device operable to receive preheated fluid from the fluid reservoir, and a nozzle (106) in fluid communication with the heating device. The reservoir heating element (54) receives power from the external power source when the power cord (42) is in communication with the external power source. The heating device receives power from the battery (58) when the power cord is unplugged from the external power source to heat the preheated fluid. The nozzle (106) is configured to receive the fluid from the heating device and discharge the fluid through the nozzle (106).

PORTABLE GARMENT STEAMER

BACKGROUND

[0001] The present invention relates to steamers, and more particularly a portable garment steamer.

[0002] Garment steamers typically include a water tank and an electric heater for converting the liquid water in the tank to steam. The steam is discharged through a nozzle that is positioned adjacent a garment or other article to be steamed. Typically, the steamers must be connected to an external power source during use in order to provide the large amount of energy that is required to boil liquid water and convert it to steam. The large energy requirement makes it difficult to provide a cordless garment steamer because batteries typically do not provide sufficient power to make cordless operation of the steamer efficient. As used herein, the word “steam” includes water vapor as well as visible fog or mist of condensing vapor, and also condensed vapor.

SUMMARY

[0003] In one aspect, the invention provides a steamer for steaming an article, the steamer including a housing, a power cord configured to be selectively coupled to an external power source, a battery, a fluid reservoir positioned in the housing, a reservoir heating element configured to preheat fluid in the fluid reservoir, a heating device operable to receive preheated fluid from the fluid reservoir, and a nozzle in fluid communication with the heating device. The reservoir heating element receives power from the external power source when the power cord is in communication with the external power source. The heating device receives power from the battery when the power cord is unplugged from the external power source to heat the preheated fluid. The nozzle is configured to receive the fluid from the heating device and discharge the fluid through the nozzle.

[0004] In another aspect, the invention provides a steamer including a portable housing, a conduit, and a wand movable relative to the housing. The housing includes a battery, a fluid reservoir, and a reservoir heating element configured to heat fluid in the fluid reservoir to a predetermined temperature below the boiling point of the fluid. The reservoir heating element selectively receives power from an external power source. The conduit is in fluid communication with the fluid reservoir. The wand includes a heating device and a nozzle.

The heating device is in fluid communication with the fluid reservoir via the conduit, and receives power from the battery to heat the fluid in the heating device. The nozzle is in fluid communication with the heating device to receive the fluid and discharge the fluid.

[0005] In yet another aspect, the invention provides a steamer for steaming an article. The steamer includes a housing, a power cord, a battery, a fluid reservoir positioned in the housing, a reservoir heating element for heating fluid in the fluid reservoir to a predetermined temperature below the boiling point of the fluid, a conduit, a wand, an atomizer operable to receive fluid from the fluid reservoir and generate a spray, and a nozzle. The power cord is configured to be selectively coupled to an external power source. The reservoir heating element receives power from the external power source when the power cord is in communication with the external power source. The conduit includes a first end and a second end. The first end is in fluid communication with the fluid reservoir. The wand is coupled to the second end of the conduit and is movable relative to the housing. The nozzle is in fluid communication with the atomizer and configured to receive the spray from the atomizer and discharge the spray through the nozzle.

[0006] In still another aspect, the invention provides a method of generating steam in a steamer. The method includes receiving fluid in a reservoir including a heating element; preheating the fluid using power from an external power source until the fluid is a predetermined temperature below a boiling temperature of the fluid; conveying the preheated fluid to a heating device; heating the fluid in the heating device using power from a battery when the steamer is unplugged from the external power source; and discharging the fluid through a nozzle.

[0007] Other aspects of the invention will become apparent by consideration of the detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a perspective view of a garment steamer.

[0009] FIG. 2 is a side schematic view of a housing.

[0010] FIG. 3 is a side schematic view of a wand.

[0011] FIG. 4 is a side schematic view of a wand according to another embodiment.

[0012] FIG. 5 is a side schematic view of a wand according to another embodiment.

[0013] FIG. 6 is a side schematic view of a garment steamer according to another embodiment.

[0014] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

DETAILED DESCRIPTION

[0015] FIG. 1 illustrates a steamer 10. The steamer 10 includes a canister or housing 14, a wand 22 that is movable relative to the housing 14, and a conduit 30 extending between the housing 14 and the wand 22. In the illustrated embodiment, the housing 14 includes a handle 34 and a strap 38 to facilitate transporting the housing 14. A power cord 42 is coupled to the housing 14 and includes a plug 44 that can be connected to an external power source, such as an AC power outlet 46.

[0016] FIG. 2 schematically illustrates the components positioned within the housing 14, including a tank or reservoir 50, a reservoir heater 54, a battery 58, and a pump 62. The reservoir 50 stores a fluid, such as water. In some embodiments, the reservoir 50 is removably coupled to the housing 14 so that the reservoir 50 may be removed and re-filled with fluid; in other embodiments, the housing 14 includes a port through which fluid may be poured to re-fill the reservoir 50. The reservoir heater 54 provides heat to the fluid in the reservoir 50, thereby raising the temperature of the fluid. The reservoir heater 54 is in electrical communication with both the power cord 42 and the battery 58 by a switch 66. In one embodiment, the heater 54 and/or reservoir 50 is insulated to aid in maintaining fluid temperature and to inhibit heat transfer to the battery 58 and/or the exterior of the housing 14.

[0017] When the plug 44 is connected to the external power source, the switch 66 places the reservoir heater 54 in electrical communication with the power cord 42 such that the heater 54 receives power from the external power source. In the illustrated embodiment, the

power cord 42 also provides power to the battery 58 so that the battery 58 is charged by the external power source when the power cord 42 is connected to the external power source. The reservoir heater 54 heats the fluid in the reservoir 50 to a temperature below the boiling point of the fluid. In one embodiment, the heater 54 heats water in the reservoir 50 to approximately five to ten degrees Celsius below the boiling point. When the power cord 42 is disconnected from the external power source, the switch 66 is positioned to place the steam generating device 102 (discussed below with respect to FIG. 3), and optionally the heater 54, in electrical communication with the battery 58. In one embodiment, the heater 54 receives power from the battery 58 to maintain the fluid in the reservoir 50 at the desired temperature; the battery 58 powers the heater 54 if the temperature of the fluid in the reservoir decreases below a predetermined temperature. In other embodiments, the heater 54 does not receive power from the battery 58. In some embodiments, the switch 66 may also be positioned in an “off” state so that the heater 54 is unpowered (i.e., the heater 54 is not in communication with the power cord 42 or the battery 58).

[0018] The pump 62 is in fluid communication with the reservoir 50 and the conduit 30. The pump 62 is also in electrical communication with the battery 58, which powers the pump 62 to convey fluid from the reservoir 50, through the conduit 30, and into the wand 22. In the illustrated embodiment, the conduit 30 includes at least one fluid line 74 for conveying fluid from the housing 14 to the wand 22 (FIG. 1), a first electrical line 78 for transmitting electricity from the battery 58 to components of the wand 22, and a second electrical line 82 for transmitting a control signal from the wand 22 to the pump 62 to operate the pump 62 as discussed below.

[0019] FIG. 3 schematically illustrates the components positioned within the wand 22. In the illustrated embodiment, the wand 22 includes a handle 90 and an end opposite the handle 94. An actuator 98 (e.g., a trigger) is positioned proximate the handle 90 and is operable by a user to actuate the pump 62 (FIG. 2). In other embodiments, the actuator 98 may be located in a different position on the wand 22 or may be positioned on the housing 14.

[0020] The wand 22 also includes a steam generating device 102 and a nozzle 106 positioned on the end 94 of the wand 22 and in fluid communication with the steam generating device 102. The steam generating device 102 is in fluid communication with the fluid line 74 in the conduit 30 to receive water from the pump 62 (FIG. 2). In the illustrated embodiment, the steam generating device 102 includes cylinder 110 defining a bore 114

having a first end 118, a second end 122 opposite the first end 118, and a heating element 126 positioned at least partially within the bore 114. The heating element 126 is in electrical communication with the battery 58 (FIG. 2) by the electrical line 78 in the conduit 30. In the illustrated embodiment, the cylinder 110 of the steam generating device 102 is a zinc-aluminum alloy and the heating element 126 is a resistive heater embedded in the cylinder 110. The water from the fluid line 74 flows under pressure from the first end 118 of the bore 114 toward the second end 122 and passes the heating element 126. The heating element 126 heats the water, causing the water to be converted to steam. In one embodiment, the heating element 126 is a flash heater. The steam passes from the second end 122 of the bore 114 to the nozzle 106, where the steam is discharged from the end 94 of the wand 22 and onto an article or garment (not shown). In one embodiment, the nozzle 106 includes a plurality of openings through which the steam is discharged.

[0021] FIG. 5 illustrates another embodiment of the steamer 10 in which the battery 58 is positioned on the wand 22. In addition, FIG. 6 illustrates another embodiment in which the steamer 10 is formed as a handheld unit. The actuator 98 and the steam generating device 102 are positioned on the housing 14, and the nozzle 106 is integrally formed on the housing 14. In addition, in other embodiments, the fluid transfer between the reservoir 50 and the steam generating device 102 may be gravity-fed, such that the fluid flows primarily due to the force of gravity.

[0022] Prior to using the steamer 10 to steam garments, the power cord 42 is connected to the external power source to pre-heat the water in the reservoir 50 to a temperature that is a predetermined amount below the boiling point of the water. The external power source may also charge the battery 58. When a user wishes to apply the steamer 10 to a garment or other article, the user may unplug the power cord 42 and transport the portable housing 14 (e.g., using the handle 34 or carrying strap 38). In one embodiment, when the power cord 42 is unplugged, the battery 58 powers the reservoir heater 54 to maintain the temperature of the fluid at the desired level. In other embodiments, when the power cord 42 is unplugged, the reservoir 50 is not further heated. When the nozzle 106 is positioned adjacent the article to which the steam will be applied, the user moves the actuator 98, thereby operating the pump 62. The pump 62 conveys liquid water from the reservoir 50, through the fluid line 74 in the conduit 30 and into the steam generating device 102. The steam generating device 102

converts the liquid water to steam, which is then discharged through the nozzle 106 and onto the article.

[0023] The portable steamer 10 permits a user to apply steam to an article without requiring the steamer 10 to be plugged into an external power source (that is, the steamer 10 is cordless during use). The steamer 10 is plugged in before use to charge the battery 58 and heat the water in the reservoir 50, thereby utilizing an external power source to provide a significant amount of the energy required to prepare the steamer 10 for use. The charging function minimizes the energy required from the battery 58, which simply provides the necessary energy to maintain the water at the predetermined temperature, to operate the pump 62, and to power the heating element 126 of the steam generating device 102. In addition, instead of converting a large amount of liquid water to steam, the steam generating device 102 converts a relatively small amount of liquid water to steam at a given instant. This reduces the amount of energy required to produce the steam, and permits greater control over the amount of steam that is applied to the article. Also, most of the components for the steamer 10 are contained in the housing 14, reducing the weight of the handheld wand 22. Furthermore, although the water is heated in the reservoir 50, the water remains in its liquid state while in the reservoir 50 and pressurization of the fluid typically occurs after the fluid exits the reservoir 50.

[0024] In some embodiments, the power cord 42 is also connected to the pump 62 and the steam generating device 102 and provides power to those components when the power cord 42 is connected to the external power source. The connection between each component and the power cord 42 may override the connection between the component and the battery 58 so that the component receives power from the external power source when the power cord 42 is plugged in, thereby allowing the steamer 10 to be operated while the power cord 42 is plugged in without requiring energy from the battery 58. In addition, the power cord 42 may pre-heat the heating element 126 of the steam generating device 102, further reducing the energy required from the battery 58 during use.

[0025] FIG. 4 illustrates another embodiment of the wand 22 including an atomizer 142 instead of the steam generating device 102. The atomizer 142 may be, for example, a piezoelectric atomizer that is actuated by ultrasonic vibrations to convert a liquid in a tube into a mist or spray that is discharged from the nozzle 106. The atomizer 142 may be powered by the battery 58. In this embodiment, the water in the reservoir 50 may be heated

to within five degrees Celsius of the boiling point. In still other embodiments, the wand 22 could use a series of baffles to transfer heat to the fluid and convert the liquid water to steam.

[0026] Thus, the invention provides, among other things, a portable garment steamer. Although the invention has been described in detail with reference to certain preferred embodiments, variations and modifications exist within the scope and spirit of one or more independent aspects of the invention as described.

CLAIMS

What is claimed is:

1. A steamer for applying steam to an article, the steamer comprising:
 - a housing;
 - a power cord configured to be selectively coupled to an external power source;
 - a battery;
 - a fluid reservoir positioned in the housing;
 - a reservoir heating element for heating fluid in the reservoir to a predetermined temperature below the boiling point of the fluid, the reservoir heating element receiving power from the external power source when the power cord is in communication with the external power source;
 - a conduit including a first end and a second end, the first end in fluid communication with the fluid reservoir;
 - a wand coupled to the second end of the conduit and movable relative to the housing;
 - an atomizer operable to receive fluid from the fluid reservoir and generate a spray;and
 - a nozzle in fluid communication with the atomizer, the nozzle configured to receive the spray from the atomizer and discharge the spray through the nozzle.
2. The steamer of claim 1, wherein the reservoir heating element receives power from the battery when the power cord is disconnected from the external power source.
3. The steamer of claim 1, wherein the atomizer receives power from the battery.
4. The steamer of claim 1, wherein the battery is charged by the external power source when the power cord is coupled to the external power source.
5. The steamer of claim 1, wherein the reservoir heating element is configured to heat and maintain the fluid in the reservoir at a temperature that is approximately five to ten degrees Celsius below the boiling point of the fluid.
6. The steamer of claim 1, wherein the atomizer is a piezoelectric atomizer.

7. The steamer of claim 1, further comprising a pump for conveying fluid from the reservoir, through the conduit and to the atomizer, wherein the wand includes an actuator for actuating the pump.
8. A steamer for applying steam to an article, the steamer comprising:
 - a housing;
 - a power cord configured to be selectively coupled to an external power source;
 - a battery;
 - a fluid reservoir positioned in the housing;
 - a reservoir heating element configured to preheat fluid in the fluid reservoir, the reservoir heating element receiving power from the external power source when the power cord is in communication with the external power source;
 - a heating device operable to receive preheated fluid from the fluid reservoir, the heating device receiving power from the battery when the power cord is unplugged from the external power source to heat the preheated fluid; and
 - a nozzle in fluid communication with the heating device, the nozzle configured to receive fluid from the heating device and discharge the fluid through the nozzle.
9. The steamer of claim 8, further comprising
 - a wand movable relative to the housing, the nozzle positioned on the wand; and
 - a conduit extending between the wand and the housing.
10. The steamer of claim 9, wherein the heating device is positioned on the wand and the conduit provides fluid communication between the reservoir and the heating device.
11. The steamer of claim 9, wherein the battery is positioned within the wand.
12. The steamer of claim 8, wherein the battery is positioned within the housing.
13. The steamer of claim 8, wherein the nozzle is integral with the housing.
14. The steamer of claim 8, wherein the reservoir heating element receives power from the battery when the power cord is disconnected from the external power source.
15. The steamer of claim 8, wherein the battery is charged by the external power source when the power cord is coupled to the external power source.

16. The steamer of claim 8, wherein the reservoir heating element is configured to heat the fluid in the reservoir to a predetermined temperature below the boiling point of the fluid using power from the external power source when the power cord is in communication with the external power source.

17. The steamer of claim 16, wherein the reservoir heating element is configured to heat the fluid in the reservoir to a temperature that is approximately five to ten degrees Celsius below the boiling point of the fluid.

18. The steamer of claim 8, wherein the reservoir heating element receives power from the battery when the power cord is disconnected from the external power source.

19. The steamer of claim 8, wherein the reservoir heating element receives power from the battery when a temperature of the fluid in the reservoir decreases below a predetermined level.

20. The steamer of claim 8, wherein the heating device receives power from the external power source when the power cord is coupled to the external power source.

21. The steamer of claim 8, wherein the heating device includes a resistive heating element that is configured to heat the fluid and convert the fluid into steam.

22. The steamer of claim 8, wherein the heating device includes a bore and a heating element, the bore having a first end and a second end and the heating element positioned at least partially in the bore between the first and the second end, wherein fluid enters the bore from the first end, is heated by the heating element, and exits the second end of the bore as steam.

23. The steamer of claim 8, further comprising a pump for conveying fluid from the reservoir and to the heating device.

24. The steamer of claim 23, further comprising a wand movable relative to the housing and connected to the housing by a conduit, the wand including an actuator for operating the pump.

25. A steamer comprising:
- a portable housing including a battery, a fluid reservoir, and a reservoir heating element configured to heat fluid in the fluid reservoir to a predetermined temperature below the boiling point of the fluid, the reservoir heating element selectively receiving power from an external power source;
 - a conduit in fluid communication with the fluid reservoir; and
 - a wand movable relative to the housing and including a heating device and a nozzle, the heating device in fluid communication with the fluid reservoir via the conduit, the heating device receiving power from the battery to heat the fluid in the heating device, the nozzle in fluid communication with the heating device to receive the fluid and discharge the fluid.
26. The steamer of claim 25, wherein the housing includes a power cord configured to be selectively coupled to an external power source, wherein the reservoir heating element receives power from the external power source when the power cord is in communication with the external power source and the reservoir heating element receives power from the battery when the power cord is disconnected from the external power source.
27. The steamer of claim 26, wherein the battery is charged by the external power source when the power cord is coupled to the external power source.
28. The steamer of claim 25, wherein the reservoir heating element is configured to heat the fluid in the fluid reservoir to a temperature that is approximately five to ten degrees Celsius below the boiling point of the fluid.
29. The steamer of claim 25, wherein the heating device includes a resistive heating element that is configured to heat the fluid in the heating device and convert the fluid into steam.
30. The steamer of claim 25, wherein the heating device includes a bore and a heating element, the bore having a first end and a second end and the heating element being positioned between the first end and the second end, wherein fluid enters the bore from the first end, is heated by the heating element and converted to steam, and exits the second end of the bore.
31. The steamer of claim 25, wherein the housing includes a pump for conveying fluid from the reservoir, through the conduit, and into the heating device.

32. The steamer of claim 31, wherein the wand includes an actuator for operating the pump.
33. A method of generating steam in a steamer comprising:
receiving fluid in a reservoir including a heating element;
preheating the fluid using power from an external power source until the fluid is a predetermined temperature below a boiling temperature of the fluid;
conveying the preheated fluid to a heating device;
heating the fluid in the heating device using power from a battery when the steamer is unplugged from the external power source; and
discharging the fluid through a nozzle.
34. The method of claim 33, further comprising, when the reservoir heating element is disconnected from the external power source, using power from the battery to preheat the fluid in the reservoir.
35. The method of claim 33, further comprising, when the heating device is connected to the external power source, using power from the external power source to heat the fluid.
36. The method of claim 33, further comprising charging the battery using power from the external power source.
37. The method of claim 33, wherein preheating the fluid includes heating the fluid in the reservoir to a temperature that is approximately five to ten degrees Celsius below the boiling temperature of the fluid.

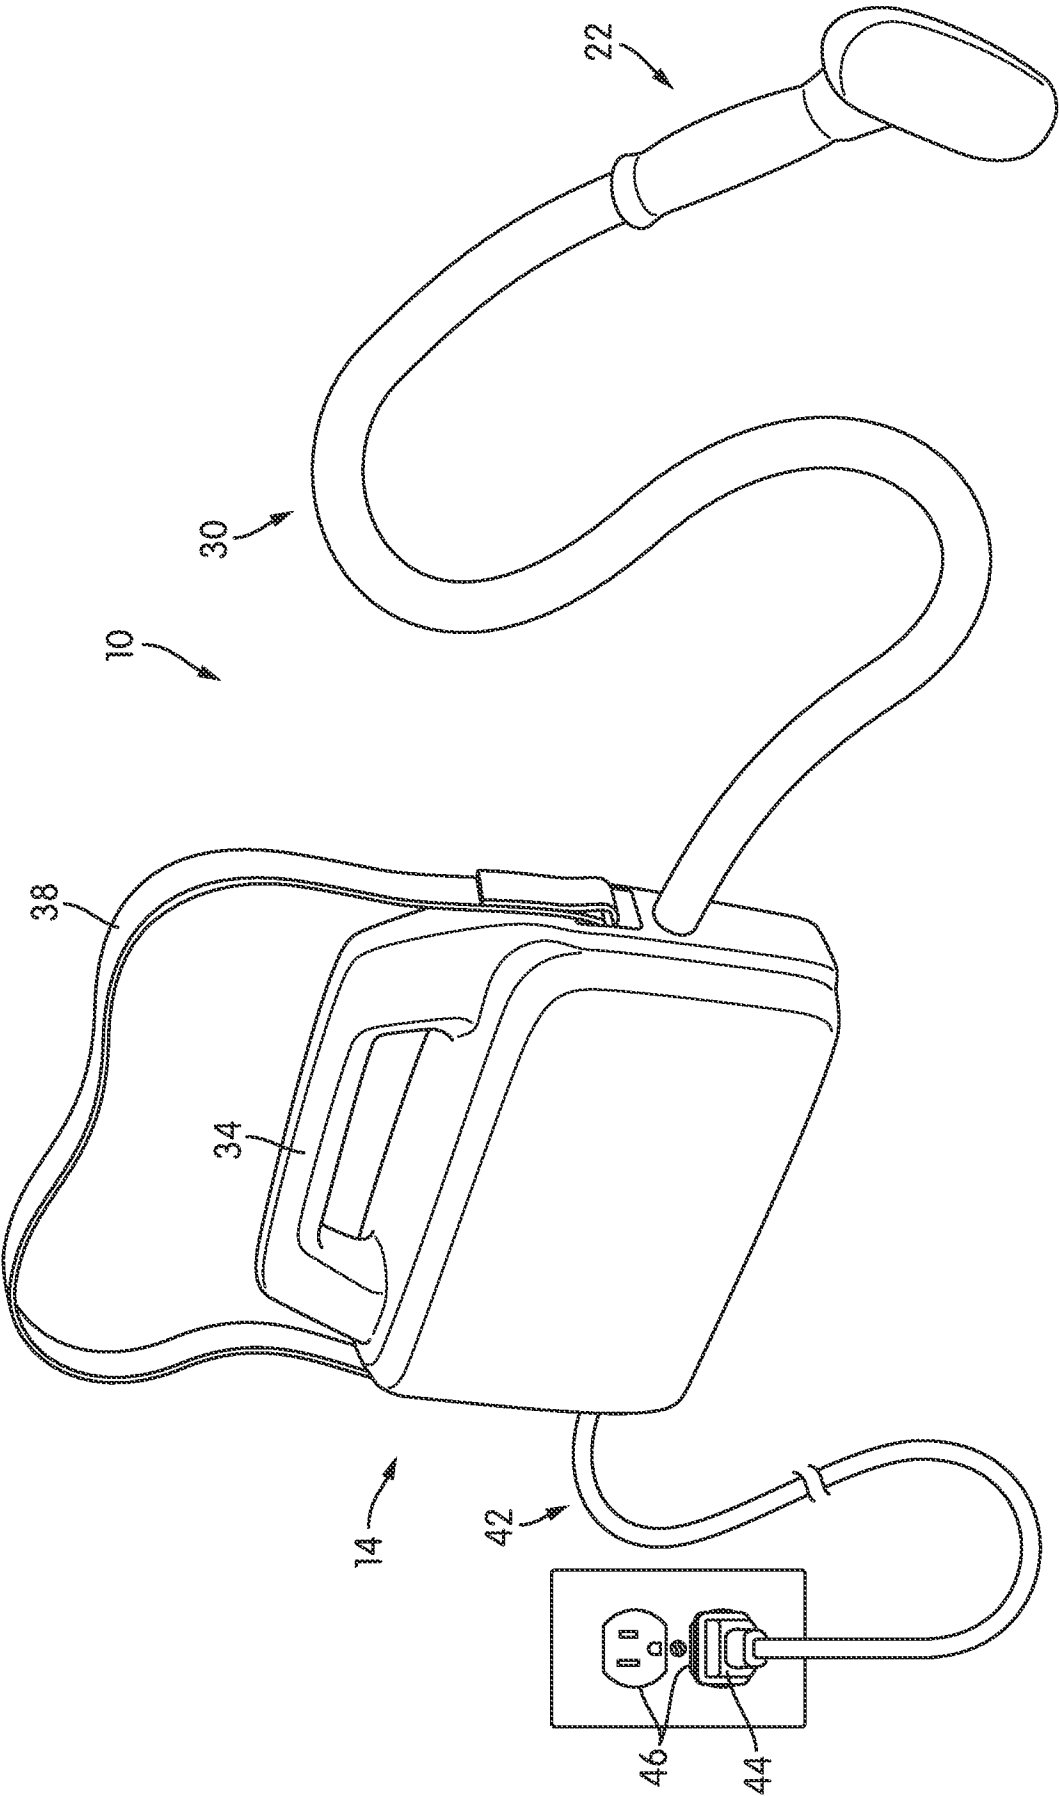


FIG. 1

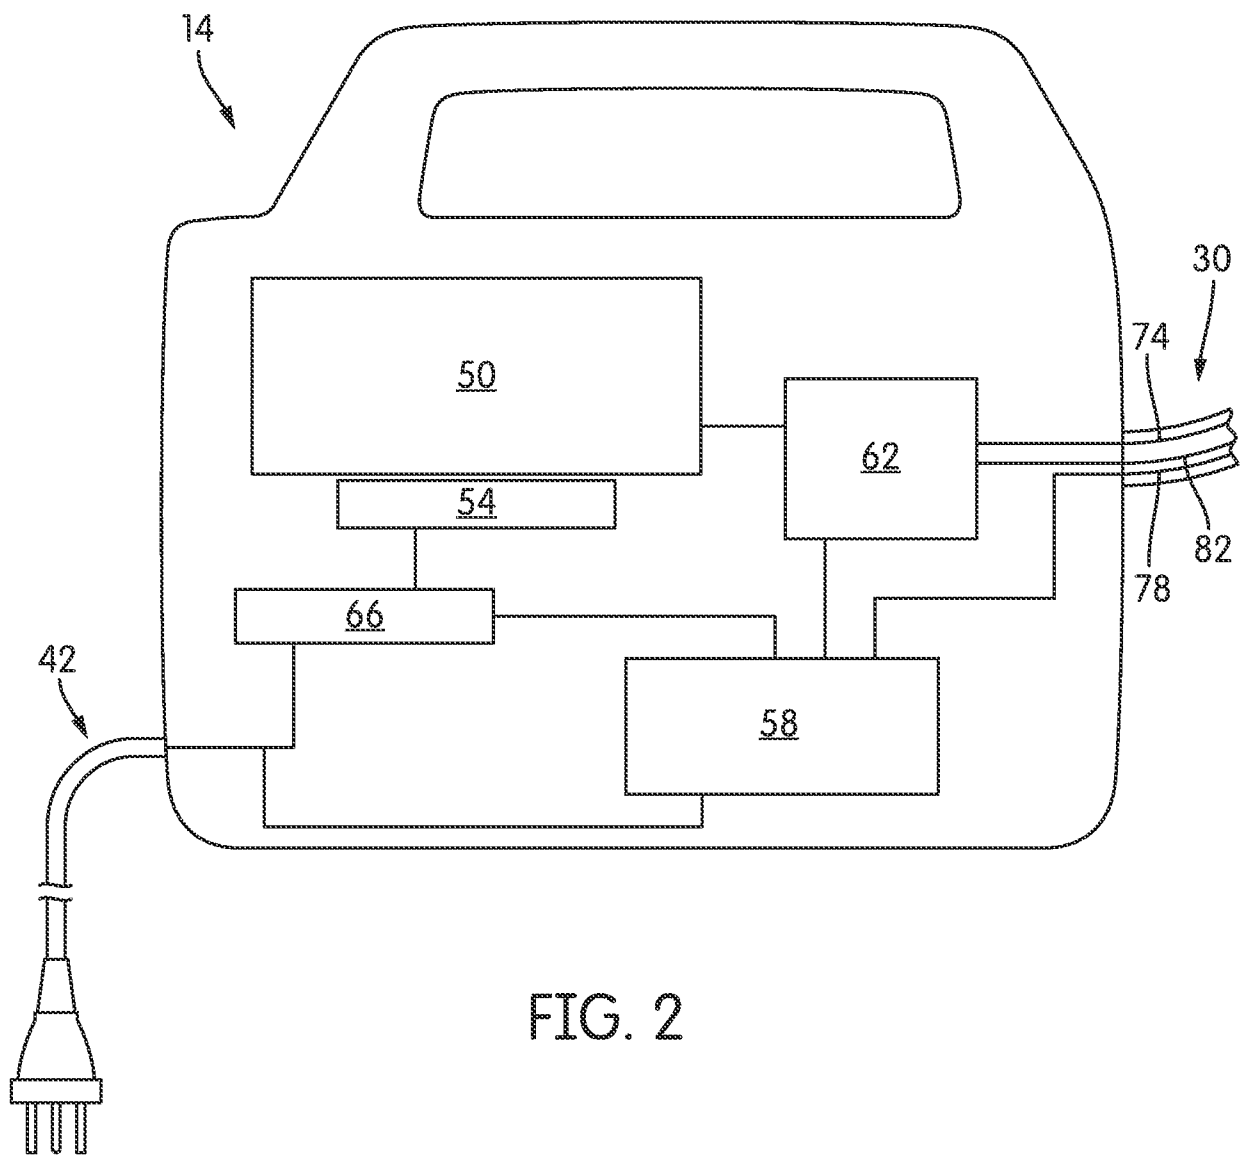


FIG. 2

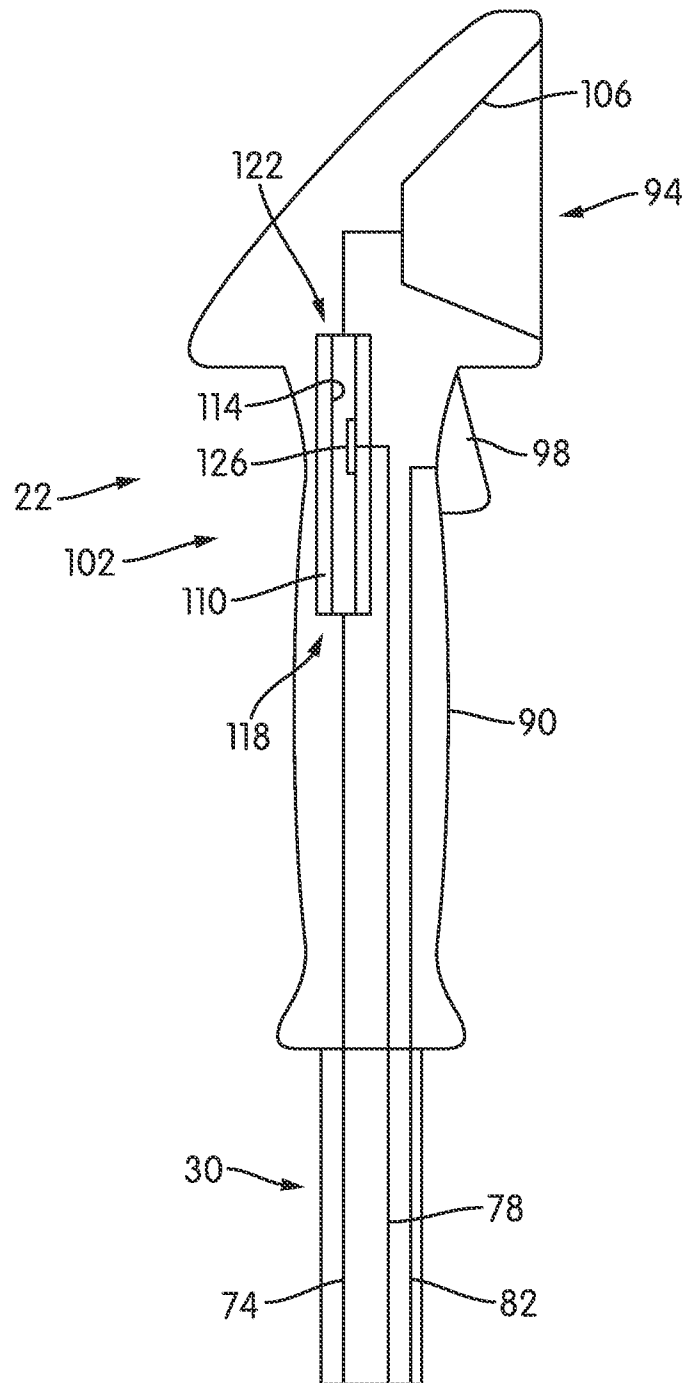


FIG. 3

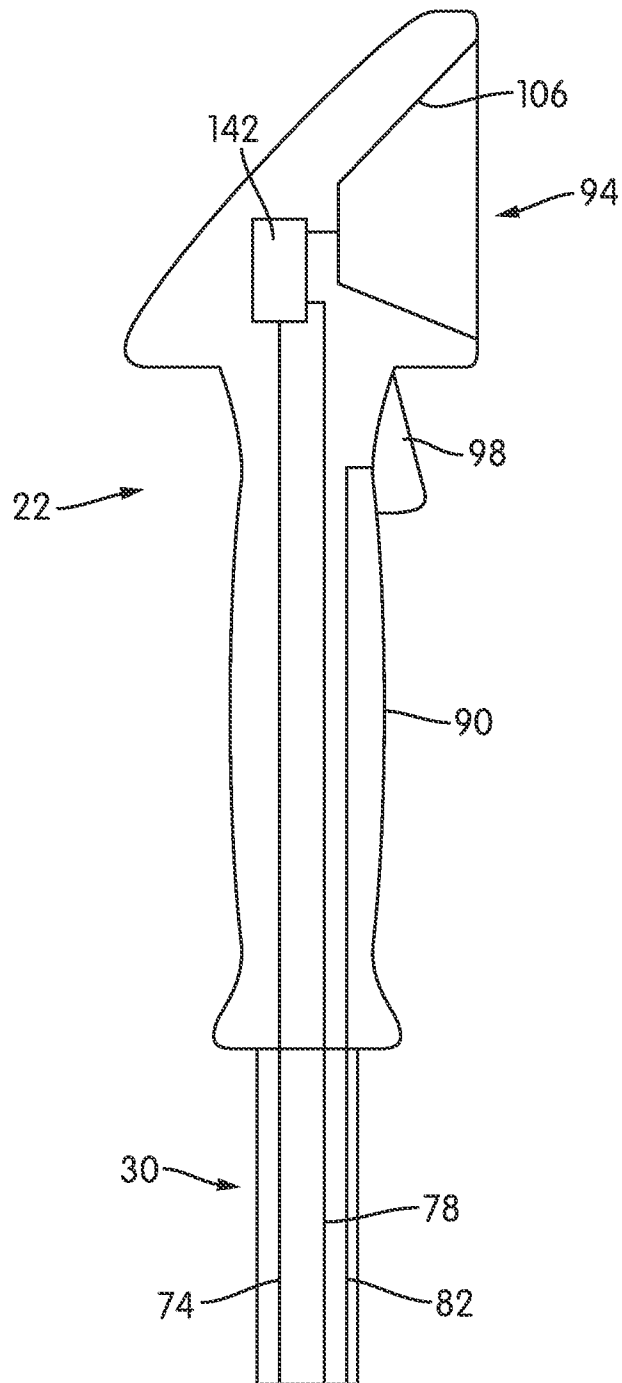


FIG. 4

5/6

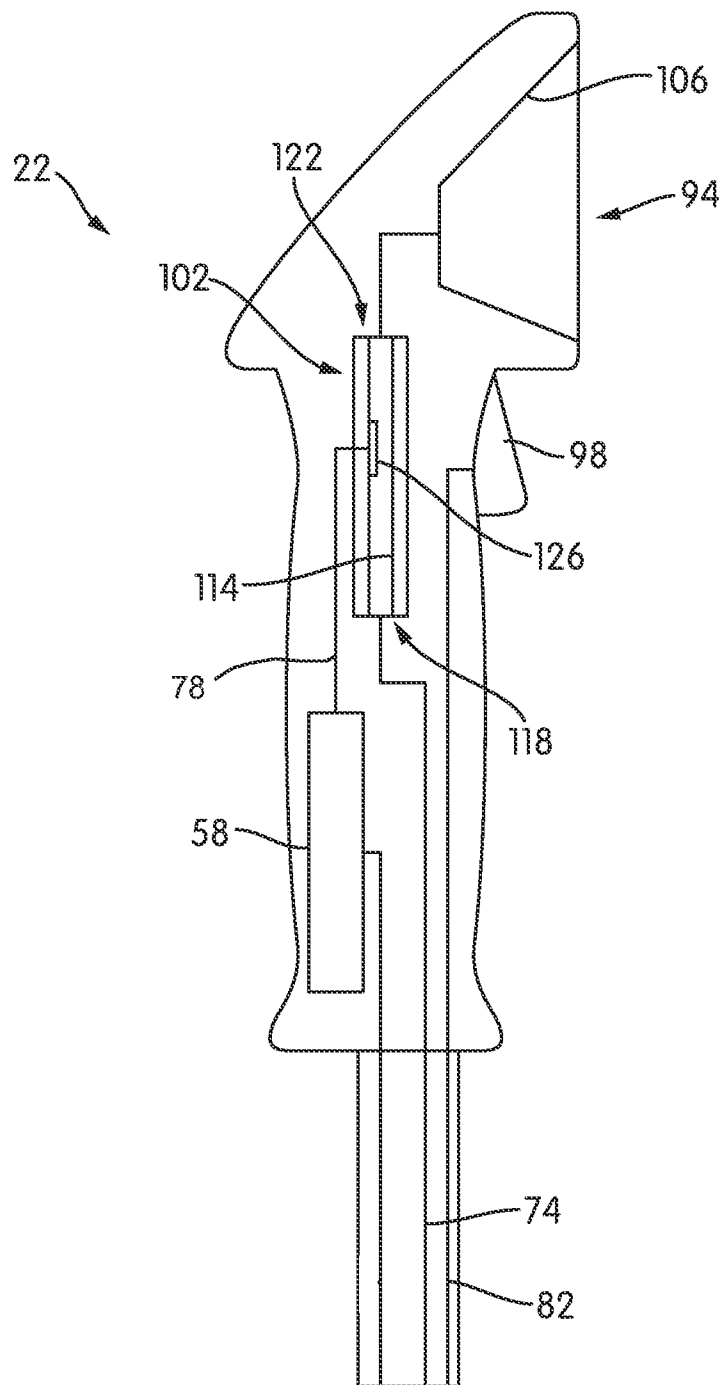


FIG. 5

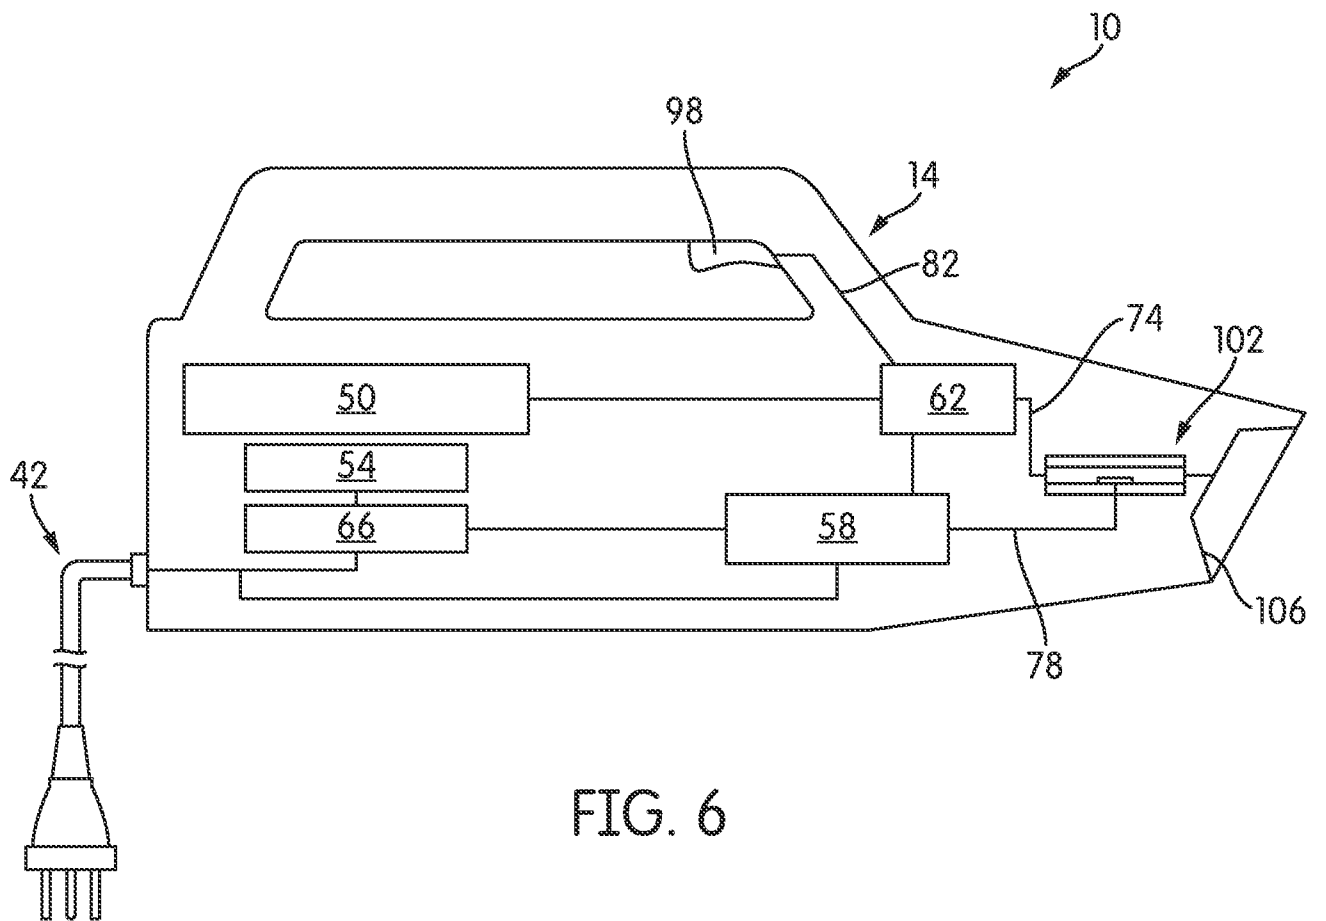


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/010302

| A. CLASSIFICATION OF SUBJECT MATTER INV. D06F75/06 A47L11/40 D06F75/12 D06F75/20 D06F75/24 D06F87/00 ADD. According to International Patent Classification (IPC) or to both national classification and IPC | | | | | | | | | | | | | | | | | |
|--|---|------------------------------------|-----------|--|-----------------------|---|--|-----------------------------------|---|--------------------|------------------------------------|---|--|-----------------|---|--|----------------------------------|
| B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) D06F A47L Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data | | | | | | | | | | | | | | | | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Category*</th> <th style="width: 60%;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="width: 30%;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>CN 102 342 781 A (YUN LIU LIU YUN) 8 February 2012 (2012-02-08)</td> <td style="vertical-align: top;">6,9, 11-22, 26-30, 33-37</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td>the whole document</td> <td style="vertical-align: top;">1-5,7,8, 10, 23-25, 31,32</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td>----- CN 202 247 451 U (JINSONG ZHOU) 30 May 2012 (2012-05-30)</td> <td style="vertical-align: top;">1-4,8, 25,33</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>the whole document ----- -/-</td> <td style="vertical-align: top;">5-7, 9-24, 26-32, 34-37</td> </tr> </tbody> </table> | | | Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. | X | CN 102 342 781 A (YUN LIU LIU YUN) 8 February 2012 (2012-02-08) | 6,9, 11-22, 26-30, 33-37 | Y | the whole document | 1-5,7,8, 10, 23-25, 31,32 | Y | ----- CN 202 247 451 U (JINSONG ZHOU) 30 May 2012 (2012-05-30) | 1-4,8, 25,33 | A | the whole document ----- -/- | 5-7, 9-24, 26-32, 34-37 |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. | | | | | | | | | | | | | | | |
| X | CN 102 342 781 A (YUN LIU LIU YUN) 8 February 2012 (2012-02-08) | 6,9, 11-22, 26-30, 33-37 | | | | | | | | | | | | | | | |
| Y | the whole document | 1-5,7,8, 10, 23-25, 31,32 | | | | | | | | | | | | | | | |
| Y | ----- CN 202 247 451 U (JINSONG ZHOU) 30 May 2012 (2012-05-30) | 1-4,8, 25,33 | | | | | | | | | | | | | | | |
| A | the whole document ----- -/- | 5-7, 9-24, 26-32, 34-37 | | | | | | | | | | | | | | | |
| <div style="display: flex; justify-content: space-between;"> <div> <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. </div> <div> <input checked="" type="checkbox"/> See patent family annex. </div> </div> | | | | | | | | | | | | | | | | | |
| <div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div> | | | | | | | | | | | | | | | | | |
| Date of the actual completion of the international search <div style="text-align: center; font-size: 1.2em;">17 March 2015</div> | Date of mailing of the international search report <div style="text-align: center; font-size: 1.2em;">27/03/2015</div> | | | | | | | | | | | | | | | | |
| Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016 | Authorized officer <div style="text-align: center; font-size: 1.2em;">Spitzer, Bettina</div> | | | | | | | | | | | | | | | | |

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/010302

| C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|--|-----------------------------------|
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| Y | WO 2009/022260 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; VALIYAMBATH KRISHNAN MOHANKUMA [S]) 19 February 2009 (2009-02-19) | 5,25 |
| A | the whole document | 1-4, 6-24, 26-37 |
| Y | ----- EP 2 138 628 A1 (TAURUS SL ELECTRODOMESTICOS [ES]) 30 December 2009 (2009-12-30) | 5,25 |
| A | the whole document | 1-4, 6-24, 26-37 |
| Y | ----- US 2006/018638 A1 (LEUNG ANTHONY K L [HK]) 26 January 2006 (2006-01-26) | 1,7,8, 25,33 |
| A | the whole document | |
| A | ----- WO 2008/021273 A2 (CONAIR [US]; LEUNG ANTHONY KIT LUN [CN]) 21 February 2008 (2008-02-21) | 1-37 |
| A | the whole document | |
| Y | ----- WO 2013/057651 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]) 25 April 2013 (2013-04-25) | 10, 23-25, 31,32 |
| A | the whole document | 1-9, 11-22, 26-30, 33-37 |
| A | ----- CN 202 369 835 U (FOSHAN SHUNDE SINCERE HOME HOME APPLIANCE MFG CO LTD) 8 August 2012 (2012-08-08) | 1-37 |
| A | the whole document | |
| A | ----- CN 202 576 979 U (FOSHAN SHUNDE SINCERE HOME HOME APPLIANCE MFG CO LTD) 5 December 2012 (2012-12-05) | 1-37 |
| A | the whole document | |
| A | ----- EP 2 455 540 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]) 23 May 2012 (2012-05-23) | 1-37 |
| A | the whole document | |
| | ----- | |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/010302

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|--|
| CN 102342781 | A | 08-02-2012 | NONE |
| CN 202247451 | U | 30-05-2012 | NONE |
| WO 2009022260 | A1 | 19-02-2009 | CN 101784719 A 21-07-2010 EP 2176460 A1 21-04-2010 JP 2010536411 A 02-12-2010 KR 20100054148 A 24-05-2010 RU 2010109361 A 20-09-2011 US 2011265354 A1 03-11-2011 WO 2009022260 A1 19-02-2009 |
| EP 2138628 | A1 | 30-12-2009 | NONE |
| US 2006018638 | A1 | 26-01-2006 | NONE |
| WO 2008021273 | A2 | 21-02-2008 | US 2008040953 A1 21-02-2008 WO 2008021273 A2 21-02-2008 |
| WO 2013057651 | A1 | 25-04-2013 | CN 103061093 A 24-04-2013 CN 202744852 U 20-02-2013 EP 2744937 A1 25-06-2014 JP 2015501176 A 15-01-2015 WO 2013057651 A1 25-04-2013 |
| CN 202369835 | U | 08-08-2012 | NONE |
| CN 202576979 | U | 05-12-2012 | NONE |
| EP 2455540 | A1 | 23-05-2012 | CN 102535134 A 04-07-2012 CN 202380310 U 15-08-2012 EP 2455540 A1 23-05-2012 EP 2640888 A2 25-09-2013 US 2013219758 A1 29-08-2013 WO 2012066473 A2 24-05-2012 |