

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2007 (15.03.2007)

PCT

(10) International Publication Number
WO 2007/029162 A1

(51) International Patent Classification:

B26B 21/38 (2006.01) **B26B 21/52** (2006.01)
B26B 21/40 (2006.01) **B26B 21/46** (2006.01)

(21) International Application Number:

PCT/IB2006/053088

(22) International Filing Date:

2 September 2006 (02.09.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/220,014 6 September 2005 (06.09.2005) US

(71) Applicant (for all designated States except US): **THE GILLETTE COMPANY** [US/US]; Prudential Tower Building, Boston, Massachusetts 02199 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SCHNAK, Fred** [DE/DE]; Niederhochstadter Strasse 55, 61476 Kronberg (DE). **BURREL, Luis** [DE/DE]; 104 Kettenhofweg, 60325 Frankfurt A. M. (DE). **REHBEIN, Stefan** [DE/DE]; 36 Schumannstr., 60325 Frankfurt A. M. (DE). **RONNEBERG, Gerrit** [DE/DE]; Barkhausstrasse 59, 64289 Darmstadt (DE). **SCHAAF, Uwe** [DE/DE]; Mainstrasse 12, 64665 Alsbach-hahnlein (DE).

(74) Common Representative: **THE GILLETTE COMPANY**; c/o Eileen L. Hughett, The Procter & Gamble Company, Winton Hill Business Center, 6110 Center Hill Road, Cincinnati, Ohio 45224 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RAZORS

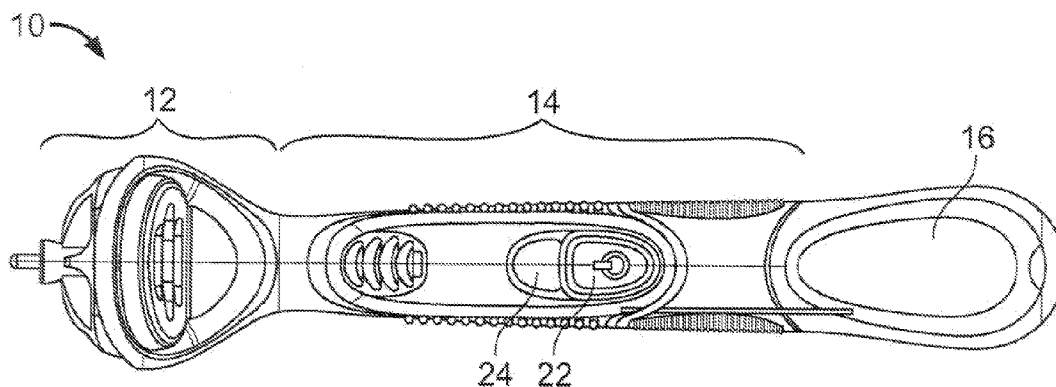

(57) Abstract: Handles are provided for battery operated razors. In some implementations, the handles include (a) a housing including a grip portion defining a chamber having an interior wall, and a battery cover removably mounted on the grip portion, the housing being configured to contain one or more batteries, and (b) a closing system, including a first component within the battery cover, and a second component secured to the interior wall of the grip portion, the first component being configured to move axially within the battery cover during engagement of the battery cover with the grip portion, and being biased toward a predetermined axial position.

Razors

TECHNICAL FIELD

This invention relates to razors, and more particularly to razors for wet shaving that include a battery-powered functionality.

5

BACKGROUND

In many small battery-operated devices, the batteries are replaceable by the user, and are inserted and removed from a battery compartment through an opening having a cover. It is necessary to mechanically secure the cover in place, so that the batteries do not fall out and the cover is not lost and, in the case of water-tight devices, to provide a
10 seal between the cover and the housing to which it is secured. It is also necessary to make electrical contact between the batteries and the electrical circuitry within the device, and to hold the battery in place within the device.

SUMMARY

The present invention provides a simple, efficient mechanism for both securing a
15 battery cover to the housing of a razor and at the same time providing a high reliability electrical contact between the battery and electronics of the razor. Preferred closing systems include very few parts and thus are easy and economical to manufacture and assemble. Moreover, some preferred closing systems are suitable for use with small, space saving housing designs and/or designs that includes non-linear seam lines between
20 the battery cover and housing.

In one aspect, the invention features a battery operated razor including (a) a housing including a grip portion defining a chamber having an interior wall, and a battery cover removably mounted on the grip portion, the housing being configured to contain one or more batteries, and (b) a closing system, including a first component within the
25 battery cover, and a second component secured to the interior wall of the grip portion, the first component being configured to move axially within the battery cover during engagement of the battery cover with the grip portion, and being biased toward a predetermined axial position.

Some implementations include one or more of the following features. The first and second components may be configured to engage each other by rotation of the battery cover relative to the housing. For example, the first component may include a circumferentially extending slot having an open end and the second component may include a male portion configured to slide into the slot through the open end during rotation. Alternatively, the first component may include a male portion configured to slide into the slot through the open end during rotation and the second component may include a circumferentially extending slot having an open end. In either case, the open end of the slot may include a lead-in configured to guide insertion of the male portion into the slot, and the slot may terminate in a detent area configured to receive the male portion.

The first component may be biased towards a bottom region of the battery cover, for example by a spring element configured to apply an axial force between the grip portion and battery cover when the first and second components are engaged. For example, the first component may be biased by a bayonet spring. In some implementations, the first and second components are electrically conductive, and engagement of the first and second components provides an electrical connection between the first and second components. The razor may further include a battery spring positioned to bias a battery within the housing towards an electrical contact at an opposite end of the housing.

The razor may further include electronic components disposed within the chamber. The second component may extend from a carrier on which the electronics are mounted within the chamber, and may include a portion configured to make electrical contact with the electronics. The carrier may include one or more power rails. The electronics may be configured to drive a vibrating function of the razor. The carrier may include a pair of battery clamp fingers configured to exert a clamping force against the battery when the battery is in place in the housing.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

FIG. 1 is a top view of a razor handle according to one embodiment.

FIGS. 1A and 1B are cross sectional views of the razor handle of FIG. 1.

FIG. 2 is a bottom view of the razor handle of FIG. 1.

5 FIG. 3 is a partially exploded view of the razor handle of FIG. 1.

FIG. 4 is a perspective view of the head tube exploded from the grip tube of the razor.

FIG. 5 is a side view of the grip tube.

10 FIG. 6 is an exploded view of the grip tube showing the components contained therein.

FIGS. 7-7C are exploded views illustrating the assembly of the components contained in the grip tube.

15 FIG. 8 is a perspective view of the grip tube with the LED window exploded from the tube and the actuator button omitted. FIG. 8A is a perspective view of the grip tube with the LED window welded in place and the actuator button exploded from the tube. FIGS. 8B-8D are enlarged perspective views of a portion of the grip tube, showing steps in assembly of the actuator button onto the tube.

FIG. 9 is a perspective view of a bayonet assembly used in the razor of FIG. 1. FIG. 9A is an enlarged detail view of area A in FIG. 9. FIG. 9B is an enlarged detail view of the bayonet assembly with the male and female components engaged and the bayonet and battery springs compressed.

FIG. 10 is a side view of the bayonet assembly shown in FIG. 9, rotated 90 degrees with respect to the position of the assembly in FIG. 9.

25 FIG. 11 is an exploded view of the lower portion of the bayonet assembly and the battery shell that contains the lower portion.

FIG. 12 is a cross-sectional view of the battery shell.

FIG. 13 is an exploded view of the venting components of the battery shell.

Like reference symbols in the various drawings indicate like elements.

FIG. 14A shows a razor having a speed control switch.

30 FIG. 14B shows a razor having a speed control switch and a memory for storage of preferred speeds.

FIG. 14C shows a razor having an indirect power supply.

FIG. 14D shows a voltage converter for the indirect power supply of FIG. 14C.

FIG. 14E shows the signals output by the control logic and the oscillator, and their effect on the capacitor voltage.

FIG. 14F shows another voltage converter for the indirect power supply of FIG.
5 14C.

FIG. 14G shows a circuit for supplying power to a load.

FIG. 15A shows a blade-life indicator that counts the number of times a motor has started since blade replacement.

FIG. 15B shows a blade-life indicator that accumulates motor-operating time
10 since blade replacement.

FIG. 15C shows a blade-life indicator that counts the number of strokes since blade replacement.

FIG. 15D shows a blade-life indicator that accumulates stroke time since blade replacement.

FIG. 16A shows a mechanical lock.
15

FIG. 16B shows a locking circuit in which a lock signal disarms the razor.

FIG. 17A shows a force-measurement circuit that senses variations in current drawn by the motor.

FIG. 17B shows a force-measurement circuit that senses variations in motor
20 speed.

DETAILED DESCRIPTION

Overall Razor Structure

Referring to FIG. 1, a razor handle 10 includes a razor head 12, a grip tube 14, and a battery shell 16. The razor head 12 includes a connecting structure for mounting a
25 replaceable razor cartridge (not shown) on the handle 10, as is well known in the razor art. The grip tube 14 is constructed to be held by a user during shaving, and to contain the components of the razor that provide the battery-powered functionality of the razor, e.g., a printed circuit board and a motor configured to cause vibration. The grip tube is a sealed unit to which the head 12 is fixedly attached, allowing modular manufacturing and
30 providing other advantages which will be discussed below. Referring to FIG. 3, the battery shell 16 is removably attached to the grip tube 14, so that the user may remove the

battery shell to replace the battery 18. The interface between the battery shell and grip tube is sealed, e.g., by an O-ring 20, providing a water-tight assembly to protect the battery and electronics within the razor. The O-ring 20 is generally mounted in groove 21 (FIG. 5) on the grip tube, e.g., by an interference fit. Referring again to FIG. 1, the grip tube 14 includes an actuator button 22 that may be pressed by the user to actuate the battery-powered functionality of the razor via an electronic switch 29 (FIG. 7A). The grip tube also includes a transparent window 24 to allow the user to view a light 31 or display or other visual indicator (FIG. 7A), e.g., an LED or LCD, that provides a visual indication to the user of battery status and/or other information. The light 31 shines through an opening 45 (FIG. 8) provided in the grip tube beneath the transparent window. These and other features of the razor handle will be described in further detail below.

Modular Grip Tube Structure

As discussed above, the grip tube 14 (shown in detail in FIGS. 4 and 5) is a modular assembly, to which the razor head 12 is fixedly attached. The modularity of the grip tube advantageously allows a single type of grip tube to be manufactured for use with various different razor head styles. This in turn simplifies manufacturing of “families” of products with different heads but the same battery-powered functionality. The grip tube is water-tight except for the opening 25 at the end to which the battery shell is attached, and is preferably a single, unitary part. Thus, the only seal that is required to ensure water-tightness of the razor handle 10 is the seal between the grip tube and the battery shell, provided by O-ring 20 (FIG. 3). This single-seal configuration minimizes the risk of water or moisture infiltrating the razor handle and damaging the electronics.

As shown in FIG. 6, the grip tube 14 contains a subassembly 26 (also shown in FIG. 7C) which includes a vibration motor 28, a printed circuit board 30, an electronic switch 29 and the light 31 mounted on the printed circuit board, and the positive contact 32 for providing battery power to the electronics. These components are assembled within a carrier 34 which also includes battery clamp fingers 36 and a male bayonet portion 38, the functions of which will be discussed in the Battery Clamp and Battery Shell Attachment sections below. The assembly of all the functional electronic components of the razor onto the carrier 34 allows the battery-powered functionality to be pre-tested so that failures can be detected early, minimizing costly scrapping of completed

razors. Subassembly 26 also includes an insulation sleeve 40 and mounting tape 42, the function of which will be discussed in the Battery Clamp section below.

The subassembly 26 is assembled as shown in FIGS. 7-7C. First, the positive contact 32 is assembled onto a PCB carrier 44, which is then mounted on carrier 34 (FIG. 7). Next, the printed circuit board 30 is placed in the PCB carrier 44 (FIG. 7A), and the vibration motor 28 is mounted on the carrier 34 (FIG. 7B) with lead wires 46 being soldered onto the printed circuit board to complete the subassembly 26 (FIG. 7C). The subassembly may then be tested prior to assembly into the grip tube.

The subassembly 26 is assembled into the grip tube so that it will be permanently retained therein. For example, the subassembly 26 may include protrusions or arms that engage corresponding recesses in the inner wall of the grip tube in an interference fit.

The grip tube also includes an actuator button 22. The rigid actuator button is mounted on a receiving member 48 (FIG. 8) that includes the window 24, discussed above. The receiving member 48 includes a cantilevered beam 50 that carries an actuator member 52. Actuator member 52 transmits force that is applied to the button 22 to an underlying resilient membrane 54 (FIG. 8). Membrane 54 may be, for example, an elastomeric material that is molded onto the grip tube to form not only the membrane but also an elastomeric gripping portion. The cantilevered beam, acting in concert with the membrane, provides a restoring force to return the button 22 to its normal position after it is depressed by a user. When the button is depressed, the actuator member 52 contacts the underlying electronic switch 29, which activates the circuitry of the PCB 30.

Activation may be by a "push and release" on/off action or other desired action, e.g., push on/push off. The electronic switch 29 makes an audible "click" when actuated, giving the user feedback that the device has been correctly turned on. The switch is preferably configured to require a relatively high actuation force applied over a small distance (e.g., at least 4 N applied over about an 0.25 mm displacement). This switch arrangement, combined with the recessed, low profile geometry of button 22, tends to prevent the razor from being accidentally turned on during travel, or inadvertently turned off during shaving. Moreover, the structure of the switch/membrane/actuator member assembly provides the user with good tactile feedback. The actuator member 52 also holds the button 22 in place, the aperture 55 in the center of the actuator member 52 receiving a protrusion 56 on the underside of the button 22 (FIG. 8B).

Adjacent to the button 22 is the transparent window 24, through which the user can observe the indications provided by the underlying light, which are described in detail in the Electronics section below.

Assembly of the window 24 and actuator button onto the grip tube, is illustrated in FIGS. 8-8D. First, the receiving member 48, carrying the window 24, is sealingly mounted on the grip tube, e.g., by gluing or ultrasonic or heat welding (FIG. 8), to form the unitary water-tight part discussed above. Next, the button 22 is slid into place and gently (preferably with less than 10 N force) pushed down into the opening in the receiving member, causing the protrusion 56 to engage the aperture 55 (FIGS. 8A-8C).

Battery Shell Attachment

As discussed above, the battery shell 16 is removably attached to the grip tube 14, allowing removal and replacement of the battery. The two parts of the handle are connected, and electrical contact is established between the negative terminal of the battery and the electronic components, by a bayonet connection. The grip tube carries the male portion of the bayonet connection, while the battery shell carries the female portion. The assembled bayonet connection, with the grip tube and battery shell omitted for clarity, is shown in FIGS. 9, 9A and 10.

The male bayonet portion 38 of the carrier 34, discussed above, provides the male portion of the bayonet connection. Male bayonet portion 38 carries a pair of protrusions 60. These protrusions are constructed to be received and retained in corresponding slots 62 in a female bayonet component 64, carried by the battery shell. Each slot 62 includes a lead-in having angled walls 66, 68 (FIG. 9A), to guide each protrusion into the corresponding slot as the battery shell is rotated relative to the grip tube. A detent area 65 (FIG. 9A) is provided at the end of each slot 62. The engagement of the protrusions in the detent areas 65 (FIG. 9B) provides a secure, twist-on mechanical connection of the battery shell to the grip tube.

The carrier 34 and the female bayonet component 64 are both made of metal, and thus engagement of the protrusions with the slots also provides electrical contact between the carrier and the female bayonet component. The carrier is in turn in electrical contact with circuitry of the device, and the negative terminal of the battery is in contact with a battery spring 70 (FIG. 9A) that is in electrical communication with the female bayonet

component, and thus contact of the spring members and electrical part ultimately results in contact between the battery and the circuitry of the device.

As shown in FIG. 12, the battery spring 70 is mounted on a spring holder 72, which is in turn mounted fixedly to the inner wall of the battery shell 16. The female bayonet component 64 is free to slide axially back and forth within the battery shell 16. In its rest position, the female bayonet component is biased to the base of the battery shell by a bayonet spring 74. The bayonet spring 74 is also mounted on the spring holder 72 and thus its upper end is fixedly mounted with respect to the inner wall of the battery shell. When the battery shell is twisted onto the grip tube, the engagement of the protrusions on the male bayonet component with the angled slots on the female bayonet component draws the female bayonet component forward, compressing the bayonet spring 74. The biasing force of the bayonet spring then causes the female bayonet component to pull the male bayonet component and thus the grip tube toward the battery shell. As a result, any gap between the two parts of the handle is closed by the spring force and the O-ring is compressed to provide a water-tight sealing engagement. When engagement is complete and the protrusions 60 are received into the corresponding V-shaped detent areas 65 of the female bayonet slots 62 (FIG. 9B). This is perceived by the user as a clear and audible click, providing a clear indication that the battery shell has been correctly engaged. This click is the result of the action of the bayonet spring causing the protrusions to slide quickly into the V-shaped detent areas 65.

This resilient engagement of the battery shell with the grip tube compensates for non-linear seam lines between the battery shell and grip tube and other geometry issues such as tolerances. The force applied by the bayonet spring also provides solid and reliable electrical contact between the male and female bayonet components.

The spring-loaded female bayonet component also limits the force acting on the male and female bayonet components when the battery shell is attached and removed. If, after the grip tube and battery shell contact each other, the user continues to rotate the battery shell, the female bayonet component can move forward slightly within the battery shell, reducing the force applied by the protrusions of the male bayonet component. Thus, the force is kept relatively constant, and within a predetermined range. This feature can prevent damage to parts due to rough handling by the user or large part or assembly tolerances.

To accomplish the resilient engagement described above, it is generally important that the spring force of the bayonet spring be greater than that of the battery spring.

Generally, the preferred relative forces of the two springs may be calculated as follows:

1. Design the battery spring such that the contact force F_{batmin} applied by the
5 spring is sufficient for a minimum battery length.
2. Calculate the battery spring force F_{batmax} that would be required for a maximum battery length.
3. Calculate the maximum force F_{pmax} that would be required to push the battery shell against the grip tube to overcome the friction of the o-ring.
- 10 4. Determine the minimum closing force F_{clmin} with which the battery shell should be pressed against the grip tube in the closed condition.
5. Calculate the force applied by the bayonet spring according to $F_{bayonet} = F_{batmax} + F_{pmax} + F_{clmin}$.

As an example, in some implementations $F_{batmax} = 4$ N, $F_{pmax} = 2$ N, and
15 $F_{clmin} = 2$ N, and thus $F_{bayonet} = 8$ N.

Battery Clamp

As discussed above, carrier 34 includes a pair of battery clamp fingers 36 (FIGS. 6, 10). These fingers act as two springs which exert a small clamping force against the
20 battery 18 (FIG. 3). This clamping force is sufficiently strong so as to prevent the battery from rattling against the inner wall of the grip tube or against other parts, reducing the noise generated by the razor during use. Preferably, the clamping force is also sufficiently strong so as to keep the battery from falling out when the battery shell is removed and the grip tube is inverted. On the other hand, the clamping force should be
25 weak enough so that the user can easily remove and replace the battery. The male bayonet component 38 includes open areas 80 (FIG. 4) through which the battery can be grasped by the user for removal.

The dimensions of the spring fingers and their spring force are generally adjusted to allow the spring fingers to hold the weight of the minimum size battery discussed
30 above, to prevent it from falling out when the razor is held vertical, while also allowing the maximum size battery to be easily removed from the grip tube. To satisfy these constraints, in some implementations it is preferred that, with a coefficient of friction

between the battery and foil of about 0.15 - 0.30, the spring force for one finger be about 0.5 N when a minimum size battery (e.g., having a diameter of 9.5 mm) is inserted and less than about 2.5 N when a maximum size battery (e.g., having a diameter of 10.5 mm) is inserted. In general, the spring fingers will perform the above functions if, when the razor is held with the battery opening pointing downwards, the minimum size battery will not fall out and the maximum size battery can be taken out easily.

Referring to FIGS. 6 and 7C, a thin insulation sleeve 40, e.g., of plastic foil, further damps vibration noise and provides safety against a short circuit if the battery surface is damaged. As shown in FIG. 7C, the sleeve 40 is secured with tape 42 to the battery clamp fingers to hold the sleeve in place when the battery is removed and replaced. A suitable material for the insulation sleeve is polyethylene terephthalate (PET) film having a thickness of about 0.06 mm.

Venting Battery Compartment

Under certain conditions, hydrogen can accumulate in the interior of battery-powered appliances. The hydrogen may be released from the battery, or may be created by electrolysis outside the battery. Mixing of this hydrogen with ambient oxygen can form an explosive gas, which could potentially be ignited by a spark from the motor or switch of the device. Thus, any hydrogen should be vented from the razor handle, while still maintaining water tightness.

Referring to FIG. 13, a vent hole 90 is provided in the battery shell 16. A microporous membrane 92 that is gas-permeable but impermeable to liquids is welded to the battery shell 16 to cover the vent hole 90. A suitable membrane material is polytetrafluoroethylene (PTFE), commercially available from GORE. A preferred membrane has a thickness of about 0.2 mm. It is generally preferred that the membrane have a water-proofness of at least 70 kPa, and an air permeability of at least 12 l/hr/cm² at 100 mbar overpressure.

An advantage of the microporous membrane is that it will vent hydrogen by diffusion due to the difference in partial pressures of hydrogen on the two sides of the membrane. No increase in total pressure within the razor handle is required for venting to occur.

It is undesirable from an aesthetic standpoint for the user to see the vent hole and membrane. Moreover, if the membrane is exposed there is a risk that the pores of the membrane will become clogged, and/or that the membrane will be damaged or removed. To protect the membrane, a cover 94 is attached to the battery shell over the
5 membrane/vent area, e.g., by gluing. So that gas can escape from under the cover 94, an open area is provided between the inner surface of the cover and the outer surface 98 of the battery shell 16. In the implementation shown in the Figures, a plurality of ribs 96 are provided on the battery shell adjacent the vent hole 90, creating air channels between the cover and the battery shell. However, if desired other structures can be used to create the
10 venting space, for example the cover and/or the grip tube may include a depressed groove that defines a single channel and the ribs may be omitted.

The height and width of the air channels are selected to provide a safe degree of venting. In one example (not shown), there may be one channel on each side of the vent hole, each channel having a height of 0.15 mm and width of 1.1 mm.

15 Cover 94 may be decorative. For example, the cover may carry a logo or other decoration. The cover 94 may also provide a tactile gripping surface or other ergonomic features.

Electronics

20 Variable Speed Control

A powered razor is often used to shave different types of hair at different locations on the body. These hairs have markedly different characteristics. For example, whiskers tend to be thicker than hair on the legs. These hairs also protrude from the skin at different angles. For example, stubble is predominantly orthogonal to the skin, whereas leg hairs
25 tend to lay flatter.

The ease with which one can shave these hairs depends, in part, on the frequency at which the cartridge vibrates. Since these hairs have different characteristics, it follows that different vibration frequencies may be optimal for different types of hair. It is therefore useful to provide a way for the user to control this vibration frequency.

30 As shown in FIG. 14A, the vibration frequency of the shaving cartridge is controlled by a pulse width modulator **301** having a duty cycle under the control of control logic **105**. As used herein, "duty cycle" means the ratio between the temporal

extent of a pulse and that of the pause between pulses. A low duty cycle is thus characterized by short pulses with long waits between pulses, whereas a high duty cycle is characterized by long pulses with short waits between pulses. Varying the duty cycle varies the speed of the motor **306**, which in turn governs the vibration frequency of the shaving cartridge.

The control logic **105** can be implemented in a microcontroller or other microprocessor based system. Control logic can also be implemented in an application-specific integrated circuit ("ASIC") or as a field-programmable gate array ("FPGA").

The motor **306** can be any energy-consuming device that causes movement of the shaving cartridge. One implementation of a motor **306** includes a miniature stator and rotor coupled to the shaving cartridge. Another implementation of a motor **306** includes a piezoelectric device coupled to the shaving cartridge. Or, the motor **306** can be implemented as a device that is magnetically coupled to the shaving cartridge with an oscillating magnetic field.

In razors having variable speed control, the control logic **105** receives an input speed control signal **302** from a speed-control switch **304**. In response to the speed control signal **302**, the control logic **105** causes the pulse-width modulator **301** to vary its duty cycle. This, in turn, causes the motor speed to vary. The pulse-width modulator **301** can thus be viewed as a speed controller.

The speed-control switch **304** can be implemented in a variety of ways. For example, the speed-control switch can move continuously. In this case, the user can select from a continuum of speeds. Or, the speed-control switch **304** can have discrete stops, so that the user can select from a set of pre-defined motor speeds.

The speed-control switch **304** can take a variety of forms. For example, the switch **304** can be a knob or a slider that moves continuously or between discrete steps. The switch **304** can also be a set of buttons, with each one assigned to a different speed.

Or, the switch **304** can be a pair of buttons, with one button being assigned to increase and the other to decrease the speed. Or, the switch **304** can be a single button that one presses to cycle through speeds, either continuously or discretely.

Another type of switch **304** is a spring-loaded trigger. This type of switch enables the user to vary the vibration frequency continuously while shaving in the same way that one can continuously vary the speed of a chain saw by squeezing a trigger.

The actuator button **22** can also be pressed into service as a speed control switch **304** by suitably programming the control logic **105**. For example, one can program the control logic **105** to consider a double-click or a long press of the actuator button **22** as a command to vary the motor speed.

5 Among the available speeds is one that is optimized for cleaning the razor. An example of such a speed is the highest possible vibration frequency, which is achieved by causing the control logic **105** to drive the duty cycle as high as possible. Alternatively, the control logic **105** can operate in a cleaning mode in which it causes the motor **306** to sweep through a range of vibration frequencies. This enables the motor **306** to stimulate
10 different mechanical resonance frequencies associated with the blades, the cartridge, and any contaminating particles, such as shaven whisker fragments. The cleaning mode can be implemented as a continuous sweep across a frequency range, or as a stepped sweep, in which the control logic **105** causes the motor **306** to step through several discrete frequencies, pausing momentarily at each such frequency.

15 In some cases, it is useful to enable the razor to remember one or more preferred vibration frequencies. This is achieved, as shown in FIG. 14B, by providing a memory in communication with the control logic **105**. To use this feature, the user selects a speed and causes transmission of a memory signal, either with a separate control, or by pressing the actuator button **22** according to a pre-defined sequence. The user can then recall this
20 memorized speed when necessary, again by either using a separate control or by pressing the actuator button **22** according to a pre-defined sequence.

As shown in FIGS. 3A-3B, the razor features an indirect switching system in which the actuator button **22** controls the motor **306** indirectly through control logic **105** that operates the pulse-width modulator **301**. Thus, unlike a purely mechanical switching
25 system, in which the state of the switch directly stores the state of the motor **306**, the indirect switching system stores the state of the motor **306** in the control logic **105**.

Since the actuator button **22** no longer needs to mechanically store the state of the motor **306**, the indirect switching system provides greater flexibility in the choice and placement of the actuator button **22**. For example, a razor with an indirect switching
30 system, as disclosed herein, can use ergonomic buttons that combine the advantages of clear tactile feedback and shorter travel. Such buttons, with their shorter travel, are also easier to seal against moisture intrusion.

Another advantage to the indirect switching system is that the control logic **105** can be programmed to interpret the pattern of actuation and to infer, on the basis of that pattern, the user's intent. This has already been discussed above in connection with controlling the speed of the motor **306**. However, the control logic **105** can also be programmed to detect and ignore abnormal operation of the actuator button **22**. Thus, an unusually long press of the actuator button **22**, such as that which may occur unintentionally while shaving, will be ignored. This feature prevents the annoyance associated with accidentally turning off the motor **306**.

Voltage Controller

The effectiveness of the razor depends in part on the voltage provided by a battery **316**. In a conventional motorized wet razor, there exists an optimum voltage or voltage range. Once the battery voltage is outside the optimum voltage range, the effectiveness of the razor is compromised.

To overcome this difficulty, the razor features an indirect power supply, shown in FIG. 14C, that separates the voltage of the battery **316** from the voltage actually seen by the motor **306**. The voltage actually seen by the motor **306** is controlled by the control logic **105**, which monitors the battery voltage and, in response to a measurement of battery voltage, controls various devices that ultimately compensate for variations in battery voltage. This results in an essentially constant voltage as seen by the motor **306**.

The method and system described herein for controlling the voltage seen by a motor **306** is applicable to any energy-consuming load. For this reason, FIG. 14C refers to a generalized load **306**.

In one embodiment, the motor **306** is designed to operate at an operating voltage that is less than the nominal battery voltage. As a result, when a new battery **316** is inserted, the battery voltage is too high and must be reduced. The extent of the reduction decreases as the battery **316** wears down, until finally, no reduction is necessary.

Voltage reduction is readily carried out by providing a voltage monitor **312** in electrical communication with the battery **316**. The voltage monitor **312** outputs a measured battery voltage to the control logic **105**. In response, the control logic **105** changes the duty cycle of the pulse-width modulator **301** to maintain a constant voltage as seen by the motor **306**. For example, if the battery voltage is measured at 1.5 volts, and

the motor **306** is designed to operate at one volt, the control logic **105** will set the duty cycle ratio to be 75%. This will result in an output voltage from the pulse-width modulator **301** that is, on average, consistent with the motor's operating voltage.

In most cases, the duty cycle is a non-linear function of the battery voltage. In that case, the control logic **105** is configured either to perform the calculation using the non-linear function, or to use a look-up table to determine the correct duty cycle. Alternatively, the control logic **105** can obtain a voltage measurement from the output of the pulse-width modulator **301** and use that measurement to provide feedback control of the output voltage.

In another embodiment, the motor **306** is designed to operate at an operating voltage that is higher than the nominal battery voltage. In that case, the battery voltage is stepped up by increasing amounts as the battery **316** wears down. This second embodiment features a voltage monitor **312** as described above, together with a voltage converter **314** that is controlled by the control logic **105**. A suitable voltage converter **314** is described in detail below.

A third embodiment combines both of the foregoing embodiments in one device. In this case, the control logic **105** begins by reducing the output voltage when the measured battery voltage exceeds the motor operating voltage. Then, when the measured battery voltage falls below the motor operating voltage, the control logic **105** fixes the duty cycle and begins controlling the voltage converter **312**.

In a conventional powered razor, the motor speed gradually decreases as the battery **316** wears down. This gradual decrease provides the user with ample warning to replace the battery **316**. However, in a powered razor with an indirect power supply, there is no such warning. Once the battery voltage falls below some lower threshold, the motor speed decreases abruptly, perhaps even in the middle of a shave.

To prevent this inconvenience, the control logic **105**, on the basis of information provided by the voltage monitor **312**, provides a low-battery signal to a low-battery indicator **414**. The low-battery indicator **414** can be a single-state output device, such as an LED, that lights up when the voltage falls below a threshold, or conversely, that remains lit when the voltage is above a threshold and goes out when the voltage falls below that threshold. Or, the low-battery indicator **414** can be a multi-state device, such

as a liquid crystal display, that provides a graphical or numerical display indicative of the state of the battery **316**.

The voltage monitor **312**, in conjunction with the control logic **105**, can also be used to disable operation of the razor completely when the battery voltage falls below a deep-discharge threshold. This feature reduces the likelihood of damage to the razor caused by battery leakage that may result from deep-discharge of the battery **316**.

A suitable voltage converter **312**, shown in FIG. 14D, features a switch **S1** that controls an oscillator. This switch is coupled to the actuator button **22**. A user who presses the actuator button **22** thus turns on the oscillator. The oscillator output is connected to the gate of a transistor **T1**, which functions as a switch under the control of the oscillator. A battery **316** provides a battery voltage V_{BAT} .

When the transistor **T1** is in its conducting state, a current flows from the battery **316** through an inductor **L1**, thus storing energy in the inductor **L1**. When the transistor is in its non-conducting state, the current through the inductor **L1** will continue to flow, this time through the diode **D1**. This results in the transfer of charge through the diode **D1** and into the capacitor **C1**. The use of a diode **D1** prevents the capacitor **C1** from discharging to ground through the transistor **T1**. The oscillator thus controls the voltage across the capacitor **C1** by selectively allowing charge to accumulate into the capacitor **C1**, thereby raising its voltage.

In the circuit shown in FIG. 14D, the oscillator causes a time-varying current to exist in the inductor **L1**. As a result, the oscillator induces a voltage across the inductor **L1**. This induced voltage is then added to the battery voltage, with the resulting sum being available across the capacitor **C1**. This results in an output voltage, at the capacitor **C1** that is greater than the voltage provided by the battery alone.

The capacitor voltage, which is essentially the output voltage of the voltage converter **312**, is connected to both the control logic **105** and to the pulse-width modulator **301** that ultimately drives the motor **306**. When the capacitor voltage reaches a particular threshold, the control logic **105** outputs an oscillator control signal "*osc_ctr*" that is connected to the oscillator. The control logic **105** uses the oscillator control signal to selectively turn the oscillator on and off, thereby regulating the capacitor voltage in response to feedback from the capacitor voltage itself. The set point of this feedback

control system, i.e. the voltage across the capacitor **C1**, is set to be the constant operating voltage seen by the motor **306**.

A resistor **R1** disposed between the oscillator and ground functions as part of a decoupling circuit to selectively transfer control of the oscillator from the switch **S1** to the control logic **105**. Before initialization of the control logic, the port that carries the oscillator control signal (the “oscillator control port”) is set to be a high-impedance input port. As a result, it is the switch **S1** that controls the operation of the oscillator. The resistor **R1** in this case prevents a short circuit from the oscillator control port to ground. Following initialization, the oscillator control port becomes a low-impedance output port.

Eventually, the user will complete shaving, in which case he may want to turn off the motor **306**. With the control logic **105** now controlling the oscillator, there would be no way to turn off the shaver without removing the battery **316**. To avoid this difficulty, it is useful to periodically determine the state of the external switch **S1**. This is achieved by configuring the control logic **105** to periodically cause the oscillator control port to become a high-impedance input port, so that the voltage across the resistor **R1** can be sampled.

In certain types of switches, the state of the switch indicates the user’s intent. For example, a switch **S1** in the closed position indicates that the user wishes to turn on the motor **306**, and a switch **S1** in an open position indicates that the user wishes to turn off the motor **306**. If the voltage thus sampled indicates that the user has opened the switch **S1**, then, when the oscillator control port again becomes a low-impedance output port, the control logic **105** causes the oscillator control signal to shut down the oscillator, thereby shutting down both motor **306**. In doing to, the control logic **105** also shuts down its own power supply.

In other types of switches, closing of the switch **S1** indicates only that the user wishes to change the state of the motor from on to off or vice versa. In embodiments that use such switches, the voltage across the resistor **R1** changes only briefly when the user actuates the switch **S1**. As a result, the control logic **105** causes the voltage across the resistor **R1** to be sampled frequently enough to ensure capturing the user’s momentary actuation of the switch **S1**.

FIG. 14E shows the interaction between the oscillator control signal, the oscillator output, and the capacitor voltage. When the capacitor voltage falls below a lower threshold, the oscillator control signal turns on, thereby turning the oscillator on. This causes more charge to accumulate in the capacitor **C1**, which in turn raises the capacitor voltage. Once the capacitor voltage reaches an upper threshold, the oscillator control signal turns off, thereby turning off the oscillator. With no more charge accumulating in the capacitor **C1** from the battery **316**, the accumulated charge begins to drain away and the capacitor voltage begins to decrease. It does so until it reaches the lower threshold once again, at which point the foregoing cycle repeats itself.

Another embodiment of a voltage converter **312**, shown in FIG. 14F is identical to that described in connection with FIG. 14D with the exception that the diode **D1** is replaced by an additional transistor **T2** having a gate controlled by an RC circuit (**R2** and **C2**). In this embodiment, when the oscillator is inactive, the voltage between the emitter and the base (V_{BE2}) of the additional transistor **T2** is zero. As a result, current flow through the additional transistor **T2** is turned off. This means that no charge is being provided to the capacitor **C1** to replace charge that is being drained from the capacitor **C1**. When the oscillator is active, and the oscillator frequency is greater than the cut-off frequency of the RC circuit, then the voltage between the emitter and the base V_{BE2} will be approximately half the battery voltage V_{BAT} . As a result, the additional transistor **T2** functions as a diode to pass current to the capacitor **C1**, while preventing the capacitor **C1** from discharging to ground.

Another notable feature of the circuit in FIG. 14F is that the pulse-width modulator **301** is supplied with a voltage directly from the battery **316**. As a result, the output voltage of the pulse-width modulator **301** can be no higher than the battery voltage. Thus, in FIG. 14F, the motor **306** is powered by a step down in voltage, whereas the stepped up voltage, which is the voltage across the capacitor **C1**, is used to power the control logic **105**. However, the circuit shown in FIG. 14F can also feature a pulse-width modulator **316** that takes its input from the voltage across the capacitor **C1**, as shown in FIG. 14D.

FIG. 14G shows a circuit for driving a voltage converter **312** of the type shown in FIG. 14F in greater detail. The oscillator is shown in greater detail, as are the connections associated with the control logic **105**. However, the circuit shown in FIG. 14G is

otherwise essentially identical to that described in connection with FIG. 14D modified as shown in FIG. 14F.

As described herein, a voltage control system provides a constant operating voltage to a motor **306**. However, a powered razor may include loads other than a motor. Any or all of these loads may likewise benefit from a constant operating voltage as provided by the voltage control system disclosed herein.

One load that may benefit from a constant operating voltage is the control logic **105** itself. Commercially available logic circuits **105**, are typically designed to operate at a voltage that is higher than the 1.5 volts available in a conventional battery. Hence, a voltage control system that provides a step up in voltage to the control logic is useful to avoid the need for additional batteries.

Cartridge Lifetime Detection

In the course of slicing through hundreds of whiskers on a daily basis, the blades of a razor cartridge inevitably grow duller. This dullness is difficult to detect by visual inspection. As a rule, dull blades are only detected when it is too late. In too many cases, by the time a user realizes that a blade is too dull to use, he has already begun what will be an unpleasant shaving experience.

This final shave with a dull blade is among the more unpleasant aspects of shaving with a razor. However, given the expense of shaving cartridges, most users are understandably reluctant to replace the cartridge prematurely.

To assist the user in determining when to replace a cartridge, the razor includes a blade lifetime indicator **100**, shown in FIG. 15A, having a counter **102** that maintains a count indicative of the extent to which the blades have been already used. The counter is in communication with both the actuator button **22** on the handle **10**, and with a cartridge detector **104**, mounted at the distal end of the razor head **12**. A suitable counter **102** can be implemented in the control logic **105**.

A cartridge detector **104** can be implemented in a variety of ways. For example a cartridge detector **104** may include a contact configured to engage a corresponding contact on the cartridge.

Razor cartridges can include one, two, or more than two blades. Throughout this description, a single blade is referred to. It is understood, however, that this blade can be any blade in the cartridge, and that all the blades are subject to wear.

5 In operation, when the user replaces the cartridge, the cartridge detector **104** sends a reset signal to the counter **102**. Alternatively, a reset signal can be generated manually, for example by the user pressing a reset button, or by the user pressing the actuator button according to a pre-determined pattern. This reset signal causes the counter **102** to reset its count.

10 The ability to detect the cartridge can be used for applications other than resetting the count. For example, the cartridge detector **104** can be used to determine whether the correct cartridge has been used, or whether a cartridge has been inserted improperly. When connected to the control logic **105**, the cartridge detector **104** can cause the motor to be disabled until the condition is corrected.

15 When the user shaves, the counter **102** changes the state of the count to reflect the additional wear on the blade. There are a variety of ways in which the counter **102** can change the state of the count.

20 In the implementation shown in FIG. 15A, the counter **102** changes the count by incrementing it each time the motor is turned on. For users whose shaving time varies little on a shave-to-shave basis, this provides a reasonably accurate basis for estimating blade use.

In some cases, the number of times the motor has been turned on may misestimate the remaining lifetime of a blade. Such errors arise, for example, when a person “borrows” one’s razor to shave their legs. This results in the shaving of considerable acreage with only a single activation of the motor.

25 The foregoing difficulty is overcome in an alternative implementation, shown in FIG. 15B, in which the actuator button **22** and the counter **102** are in communication with a timer **106**. In this case, the actuator button **22** sends signals to both the control logic **105** and the timer **106**. As a result, the counter **102** maintains a count indicative of the accumulated motor-operating time since the last cartridge replacement.

30 The accumulated motor-operating time provides an improved indicator of blade wear. However, as a rule, the blade does not contact the skin at all times that the motor is operating. Thus, an estimate based on the motor’s operating-time cannot help but

overestimate blade wear. In addition, the motor switch may be inadvertently turned on, for example when the razor is jostled in one's luggage. Under those circumstances, not only will the battery be drained, but the counter **102** will indicate a worn blade, even though the blade has yet to encounter a single whisker.

5 Another implementation, shown in FIG. 15C, includes a counter **102** in communication with a stroke-detector **108**. In this case, the actuator button **22** signals both the stroke detector **108** and the control logic **105**. Thus, turning on the motor also turns on the stroke-detector **108**.

10 The stroke-detector **108** detects contact between the blade and the skin and sends a signal to the counter **102** upon detecting such contact. In this way, the stroke-detector **108** provides the counter **102** with an indication that the blade is actually in use. In the implementation of FIG. 15C, the counter **102** maintains a count indicative of the accumulated number of strokes that the blade has endured since the cartridge was last replaced. As a result, the counter **102** ignores time intervals during which the motor is
15 running but the blade is not actually in use.

20 A variety of implementations are available for the stroke-detector **108**. Some implementations rely on the change between the electrical properties on or near the skin and electrical properties in free space. For example, the stroke-detector **108** can detect skin contact by measuring a change in resistance, inductance, or capacitance associated with contacting the skin. Other implementations rely on the difference between the
25 acoustic signature of a blade vibrating on the skin and that of a blade vibrating in free space. In these implementations, the stroke-detector **108** can include a microphone connected to a signal processing device configured to distinguish between the two signatures. Yet other implementations rely on changes to the motor's operating
30 characteristics when the blade touches the skin. For example, because of the increased load associated with skin contact, the motor's appetite for current may increase and the motor's speed may decrease. These implementations include ammeters or other current indicating devices, and/or speed sensors.

 An estimate that relies on the number of strokes may nevertheless be inaccurate
30 because not all strokes have the same length. For example, a stroke down a leg may wear the blade more than the several strokes needed to shave a moustache. The stroke-detector **108**, however, cannot tell the difference between strokes of different lengths.

Another implementation, shown in FIG. 15D, includes both a stroke-detector **108** in communication with the actuator button **22** and a timer **106**. The timer **106** is in communication with the counter **102**. Again, the actuator button signals both the stroke detector **108** and the control logic **105**. The stroke detector **108** stops and starts the timer **106** in response to detecting the beginning and end of a stroke respectively. This implementation is identical to that in FIG. 15C except that the counter **102** now maintains a count indicative of the accumulated time that the cartridge has been in contact with the skin (referred to as “stroke time”) since the last cartridge replacement.

A stroke-detector **108** in conjunction with a timer **106** as described in connection with FIG. 15D has applications other than providing information indicative of blade wear. For example, the absence of a stroke for an extended period of motor operation may indicate that the motor has been turned on or left on inadvertently. This may occur when the razor is jostled in one’s luggage. Or it may occur because one has absent-mindedly overlooked the need to turn off the motor after shaving.

In the embodiments of FIGS. 1A-1D, the counter **102** is in communication with a replacement indicator **110**. When the count reaches a state indicative of a worn blade, the counter **102** sends a replacement signal to the replacement indicator **110**. In response, the replacement indicator **110** provides the user with a visual, audible, or tactile cue to indicate that the blade is worn out. Exemplary cues are provided by an LED, a buzzer, or a governor that varies the motor speed, or otherwise introduces an irregularity, such as a stutter, into the operation of the motor.

The counter **102** includes an optional remaining-lifetime output that provides a remaining-life signal indicative of an estimate of the remaining life of the blade. The remaining-life estimate is obtained by comparing the count and an expected lifetime. The remaining life signal is provided to a remaining-life indicator **112**. A suitable remaining-life indicator **112** is a low-power display showing the expected number of shaves remaining before the worn-out signal activates the worn-out indicator. Alternatively, the remaining lifetime estimate may be shown graphically, for example by flashing a light with a frequency indicative of a remaining lifetime estimate, or by selectively illuminating several LEDs according to a pre-defined pattern.

Travel Lock

In some cases, it is possible to inadvertently turn on the motor of a powered wet razor. This may occur, for example, during travel when other items in a toilet kit shift and press the actuator button **22**. If this occurs, the motor will draw on the battery until the battery runs down.

5 To avoid this difficulty, the razor can include a lock. One such lock is a mechanical lock **200** on the actuator button **22** itself. An example of a mechanical lock **200** is a sliding cover, as shown in FIG. 16A, that covers the actuator button **22** when the razor is put away. Other examples of mechanical locks are associated with a holder for the razor, rather than with the razor itself. For example, the switch can be configured to
10 cover the actuator button **22** when the razor is stowed in the holder.

Other locks are electronic in implementation. One example of an electronic lock is a locking circuit **202**, as shown in FIG. 16B, that receives a switch signal **204** from the actuator button **22** (labeled “1/0” in the figure) and an arming signal **206** from an arming circuit **208** (labeled “arming-signal source” in the figure). The locking circuit **202** outputs
15 a motor control signal **210** to the control logic **105** in response to the states of the switch signal **204** and the arming signal **206**.

The arming circuit **208** is said to arm and disarm the locking circuit **202** using the arming signal **206**. As used herein, the locking circuit **202** is considered armed when pressing the actuator button **22** starts and stops the motor. The locking circuit **202** is
20 considered disarmed when pressing the actuator button **22** fails to operate the motor at all.

Arming circuits **208** and locking circuits **202** typically include digital logic circuits that change the state of their respective outputs in response to state changes in their respective inputs. As such, they are conveniently implemented within the control logic **105**. However, although digital logic elements provide a convenient way to build
25 such circuits, nothing precludes the use of analog or mechanical components to carry out similar functions. Examples of arming circuits **208**, or portions thereof, are described below.

One example of an arming circuit **208** includes an arming switch. In this implementation, the user operates the arming switch to change the state of the arming
30 signal **206**. The user then presses the actuator button **22** to start the motor. After shaving, the user again presses the actuator button **22**, this time to stop the motor. He then operates the arming switch to disarm the locking circuit **202**.

Alternatively, the arming circuit **208** can be configured to disarm the locking circuit automatically upon detecting that the motor has been turned off. In this case, the arming circuit **208** will generally include an input to receive a signal indicating that that the motor has been turned off.

5 As used herein, “switch” includes buttons, levers, sliders, pads, and combinations thereof for effecting a change in the state of a logic signal. Switches need not be actuated by physical contact but can instead be activated by radiant energy carried, for example, optically or acoustically. A switch can be directly user-operable. One example of such a switch is the actuator button **22**. Alternatively, the switch can be operated by a change in
10 the disposition of the razor, for example by replacing a razor in its holder, or by removing and installing a cartridge.

As suggested by FIG. 16B, the locking circuit **202** can be viewed abstractly as an “AND” gate. Although the locking circuit can be implemented as an “AND” gate, any digital logic circuit with a suitable truth table can be used to carry out the arming function
15 of the locking circuit **202**. For example, the locking circuit **202** can be implemented by placing an arming switch in series with the actuator button **22**.

In another implementation, the arming circuit **208** includes a timer. The output of the timer causes the arming circuit **208** to initially arm the locking circuit **202**. Upon the lapse of a predetermined shaving interval, the timer causes the arming circuit **208** to
20 disarm the locking circuit **202**, thereby turning off the motor. The length of the shaving interval corresponds to a typical shaving time. A suitable length is between about five and seven minutes.

In this implementation, upon pressing the actuator button **22**, the motor will run either until the actuator button **22** is pressed again, or until the lapse of the shaving
25 interval. Should the user take longer than the shaving interval to shave, the motor will turn off, in which case, the user must press the actuator button **22** again to restart the motor and complete the shave. To avoid this, the arming circuit **208** can be provided with an adaptive feedback loop that extends the default shaving interval in response to
“extensions” requested by the user.

30 When the arming circuit **208** includes a timer, a reset input on the timer is connected to either the output of the locking circuit **202** or to the actuator button **22**. This enables the timer to reset itself in response to a change in the state of the switch signal

204. In particular, the timer resets itself whenever the switch signal **204** turns off the motor. This can occur when either the user presses the actuator button **22** prior to the lapse of the shaving interval, or upon the lapse of the shaving interval.

In another implementation, the arming circuit **208** includes a decoder having an
5 input connected to either the actuator button **22** or to a separate decoder input-button. In this case, the state of the arming signal **206**, which depends on the decoder's output is controlled manually by the user, either by pressing the actuator button **22** according to a predefined pattern, or, in the alternative implementation, by operating the decoder input-button.

10 For example, in the case in which the decoder takes its input from the actuator button **22**, the decoder may be programmed to respond to an extended press of the actuator button **22** or a rapid double-click of the actuator button **22** by causing a change to the state of the arming signal **206**. Alternatively, in the case in which the decoder accepts input from a separate decoder input-switch, the user need only operate the decoder input-
15 switch. There is no need for the user to remember how to lock and unlock the motor with the actuator button **22**.

In those implementations that rely on the user to change the state of the arming signal **206**, it is useful to provide an indicator, such as an LED, that provides the user with feedback on whether he has successfully changed the state of the arming signal **206**.

20 In other implementations, the arming circuit **208** relies on the disposition of the razor to determine whether it should disarm the locking circuit **202**. For example, the arming circuit **208** may include a contact switch that detects the installation and removal of a shaving cartridge. When the cartridge is removed, the arming circuit **208** disarms the locking circuit **202**. Alternatively, the arming circuit **208** can include a contact switch that
25 detects whether or not the razor has been stowed in its holder. In this case, when the arming circuit **208** detects that the razor has been stowed in its holder, it disarms the locking circuit **202**.

In the case in which the arming circuit **208** responds to the presence of a cartridge, a user prevents the motor from accidentally turning on by removing the cartridge from the
30 handle. To operate the razor normally the user re-installs the cartridge on the handle.

In the case in which the arming circuit **208** responds to the presence of a holder, the user prevents the motor from accidentally turning on by stowing it in its holder. The user operates the razor normally, the user removes it from its holder, which is something he would have to do in any case.

5 While the embodiment described herein controls the operation of a motor, the disclosed methods and devices can be used to prevent battery drain from inadvertent consumption of energy by any load.

Shaving Force Measurement

10 During the course of a shave, the user applies a force that presses the blade against the skin. The magnitude of this shaving force affects the quality of the shave. A shaving force that is too low may be insufficient to force the whiskers into an optimum cutting position. One that is too high may result in excessive skin abrasion. Because of the varying contours of the face, it is difficult for the user to maintain even a constant shaving force, much less an optimal shaving force.

15 This difficulty is overcome in razors that include force-measurement circuits **400** as shown in FIGS. 4A and 4B. The illustrated force-measurement circuits **400** exploit the fact that in a motorized razor, the shaving force governs, in part, the load applied to the motor **306** that drives the blade. The operating characteristics of this motor **306** thus change in response to the shaving force.

20 The force-measurement circuit **400** shown in FIG. 17A exploits the change in the current drawn by the motor **306** in response to different loads. As the shaving force increases, the motor **306** draws more current in response. The implementation in FIG. 17A thus features a current sensor **402** that senses the magnitude of the current drawn by the motor **306**. The current sensor provides a force signal **408** to the control logic **105**.

25 The force-measurement circuit shown in FIG. 17B exploits the change in motor speed that results from different loads on the motor **306**. As the shaving force increases, the motor speed decreases. The implementation shown in FIG. 17B thus features a speed sensor **410** for sensing the motor speed. This speed sensor provides a force signal **408** to the control logic **105**.

30 The control logic **105** receives the force signal **408** and compares it with a nominal force signal indicative of what the force signal would be under a known load.

Typically, the known load is selected to correspond to a razor vibrating in free space, without contacting any surface. Alternatively, the control logic **105** compares the force signal **408** with a pair of nominal force signals corresponding to a razor vibrating with two known loads, one corresponding to a minimum shaving force and another
5 corresponding to a maximum shaving force.

The control logic **105** then determines whether the applied shaving force falls outside the band defined by the upper and lower shaving force thresholds. If the applied shaving force falls outside the band, the control logic **105** sends a correction signal **412** to an indicator **414**. The indicator **414** then transforms the correction signal **412** into an
10 observable signal that is observable by the user, either because it is visible, audible, or provides some tactile stimulation.

For an acoustic observable signal, the indicator **414** can be a speaker that provides an audible signal to the user. For an optically observable signal, the indicator **414** can be an LED that provides a visible signal to the user. For a tactile observable signal, the motor
15 **306** itself is used as an indicator **414**. Upon detecting an incorrect shaving force, the control logic **105** sends a correction signal **412** to the motor **306** to introduce a disturbance into its normal operation. For example, the control logic **105** might send a correction signal **412** that causes the motor **306** to stutter.

In all the foregoing cases, the signal for an insufficient shaving force can differ
20 from that for an excessive shaving force so that the user will know how to correct the applied shaving force.

A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention.

25 For example, while the razors described above include a vibration motor and provide a vibrating functionality, other types of battery-operated functionality may be provided, such as heating.

Moreover, while in the embodiment described above a receiving member containing a window is welded into an opening in the grip tube, if desired the window
30 may be molded into the grip tube, e.g., by molding a transparent membrane into the grip tube.

In some implementations, other types of battery shell attachment may be used. For example, the male and female portions of the battery shell and grip tube may be reversed, so that the battery shell carries the male portion and the grip tube carries the female portion. As another example, the battery shell may be mounted on the grip tube using the approach described in copending U.S. Serial No. 11/115,885, filed on April 27, 2005, the complete disclosure of which is incorporated herein by reference. Other mounting techniques may be used in some implementations, e.g., latching systems that are released by a push button or other actuator.

Additionally, in some implementations the razor may be disposable, in which case the battery shell may be permanently welded to the grip tube, as it is not necessary or desirable that the consumer access the battery. In disposable implementations, the blade unit is also fixedly mounted on the razor head, rather than being provided as a removable cartridge.

Other venting techniques may also be used, for example venting systems that employ sealing valve members rather than a microporous membrane. Such venting systems are described, for example, in U.S. Serial No. 11/115,931, filed on April 27, 2005, the complete disclosure of which is incorporated herein by reference.

Some implementations include some of the features described above, but do not include some or all of the electronic components discussed herein. For example, in some cases the electronic switch may be replaced by a mechanical switch, and the printed circuit board may be omitted.

Accordingly, other embodiments are within the scope of the following claims.

A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention.

For example, while the razors described above include a vibration motor and provide a vibrating functionality, other types of battery-operated functionality may be provided, such as heating.

Moreover, while in the embodiment described above a receiving member containing a window is welded into an opening in the grip tube, if desired the window

may be molded into the grip tube, e.g., by molding a transparent membrane into the grip tube.

In some implementations, other types of battery shell attachment may be used. For example, the male and female portions of the battery shell and grip tube may be reversed, so that the battery shell carries the male portion and the grip tube carries the female portion. As another example, the battery shell may be mounted on the grip tube using the approach described in copending U.S. Serial No. 11/115,885, filed on April 27, 2005, the complete disclosure of which is incorporated herein by reference. Other mounting techniques may be used in some implementations, e.g., latching systems that are released by a push button or other actuator.

Additionally, in some implementations the razor may be disposable, in which case the battery shell may be permanently welded to the grip tube, as it is not necessary or desirable that the consumer access the battery. In disposable implementations, the blade unit is also fixedly mounted on the razor head, rather than being provided as a removable cartridge.

Other venting techniques may also be used, for example venting systems that employ sealing valve members rather than a microporous membrane. Such venting systems are described, for example, in U.S. Serial No. 11/115,931, filed on April 27, 2005, the complete disclosure of which is incorporated herein by reference.

Some implementations include some of the features described above, but do not include some or all of the electronic components discussed herein. For example, in some cases the electronic switch may be replaced by a mechanical switch, and the printed circuit board may be omitted.

Accordingly, other embodiments are within the scope of the following claims.

What is claimed is:

1. A battery operated razor comprising
a housing including a grip portion defining a chamber having an interior wall, and
a battery cover removably mounted on the grip portion, the housing being configured to
5 contain one or more batteries, and
a closing system, including a first component within the battery cover, and a
second component secured to the interior wall of the grip portion, the first component
being configured to move axially within the battery cover during engagement of the
battery cover with the grip portion, and being biased toward a predetermined axial
10 position.
2. The razor of claim 1 wherein the first and second components are configured to
engage each other by rotation of the battery cover relative to the housing.
- 15 3. The razor of claim 2 wherein the first component includes a circumferentially
extending slot having an open end and the second component includes a male portion
configured to slide into the slot through the open end during rotation.
4. The razor of claim 1 wherein the first and second components are electrically
20 conductive.
5. The razor of claim 1 wherein the first component is biased towards a bottom
region of the battery cover.
- 25 6. The razor of claim 1 wherein the first component includes a spring element
configured to apply an axial force between the grip portion and battery cover when the
first and second components are engaged.
7. The razor of claim 1 wherein engagement of the first and second components
30 provides an electrical connection between the first and second components.

8. The razor of claim 1 further comprising electronic components disposed within the chamber.

5 9. The razor of claim 2 wherein the first component includes a male portion configured to slide into the slot through the open end during rotation and the second component includes a circumferentially extending slot having an open end.

10. The razor of claim 1 wherein the first component is biased by a bayonet spring.

1/25

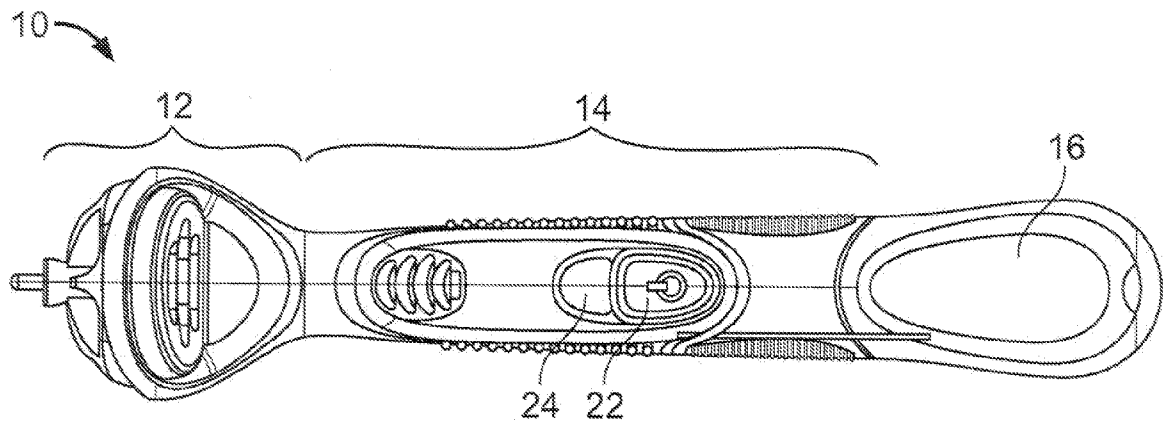


FIG. 1

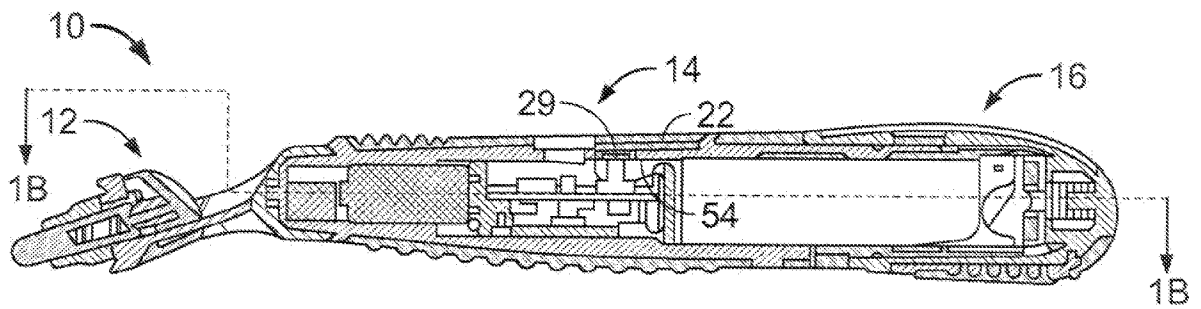


FIG. 1A

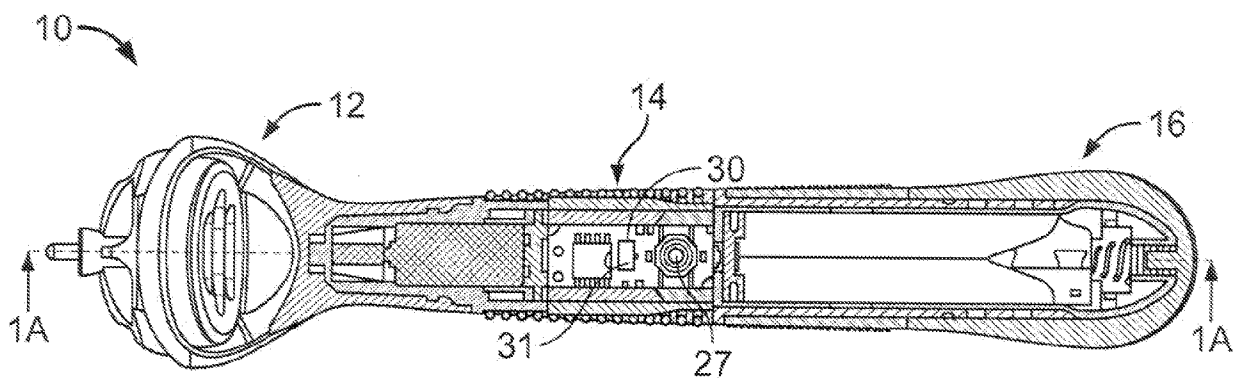


FIG. 1B

2/25

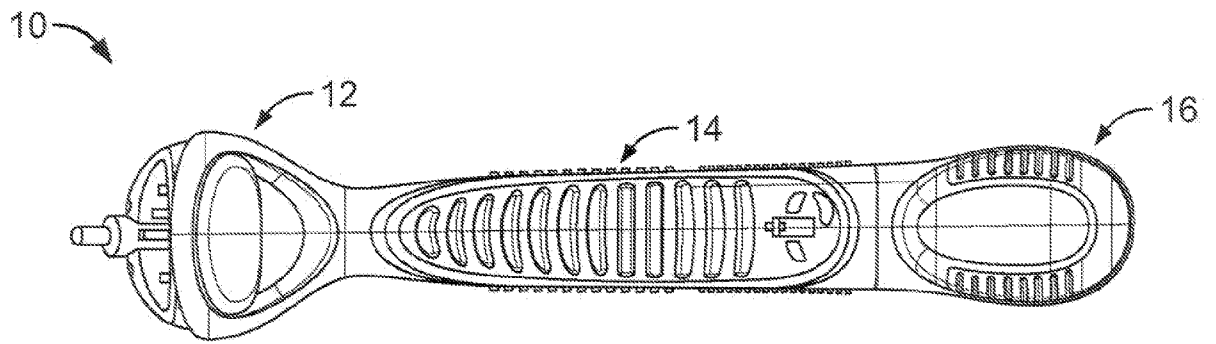


FIG. 2

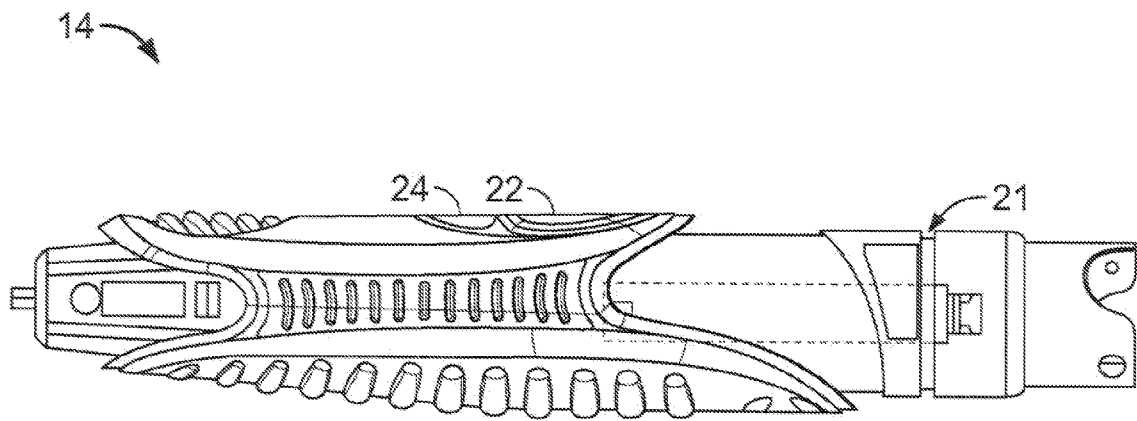


FIG. 5

3/25

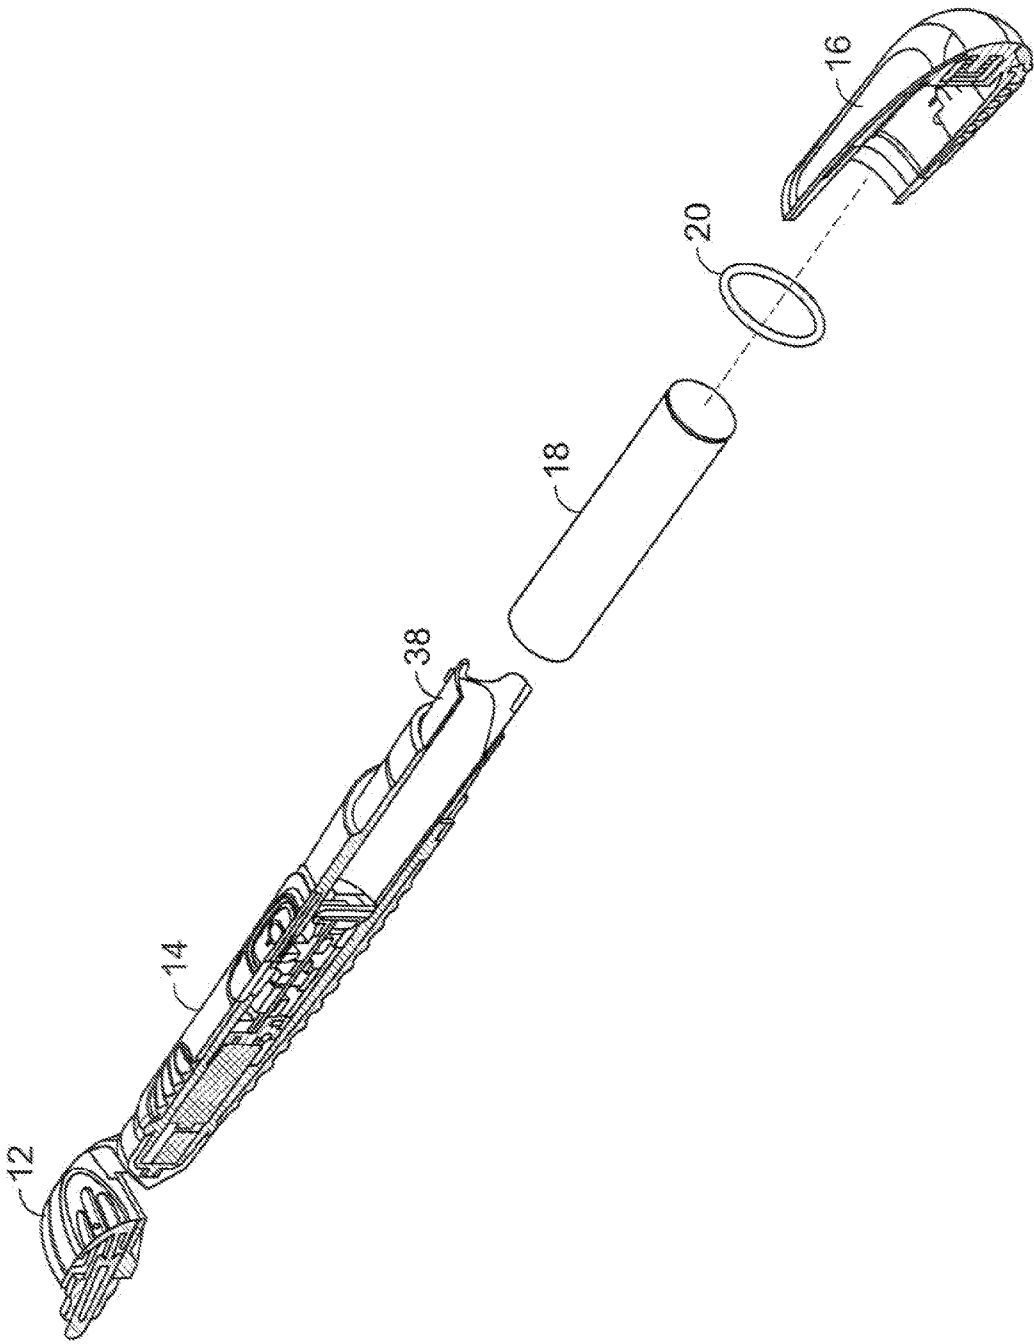
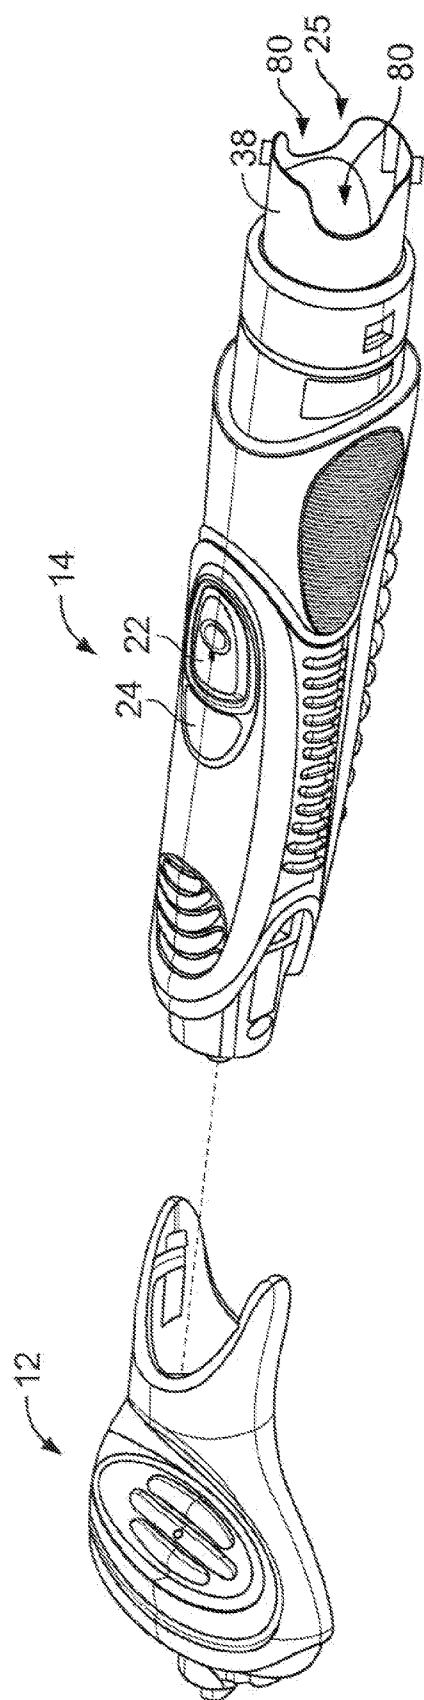


FIG. 3

4
G
F

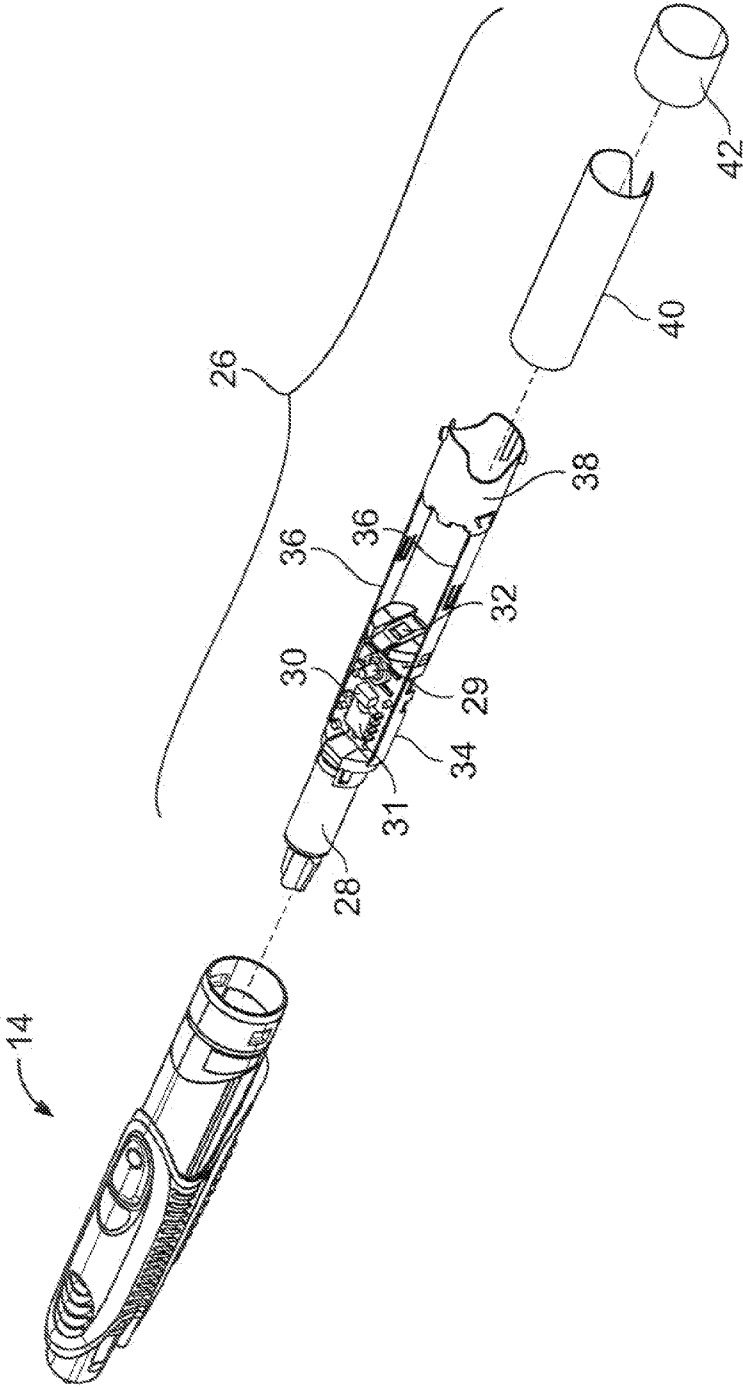


FIG. 6

6/25

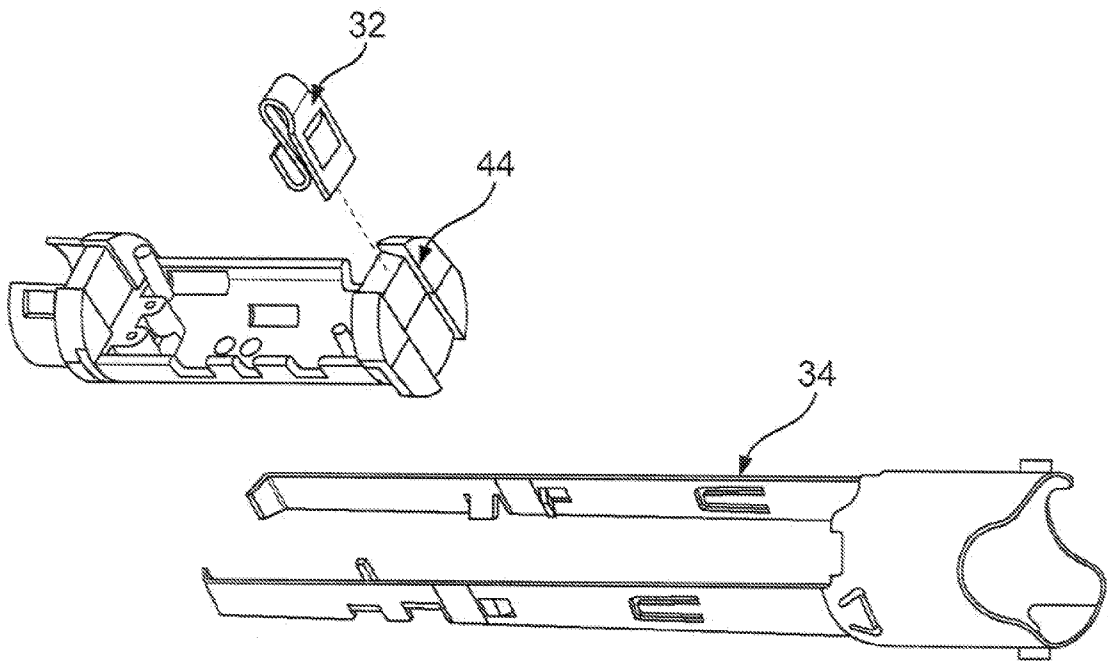


FIG. 7

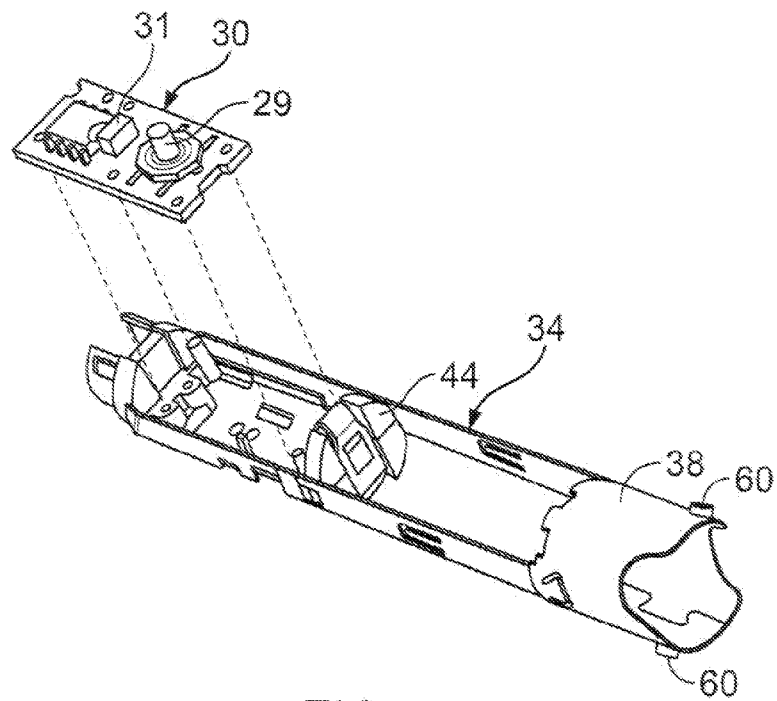


FIG. 7A

7/25

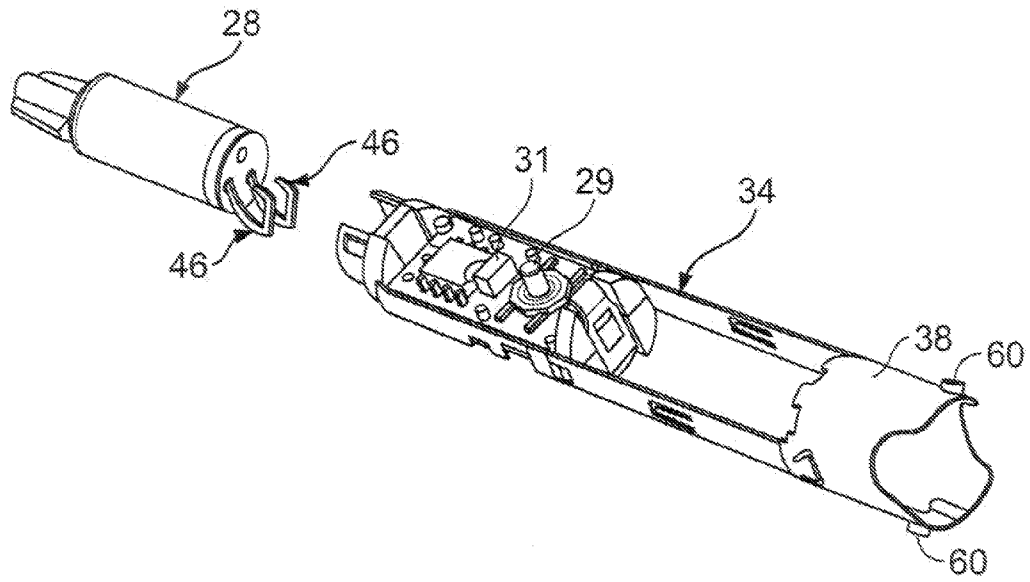


FIG. 7B

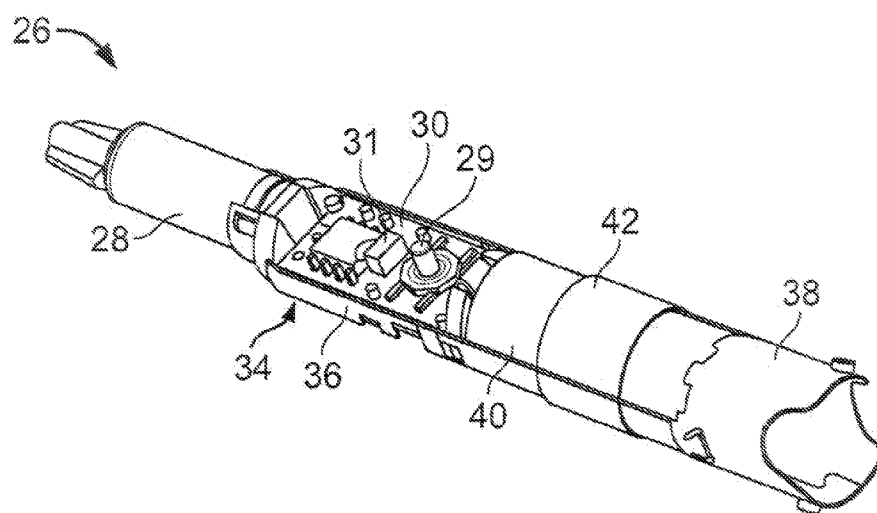


FIG. 7C

8/25

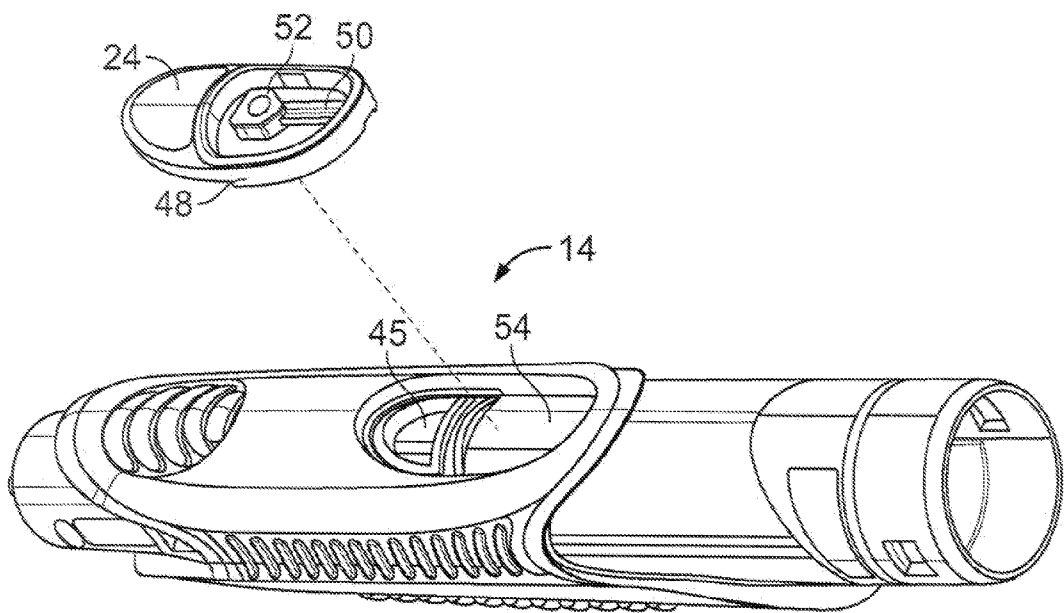


FIG. 8

9/25

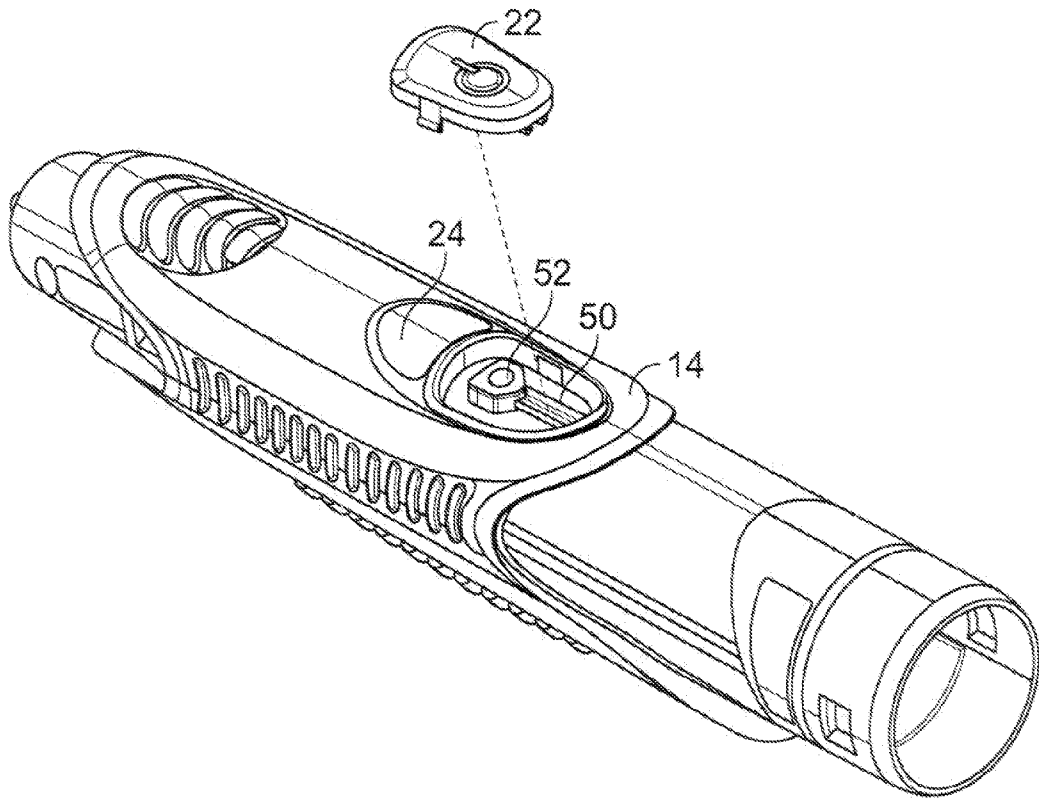


FIG. 8A

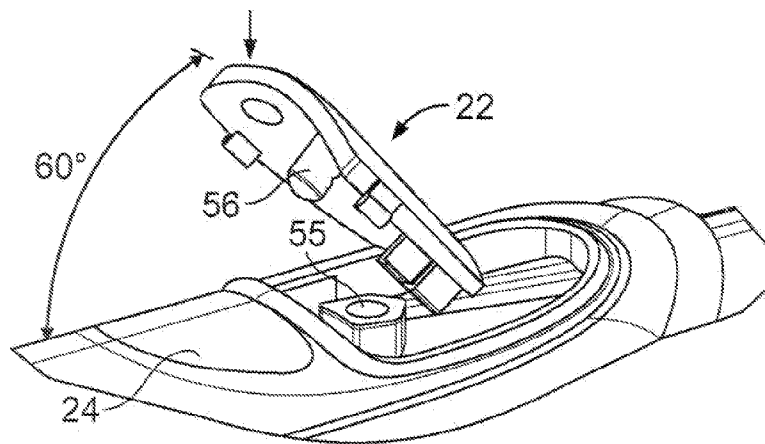


FIG. 8B

10/25

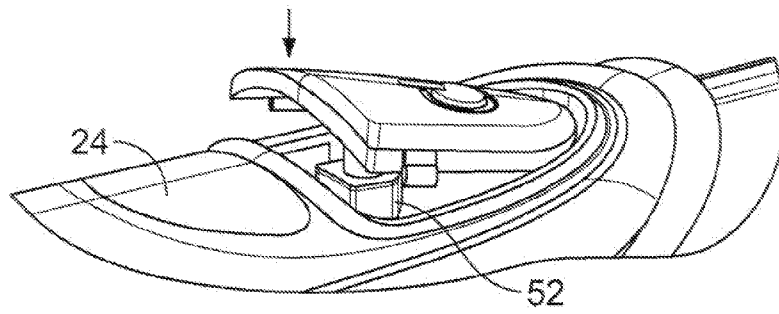


FIG. 8C

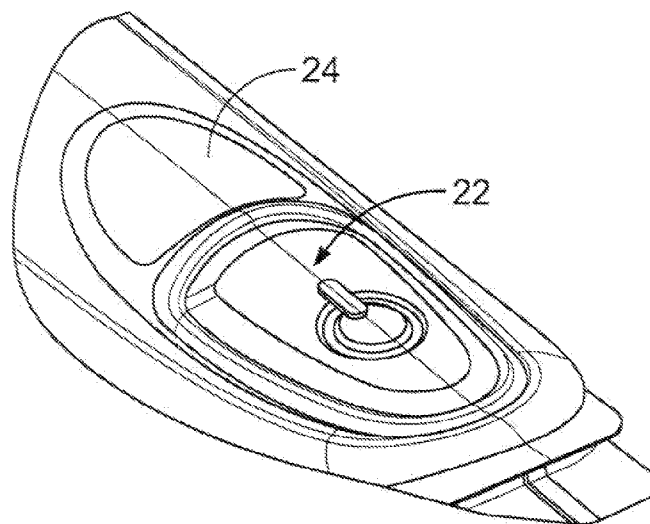


FIG. 8D

11/25

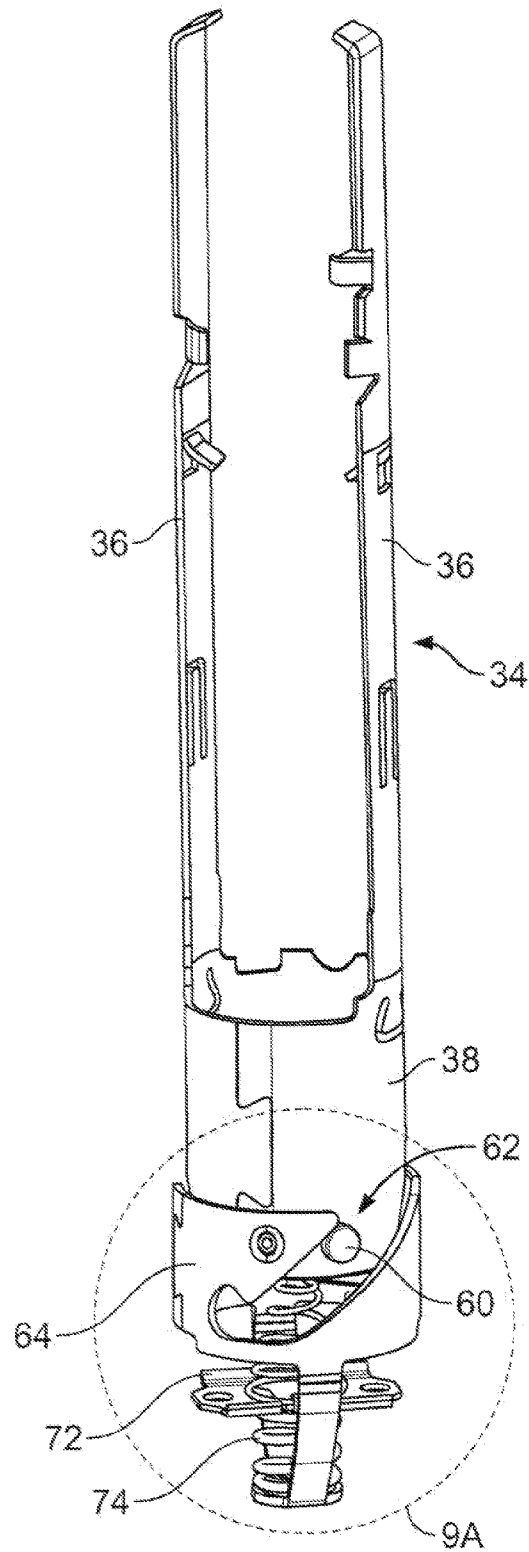


FIG. 9

12/25

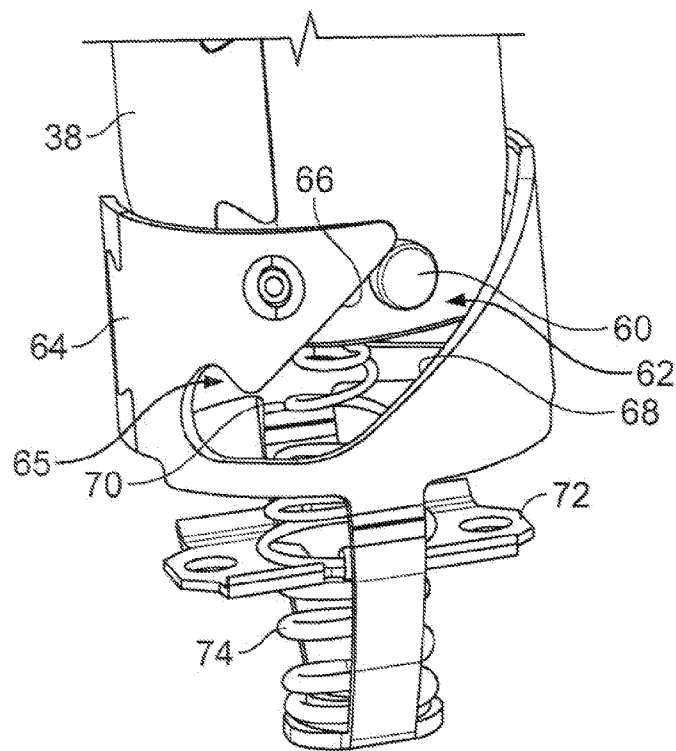


FIG. 9A

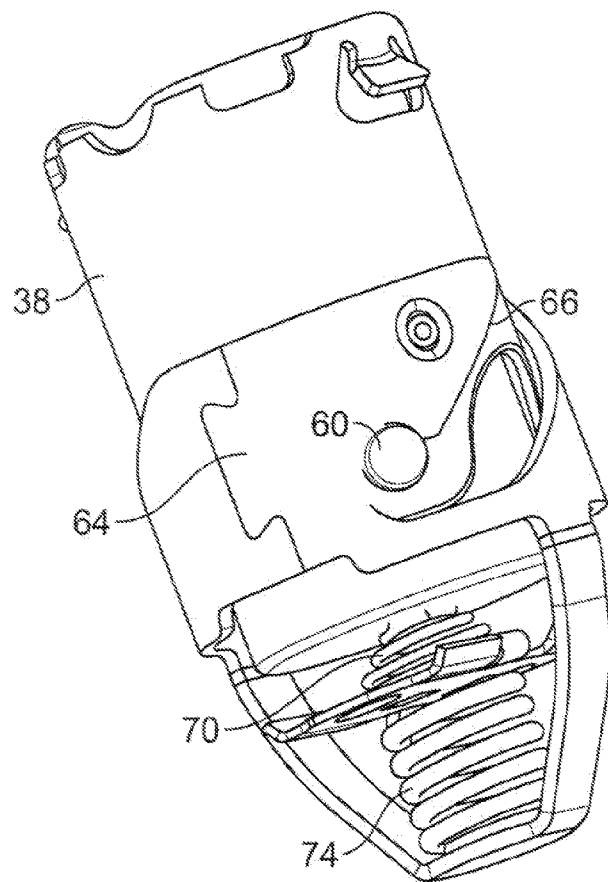


FIG. 9B

14/25

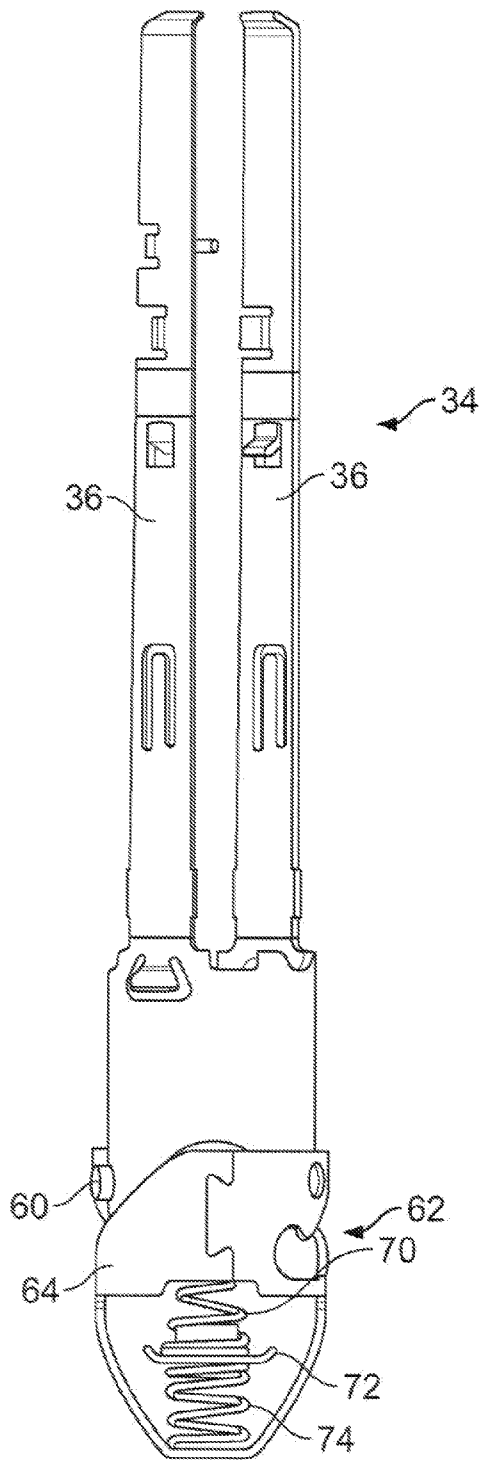


FIG. 10

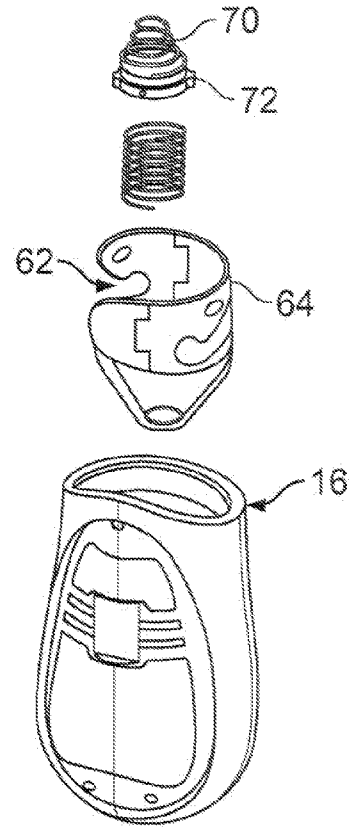


FIG. 11

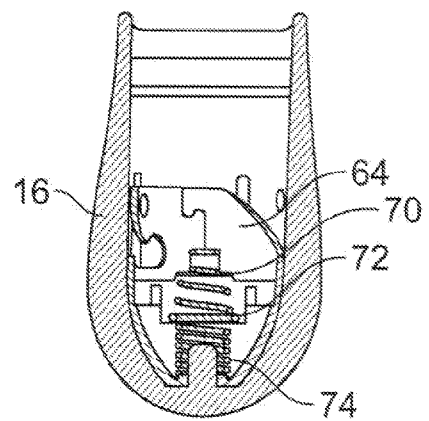


FIG. 12

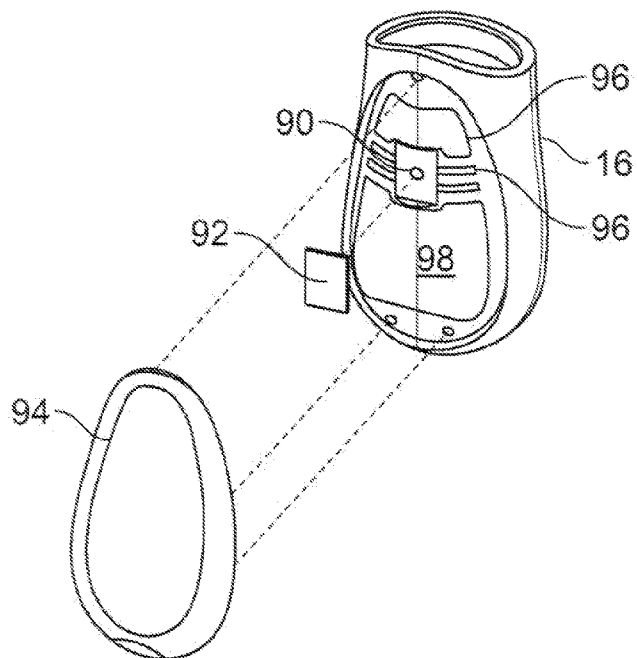


FIG. 13

16/25

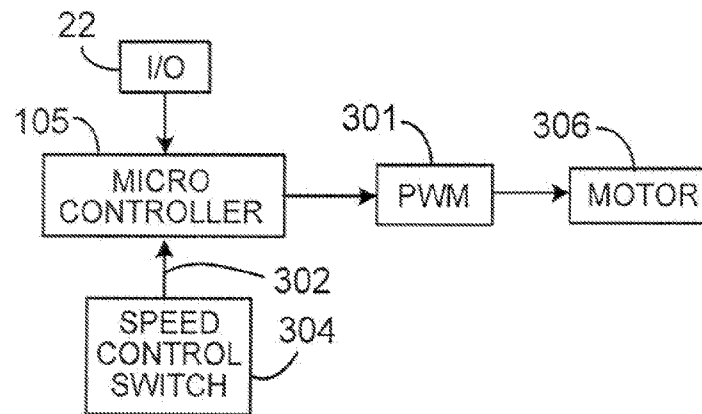


FIG. 14A

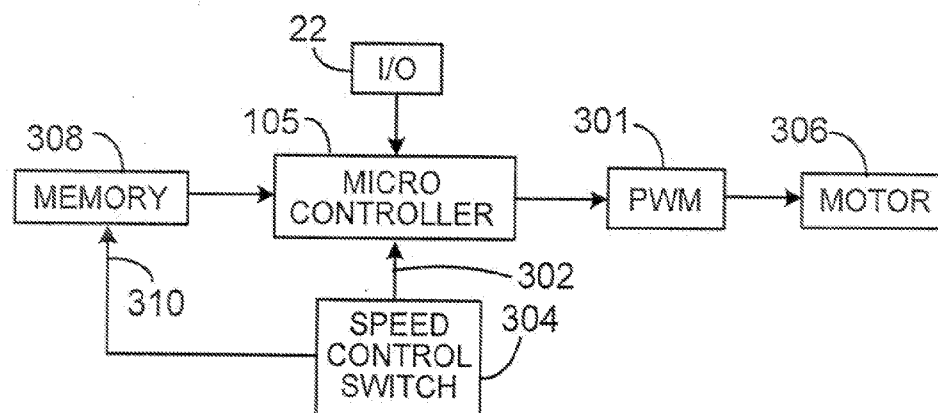


FIG. 14B

17/25

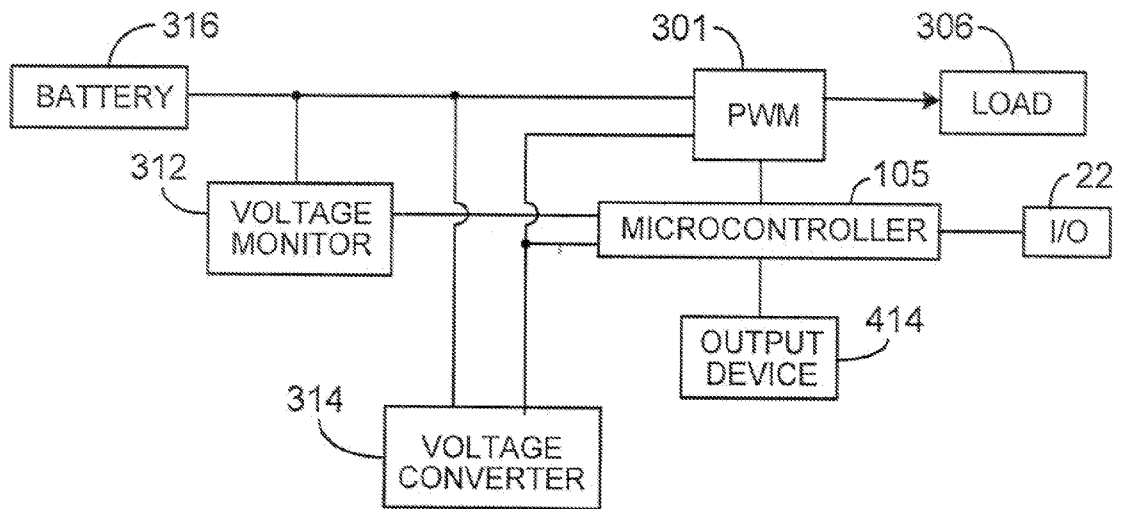


FIG. 14C

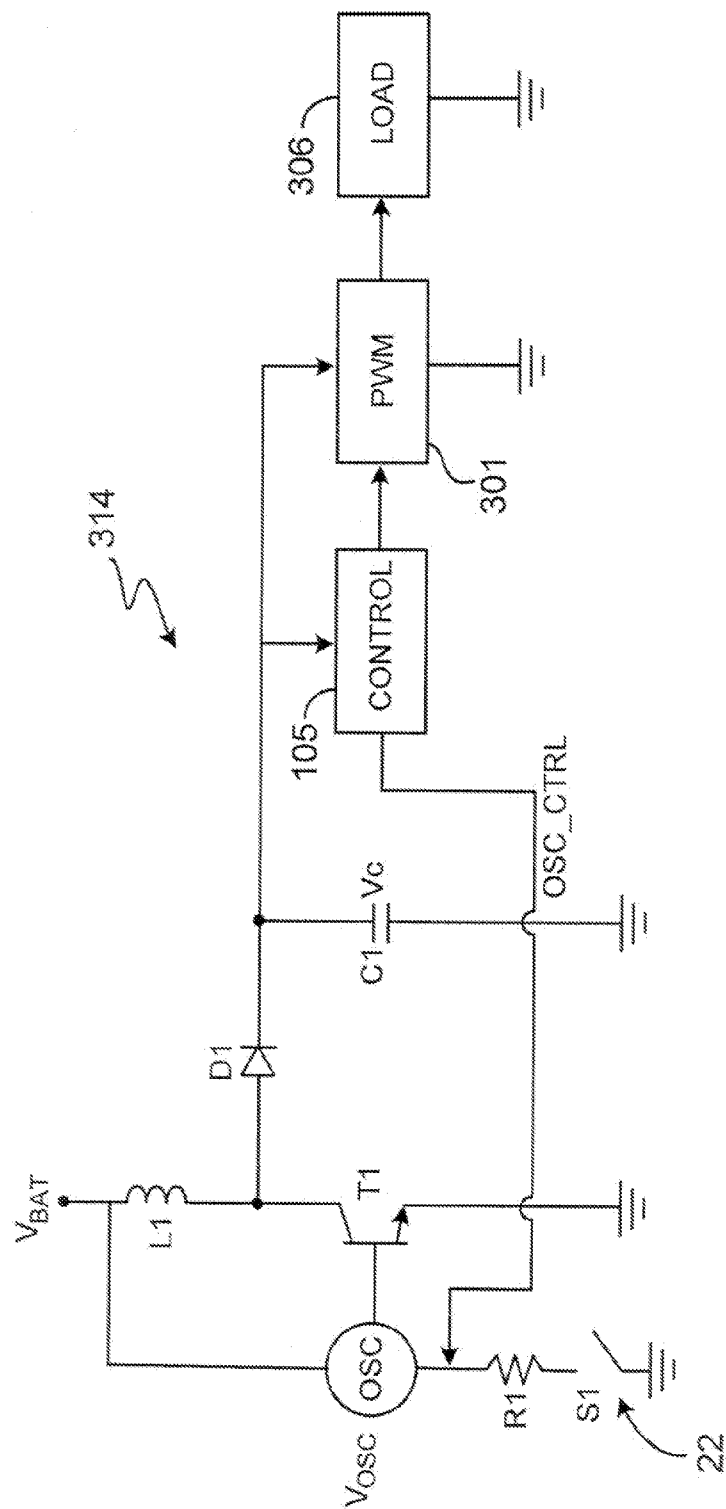


FIG. 14D

19/25

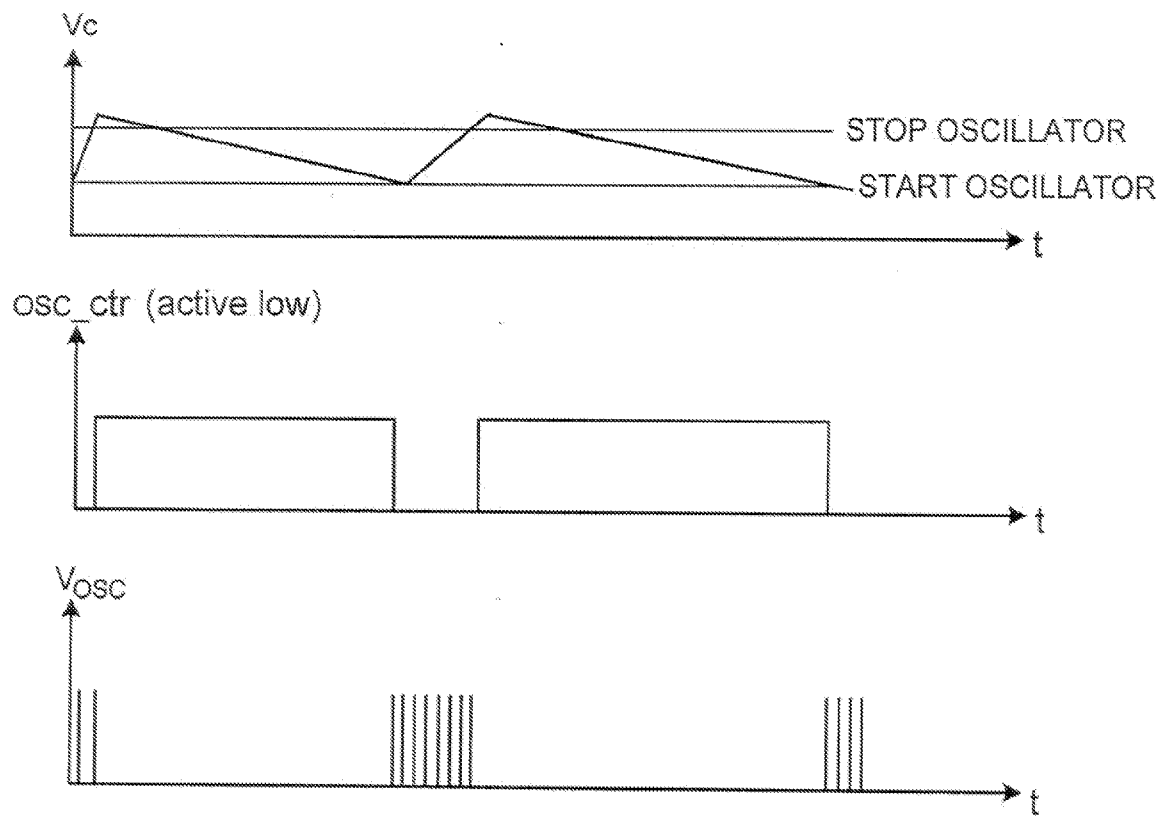


FIG. 14E

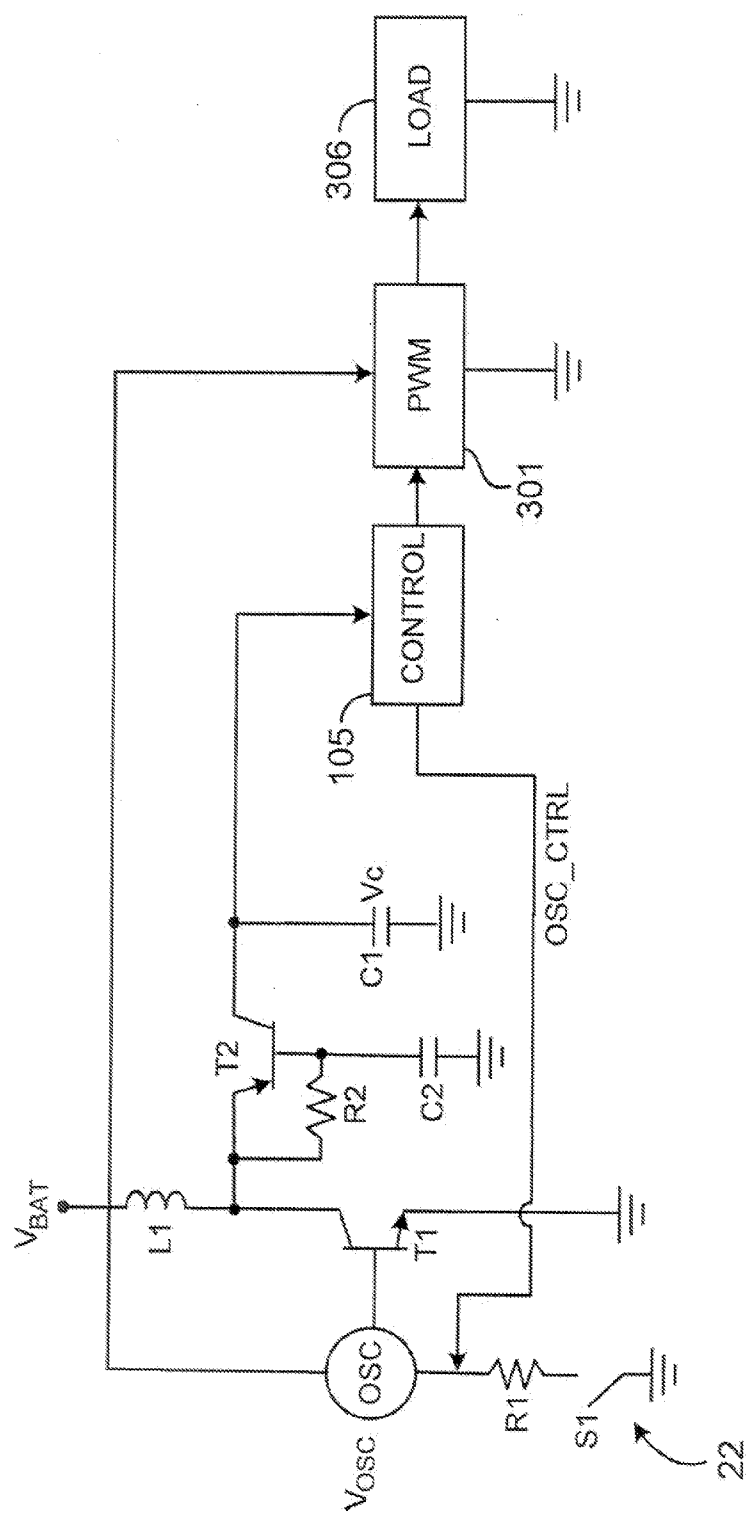


FIG. 14F

21/25

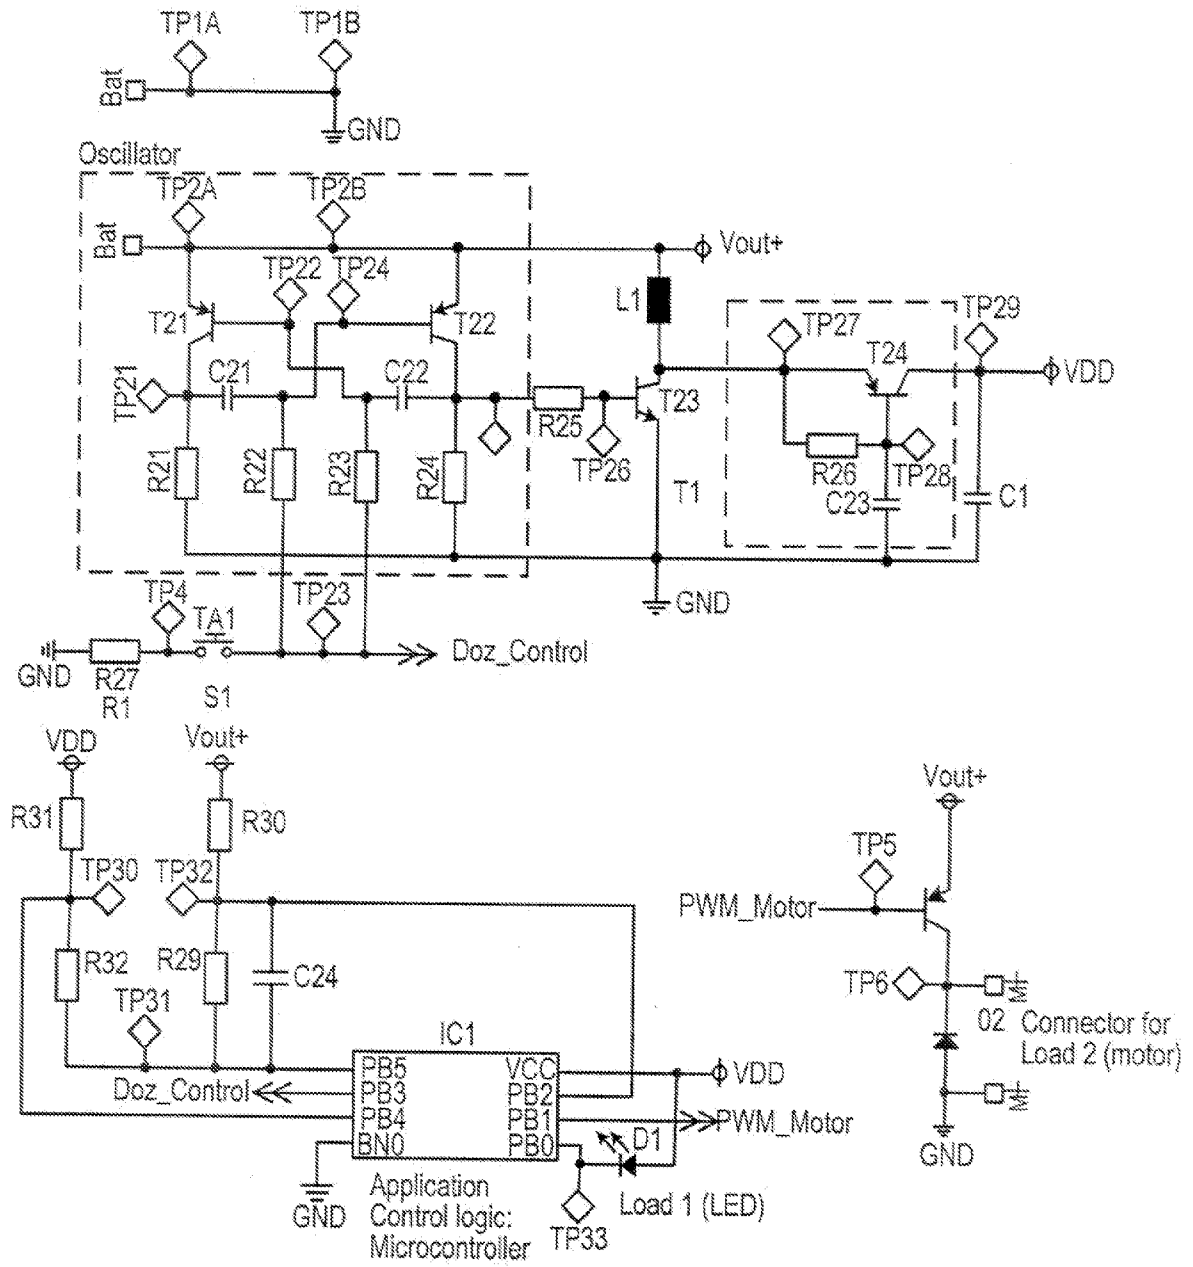


FIG. 14G

22/25

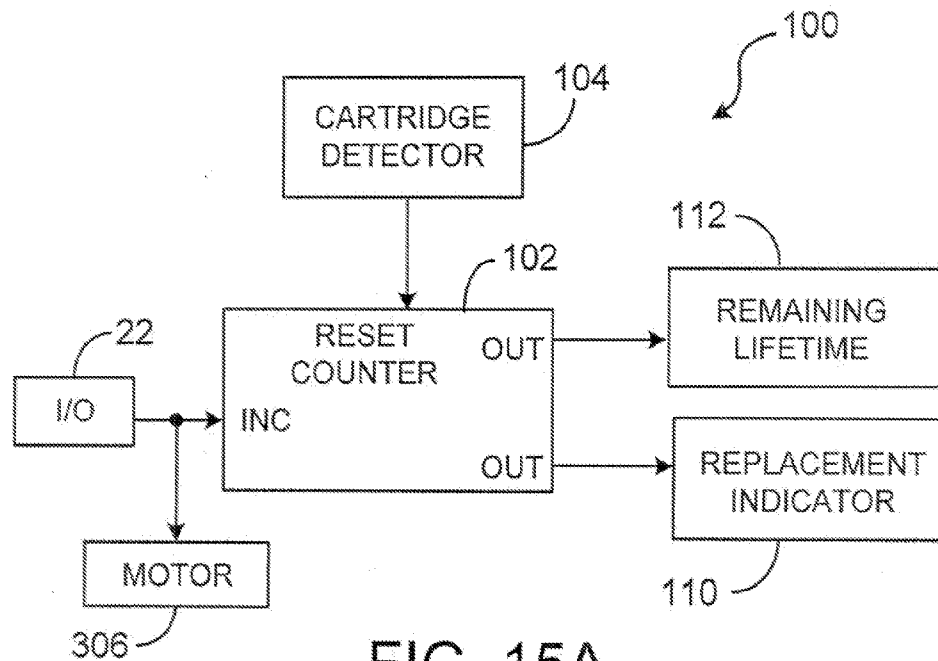


FIG. 15A

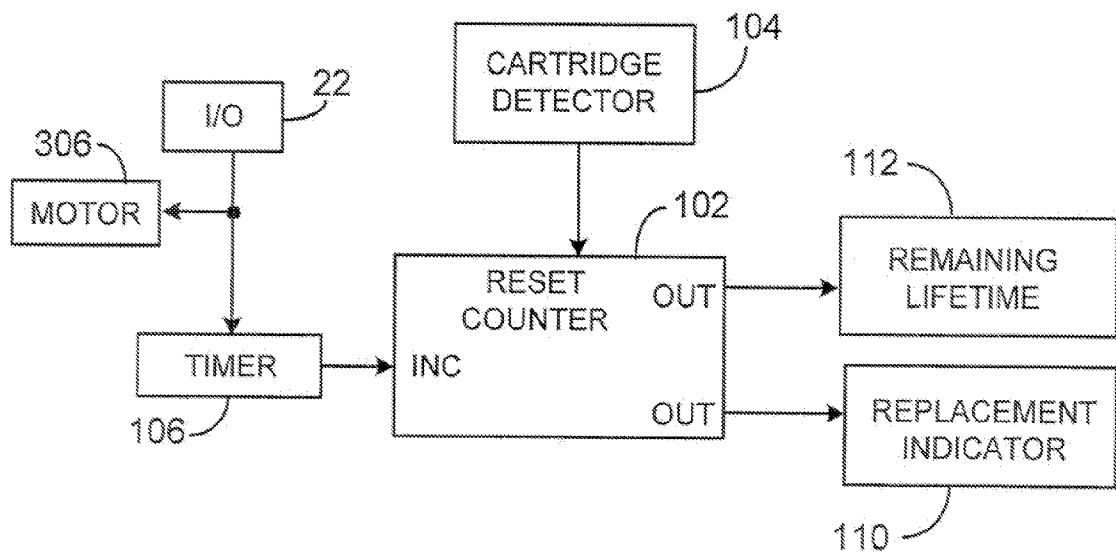


FIG. 15B

23/25

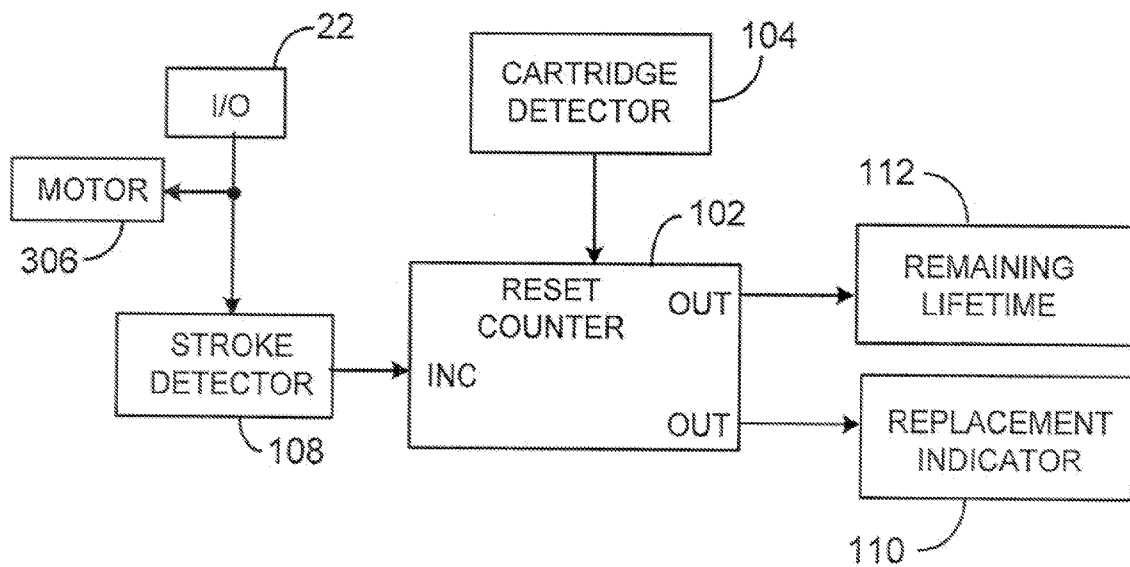


FIG. 15C

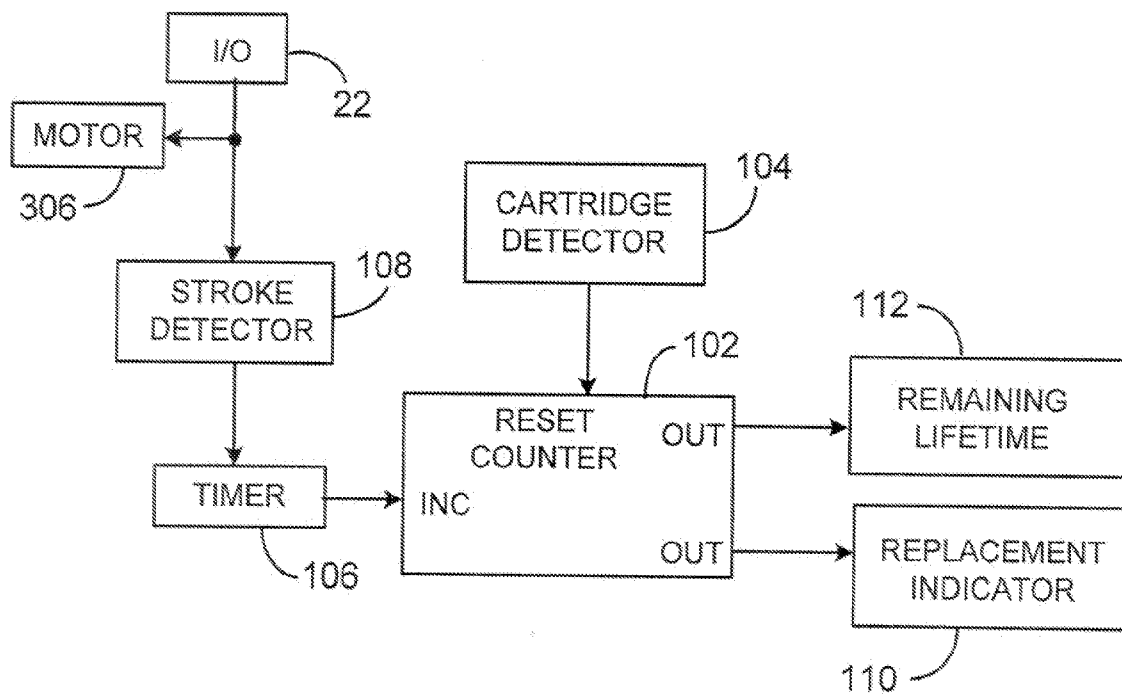


FIG. 15D

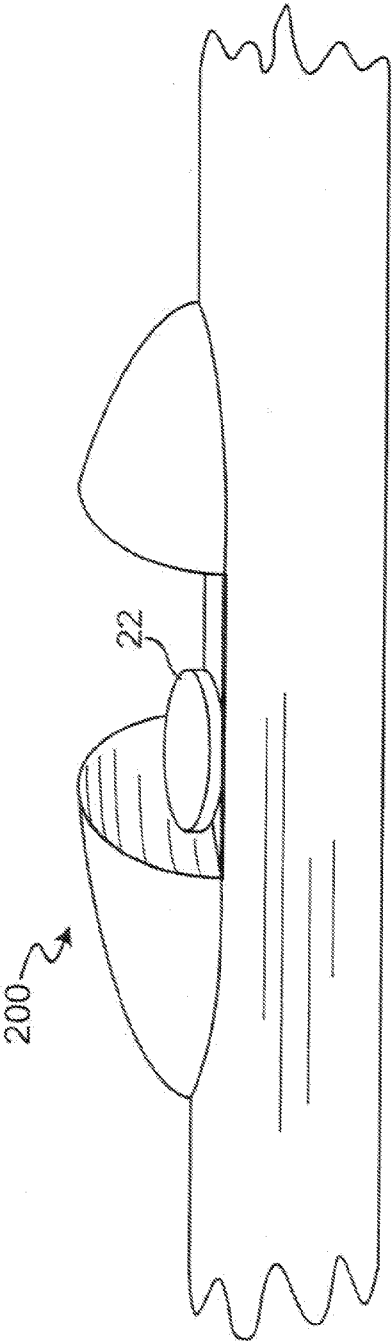


FIG. 16A



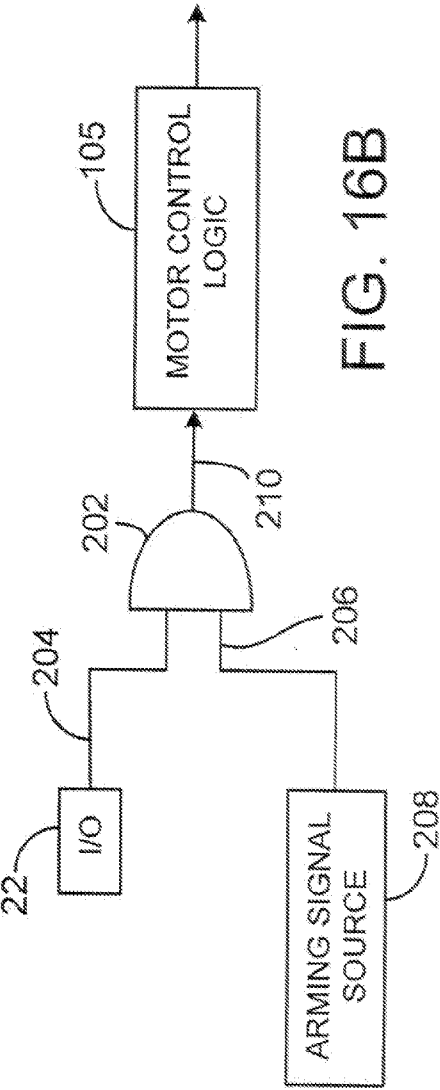


FIG. 16B

25/25

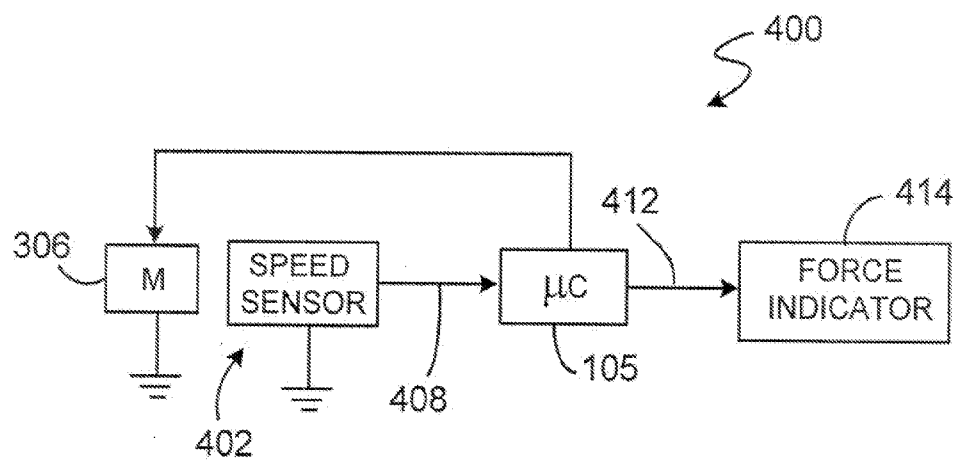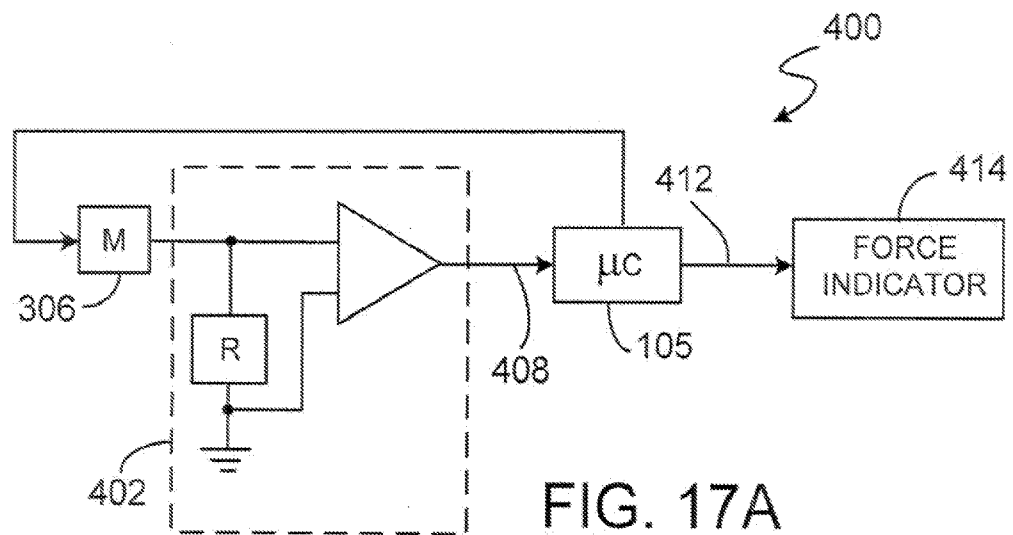

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2006/053088

A. CLASSIFICATION OF SUBJECT MATTER

INV. B26B21/38 B26B21/40 B26B21/52 B26B21/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B26B H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/172493 A1 (FISCHER FRANZ [CH] ET AL) 11 August 2005 (2005-08-11) paragraphs [0087], [0097], [0114], [0122], [0123]; figures 2a-b, 5a-d, 7a-b	1
A	US 5 299 354 A (METCALF STEPHEN C [US] ET AL) 5 April 1994 (1994-04-05) column 3, line 42 - column 4, line 46; figures 1-4b	
A	US 5 007 169 A (MOTTA VINCENT C [US]) 16 April 1991 (1991-04-16) column 2, line 38 - line 62; figure 1	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search:

11 January 2007

Date of mailing of the international search report

19/01/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Maier, Michael

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2006/053088

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005172493 A1	11-08-2005	EP 1563967 A1	17-08-2005
US 5299354 A	05-04-1994	AU 8725691 A	20-05-1992
		DE 69128201 D1	18-12-1997
		DE 69128201 T2	28-05-1998
		EP 0552224 A1	28-07-1993
		JP 6501868 T	03-03-1994
		MX 9101522 A1	01-06-1992
		PT 99210 A	31-12-1993
		WO 9206825 A1	30-04-1992
		ZA 9107891 A	30-09-1992
US 5007169 A	16-04-1991	JP 2891547 B2	17-05-1999
		JP 5309184 A	22-11-1993