



- (51) **International Patent Classification:**
D04B 21/12 (2006.01) *A61F 2/00* (2006.01)
- (21) **International Application Number:**
PCT/EP2012/076981
- (22) **International Filing Date:**
27 December 2012 (27.12.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1162535 29 December 2011 (29.12.2011) FR
- (71) **Applicant: SOFRADIM PRODUCTION** [FR/FR]; 116
avenue du Formans, F-01600 Trevoux (FR).
- (72) **Inventors: LECUIVRE, Julie;** 290B rue Biolay, F-69620
Le Bois d'Oingt (FR). **BOURGES, Xavier;** rue Saint Jean,
F-01140 Mogneneins (FR). **BAILLY, Pierre;** 55bis,
chemin des Peupliers, F-69300 Caluire (FR).
- (74) **Agent: CABINET GERMAIN & MAUREAU;** B.P.
6153, F-69466 Lyon Cedex 06 (FR).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

(54) **Title:** BARBED PROSTHETIC KNIT AND HERNIA REPAIR MESH MADE THEREFROM AS WELL AS PROCESS FOR MAKING SAID PROSTHETIC KNIT

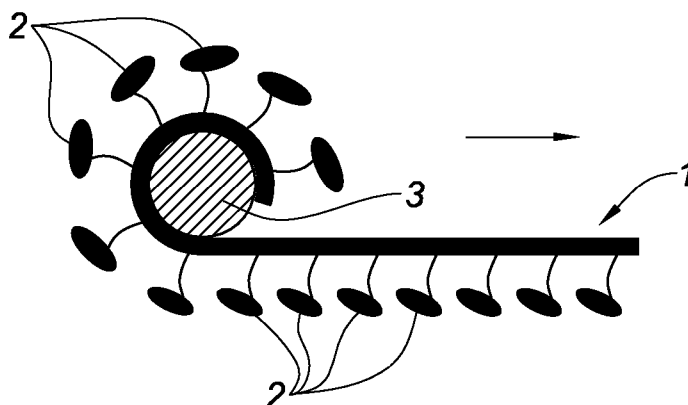


Fig. 3

(57) **Abstract:** The present invention relates to a prosthetic knit based on at least a first yarn of biocompatible polymer material defining first and second opposite and openwork faces, and on at least a second biocompatible and heat-fusible monofilament yarn, forming barbs that protrude outwards from at least said first face and are obtained by melting loops generated by said second yarn, the chart followed for the knitting of said first and second yarns on a warp knitting machine having three guide bars B1, B2, B3 being the following, according to the ISO 11676 standard: - Bar B1 : 1.0/0.1// - Bar B2 : 1.0/7.7/6.6/7.7// - Bar B3 : 2.1/5.5/3.4/0.0// said second yarn following the chart of bar B3. The present invention also relates to a process for manufacturing such a knit.



BARBED PROSTHETIC KNIT AND HERNIA REPAIR MESH MADE THEREFROM AS WELL AS PROCESS FOR MAKING SAID PROSTHETIC KNIT

The present invention relates to a prosthetic knit equipped with barbs, capable of being rolled up on itself, then unrolled effortlessly. Such a knit
5 can particularly be used for producing wall-reinforcing prostheses intended to be introduced into a patient by coelioscopy.

Wall-reinforcing prostheses, for example prostheses for reinforcing the abdominal wall, are widely used in the surgical field. These prostheses are intended to treat hernias by temporarily or permanently filling a tissue defect.
10 These prostheses are generally made of biocompatible prosthetic fabric and can have a number of shapes, for example rectangular, circular or oval, depending on the anatomical structure to which they are to be fitted. Some of these prostheses are made from entirely bioresorbable yarns and are intended to disappear after having carried out their reinforcing role while cell colonization
15 takes place and tissue rehabilitation takes over. Other prostheses comprise non-bioresorbable yarns and are intended to remain permanently in the body of the patient.

Some of these prostheses are made from an arrangement of yarns, a knit, a woven fabric or non-woven fabric, comprising barbs that protrude
20 outwards from one face of the prosthesis: these barbs constitute hooks that are able to fix themselves either in another prosthetic fabric, belonging to the same prosthesis or not, or directly in the biological tissues, for example the abdominal wall.

Furthermore, for the sake of minimizing the traumatism
25 subsequent to any surgical operation, patients are increasingly often operated on via coelioscopic surgery when the type of operation carried out permits it. Coelioscopic surgery requires only very small incisions, through which a trocar is passed, within which the prosthesis is conveyed to the implantation site. Thus open surgery is avoided and the patient can leave hospital rapidly.
30 Coelioscopic surgery is particularly popular in surgical operations carried out in the abdomen, such as for example the treatment of hernias.

However, the trocars used in coelioscopic surgery generally have a relatively small calibrated diameter, which may vary, for example, from 5 to 15 mm, in order to reduce the size of the incision made as much as possible.
35 The prosthesis must therefore be conveyed within a channel of reduced diameter and it must then be deployed at the implantation site.

In order to carry out this step, the prosthesis is generally rolled up on itself in order to make it slide in the channel of the trocar or directly introduced by force. However, when the prosthetic fabric forming the prosthesis comprises barbs on one face, it may happen that these barbs become entangled in the body of the fabric and upset the subsequent deployment of the prosthesis at the implantation site. Furthermore, due to the fact that they are not protected, the barbs may be damaged during the unrolling of the prosthesis or during its transportation through the trocar to the implantation site.

Thus, there remains the need for a prosthetic fabric comprising barbs, that can be used for manufacturing prostheses, such as for example abdominal wall reinforcements, capable of being rolled up on itself in order to be conveyed within a channel such as that of a trocar, without damaging the barbs, and then capable of being completely deployed, and preferably in an easy manner, once it has reached the implantation site in the body of the patient.

The present invention aims to meet such a need.

A first aspect of the invention is a prosthetic knit based on at least a first yarn of biocompatible polymer material defining first and second opposite and openwork faces, and on at least a second biocompatible and heat-fusible monofilament yarn, forming barbs that protrude outwards from at least said first face and are obtained by melting loops generated by said second yarn, the chart followed for the knitting of said first and second yarns on a warp knitting machine having three guide bars B1, B2, B3 being the following, according to the ISO 11676 standard:

- Bar B1: 1.0/0.1//
- Bar B2: 1.0/7.7/6.6/7.7//
- Bar B3: 2.1/5.5/3.4/0.0//

said second yarn following the chart of bar B3.

The knit according to the invention has both openwork faces, which favour cell recolonization, and barbs, suitable for hooking into biological tissues or any other textile, and an ability to be rolled up on itself, then unrolled effortlessly.

The knit according to the invention can be used as is in order to constitute a reinforcing prosthesis for repairing a hernia, or it may constitute one part of a reinforcing prosthesis for repairing hernias: for example, it may be partially or completely coated over part or all of its faces with a coating made of

a biocompatible, for example non-stick, material; alternatively or in combination, the knit according to the invention may be combined with another textile in order to form a composite reinforcing prosthesis.

In the present application, the expression "openwork face" is understood to mean that said face comprises openings or pores: these openings or pores are in particular generated by the chart followed for the knitting of the yarns of the knit according to the invention, and may correspond to the various meshes of said knit.

The barbs of the knit according to the invention may protrude from the first face substantially perpendicular to the plane of said face or alternatively along one or more planes that are inclined relative to the plane of said face. These barbs are intended to function as fastening means, either by becoming entangled in one or more arrangements of yarns, fibres, filaments and/or multifilaments of another prosthetic fabric, for example in order to form a composite reinforcing prosthesis, or by anchoring directly in the biological tissues, such as for example an abdominal wall, once the prosthesis comprising this knit or constituted of this knit is implanted. Generally, these barbs have the shape of a shaft, having the diameter of the yarn used for their formation, surmounted by a head having a diameter greater than that of the shaft.

In the knit according to the invention, the chart followed for the knitting of the yarns of the knit generates a particular structure of the knit, that is to say a specific arrangement between the various openings of the faces of the knit, the respective size of these various openings and the position and distribution of the barbs being such that, even if some of the barbs present on the first face are caused to be trapped within some of the openings present on the second face when the knit is rolled up on itself under the effect of an external stress, such as for example the stress exerted by the surgeon when he rolls the knit or the prosthesis comprising the knit up on itself in order to introduce it into a trocar, and subsequently the stress exerted by the internal walls of the trocar, then a large number of the barbs trapped will be released automatically, or under the effect of a very small unrolling force, when said stress is relieved.

The knit according to the invention can be used to produce a reinforcing prosthesis for repairing a hernia. Thus, when the surgeon wishes to implant a prosthesis formed of a knit according to the invention, he can easily

roll the knit up on itself, for example by folding the face provided with barbs outwards. It is then possible to introduce the knit according to the invention, thus rolled up, into a trocar, for example having an internal diameter of 10 mm. Once the knit according to the invention has been thus conveyed in the form of a roll to the implantation site via the trocar, it can be unrolled and deployed easily: indeed, even if some of the barbs were trapped within some of the openings present on the second face of the knit during the rolling up of the knit according to the invention and during its passage in the trocar, the particular structure of the knit according to the invention obtained by means of the particular chart followed during the knitting of the knit according to the invention means that these trapped barbs can be released very easily by exerting a minimal force for unrolling the knit. Thus, even if the barbs were entangled when the prosthesis was rolled up, they can be easily disentangled, and the surgeon can deploy the knit and/or the prosthesis easily in order to position it correctly on the implantation site.

The knit can then be fastened either to another fabric, or to a biological wall, owing to the anchoring abilities of the barbs.

In one embodiment of the invention, the first yarn or yarns are monofilament yarns. The first yarn or yarns of the knit according to the invention are those that follow the charts of bars B1 and B2. They constitute the ground structure or alternatively the base of the knit according to the invention, since the second yarn, namely a heat-fusible monofilament yarn, so as to generate the barbs, is regularly cut at the loops that it forms. The generation of barbs from loops made of heat-fusible yarn is known and is described, for example in document WO 01/81 667. When the first yarn or yarns are monofilament yarns, the possible presence of protrusions or anchorage points of the barbs is limited and the force needed to unroll the knit after the rolling up as described above is very small.

The first yarns of the knit according to the invention may be made of any biodegradable or non-biodegradable biocompatible material. Thus, the biodegradable materials suitable for the first yarns of the knit of the present invention may be selected from polylactic acid (PLA), polyglycolic acid (PGA), oxidized cellulose, polycaprolactone (PCL), polydioxanone (PDO), trimethylene carbonate (TMC), polyvinyl alcohol (PVA), polyhydroxyalkanoates (PHAs), copolymers thereof and mixtures thereof. The non-biodegradable materials suitable for the first yarns of the knit of the present invention may be selected

from polyethylene terephthalate (PET), polyamides, aramids, expanded polytetrafluoroethylene, polyurethane, polyvinylidene difluoride (PVDF), butyl ester polymers, polyetheretherketone (PEEK), polyolefins (such as polyethylene or polypropylene), polyethers, copper alloys, silver or platinum alloys, medical grades of steel such as medical-grade stainless steel, and combinations thereof.

In one embodiment of the invention, the first yarns are monofilament yarns made of polyester terephthalate (PET) having a diameter of 0.09 mm. Such yarns have an intrinsic stiffness meaning that when these yarns follow the particular charts of bars B1 and B2 of the knit according to the present invention, the knit obtained naturally tends to return to a flat configuration when it is unrolled under the effect of a stress as described above.

The second heat-fusible monofilament yarn may be made of a bioresorbable or non-bioresorbable material. For example, the heat-fusible monofilament yarn is made of a material selected from polypropylene, polyglycolic acid, polylactic acid, and mixtures thereof. In one embodiment, the heat-fusible monofilament yarn is a polylactic acid monofilament yarn having a diameter of 0.15 mm: such a yarn having such a diameter makes it possible to obtain barbs that have good anchoring abilities in biological tissues or in another openwork textile, while maintaining the ability of the knit according to the invention to be unrolled easily.

Another aspect of the invention is a process for manufacturing a prosthetic knit as described above, comprising the following steps:

i) knitting, on a warp knitting machine, of biocompatible yarns distributed over three guide bars, according to the following chart, according to the ISO 11676 standard:

- Bar B1: 1.0/0.1//
- Bar B2: 1.0/7.7/6.6/7.7//
- Bar B3: 2.1/5.5/3.4/0.0//

the yarn threaded on bar B3 being a heat-fusible monofilament yarn that generates loops that protrude outwards with respect to said first face,

ii) cutting, by melting, of each loop, each loop thus generating two barbs.

In the process according to the invention the yarns threaded on bar B1 and bar B2 are the first yarns made of biocompatible polymer material:

these yarns may be identical or different. Thus, as seen above, these yarns may be monofilament yarns, in particular monofilament yarns made of polyester terephthalate (PET) having a diameter of 0.09 mm.

In one embodiment of the invention, the yarns are threaded one full, one empty on bars B1 and B2, and one full, three empty on bar B3.

Another aspect of the invention is a knit capable of being obtained according to the above process.

Another aspect of the invention is a prosthesis for repairing a hernia, comprising a knit as described above or obtained according to the process described above.

The knit according to the invention and/or the prosthesis according to the invention may be used in a method for treating a hernia, in particular the abdominal wall. The knit and the prosthesis according to the invention are particularly suitable for coelioscopic or laparoscopic surgery.

The advantages of the present invention are illustrated by means of the experimental section which follows and the following supporting figures:

Figures 1A to 1C: are diagrams showing the charts followed for the knitting of the yarns of the knits according to the invention,

Figure 2: is a diagram showing a chart followed for the knitting of the yarns of a knit from the prior art,

Figure 3: is a diagram illustrating the method for rolling up a knit,

Figures 4A and 4B: are diagrams illustrating the test for evaluating the force for unrolling a rolled-up knit,

Figure 5: shows the curve representing the force applied, in N, as a function of the extension, in mm, of a knit during the unrolling thereof.

EXAMPLE 1:

Produced on a warp knitting machine having three guide bars B1, B2 and B3, were a knit A, according to the invention, and a comparative knit B, the chart of which differs from that of the knit according to the invention.

Knit A: according to the invention, having the following chart according to the ISO 11676 standard:

- Bar B1: 1.0/0.1//
- Bar B2: 1.0/7.7/6.6/7.7//
- Bar B3: 2.1/5.5/3.4/0.0//

5

These charts are illustrated in Figures 1A to 1C according to a representation known to a person skilled in the art: the chart of bar B1 is illustrated in Figure 1A; the chart of bar B2 is illustrated in Figure 1B and the chart of bar B3 is illustrated in Figure 1C.

10

Bar B1 and bar B2 are each threaded 1 full, 1 empty, with a monofilament yarn made of polyester terephthalate (PET) having a diameter of 0.09 mm; bar B3, which gives rise to the barbs, is threaded 1 full, 3 empty, with a heat-fusible monofilament yarn made of polylactic acid having a diameter of

15 0.15 mm.

Knit B: comparative, having the following chart according to the ISO 11676 standard:

20

- Bar B1: 1.0/0.1//
- Bar B2: 1.0/5.5/1.0/3.3//
- Bar B3: 2.1/5.5/3.4/0.0//

The chart of bar B2 is illustrated in Figure 2.

25

Bar B1 and bar B2 are each threaded 1 full, 1 empty, with a monofilament yarn made of polyester terephthalate (PET) having a diameter of 0.08 mm; bar B3, which gives rise to the barbs, is threaded 1 full, 3 empty, with a heat-fusible monofilament yarn made of polylactic acid having a diameter of

30 0.15 mm.

For each of the two knits A and B, bar B3 is the one that leads to the formation of the barbs. Since the bars B3 are threaded in an identical manner for the two knits, and these bars have the same chart, the density of the barbs, once the loops have been melted, is the same for both knits.

35

Once the loops have been melted and the barbs have been formed as described in WO 01/81667, the unrolling properties were evaluated after rolling these knits up on themselves, according to the following test:

- for each knit, samples of 5 cm x 10 cm were cut,

5 - as shown in Figure 3, each sample 1 of knit is rolled up on itself around a rod 3 having a diameter of 5 mm, the barbs 2 on the outside, along the direction of the arrow represented in Figure 3. The roll obtained is then grasped with tweezers and inserted into a trocar having an internal diameter of 10 mm, then pushed until it comes out of the trocar.

10

On exiting the trocar, as shown in Figure 4A, the sample 1 in the form of a roll is mounted on a machine 4 equipped with a cell loaded to 25 N, comprising a fixed part 5 and a moving part 6. Around 2 cm of the sample 1 is unrolled and 1 cm of the sample 1 is fastened to the moving part 6. A constant
15 extension rate of 50 mm/min is then applied to the sample 1 tested in order to unroll it, and the corresponding force F needed to maintain said constant extension rate is measured. The force F needed is recorded as a function of the length L of the unrolled portion of the sample 1 until sample 1 is completely
20 unrolled, as shown in Figure 4B. During the unrolling of the sample 1, the force F needed may vary as a function of the resistance encountered. In particular, points of resistance, for which the force F for successfully unrolling the sample 1 must be increased, at least occasionally, may appear during the unrolling.

25

These "points of resistance" are measured as follows: using measured values of the force F and length L of the unrolled portion as indicated above, the curve representing the force F , in newtons, is plotted as a function of the length L of the unrolled portion in mm, of the sample 1. Next, a threshold value is determined for the force F , for example 0.5 N. Each peak of the curve
30 having a value greater than 0.5 N is considered to be a point of resistance. An example of such a curve, showing the peaks counted encircled, is represented in Figure 5. By virtue of this curve, the maximum force needed, F_{max} , is also determined.

35

The results obtained for knit A according to the invention and comparative knit B are presented in Table I below:

Sample	Number of tests	Number of "points of resistance"	Average force (N)	Maximum force (N)
Knit A	16	52 ± 11	1.13 ± 0.33	3.54 ± 0.85
Knit B	20	79 ± 8	4.01 ± 0.80	9.56 ± 1.68

Table I

5

As it emerges from this table, the knit according to the invention (Knit A) has significantly fewer points of resistance than the knit from the prior art (Knit B). The average force needed to unroll the knit of the invention, after it has been rolled up on itself then passed through a trocar having an internal diameter of 10 mm is substantially lower than that needed to unroll the knit from the prior art. Likewise, the maximum force needed to unroll knit A according to the invention is practically divided by 3 compared to the maximum force needed in the case of the comparative knit B.

15

Thus, the knit according to the invention can be unrolled easily after having been rolled up on itself then passed through a trocar having a diameter of 10 mm. The knit can thus be brought to an implantation site during laparoscopic or coelioscopic surgery for repairing a hernia, by means of a trocar, then it can be unrolled without the surgeon having to apply considerable force in order to deploy the knit and/or the prosthesis comprising said knit.

20

CLAIMS

1. Prosthetic knit based on at least a first yarn of biocompatible polymer material defining first and second opposite and openwork faces, and on at least a second biocompatible and heat-fusible monofilament yarn, forming
5 barbs that protrude outwards from at least said first face and are obtained by melting loops generated by said second yarn, the chart followed for the knitting of said first and second yarns on a warp knitting machine having three guide bars B 1, B2, B3 being the following, according to the ISO 11676 standard:
- Bar B 1: 1.0/0.1//
 - 10 - Bar B2: 1.0/7.7/6.6/7.7//
 - Bar B3: 2.1/5.5/3.4/0.0//
- said second yarn following the chart of bar B3.
2. Knit according to Claim 1, in which the first yarns are monofilament yarns.
- 15 3. Knit according to Claim 2, in which the first yarns are monofilament yarns made of polyester terephthalate (PET) having a diameter of 0.09 mm.
4. Knit according to any one of the preceding claims, in which the second heat-fusible monofilament yarn is made of a material selected from
20 polypropylene, polyglycolic acid, polylactic acid, and mixtures thereof.
5. Knit according to any one of the preceding claims, in which the second heat-fusible monofilament yarn is a polylactic acid monofilament yarn having a diameter of 0.15 mm.
6. Process for manufacturing a prosthetic knit according to Claim 1,
25 comprising the following steps:
- i) knitting, on a warp knitting machine, of biocompatible yarns distributed over three guide bars, B 1, B2 and B3, according to the following chart, according to the ISO 11676 standard:
 - Bar B 1: 1.0/0.1//
 - 30 - Bar B2: 1.0/7.7/6.6/7.7//
 - Bar B3: 2.1/5.5/3.4/0.0//
- the yarn threaded on bar B3 being a heat-fusible monofilament yarn that generates loops that protrude outwards with respect to said first face,
- ii) cutting, by melting, of each loop, each loop thus generating two
35 barbs.


7. Process according to Claim 6, in which the yarns threaded on bar B1 and bar B2 are monofilament yarns.

8. Process according to Claim 6 or 7, in which the yarns threaded on bar B1 and bar B2 are monofilament yarns made of polyester terephthalate (PET) having a diameter of 0.09 mm.

9. Process according to any one of Claims 6 to 8, in which the yarn threaded on Bar B3 is selected from the heat-fusible monofilament yarns made of a material selected from polypropylene, polyglycolic acid, polylactic acid, and mixtures thereof.


10. Process according to any one of Claims 6 to 9, in which the yarn threaded on Bar B3 is a polylactic acid monofilament yarn having a diameter of 0.15 mm.

11. Prosthesis for repairing a hernia, comprising a knit according to any one of Claims 1 to 5 or obtained according to the process of any one of Claims 6 to 10.




B1

Fig. 1A

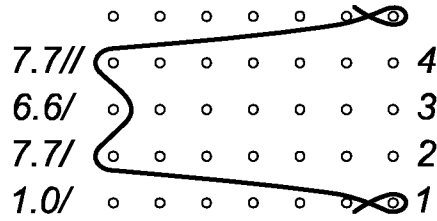


B2

Fig. 1B

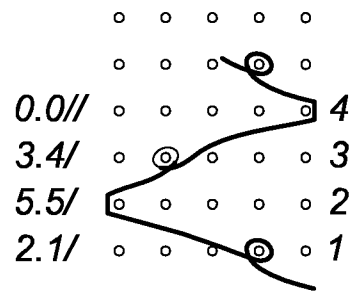

B3

Fig. 1C

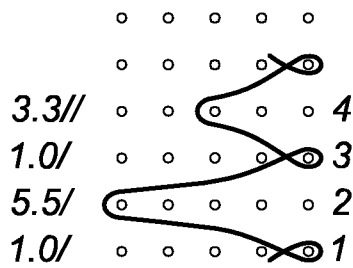

B2

Fig. 2

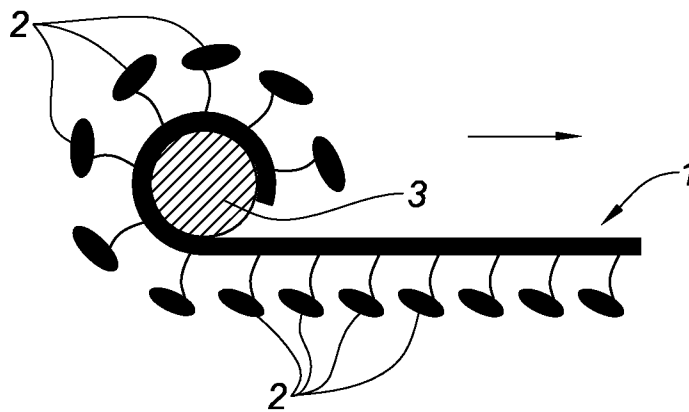


Fig. 3

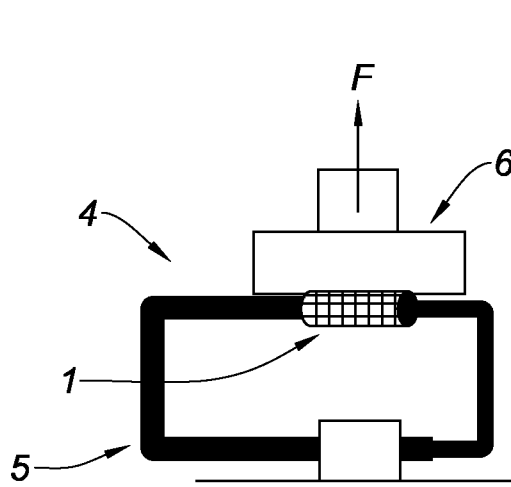


Fig. 4A

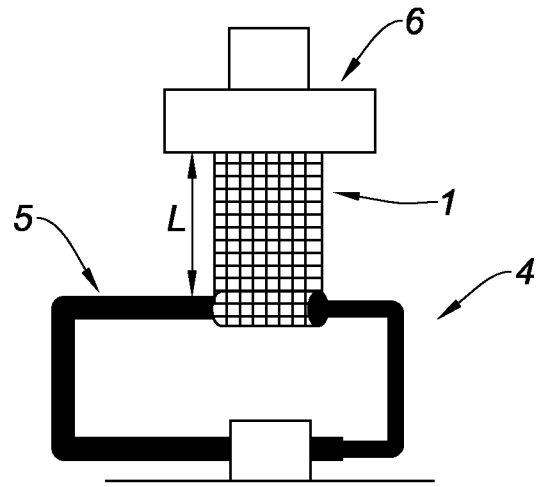


Fig. 4B

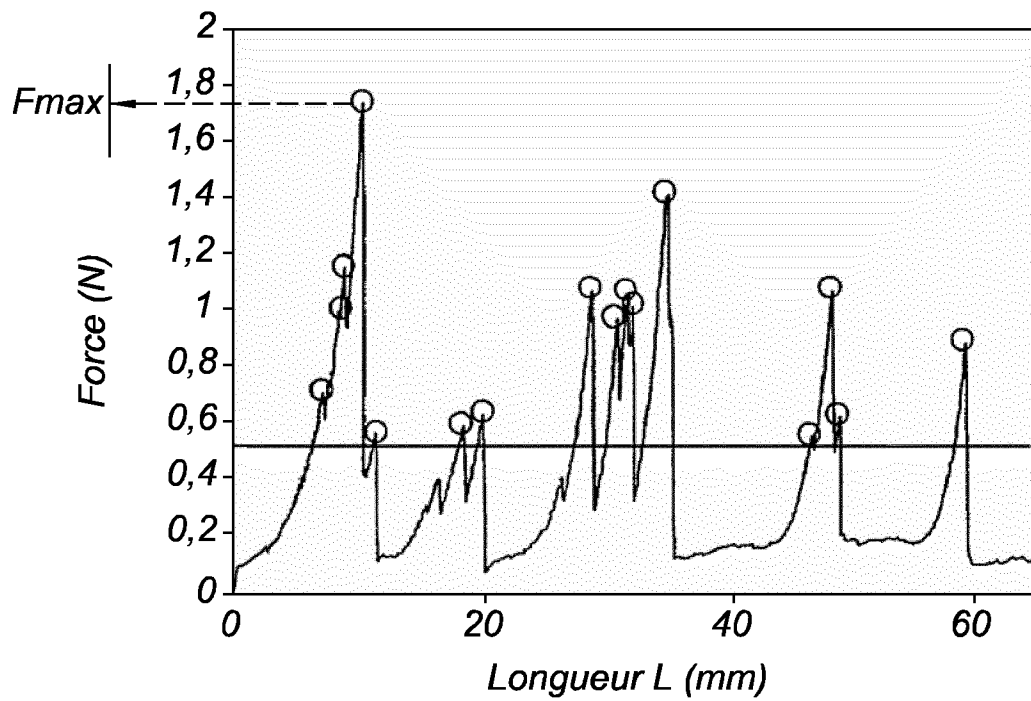


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/076981

A. CLASSIFICATION OF SUBJECT MATTER
INV. D04B21/12
ADD. A61F2/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
D04B A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	wo 01/81667 Al (SOFRADIM PRODUCTION [FR] ; ORY FRANCOIS REGIS [FR] ; THERIN MICHEL [FR] ;) 1 November 2001 (2001-11-01) cited in the applicati on	11
A	page 6, line 20 - page 8, line 33; claims 1, 2, 9, 11-13; figures 1, 2, 10-14 page 11, lines 14-16	1-10
A	----- wo 2011/027087 Al (SOFRADIM PRODUCTION [FR] ; MONTANARI SUZELEI [FR] ; REY PEARL [FR]) 10 March 2011 (2011-03-10) page 9, lines 28-36; figure 1 page 6, lines 5-6 -----	1,4,5

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 16 April 2013	Date of mailing of the international search report 25/04/2013
---	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Sterl e, Di eter
--	---

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/076981

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0181667	A1	01-11-2001	AT 447636 T 15-11-2009
			AU 5490101 A 07-11-2001
			EP 1274892 A1 15-01-2003
			EP 2143836 A1 13-01-2010
			ES 2334206 T3 08-03-2010
			FR 2807937 A1 26-10-2001
			JP 5049442 B2 17-10-2012
			JP 2003530981 A 21-10-2003
			US 2004054376 A1 18-03-2004
			US 2008195231 A1 14-08-2008
			WO 0181667 A1 01-11-2001

WO 2011027087	A1	10-03-2011	AU 2010291040 A1 12-04-2012
			CA 2772409 A1 10-03-2011
			EP 2473133 A1 11-07-2012
			FR 2949687 A1 11-03-2011
			JP 2013503674 A 04-02-2013
			US 2012165937 A1 28-06-2012
			WO 2011027087 A1 10-03-2011
