



(51) International Patent Classification:

A63C 17/00 (2006.01) A63C 17/26 (2006.01)
A63C 17/14 (2006.01)

(21) International Application Number:

PCT/US2013/024059

(22) International Filing Date:

31 January 2013 (31.01.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/365,899 3 February 2012 (03.02.2012)

US

(72) Inventor; and

(71) Applicant : ELLIS, Craig, Melvin [US/US]; 2920 Via
Alvarado, Palos Verdes Estates, CA 90274 (US).

(74) Agent: HANKIN, Marc, E.; Hankin Patent Law, APC,
12400 Wilshire Boulevard, Suite 1265, Los Angeles, CA
90025 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SKATE BRAKE

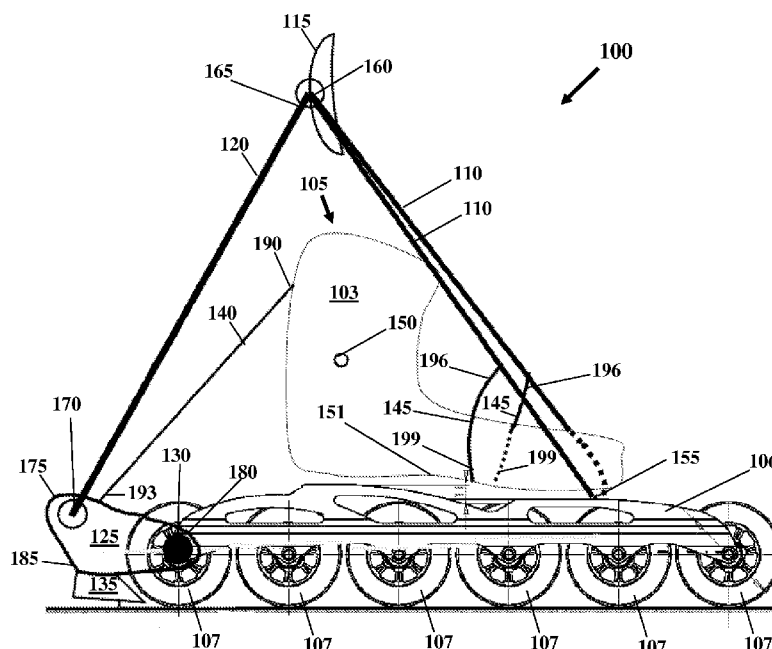


FIG. 1

(57) Abstract: The present invention is a friction brake that may be designed to work with either inline or quad skates. The invention is adjustable and/or can be made specifically to fit virtually any skate of a skater. The invention is preferably comprised of a cuff, one or

[Continued on next page]

**Declarations under Rule 4.17:****Published:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
 - *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *with international search report (Art. 21(3))*

more compression members, brake frame, brake pad, primary tension member, second tension member, and third tension member. Although the present invention does not have to include all of the tension members, the invention works best when all of the tension members are present.

SKATE BRAKE

FIELD OF THE INVENTION

[0001] The present invention relates to brake devices for skates. In particular, the present invention is a skate brake assembly device capable of inhibiting the skating motion of a user when the user moves his or her calf rearward or backwards.

BACKGROUND OF THE INVENTION

[0002] Braking devices for roller skates are well known and are used to slow or stop the skater. Conventional skate braking devices typically consist of a resilient material, such as a rubber pad, which is fixedly attached to either the front or rear of the skate or skate frame. When the user wishes to brake, slow, or stop, the user typically pivots the skate about its front or rear wheels and drags this high friction resilient material along the ground. This is typically very difficult to maneuver and likely requires the skater to delicately balance on one skate while trying to drive the brake on the other skate into the ground.

[0003] Other braking devices include rotating brakes, which typically consists of a cuff, one or more compression or bending members, and a brake pad. The cuff, sometimes called a quarter, which is typically attached to the skate boot, is coupled to one end of the bending or compression member. The brake pad, which inhibits a skater's movement upon contact, is typically connected to the other end of the compression member. The compression member is also further moveably connected around a hinge, such that, as the user moves his calf rearward or backwards, the compression member pivots, causing the brake pad to contact one or more surfaces.

[0004] For example, U.S. Patent No. 5,487,552, issued to Daoust discloses a skate braking device that utilizes a cuff, two L-shaped levers or compression members, and a brake pad. The upper ends of the levers are connected to the cuff and the lower ends of the levers are connected to the brake pad. Each lever has two arms, which are pivotally connected to the chassis of the skate; wherein the upward portions of the arms extend upwardly in general alignment with the skater's leg and the rearward portions of the arms extends rearwardly from the chassis. As the skater moves the cuff rearwardly, the rearward rotation causes a rearward movement on the upper distal ends, thereby moving the brake pad downwardly. The arms are subject to significant bending loads.

[0005] Another example of a skate braking device that utilizes a cuff and one or more compression members is U.S. Patent No. 5,397,137, issued to Pellegrini et. al. The Pellegrini reference discloses a skate braking device, which includes a shoe comprised of a shell for

supporting a user's foot; a fixed and pivoted quarter (sometimes called a cuff) for supporting a user's ankle region and transferring braking force into a compression member; support frame for one or more wheels; and one compression member. The compression member is rotatably associated with the quarter and is associated with a guide formed near the support frame. As the user moves the quarter rotatably backwards, the compression member causes the brake pad to rotate so that it interacts with the ground, thereby activating the brake upon movement of the boot quarter, or cuff via the skater's ankle.

[0006] While these references include a compression, or a bending member and require a hinged cuff to activate, that inhibits a user's rolling motion when the user moves his calf muscles rearward/backward, these skate braking devices are ineffective and/or inefficient because the stiff and relatively "fixed" boot cuff, which is required for the Pelligrini brake to activate, resists efficient ankle movement, which is key to efficient skating. Both designs lacks the efficiency of a tension member that constrains a user's braking movements upon force applied to the compression member. The new design effectively separates the skating mechanics from the braking mechanics, and only serves to translate rearward movement of the skater's leg or calf into downward movement of the compression member, but otherwise does not constrain the skater's ankle in any way. The new design can be used with a "racing" style low-cut boot with no decrease in braking forces generated. The Pelligrini brake design will only work with a boot with a cuff, and neither design is interchangeable between skates of differing geometries. The new design provides all of the advantages of the prior art, i.e., calf activation while maintaining all wheels in contact with the skating surface (as opposed to traditional "fixed" heel braking, which requires the skater to perform a very awkward motion by pivoting the braking skate onto the back wheel and the brake pad while balancing on the other foot and skate). These devices are also nonadjustable and lack the ability to be customized or interchangeable on different skates a skater may own, which prevent users of skates to swap the brake between skates. This is particularly troublesome for users who skate in rough environments (i.e., a sleeper slope) because such users may need to readjust their brake assemblies for quicker and stronger responses, and as the brake pad wears down. In addition, during times when a skater wishes to skate very efficiently and has no need for braking (for instance, a long flat section with no hazards), these brakes create two problems: (1) a longer total "wheelbase" (fore and aft length from the front of the front wheel to the back of the brake) which inhibits the skater's ability to perform a "crossover" skating stroke for speed and/or cornering, and (2) there is a very heavy brake pad, usually a dense and heavy rubber or polymer, that is far from the skater's ankle and therefore a mass ("swing

weight”) that must be overcome by additional energy from the skater.

[0007] Therefore, what is needed is a skate braking device that is activated by the user’s calf muscles via a compression member that is restrained and guided by a flexible cord; wherein the flexible cord is further restrained by the skating shoe or boot. Preferably, the skate braking device is adjustable and customizable, such that the brake may fit any combination of boot, frame, wheel size, or skater size. Further, a brake is needed that can be easily reconfigured over the duration of a skate that may involve differing braking needs, including a “stowed” position wherein the brake can be put in a position that has lower “swing weight” (i.e., closer to the skater’s ankle) and a shorter total wheelbase (fore and aft length).

SUMMARY OF THE INVENTION

[0008] To minimize the limitations in the prior art, and to minimize other limitations that will become apparent upon reading and understanding the present specification, the present invention discloses a new and useful skate brake device.

[0009] One embodiment of the present invention is a skate brake assembly, comprising: one or more primary tension members; a cuff; one or more compression members; a brake frame; and a brake pad; wherein a first end of the one or more primary tension members are configured to be attached to a skate, and wherein a second end of the one or more primary tension members are attached to the cuff. The cuff is configured to be attached or aligned to a leg of a user, such that when the leg pushes rearward, the cuff is also pushed rearward. An upper end of the one or more compression members is attached to the cuff, and a lower end of the one or more compression members is attached to the brake frame. The brake frame is configured to be connected to the skate, and the brake pad is attached to the brake frame. The brake pad is configured to contact one or more surfaces being skated on. As the leg of the user pushes rearward, the cuff pushes the one or more compression members rearward. As the one or more compression members is pushed rearward, the one or more primary tension members constrain the backward motion of the one or more compression members, such that the one or more compression members is pushed substantially downward. As the one or more compression members is pushed substantially downward, the brake frame is pushed downward, such that the brake pad contacts the one or more surfaces being skated on. Preferably, the skate brake assembly further comprises: one or more second tension members; wherein a first end of the one or more second tension members are preferably configured to be attached to the skate, and a second end of the one or more second tension members are preferably attached to the brake frame. Preferably, the one or more second tension members are configured to hold the brake frame in a neutral position, such that the

brake pad is not in contact with the one or more surfaces being skated on when the leg is not pushed backwards. Preferably, the skate brake assembly further comprises: one or more third tension members; wherein a first end of the one or more third tension members should be connected to the one or more primary tension members and a second end of the one or more third tension members should be configured to be connected to the skate, such that the one or more third tension members substantially aligns the one or more primary tension members. Preferably, the brake frame rotatably attaches to a pivot, such that when the one or more compression members pushes downwards, the brake frame pivots downwards, and when the one or more compression members is not pushing down, the brake frame pivots to the neutral position by virtue of the second tension member. The length of the one or more compression members, and all tension members, may be adjustable. The skate brake assembly preferably is configured to include a stowed position; wherein the stowed position occurs when the brake frame pivots upwards, such that the brake pad is substantially away from the one or more surfaces. In this position, the one or more compression members, cuff and primary tension member may be easily detached and stowed in the skater's pocket or pack, or be slung over the shoulder when braking is not required, thereby lowering the weight the skater is "swinging" on their leg and shortening the wheelbase allowing efficient cross-over skating. Preferably, the leg of the user is a calf. The brake frame may be adjustable to one or more wheel sizes, such that the user may reposition the pivot at one or more hinge points of the brake frame. The brake frame may be adjustable to one or more braking forces, such that the user may reposition the lower end of the one or more compression members to one or more connections points of the brake frame.

[0010] Another embodiment of the present invention is a skate brake assembly, comprising one or more primary tension members; a cuff; one or more compression members; a brake frame; and a brake pad. A first end of the one or more primary tension members are configured to be attached to a skate. A second end of the one or more primary tension members are attached to the cuff. The cuff is configured to be attached, or aligned, to a calf of a user, such that when the calf pushes rearward, the cuff is also pushed rearward. An upper end of the one or more compression members is attached to the cuff. A lower end of the one or more compression members is attached to the brake frame. The brake frame is configured to be connected to the skate. The brake pad is attached to the brake frame. The brake pad is configured to contact one or more surfaces being skated on. As the calf of the user pushes rearward, the cuff pushes the one or more compression members rearward. As the one or more compression members is pushed rearward, the one or more primary tension

members constrain the backward motion of the one or more compression members, such that the one or more compression members is pushed substantially downward, and, as the one or more compression members is pushed substantially downward, the brake frame is pushed downward, such that the brake pad contacts the one or more surfaces being skated on. Preferably, the skate assembly further comprises: one or more second tension members; wherein a first end of the one or more second tension members are configured to be attached to the skate, and a second end of the one or more second tension members are attached to the brake frame. Preferably, the one or more second tension members are configured to hold the brake frame in a neutral position, such that the brake pad is not in contact with the one or more surfaces being skated on when the calf is not pushed backwards. Preferably, the skate brake assembly further comprises: one or more third tension members; wherein a first end of the one or more third tension members should be connected to the one or more primary tension members and a second end of the one or more third tension members should be configured to be connected to the skate, such that the one or more third tension members substantially aligns the one or more primary tension members. Preferably, the brake frame rotatably attaches to a pivot, such that when the one or more compression members pushes downwards, the brake frame preferably pivots downwards, and when the one or more compression members is not pushing down, the brake frame preferably pivots to the neutral position. Preferably, the skate brake assembly is configured to a stowed position; wherein the stowed position occurs when the brake frame pivots upwards, such that the brake pad is preferably substantially away from the one or more surfaces. Preferably, the brake frame is adjustable to one or more wheel sizes, such that the user may reposition the pivot at one or more hinge points of the brake frame. The brake frame may be adjustable to one or more braking forces, such that the user may reposition the lower end of the one or more compression members to one or more connections points of the brake frame. A length of the one or more compression members may be adjustable.

[0011] Another embodiment of the present invention is a skate brake assembly, comprising: one or more primary tension members; a skate; a cuff; one or more compression members; a brake frame; a brake pad; one or more second tension members; and one or more third tension members. A first end of the one or more primary tension members are configured to be attached to the skate. A second end of the one or more primary tension members are attached to the cuff. The cuff is configured to be attached or aligned to a calf of a user, such that when the calf pushes rearward, the cuff is also pushed rearward. An upper end of the one or more compression members is attached to the cuff. A lower end of the one or more

compression members is attached to the brake frame. The brake frame is configured to be moveably connected to the skate. The brake frame rotatably attaches to a pivot, such that when the one or more compression members pushes downwards, the brake frame pivots downwards, and when the one or more compression members is not pushing down, the brake frame pivots to the neutral position. The pivot is preferably configured to be located on a wheel axle of the skate. The brake frame is adjustable to one or more wheel sizes, such that the user may reposition the pivot at one or more hinge points of the brake frame. The brake frame is adjustable to one or more braking forces, such that the user may reposition the lower end of the one or more compression members to one or more connections points of the brake frame. The brake pad is attached to the brake frame, and the brake pad is configured to contact one or more surfaces being skated on. As the calf of the user pushes rearward, the cuff pushes the one or more compression members rearward. As the one or more compression members is pushed rearward, the one or more primary tension members constrain the backward motion of the one or more compression members, such that the one or more compression members is pushed substantially downward. As the one or more compression members is pushed substantially downward, the brake frame is pushed downward, such that the brake pad contacts the one or more surfaces being skated on. A first end of the one or more second tension members are configured to be attached to the skate. A second end of the one or more second tension members are attached to the brake frame. The one or more second tension members are configured to hold the brake frame in a neutral position, such that the brake pad is not in contact with the one or more surfaces being skated on when the calf is not pushed backwards; and wherein a first end of the one or more third tension members are connected to the one or more primary tension members and a second end of the one or more third tension members are configured to be connected to the skate, such that the one or more third tension members substantially aligns the one or more primary tension members.

[0012] It is an object of the present invention to create a skate brake assembly that is activated by the user's calf through one or more compression members that is restrained by a flexible tension cord, which, in turn, is restrained by another tension member that is connected to the bottom of the skate, shoe, or frame. This other tension member, which is the referred to as the third tension member, as detailed herein, may be any elastic or inelastic cord, which may be a lace of a skate, or any mechanism to keep the primary tension member from flapping around and to keep it aligned with the skate and skater's leg.

[0013] It is an object of the present invention to create a skate brake assembly, which is

adjustable such that the brake may be retrofitted on to any type skate, which may include inline or quad skates, regardless of the size or type of the skate boot, frame, wheel size, skater size, and skater preferences.

[0014] It is an object of the present invention to provide a brake that provides a very high level of braking force.

[0015] It is an object of this invention to provide a brake that is activated while keeping all wheels of both skates in contact with the skating surface during the braking maneuver

[0016] It is an object of this invention to provide a brake that can be easily reconfigured during the course of a skating outing to meet different braking requirements while providing the most efficient brake possible (i.e., the lowest swing weight, shortest wheelbase, and least interference to the movement of the skater's ankle).

[0017] It is an object of the present invention to provide a skate brake assembly that incorporates multiple modes of braking such as: "Max-brake" rotating for heavy braking; "Medium Brake" for low to moderate braking ; and "Stowed" (or removed" for situations where no brake is needed (such as for speed skating, urban skating, slalom or "cone" skating, or hockey)). Preferably, the present invention makes changing from one mode to another very quick and easy (i.e., from "Max-brake" to "Medium Brake" to "stowed" to off configuration, and vice-versa) by combining the tension members, compression members, and brake frame with various fasteners such as pins, bolts, screws, and the like.

[0018] It is an object of the present invention to provide a skate brake assembly that uses many off-the-shelf and readily available commodity brake pads, unlike most conventional skate brakes, which require a purpose-designed/matched brake pad.

[0019] It is an object of the present invention to provide a skate brake assembly that allows the skater or user to apply braking forces from both feet at the same time, such that the user is not restricted to a "one foot" stoop and thereby able to create greater braking forces from both skates.

[0020] It is an object of the present invention to provide a skate brake assembly that is easy to learn, easy to use, and provides a high level of reassurance and stability to the skater.

[0021] It is an object of the present invention to provide a skate brake assembly that can be adjusted and assembled to virtually any skate without any significant modifications required to the skate.

[0022] It is an object of the present invention to provide a brake that is effective when used on long-wheelbase skates, such as downhill or cross country skates, and with low-cut speed skating shoes with any diameter wheels.

[0023] It is an object of the present invention to overcome the limitations of the prior art.

[0024] These, as well as other components, steps, features, objects, benefits, and advantages, will now become clear from a review of the following detailed description of illustrative embodiments, the accompanying drawings, and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The drawings are of illustrative embodiments. They do not illustrate all embodiments. Other embodiments may be used in addition or instead. Details which may be apparent or unnecessary may be omitted to save space or for more effective illustration. Some embodiments may be practiced with additional components or steps and/or without all of the components or steps which are illustrated. When the same numeral appears in different drawings, it refers to the same or like components or steps.

[0026] **FIG. 1** is an illustration of a side view of one embodiment of the skate brake assembly.

[0027] **FIG. 2** is an illustration of a side view of one embodiment of the skate brake assembly and shows the skate brake assembly in a stowed configuration.

[0028] **FIG. 3** is an illustration of a side view of one embodiment of the skate brake assembly and shows another stowed configuration and various placements of the second tension member.

[0029] **FIG. 4** is an illustration of a side view of one embodiment of the skate brake assembly and shows a medium brake configuration.

[0030] **FIG. 5** is a force diagram of one embodiment of the skate brake assembly.

[0031] **FIG. 6** is a detailed illustration of a side view of one embodiment of a brake frame and brake pad of the skate brake assembly.

[0032] **FIG. 7** is an illustration of a side view of one embodiment of the skate brake assembly and shows the primary tension member as an inelastic and bendable, semi-rigid or rigid strap, wherein the first end of the primary tension member is attached to the skate frame.

[0033] **FIG. 8** is an illustration of a side view of one embodiment of the skate brake assembly and shows the primary tension member as an inelastic and bendable, semi-rigid or rigid strap, wherein the first end of the primary tension member attached to the skate shoe.

[0034] **FIG. 9** is an illustration of a side view of one embodiment of the skate brake assembly and shows the second end of the primary tension member attached to the compression member.

[0035] **FIG. 10** is an illustration of a side view of one embodiment of the skate brake

assembly and shows the second end of the primary tension member attached to the compression member and then to the cuff while the cuff is attached to both the compression member and primary tension member.

[0036] FIG. 11 is an illustration of a side view of one embodiment of the skate brake assembly and shows the second end of the second tension member attached to the lower end of the compression member; the second end of the primary tension member connected only to the cuff; and the upper end of the compression member connected only to the cuff.

DETAILED DESCRIPTION OF THE DRAWINGS

[0037] In the following detailed description of various embodiments of the invention, numerous specific details are set forth in order to provide a thorough understanding of various aspects of one or more embodiments of the invention. However, one or more embodiments of the invention may be practiced without some or all of these specific details. In other instances, well-known methods, procedures, and/or components have not been described in detail so as not to unnecessarily obscure aspects of embodiments of the invention.

[0038] While multiple embodiments are disclosed, still other embodiments of the present invention will become apparent to those skilled in the art from the following detailed description, which shows and describes illustrative embodiments of the invention. As will be realized, the invention is capable of modifications in various obvious aspects, all without departing from the spirit and scope of the present invention. Accordingly, the screen shot figures, and the detailed descriptions thereof, are to be regarded as illustrative in nature and not restrictive. Also, the reference or non-reference to a particular embodiment of the invention shall not be interpreted to limit the scope of the invention.

[0039] In the following description, certain terminology is used to describe certain features of one or more embodiments of the invention. For instance, the terms “skate” and “skating device” refers to any devices worn on the feet to enable the wearer to roll along on one or more wheels, including without limitation, inline skates and quad skates. The skating device also preferably includes a boot, frame, bearings, wheels, and brakes, but may lack one or more components without deviating from the scope of the invention. The term “compression member” refers to any rigid piece of material that provides further movement and support in response to any applied force, and includes without limitation, rods, sticks, poles, shafts, stalks, levers, canes, bars, and the like. The term “primary tension member” refers to any inelastic structural elements that are subjected to axial tensile forces, and includes without

limitation, inelastic cords, cables, ropes, coaxials, inelastic cords, links, ropes, wires, and the like. The terms “second tension member” and “third tension member” refer to any elastic structural elements that are subjected to axial tensile forces, and includes without limitation, elastic cords, elastic ropes, elastic cables, stretchable strings, cords, wires, and the like. The second tension member may also be a rotary/coil spring that applies a rotary force to the brake to keep it up or can simply loop around the front of the skater’s ankle/skate boot ankle and not actually attach anywhere. The third tension member may also be any mechanism that keeps the primary tension member “tidy”, (i.e., not flopping around), such that when the skater moves calf back the primary tension member is well positioned to keep the cuff straight on the skater’s leg as it moves back. The term “cuff” refers to any mechanism or device that fastens, secures, aligns or adheres to a user’s leg, calf, ankle, or skate boot, and includes without limitation, fasteners, straps, quarters, and the like.

[0040] The skate brake invention is preferably a friction brake that may be designed to work with any type of skating device. The skate brake and components thereof are preferably adjustable and/or can be made specifically to fit virtually any skate or skater. The skate brake is preferably comprised of a cuff, compression member, brake frame, brake pad, one or more primary tension members, one or more second tension members, and one or more third tension members. The cuff, which is preferably, but not always, attached to the back of a wearer’s calf, operates such that when the calf is pushed rearward or backward, the cuff is also pushed backward. The compression member, which is a preferably a rigid and telescoping rod, is attached to the cuff and the brake frame. The compression member may also have a damping mechanism incorporated to reduce the vibration that the skate feels from the cuff due to bumps or irregularities in the skating surface. The primary tension member, which is a flexible but inelastic strap, is preferably attached to the front portion of a skate and to the cuff. As the cuff is pushed backward, the primary tension member constrains the backward motion of the compression member and forces the compression member more forcefully downward. The downward movement of the compression member, in turn, pivots the brake frame downward, which causes the brake pad to engage the ground. The secondary tension member, which is flexible and elastic, is attached to the brake frame and to one of several different positions of the back or bottom of the skate shoe. Preferably, the second tension member holds the brake frame in a stable or neutral position (i.e., ready-to-brake) during normal skating, such that the brake pad does not contact with any surfaces that are skated on. When the compression member ceases pushing down on the brake frame (by the user moving his/her calf forward), the second tension member pulls the brake frame into its

normal position. The tension in the second tension member is preferably overcome when the compression member is forced down. The third tension member, which is preferably flexible and elastic, is connected to the primary tension member and is designed to keep the primary tension member properly aligned. As discussed above, the second tension member may also be a rotary/coil spring that applies a rotary force to the brake to keep it up, or can simply loop around the front of the skater's ankle/skate boot ankle and not actually attach anywhere. Like the second tension member, the primary tension member can also simply loop around the front of the skater boot or middle of the skate boot and not actually attach anywhere. The third tension member may be any mechanism that keeps the primary tension member "tidy", (i.e., not flopping around), such that when the skater moves calf back the primary tension member is well positioned to keep the cuff straight on the skater's leg as it moves back. Although the skate brake invention does not have to include all of the tension members, the present invention works best when all of the tension members, or similar function mechanism is present.

[0041] **FIG. 1** is an illustration of a side view of one embodiment of the skate brake assembly. As shown in **FIG. 1**, the skate brake assembly **100** preferably includes: a skate **105** primary tension member **110**; cuff **115**; compression member **120**; brake frame **125**; pivot **130**; brake pad **135**; second tension member **140**; third tension member **145**; and an attachment point **150, 151**. The skate **105** preferably includes a skate shoe **103**; a skate frame **106**, and one or more skate wheels **107**. Although **FIG. 1** shows a skate shoe **103** as a boot, it should be understood that the present invention allows the skate shoe **103** to include any type of footwear device such as a boot, shoe, slippers, sandal, straps, socks, but also may incorporate no footwear device. The user's foot preferably wears the skate shoe **103** or boot, and the skate shoe **103** is preferably attached to the skate frame **106**. The skate frame **106** is preferably any structural device that is fixedly attached to the skate shoe **103** and usually holds skate wheels **107**, such that the wheels are freely rotatable. While **FIG. 1** only shows the skate shoe **103**, skate frame **106**, and skate wheels **107** as part of a six wheel in-line skate, it should be understood that skate brake assembly **100** may be attached to any type of skate with any number of wheels, including, but not limited to, inline, two-wheel, and quad skates, without deviating from the scope of the invention.

[0042] The primary tension member **110**, as shown in **FIGS. 1** and **2**, is preferably one or more narrow strips of material that are flexible, but not elastic, and may be constructed of wire, rope, cord, string, nylon, and/or the like. However, as shown in **FIGS. 7** and **8**, the primary tension member(s) **110** may be constructed of any rigid or semi-rigid but inelastic

material such as a bendable or somewhat-flexible metal strap, pieces of strip metal, or semi-rigid or rigid plastic or composite strips or the like. It should be understood that the primary tension member could be made from any type of rigid or semi-rigid but inelastic natural or man-made material. The length of the primary tension member **110** may also be adjusted by utilizing adjustment holes, locks, sliders, or the like, such that the user may configure the primary tension member **110** to be any length, width, or height, in accordance with the user's preferences, the most important/critical preferences being the ankle angle that begins engagement of the brake and/or the ankle angle where the brake is in contact with the skating surface. The cuff **115** is preferably a device that wraps, fastens to, or is secured (loosely or securely depending on skater preferences) around a user's calf, leg, or ankle, which includes any fastener and/or quarter, but may also be configured to be aligned to a user's calf or leg rather than being attached to a user. The cuff **115** also is typically constructed of any pliant material such as plastic or nylon that may include a strap or fastening device, but may also be constructed of any rigid or hard, inflexible material as well. The compression member **120** is preferably any thin, rigid straight or shaped piece of inflexible and inelastic material such as metal or wood bar or dowel or composite or reinforced plastic. The cuff and compression member can be one piece, for example molded plastic, aluminum or composites, or many pieces that are secured together rigidly, or flexibly but securely. The compression member or members may also be adjustable, such that the user may configure the compression member to be any length or height, in accordance with the user's preferences, (the primary preference being the ankle angle that begins engagement of the brake and/or the ankle angle where the brake is in contact with the skating surface) and may also have a damping mechanism incorporated to reduce the vibration that the skate feels from the cuff due to bumps or irregularities in the skating surface. The brake frame **125** is preferably a device that pivots or rotates around the pivot **130**, which is preferably attached to an end of skate frame **106**, and like the compression member, is fully adjustable by the user to create differing brake forces. The pivot **130** may be co-axial/common with one of the skate wheel axles, may be a pivot on the frame, or may be a pivot on a separate bracket that attaches to the boot and or frame. However, the pivot is preferably fixed with respect to the skate and should not move. As shown in FIG. 1, brake frame **125** cradles or holds brake pad **135**, which is pressed or makes contact with the ground in order to slow, brake, or stop the skater. The brake pad **135** may be any off-the-shelf brake pad, or proprietary brake pad.

[0043] Both the second tension member **140** and the third tension member **145** are preferably long narrow strips of pliant material, but, unlike the primary tension members **110**, both the

second tension members **140** and third tension members **145** are preferably constructed of an elastic material that returns to its original shape after any stress that deforms or distorts the tension member is removed. The present invention allows the primary tension member **110**, second tension member **140**, and third tension member **145** to be fully adjustable by the user to comport with the user's needs and preferences.

[0044] Attachment point **150** may be an alternate point of attachment for the first or second tension members. Although attachment point **150** is shown in FIG. 1 as being on skate shoe **103**, it may be located in any location of the skate **105**. Also, the first, second and third tension members may simply wrap around the skate boot. The components of the skate brake assembly **100** may be constructed from any natural, synthetic, or manmade material such as, metal, aluminum, stainless steel, leather, composites, plastic, reinforced plastics and the like, without deviating from the scope of the invention.

[0045] FIG. 1 shows the preferred interconnections of the components of the brake assembly **100**. As shown in FIG. 1, a first end **155** of the primary tension member **110** is preferably attached, connected, or otherwise aligned to the skate **105** by connecting the first end **155** of the primary tension member **110** to any part of the skate **105**, which includes the skate shoe **103**, skate frame **106** or other components of the skate **105**. Attaching the first end **155** of the primary tension member **110** may also be accomplished by forming a loop at the first end **155** of the primary tension member **110** and looping the first end **155** of the primary tension member **110** to under any part of the skate **105**, or component of the skate **105**. The second end **160** of the primary tension member **110** is shown as preferably being connected to the cuff **115** and upper end **165** of the compression member **120**. Although FIG. 1 shows: (1) the first end **155** of the primary tension member **110** as attached to the front portion of the skate **105**; and (2) the upper end **160** as attached to cuff **115**; it should be understood that the primary tension member may be attached at any location on skate **105**, cuff **115**, and/or skate frame **106** (including but not limited to the attachment point **150**), so long as the primary tension member constrains the backward movement of the compression member due to the inelasticity of the primary tension member **110**. This constraint forces the compression member **120** downward, rather than merely backward, with a strong braking force when the wearer shifts her calf backward. For example, the first end **155** of the primary tension member **110** may be attached to the front portion of the skate **105** while the second end **160** of the primary tension member **110** may be connected to the upper portion **165** of the compression member **120** (see example in FIG. 9). Alternatively, the second end **160** of the primary tension member **110** may be connected to the upper portion **165** of the compression

member **120** while another portion of the primary tension member **110** may be connected to the cuff **115** (see example in FIG. 10).

[0046] Preferably, the upper end **165** of the compression member **120** is connected to the cuff **115**, and the lower end **170** of the compression member **120** is preferably connected pivotally to a first end portion **175** of the brake frame **125**. The second portion **180** of the brake frame **125** is preferably connected at pivot **130** to a rear portion of the skate frame **106**. Preferably, the brake pad **135** is connected to a third or lower portion **185** of the brake frame **125**.

[0047] FIG. 1 shows that, preferably, the first end **190** of the second tension member **140** is connected to a rear, upper portion of the skate shoe **103**, and the second end **193** of the second tension member **140** is preferably connected to first portion **175** of the brake frame **125**. Although FIG. 1 shows the second tension member connected to the skate **105** and brake frame **125**, it should be understood that the present invention allows the second tension member **140** to be connected to other parts of the skate **105** without deviating from the scope of the invention (see examples in FIG. 3). For example, the first end **190** of the second tension member **140** may be attached to the skate **105** while the second end **193** of the second tension member **140** may be connected to the lower end **170** of the compression member **120** (see example in FIG. 11).

[0048] The first end **196** of the third tension member **145** is preferably connected to the primary tension member **110** and the second end **199** of the third tension member **145** is preferably connected to a lower portion of the skate **105**, or simply wraps under the skate **105** or skate shoe **103**. Although FIG. 1 shows the third tension member **145** with specific attachment points, it should be understood that the present invention allows a wide variety of attachment points.

[0049] It should be understood that not all of the tension members **140**, and **145** are necessary for the operation of skate brake assembly **100**. The tension members **110**, **140**, and **145** may each be constructed from any number of parts or a single part.

[0050] As shown in FIG. 1, the skate brake assembly **100** operates to brake, slow, or stop a skater when the skater shifts her calf or leg backward. First, the cuff **115** moves back or rearward. This pushes the compression member **120** rearward, but instead of going rearward, the rod is pushed primarily downward due to the constraining action of the primary tension member **110**. The primary tension member, and the cuff, forces compression member **120** to stay aligned on the back of the wearer's calf and forces compression member **120** downward rather than rearward when the skater's calf moves backward. As a result of the strong downward force on compression member **120**, the brake frame **125** pivots downward, which

in turn brings brake pad **135** in contact with the ground or surface upon which the skater is skating. The skater controls the force at which the brake pad **135** contacts the ground by lessening or increasing the rearward movement of the calf. The second tension member **140**, or similar function part like a coil spring, is used to hold the brake frame **125** in a stable or neutral position above the ground until it is overcome by the rearward movement of the user's calf and the downward movement of the compression member **120**. In the neutral position, the second tension member holds the brake frame in a stable position, such that the brake pad is not in contact with one or more surfaces, such as the ground surface when the braking force of the skate brake assembly **100** is not applied. The third tension member **145** is used to, optionally, help keep the primary tension member **110** aligned to the skate **105** and the skaters leg/calf to optimally convert the rearward movement of the user's calf into a downward force on compression member **120**.

[0051] **FIG. 2** is an illustration of a side view of one embodiment of the skate brake assembly and shows the skate brake assembly in a stowed configuration. As shown in **FIG. 2**, the stowed configuration **200** of the skate brake assembly **100** preferably includes: a skate shoe **103**; primary tension member **110**; cuff **115**; compression member **120**; brake frame **125**; pivot **130**; brake pad **135**; second tension member **140**; third tension member **145**; and attachment point **150**. The stowed configuration **200** preferably includes the brake frame **125** pivoting in an upwards fashion, such that the brake pad **135** is substantially away from the ground surface and/or wheel of the skate **105**, and in a position that does not hinder efficient skating in situation where no braking is required. In this position, compression member **120** does not force the brake pad **135** to the ground when the skater's calf moves rearward. Although it is preferred that the stowed position be held by a snap or friction, it should be understood that the stowed position may be held by any mechanism or simply by gravity.

[0052] **FIG. 3** is an illustration of a side view of one embodiment of the skate brake assembly and shows another stowed configuration and various placements of the second tension member. As shown in **FIG. 3**, the alternate stowed configuration **300** of the skate brake assembly preferably includes: a skate **105**; brake frame **125**; pivot **130**; brake pad **135**; one or more second tension members **140**; and attachment point **150**. As mentioned above, the various configurations of the second tension member **140** of the brake assembly **100** preferably includes the brake frame **125** pivoting in an upwards fashion, such that the brake pad **135** is substantially away from the ground surface and in a position that does not hinder efficient skating in situation where no braking is required. As shown in **Figure 3**, the compression member, cuff and first and second tension members have been removed to

reduce the swing weight on the skaters foot. The first and second tension members may be removed by a quick release pin, which is preferably located at the second end of the second tension members **170** but may be located at any area of any of the tension members. The first end of the second tension members **190** may be attached to various portions of the skate **105**. For instance, the first end **190** of the second tension member **140** may be attached to an upper-rear end portion of the skate shoe **103**, attachment point **150**, or bottom portion of the skate frame **106**, or simply wrapped over the top of the skater's foot/skate boot/shoe. The second end of the second tension members **170** is preferably attached to the first or rear-top end portion **175** of the brake frame **125**.

[0053] **FIG. 4** is an illustration of a side view of one embodiment of the skate brake assembly and shows a medium brake configuration. As shown in **FIG. 4**, the medium brake configuration **400** of the skate brake assembly **100** is typically a traditional heel brake configuration and preferably includes: a skate **105**; brake frame **125**; pivot **130**; brake pad **135**; attachment point **150**, **151**; and heel brake compression member **405**. In this configuration, the present invention is a retrofit of the skate brake assembly **100**. The cuff **115** and compression member **120** are preferably replaced by a heel brake compression member **405**, which is typically a shorter version of the compression member **120**. The heel brake compression member **405** preferably allows the user to perform low to moderate braking by bearing against the user's skate boot, lower leg, skate, and allowing the user to brake as needed by compressing the heel brake compression member **405**. Unlike conventional heel brakes, the heel brake compression member **405** preferably replaces the compression member **120** in a quick release manner through the use of clevis pins, cotter pins, screws, bolts, and the like. Preferably, the heel brake compression member **405** may be adjustable in length to tailor a skater's preference, to address issues such as comfort, brake and pad wear, but is typically fixed once adjusted. This configuration also allows the user to preferably adjust the brake's settings to require less power than the maximum brake configuration, and preferably allows a user to utilize multiple styles of braking from skate brake assembly **100** components.

[0054] **FIG. 5** is a force diagram of one embodiment of the skate brake assembly. As shown in **FIG. 5**, the force diagram **500** of one embodiment of the skate brake assembly shows the preferred steps of: (1) applying a rearward force **505** to cuff **115**; (2) constraining of the rearward movement of the rod **510** by primary tension member **110**; (3) generating a downward motion and force **515** on compression member **120**; and (4) generating a braking force to the brake pad **520**. Specifically, in the first step, applying a rearward force **505**, the

user preferably moves his or her calf or leg rearward or backwards such that the cuff **115** also moves rearward. The second step, constraining of the rearward movement of the rod **510**, preferably occurs when the primary tension members **110** is fully extended, due to the inelasticity of the primary tension members **110**. Accordingly, the upper part of the primary tension member cannot move rearward, which in turn constrains the backward movement of the compression member **120**. The third step, generating a downward motion and force **515**, typically occurs when the by user's calf generates a rearward movement, thereby causing the compression member **120**, which is constrained from moving rearward, is forced downward. The primary tension member **110** also helps increase the efficiency and strength of the downward force of the compression member **120** because the compression member **120** is kept aligned at the back of the wearer's calf and is prevented from swinging or slipping around to the front of the wearer's leg. Finally, the fourth step, generating a braking force to the brake pad **520**, preferably occurs when the downward motion generated by the compression member **120** forces the brake pad **135** to contact with the ground or other surface on which the skater is skating.

[0055] **FIG. 6** is a detailed illustration of a side view of one embodiment of a brake frame and brake pad of the skate brake assembly. As shown in **FIG. 6**, both the brake frame **125** and brake pad **135** preferably include: a first side or end **175** of the brake frame **125**; a second side or end **180** of the brake frame **125**; a third side or end **185** of the brake frame **125**; compression member **120**; one or more hinge points **655**, **665**, **675**; and wheel **660**, **670**, **680**. The first end **175** of the brake frame **125** preferably includes one or more connection points **635**, **640**, **645**, **650**, which are used to achieve different motion responses and braking forces generated from the compression member **120** to accommodate different skate wheel sizes and the braking desires of the skater. For example, if compression member **120** is attached to connection point **635**, the motion response would be slow, with a small angular rotation and a very strong brake force. If compression member **120**, on the other hand, is attached to connection point **650**, the motion response should be fast with a large angular rotation and a weaker brake force. Although **FIG. 6** shows only four connection points, the present invention allows any number of connection points or a single connection point, without deviating from the scope of the invention. Additionally, the brake frame **125** is preferably able to accommodate different types of brake pads or a proprietary single purpose brake pad. The second end **180** of the brake frame **125** may include one or more hinge points **655**, **665**, **675** to accommodate different wheel sizes and skate frames. For example, hinge point **655** would accommodate a small wheel **660**; hinge point **665** would accommodate a medium

sized wheel **670**; and hinge point **675** would accommodate a large wheel **680**. However, the present invention allows the brake frame **125** to pivot on any hinge with any type of wheel without deviating from the scope of the invention.

[0056] **FIG. 7** is an illustration of a side view of one embodiment of the skate brake assembly and shows the primary tension member as a bendable, semi-rigid or rigid but inelastic strap, straight or shaped, wherein the first end of the primary tension member attaches to the skate frame. As shown in **FIG. 7**, another embodiment of the skate brake assembly **200** preferably includes: a skate **205**; primary tension member **210**; cuff **215**; compression member **220**; brake frame **225**; pivot **230**; brake pad **235**; second tension member **240**; and an attachment point **250**. The skate **205** preferably includes a skate shoe **203**; a skate frame **206**; and one or more skate wheels **207**. In this embodiment, the first end **255** of the primary tension member **210**, which is preferably a bendable semi-rigid or rigid, straight or shaped, but inelastic strap, may be moveably attached, connected, or otherwise aligned to the skate **205** by connecting the first end **255** of the primary tension member **210** to the skate frame **206**. This may be accomplished by adding a pivot, hinge, rod, loop, or the like to the skate frame **206** and moveably connecting the first end **255** of the primary tension member **210** to the skate frame **206**. This may also be accomplished by moveably connecting the first end **255** of the primary tension member **210** to an existing feature of the skate frame **206**. **FIG. 7** also shows the second end **260** of the primary tension member **210** as being preferably connected to the top of the compression member, or to the cuff **215**. As discussed above, the length of the primary tension member **210** may adjusted by utilizing adjustment holes, locks, sliders, or the like, such that the point of engagement of the brake pad **235** with the ground changes in accordance with the user's preferences. The user may also configure the compression member to be any length, width, or height, in accordance with the user's preferences. Although **FIG. 7** shows the first end **255** of the primary tension member **210** as moveably attached or connected to approximately the mid-rear section of the skate frame **206**, it should be understood that the primary tension member may be attached at any location on the skate frame **206**. It should also be understood that more than one primary tension member **210** may be included such as two primary tension members for each side of the skate. The engagement point of the brake pad, to the users' preference, may also be adjusted or manipulated by adding or taking away padding in the cuff **215**. Specifically, this allows for easy, fine tuning of the brake engagement point. In the embodiment in **FIG. 7**, the primary tension member is preferably not connected at all to the skate shoe **203**.

[0057] **FIG. 8** is an illustration of a side view of one embodiment of the skate brake

assembly and shows the primary tension member as a bendable, semi-rigid or rigid but inelastic, but inelastic strap, straight or shaped, wherein the first end of the primary tension member attaches to the skate shoe. As shown in FIG. 8, another embodiment of the skate brake assembly **300** preferably includes: a skate **305**; primary tension member **310**; cuff **315**; compression member **320**; brake frame **325**; pivot **330**; brake pad **335**; second tension member **340**; and an attachment point **350**. The skate **305** preferably includes a skate shoe **303**; a skate frame **306**; and one or more skate wheels **307**. In this embodiment, the first end **355** of the primary tension member **310**, which is preferably a bendable semi-rigid or rigid, straight or shaped, but inelastic strap, may be moveably attached, connected, or otherwise aligned to the skate **305** by connecting the first end **355** of the primary tension member **310** to the skate shoe **303**. This may be accomplished by adding a pivot, hinge, rod, loop, or the like on the skate shoe **303** and moveably connecting the first end **355** of the primary tension member **310** to the skate shoe **303**. This may also be accomplished by moveably connecting the first end **355** of the primary tension member **310** to an existing feature of the skate shoe **303**. FIG. 8 also shows the second end **360** of the primary tension member **310** as being preferably connected to the top of the compression member **320**, or to the cuff **315**. As discussed above, the length of the primary tension member **310** may adjusted by utilizing adjustment holes, locks, sliders, or the like, such that the point of engagement of the brake pad **335** with the ground changes in accordance with the user's preferences. The user may also configure the compression member to be any length, width, or height, in accordance with the user's preferences. In this embodiment, the primary tension member **310** may also be adjusted by utilizing adjustment holes. Although FIG. 8 shows the first end **355** of the primary tension member **310** as moveably attached or connected to the approximately the mid-section of the skate shoe **303**, it should be understood that the primary tension member **310** may be attached at any location on the skate shoe **303**. It should also be understood that more than one primary tension member **310** may be included such as two primary tension members for each side of the skate. The engagement point of the brake pad, to the users' preference, may also be adjusted or manipulated by adding or taking away padding in the cuff **315**. Specifically, this allows for easy, fine tuning of the brake engagement point. In the embodiment in FIG. 8, the primary tension member is preferably not connected at all to the skate frame **306**.

[0058] FIG. 9 is an illustration of a side view of one embodiment of the skate brake assembly and shows the second end of the primary tension member attached to the compression member. As shown in FIG. 9, another embodiment of the skate brake assembly

400 preferably includes: a skate 405; primary tension member 410; cuff 415; compression member 420; brake frame 425; pivot 430; brake pad 435; second tension member 440; and an attachment point 450. The skate 405 preferably includes a skate shoe 403; a skate frame 406; and one or more skate wheels 407. In this embodiment, the first end 455 of the primary tension member 410, which is preferably a bendable semi-rigid or rigid, straight or shaped, but inelastic strap, may be moveably attached, connected, or otherwise aligned to the skate 405 by connecting the first end 455 of the primary tension member 410 to the skate shoe 403. This may be accomplished by adding a pivot, hinge, rod, loop, or the like on the skate shoe 403 and moveably connecting the first end 455 of the primary tension member 410 to the skate shoe 403. This may also be accomplished by moveably connecting the first end 455 of the primary tension member 410 to an existing feature of the skate shoe 403. FIG. 9 also shows the second end 460 of the primary tension member 410 as being preferably connected to an upper portion of the compression member 420. As discussed above, the length of the primary tension member 410 may be adjusted by utilizing adjustment holes, locks, sliders, or the like, such that the point of engagement of the brake pad 435 with the ground changes in accordance with the user's preferences. The user may also configure the compression member to be any length, width, or height, in accordance with the user's preferences. Although FIG. 9 shows the first end 455 of the primary tension member 410 as moveably attached or connected to the approximately the front portion of the skate shoe 403, it should be understood that the primary tension member 410 may be attached at any location on the skate shoe 403 or skate frame 406. It should also be understood that more than one primary tension member 410 may be included such as two primary tension members for each side of the skate. The engagement point of the brake pad, to the users' preference, may also be adjusted or manipulated by adding or taking away padding in the cuff 415. Specifically, this allows for easy, fine tuning of the brake engagement point.

[0059] FIG. 10 is an illustration of a side view of one embodiment of the skate brake assembly and shows the second end of the primary tension member attached to the compression member and then to the cuff while the cuff is attached to both the compression member and primary tension member. As shown in FIG. 10, another embodiment of the skate brake assembly 500 preferably includes: a skate 505; primary tension member 510; cuff 515; compression member 520; brake frame 525; pivot 530; brake pad 535; second tension member 540; and an attachment point 550. The skate 505 preferably includes a skate shoe 503; a skate frame 506; and one or more skate wheels 507. In this embodiment, the first end 555 of the primary tension member 510, which is preferably a bendable semi-rigid or rigid,

straight or shaped, but inelastic strap, may be moveably attached, connected, or otherwise aligned to the skate **505** by connecting the first end **555** of the primary tension member **510** to the skate shoe **503**. This may be accomplished by adding a pivot, hinge, rod, loop, or the like on the skate shoe **503** and moveably connecting the first end **555** of the primary tension member **510** to the skate shoe **503**. This may also be accomplished by moveably connecting the first end **555** of the primary tension member **510** to an existing feature of the skate shoe **503**. FIG. 10 also shows the second end **560** of the primary tension member **510** as being preferably connected to an upper portion of the compression member **520** with another portion of the primary tension member being connected to the cuff **515**. Specifically, while the second end **560** of the primary tension member **510** is preferably connected to the upper portion of the compression member **520**, any portion of the primary tension member such as the upper, mid, or lower portion is preferably connected to the cuff **515**. Furthermore, the cuff **515** is also preferably connected to both the upper portion of the compression member **520** and second end **560** of the primary tension member **510**. As discussed above, the length of the primary tension member **510** may adjusted by utilizing adjustment holes, locks, sliders, or the like, such that the point of engagement of the brake pad **535** with the ground changes in accordance with the user's preferences. The user may also configure the compression member to be any length, width, or height, in accordance with the user's preferences. Although FIG. 10 shows the first end **555** of the primary tension member **510** as moveably attached or connected to the approximately the front portion of the skate shoe **503**, it should be understood that the primary tension member **510** may be attached at any location on the skate shoe **503** or skate frame **506**. It should also be understood that more than one primary tension member **510** may be included such as two primary tension members for each side of the skate. The engagement point of the brake pad, to the users' preference, may also be adjusted or manipulated by adding or taking away padding in the cuff **515**. Specifically, this allows for easy, fine tuning of the brake engagement point.

[0060] FIG. 11 is an illustration of a side view of one embodiment of the skate brake assembly and shows the second end of the second tension member attached to the lower end of the compression member; the second end of the primary tension member connected only to the cuff; and the upper end of the compression member connected only to the cuff. As shown in FIG. 11, another embodiment of the skate brake assembly **600** preferably includes: a skate **605**; primary tension member **610**; cuff **615**; compression member **620**; brake frame **625**; pivot **630**; brake pad **635**; second tension member **640**; and an attachment point **650**. The skate **605** preferably includes a skate shoe **603**; a skate frame **606**; and one or more skate

wheels **607**. In this embodiment, the first end **690** of the second tension member **640**, which is preferably an elastic material that returns to its original shape, is preferably connected to a rear, upper portion of the skate shoe **603**. Additionally, the second end **693** of the second tension member **640** is preferably connected to lower end **670** of the compression member **620**. Although FIG. 11 shows the second tension member **640** connected to the skate **605** and compression member **620**, it should be understood that the present invention allows the second tension member **640** to be connected to other parts of the skate **605** without deviating from the scope of the invention (see examples in FIG. 3).

[0061] FIG. 11 also shows the second end **660** of the primary tension member **610** connected only to the cuff **615** and the upper end **665** of the compression member **620** connected only to the cuff **615**. Specifically, when the second end **660** of the primary tension member **660** and the upper end **665** of the compression member **620** are preferably connected to cuff **615**, the primary tension member **610** and compression member **620** may be separated, such that the cuff **615** preferably acts as a bridge between the compression member **620** and primary tension member **660**. This configuration preferably causes the cuff **615** to take the cumulative load from the user's leg, pull from the primary tension member **610**, and upward resisting force from the compression member **620**.

[0062] Unless otherwise stated, all measurements, values, ratings, positions, magnitudes, sizes, locations, and other specifications which are set forth in this specification, including in the claims which follow, are approximate, not exact. They are intended to have a reasonable range which is consistent with the functions to which they relate and with what is customary in the art to which they pertain.

[0063] The foregoing description of the preferred embodiment of the invention has been presented for the purposes of illustration and description. While multiple embodiments are disclosed, still other embodiments of the present invention will become apparent to those skilled in the art from the above detailed description, which shows and describes illustrative embodiments of the invention. As will be realized, the invention is capable of modifications in various obvious aspects, all without departing from the spirit and scope of the present invention. Accordingly, the detailed description is to be regarded as illustrative in nature and not restrictive. Also, although not explicitly recited, one or more embodiments of the invention may be practiced in combination or conjunction with one another. Furthermore, the reference or non-reference to a particular embodiment of the invention shall not be interpreted to limit the scope the invention. It is intended that the scope of the invention not

be limited by this detailed description, but by the claims and the equivalents to the claims that are appended hereto.

[0064] Except as stated immediately above, nothing which has been stated or illustrated is intended or should be interpreted to cause a dedication of any component, step, feature, object, benefit, advantage, or equivalent to the public, regardless of whether it is or is not recited in the claims.

CLAIMS

What is claimed is:

1. A skate brake assembly, comprising:
 - one or more primary tension members;
 - a cuff;
 - one or more compression members;
 - a brake frame; and
 - a brake pad;wherein a first end of said one or more primary tension members are configured to be attached to a skate;
wherein a second end of said one or more primary tension members are attached to said cuff;
wherein said cuff is configured to be aligned to a leg of a user, such that when said leg pushes rearward, said cuff is also pushed rearward;
wherein an upper end of said one or more compression members is attached to said cuff;
wherein a lower end of said one or more compression members is attached to said brake frame;
wherein said brake frame is configured to be connected to said skate;
wherein said brake pad is attached to said brake frame;
wherein said brake pad is configured to contact one or more surfaces being skated on;
wherein, as said leg of said user pushes rearward, said cuff pushes said one or more compression members rearward;
wherein, as said one or more compression members is pushed rearward, said one or more primary tension members constrain said backward motion of said one or more compression members, such that said one or more compression members is pushed substantially downward; and
wherein, as said one or more compression members is pushed substantially downward, said brake frame is pushed downward, such that said brake pad contacts said one or more surfaces being skated on.
2. The skate brake assembly according to claim 1, further comprising:
 - one or more second tension members;wherein a first end of said one or more second tension members are configured to be

- attached to said skate;
- wherein a second end of said one or more second tension members are attached to said brake frame;
- wherein said one or more second tension members are configured to hold said brake frame in a neutral position, such that said brake pad is not in contact with said one or more surfaces being skated on when said leg is not pushed backwards.
3. The skate brake assembly according to claim 2, further comprising:
one or more third tension members;
wherein a first end of said one or more third tension members are connected to said one or more primary tension members and a second end of said one or more third tension members are configured to be connected to said skate, such that said one or more third tension members substantially aligns said one or more primary tension members.
 4. The skate brake assembly according to claim 3, wherein said brake frame rotatably attaches to a pivot, such that when said one or more compression members pushes downwards, said brake frame pivots downwards, and when said one or more compression members is not pushing down, said brake frame pivots to said neutral position.
 5. The skate brake assembly according to claim 4, wherein a length of said one or more compression members is adjustable.
 6. The skate brake assembly according to claim 5, wherein said skate brake assembly is configured to a stowed position;
wherein said stowed position occurs when said brake frame pivots upwards, such that said brake pad is substantially away from said one or more surfaces.
 7. The skate brake assembly according to claim 6, wherein said leg of said user is a calf.
 8. The skate brake assembly according to claim 7, wherein said brake frame is adjustable to one or more wheel sizes, such that said user may reposition said pivot at one or more hinge points of said brake frame.
 9. The skate brake assembly according to claim 8, wherein said brake frame is adjustable to one or more braking forces, such that said user may reposition said lower end of said one or more compression members to one or more connections points of said brake frame.
 10. A skate brake assembly, comprising:
one or more primary tension members;

a cuff;
one or more compression members;
a brake frame; and
a brake pad;
wherein a first end of said one or more primary tension members are configured to be attached to a skate;
wherein a second end of said one or more primary tension members are attached to said cuff;
wherein said cuff is configured to be attached to a calf of a user, such that when said calf pushes rearward, said cuff is also pushed rearward;
wherein an upper end of said one or more compression members is attached to said cuff;
wherein a lower end of said one or more compression members is attached to said brake frame;
wherein said brake frame is configured to be connected to said skate;
wherein said brake pad is attached to said brake frame;
wherein said brake pad is configured to contact one or more surfaces being skated on;
wherein, as said calf of said user pushes rearward, said cuff pushes said one or more compression members rearward;
wherein, as said one or more compression members is pushed rearward, said one or more primary tension members constrain said backward motion of said one or more compression members, such that said one or more compression members is pushed substantially downward; and
wherein, as said one or more compression members is pushed substantially downward, said brake frame is pushed downward, such that said brake pad contacts said one or more surfaces being skated on.

11. The skate brake assembly according to claim 10, further comprising:

one or more second tension members;
wherein a first end of said one or more second tension members are configured to be attached to said skate;
wherein a second end of said one or more second tension members are attached to said brake frame;
wherein said one or more second tension members are configured to hold said brake frame in a neutral position, such that said brake pad is not in contact with said

one or more surfaces being skated on when said calf is not pushed backwards.

12. The skate brake assembly according to claim 11, further comprising:
one or more third tension members;
wherein a first end of said one or more third tension members are connected to said
one or more primary tension members and a second end of said one or more
third tension members are configured to be connected to said skate, such that
said one or more third tension members substantially aligns said one or more
primary tension members.
13. The skate brake assembly according to claim 12, wherein said brake frame rotatably
attaches to a pivot, such that when said one or more compression members pushes
downwards, said brake frame pivots downwards, and when said one or more
compression members is not pushing down, said brake frame pivots to said neutral
position.
14. The skate brake assembly according to claim 13, wherein said skate brake assembly is
configured to a stowed position;
wherein said stowed position occurs when said brake frame pivots upwards, such that
said brake pad is substantially away from said one or more surfaces.
15. The skate brake assembly according to claim 14, wherein said brake frame is
adjustable to one or more wheel sizes, such that said user may reposition said pivot at
one or more hinge points of said brake frame.
16. The skate brake assembly according to claim 15, wherein said brake frame is
adjustable to one or more braking forces, such that said user may reposition said
lower end of said one or more compression members to one or more connections
points of said brake frame.
17. The skate brake assembly according to claim 16, wherein a length of said one or more
compression members is adjustable.
18. A skate brake assembly, comprising:
one or more primary tension members;
a cuff;
one or more compression members;
a brake frame;
a brake pad;
wherein a first end of said one or more primary tension members are configured to be
attached to a skate;

wherein a second end of said one or more primary tension members are attached to an upper portion of said skate brake assembly, such that said second end of one or more primary tension members is behind a calf of a user;

wherein said cuff is configured to be attached to said calf of said user, such that when said calf pushes rearward, said cuff is also pushed rearward;

wherein an upper end of said one or more compression members is attached to said cuff;

wherein a lower end of said one or more compression members is attached to said brake frame;

wherein said brake frame is configured to be moveably connected to said skate;

wherein said brake pad is attached to said brake frame;

wherein said brake pad is configured to contact one or more surfaces being skated on;

wherein, as said calf of said user pushes rearward, said cuff pushes said one or more compression members rearward;

wherein, as said one or more compression members is pushed rearward, said one or more primary tension members constrain said backward motion of said one or more compression members, such that said one or more compression members is pushed substantially downward; and

wherein, as said one or more compression members is pushed substantially downward, said brake frame is pushed downward, such that said brake pad contacts said one or more surfaces being skated on.

19. The skate brake assembly according to claim 18, wherein said second end of said one or more primary tension members are attached to said upper end of said one or more compression members.

20. The skate brake assembly according to claim 18, wherein said second end of said one or more primary tension members are attached to said upper end of said one or more compression members; and

wherein a portion of said said one or more primary tension members are attached to said cuff.

21. The skate brake assembly according to claim 18, wherein said second end of said one or more primary tension members are attached to said cuff;

wherein said upper end of said one or more compression members is attached to said cuff; and

wherein said one or more primary tension members and said one or more compression

members are separate.

22. The skate brake assembly according to claim 1, further comprising:
one or more second tension members;
wherein a first end of said one or more second tension members are configured to be attached to said skate;
wherein a second end of said one or more second tension members are attached to said lower end of said one or more compression members; and
wherein said one or more second tension members are configured to hold said brake frame in a neutral position, such that said brake pad is not in contact with said one or more surfaces being skated on when said leg is not pushed backwards.
23. The skate brake assembly according to claim 5, wherein said length of said one or more compression members is adjustable, such that a movement where said rearward pushing of said calf causes said brake pad to contact said one or more surfaces can be adjusted to a preference of said user and as said brake pad wears down with use.
24. The skate brake assembly according to claim 4, wherein a length of said one or more primary tension members are adjustable, such that a movement where said rearward pushing of said calf causes said brake pad to contact said one or more surfaces can be adjusted to a preference of said user and as said brake pad wears down with use.

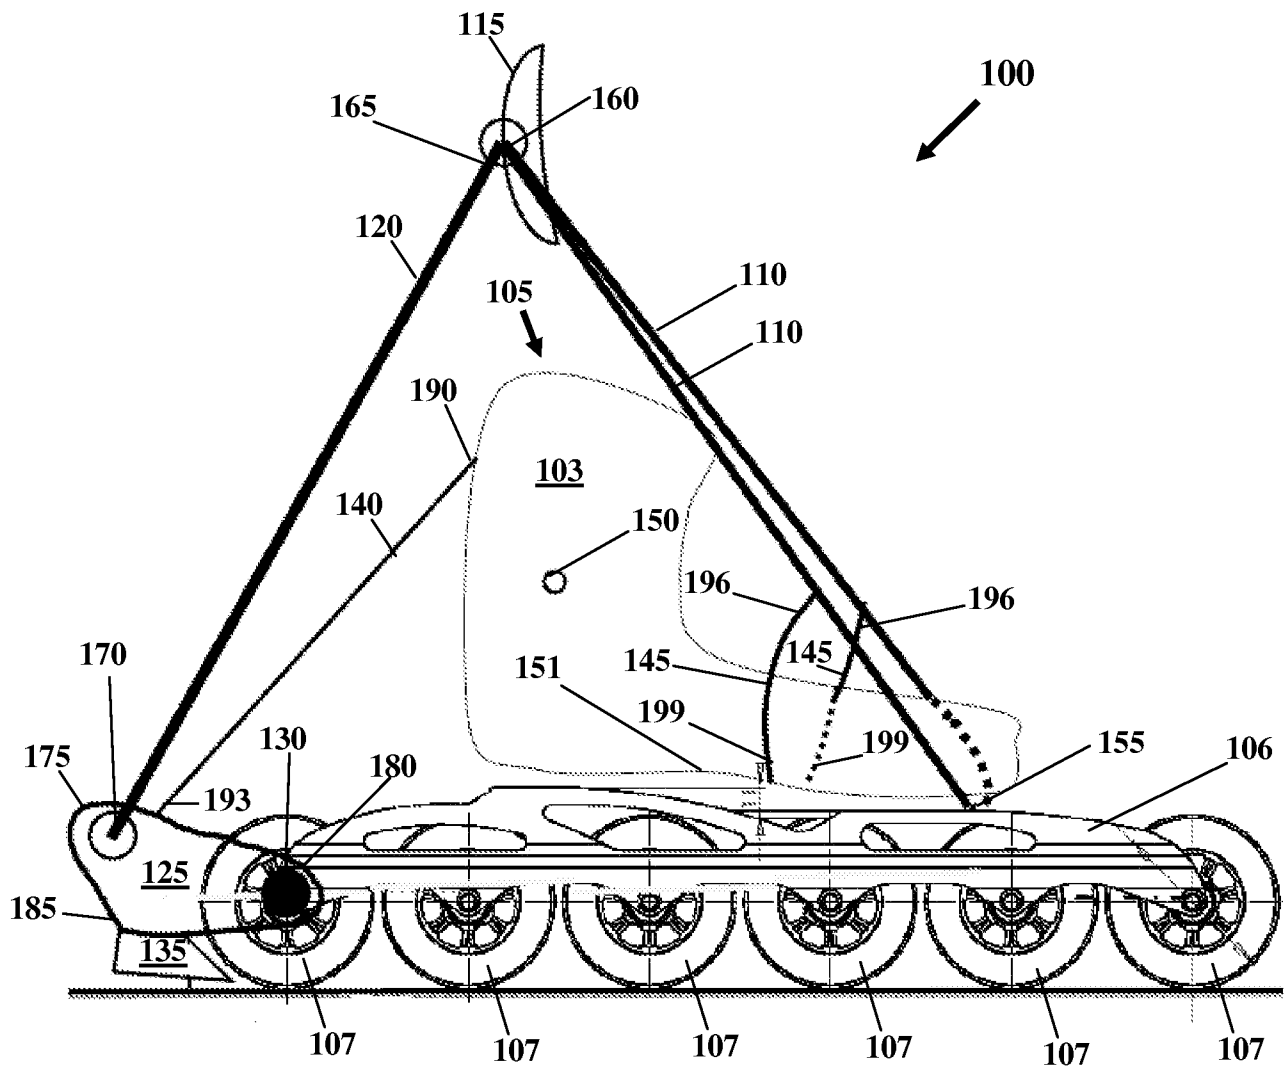


FIG. 1

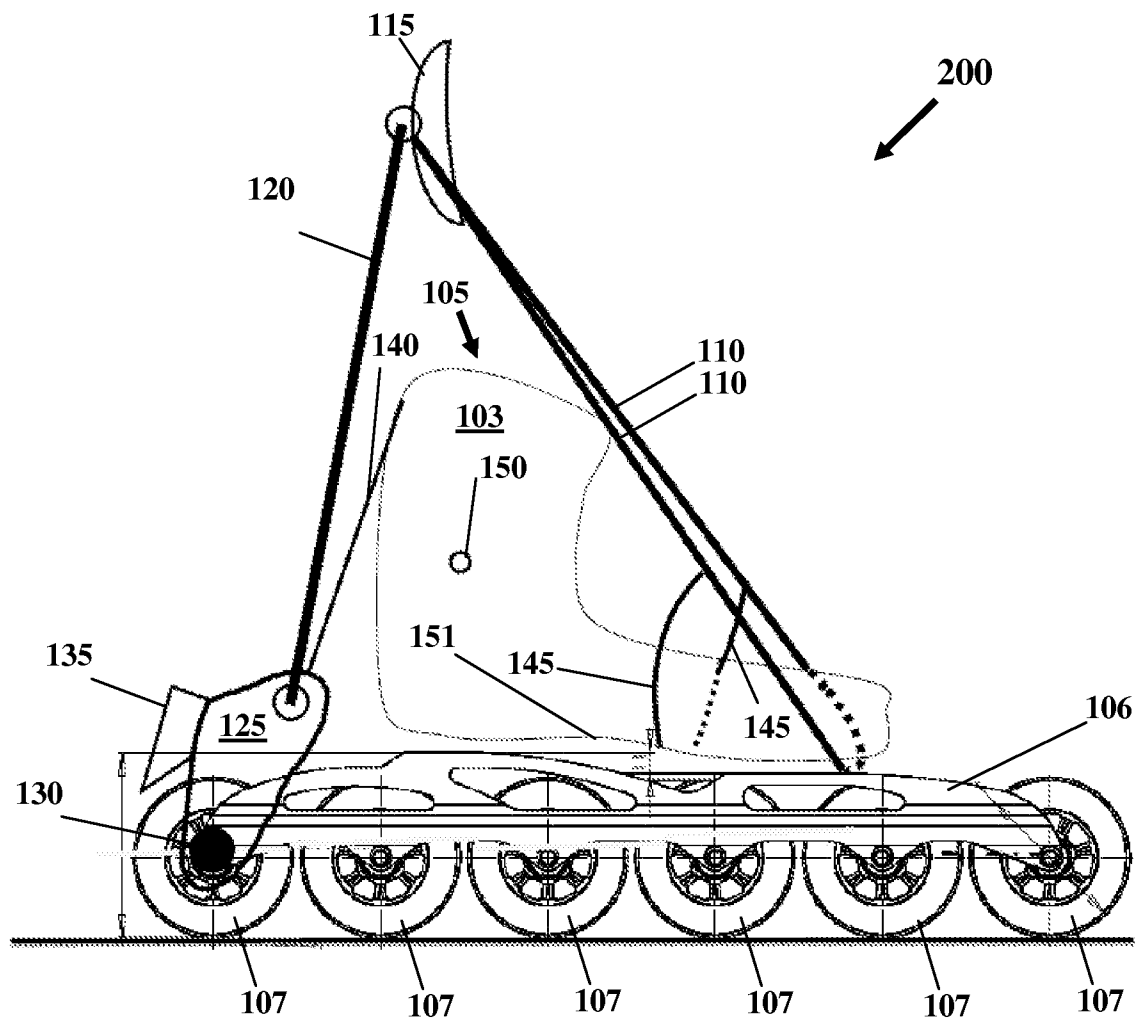


FIG. 2

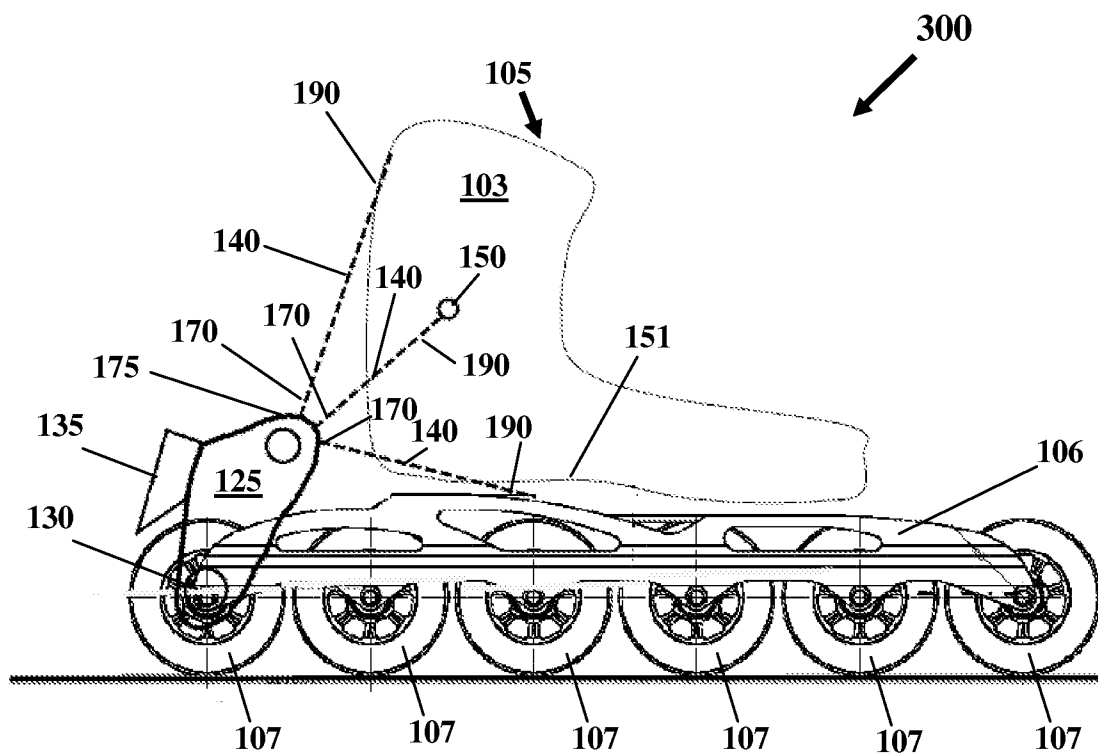


FIG. 3

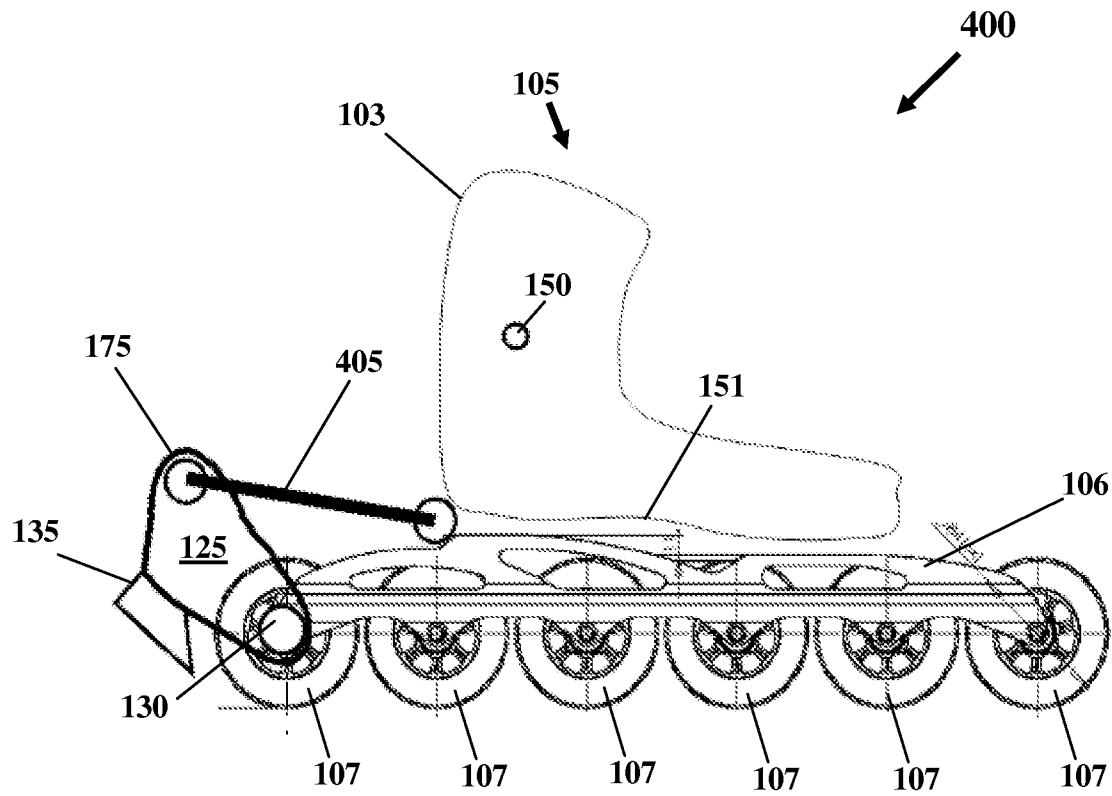


FIG. 4

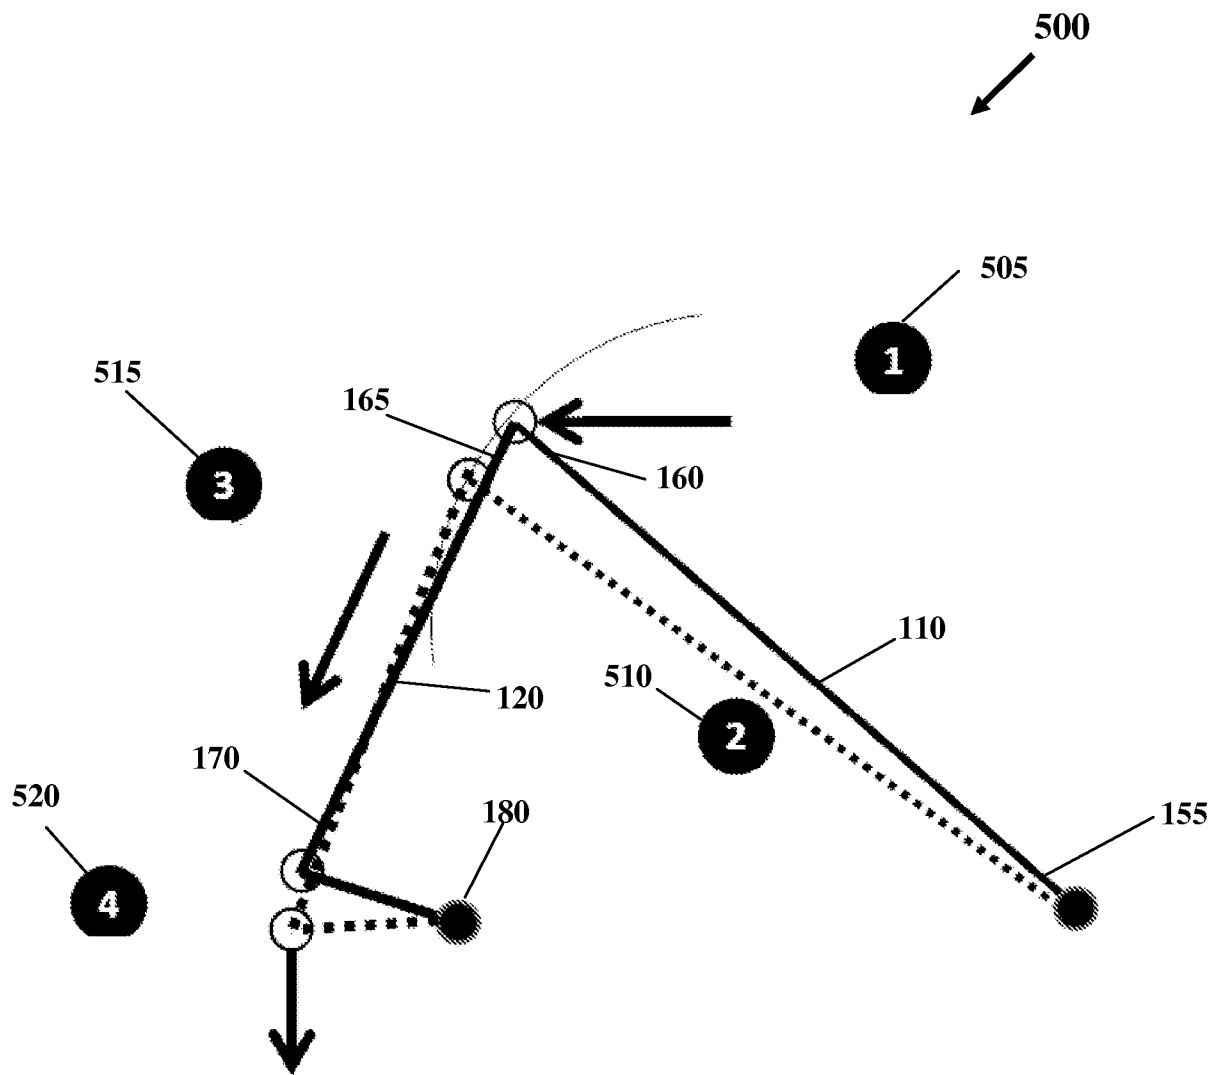


FIG. 5

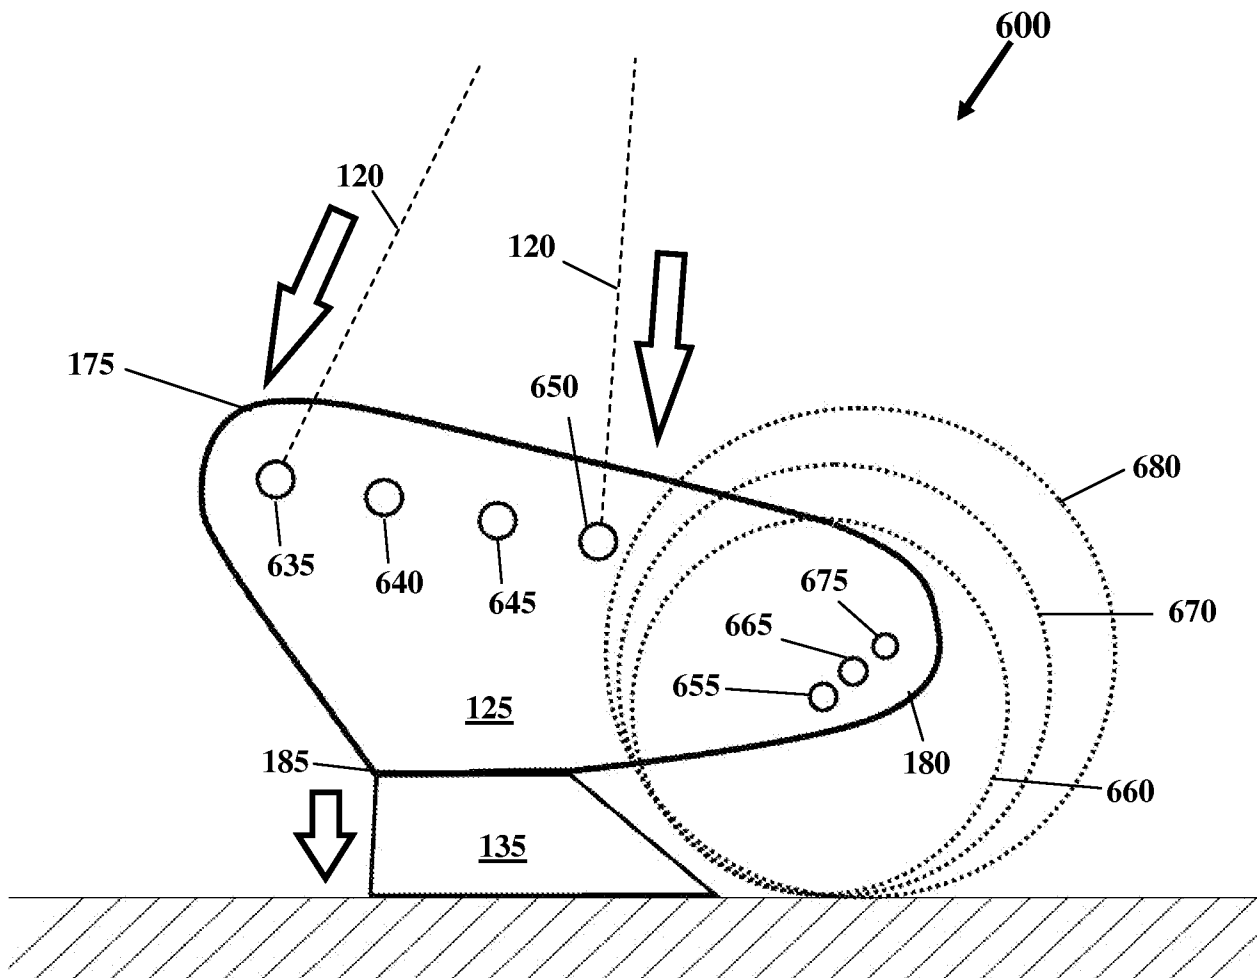


FIG. 6

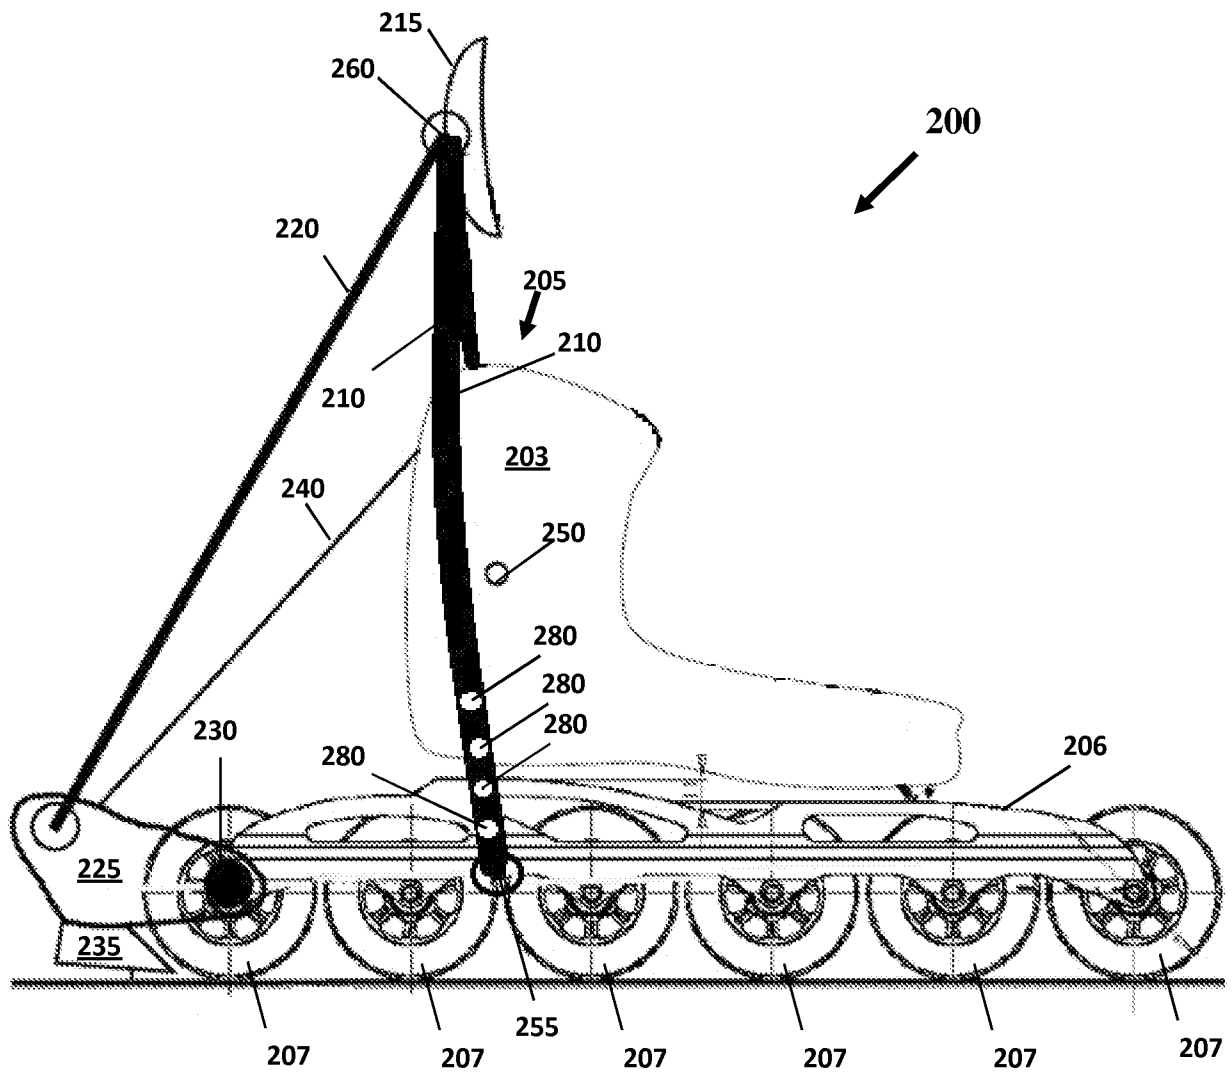


FIG. 7

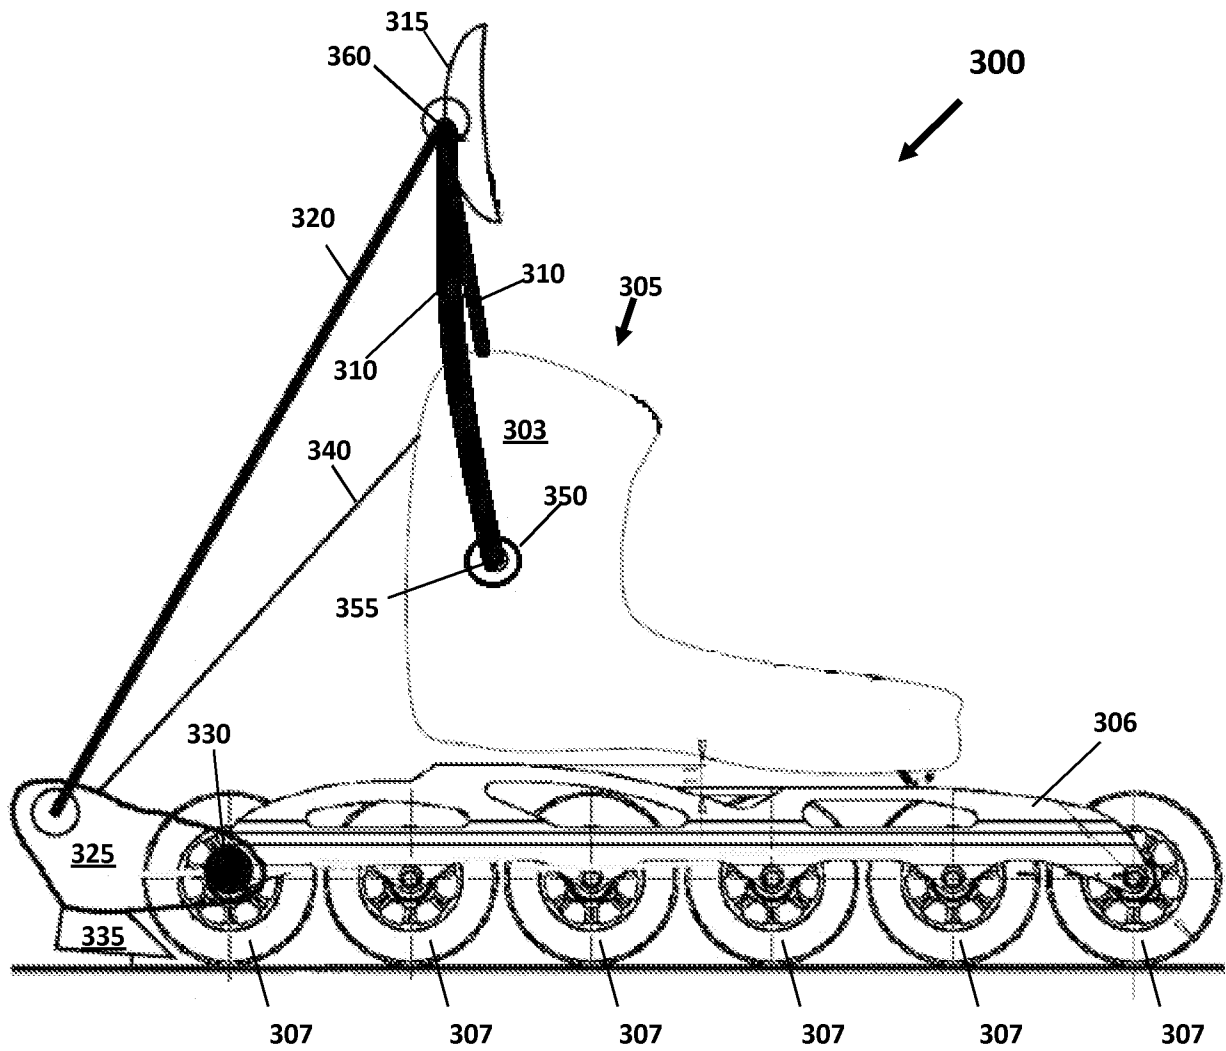


FIG. 8

9/11

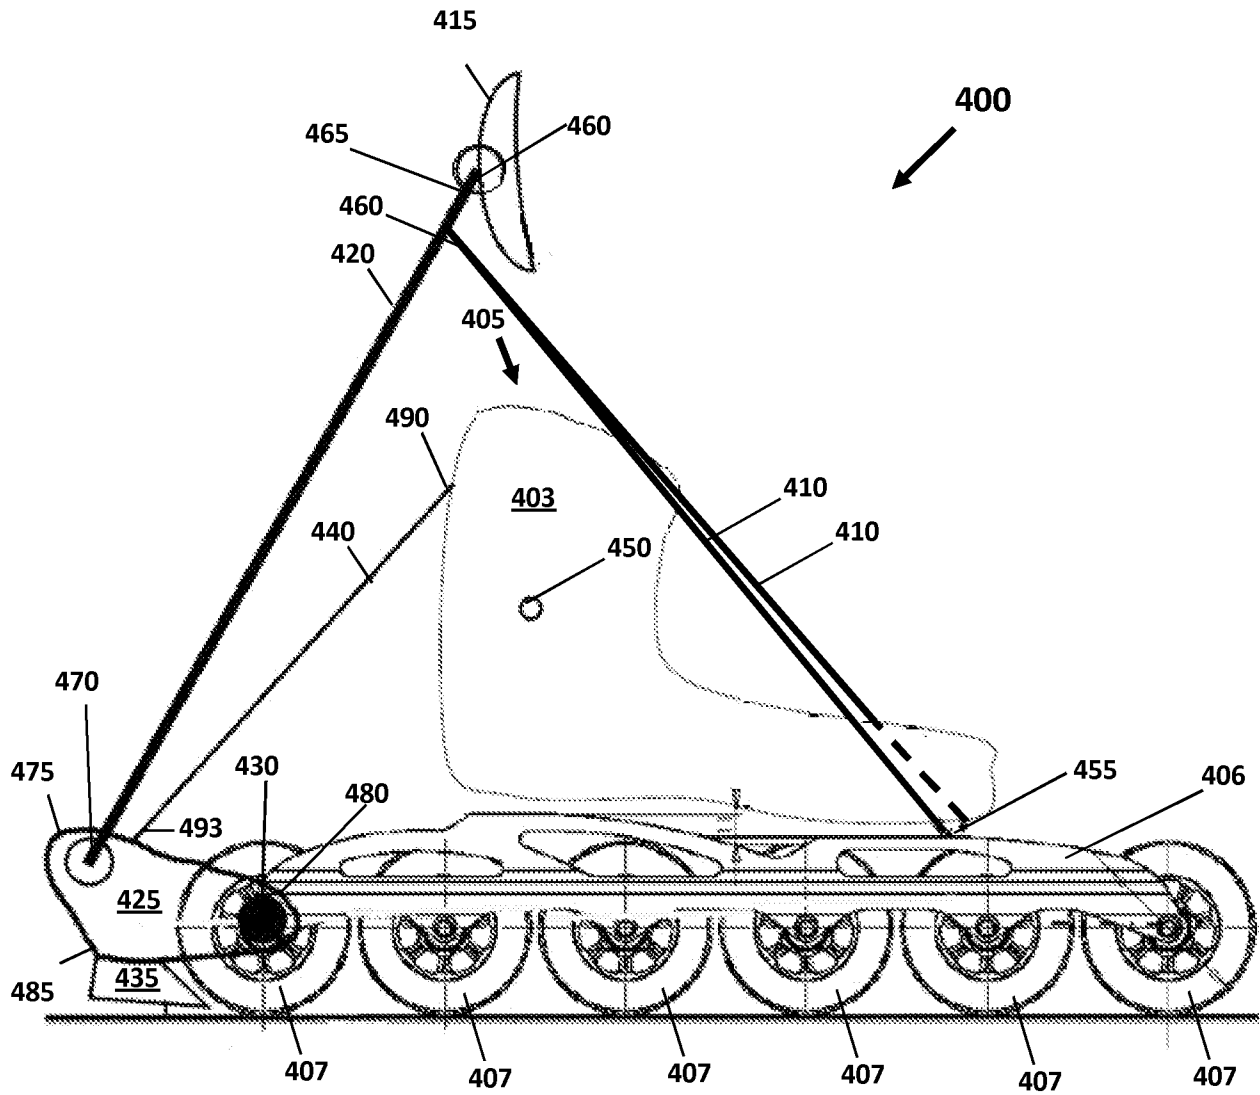


FIG. 9

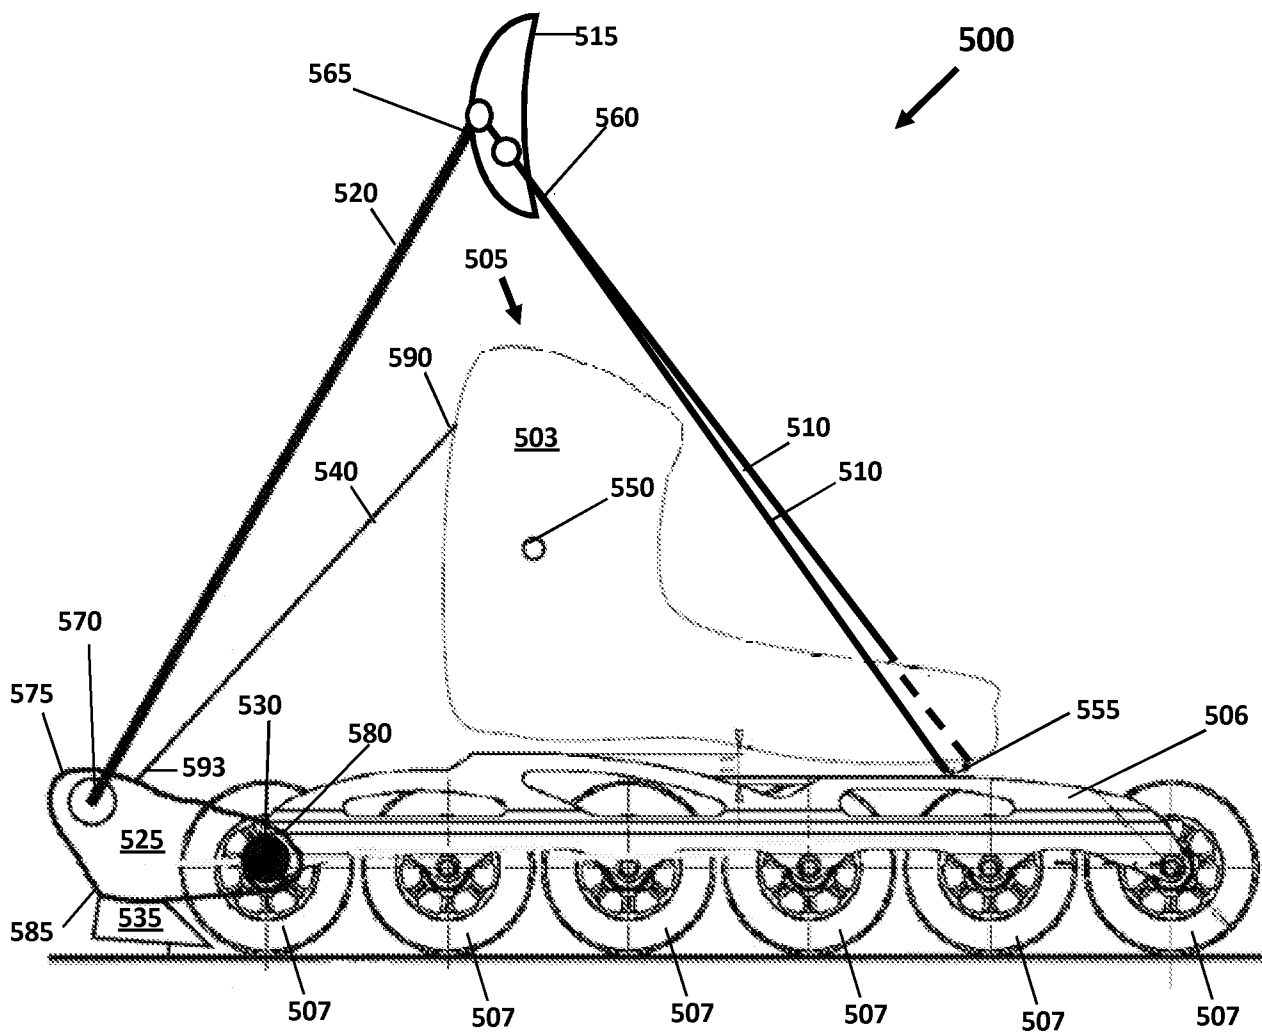


FIG. 10

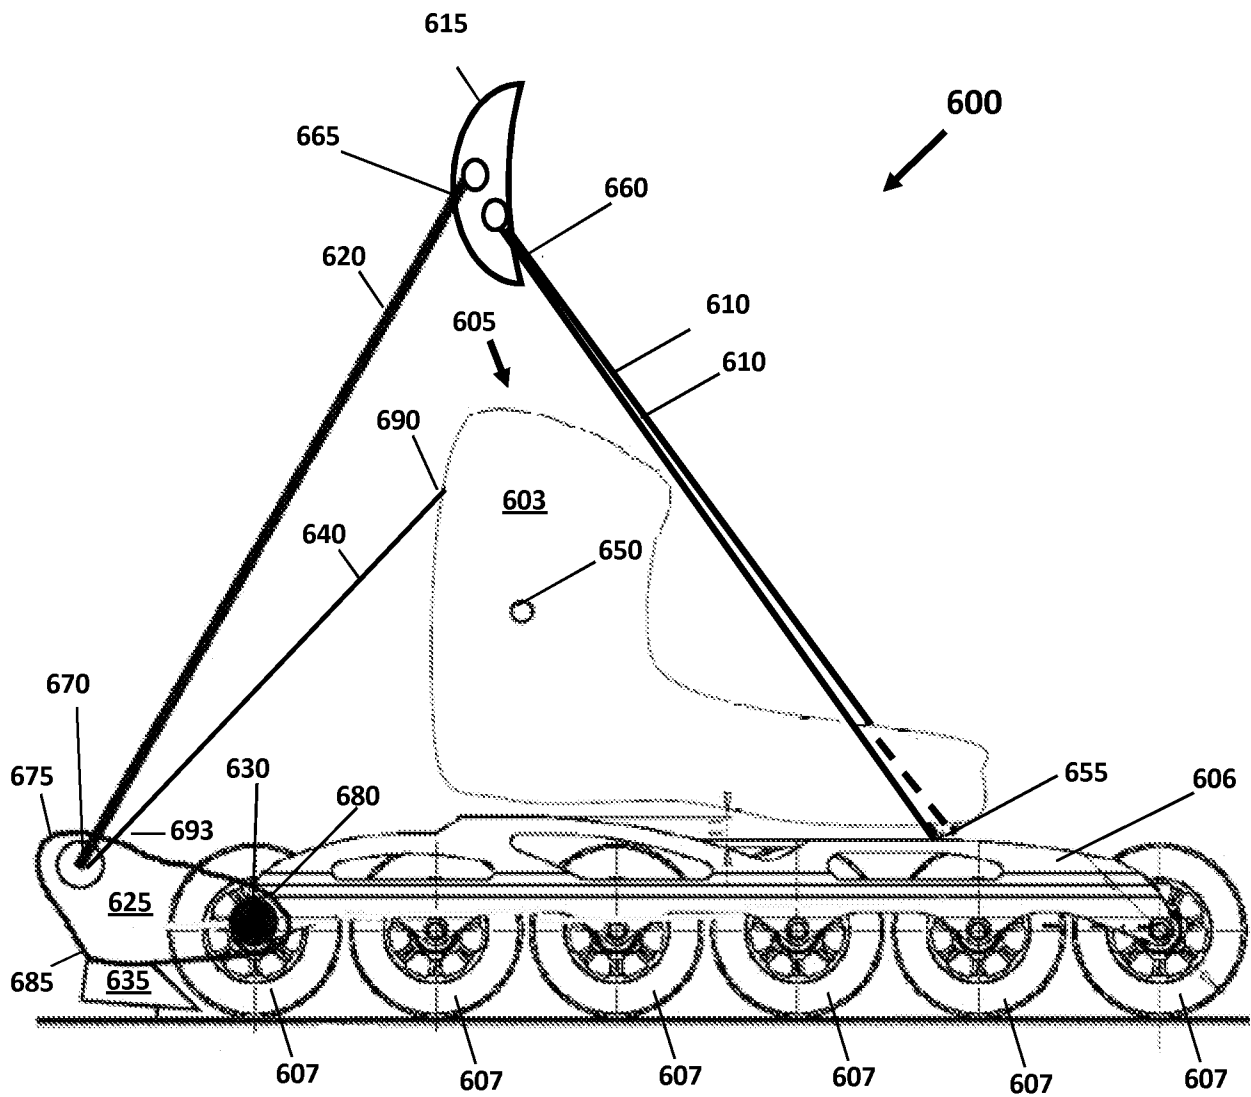


FIG. 11

A. CLASSIFICATION OF SUBJECT MATTER*A63C 17/00(2006.01)i, A63C 17/14(2006.01)i, A63C 17/26(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A63C17/14; A63C17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: roller skate, inline skate, cuff, quarter, compression, brake frame and brake pad

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,704,619 A (MITCHELL et al.) 06 January 1998 See abstract; column 7 lines 47-61, column 12 lines 10-49, column 13 lines 3-23, column 27 lines 50-67, column 28 lines 1-67, column 29, lines 1-45, column 31 lines 30-67, column 32 lines 1-25; figures 1,4-6,10,21,33-35.	1-24
A	EP 0585764 A1 (NORDICA S.P.A) 09 March 1994 See abstract; column 7 line 42-column 8 line 53; figures 4,5.	1-24
A	US 5,755,449 A (POZZOBON, ALESSANDRO) 26 May 1998 See abstract; column 4 lines 33-53; figures 1-18.	1-24
A	KR 10-2004-0050246 A (PARK, SANG KYU) 16 June 2004 See abstract; page 4 line 1-page 5 line 22; figures 1-8.	1-24
A	KR 10-2007-0117404 A (CHU, KYEONG HO) 12 December 2007 See abstract; paragraphs [0040]-[0046]; figures 1-6.	1-24
A	KR 20-0384502 Y1 (KOH, JAE CHUN) 16 May 2005 See abstract, page 3 line 4-page 4 line 30; figures 2-8.	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 May 2013 (15.05.2013)

Date of mailing of the international search report

15 May 2013 (15.05.2013)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

HAN, Joong Sub

Telephone No. 82-42-481-5606



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/024059

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5704619 A	06.01.1998	EP 0625063 A1	23.11.1994
		EP 0625063 B1	22.04.1998
		US 5211409 A	18.05.1993
		US 5253882 A	19.10.1993
		US 5316325 A	31.05.1994
		US 5330207 A	19.07.1994
		US 5564718 A	15.10.1996
		US 5651556 A	29.07.1997
		US 5664794 A	09.09.1997
		US 5992862 A	30.11.1999
		WO 93-14841 A1	05.08.1993
EP 0585764 A1	09.03.1994	AT 130777 T	15.12.1995
		AU 4601693 A	10.03.1994
		AU 663802 B2	19.10.1995
		CA 2104907 A1	02.03.1994
		CA 2104907 C	20.02.1996
		DE 585764 T1	03.11.1994
		DE 69300905 D1	11.01.1996
		DE 69300905 T2	11.04.1996
		EP 0567948 A1	03.11.1993
		EP 0567948 B1	11.09.1996
		EP 0568878 A1	10.11.1993
		EP 0568878 B1	25.02.1998
		EP 0585764 B1	29.11.1995
		EP 0594080 A2	27.04.1994
		EP 0594080 A3	15.02.1995
		EP 0594080 B1	04.09.1996
		ES 2051671 T1	01.07.1994
		ES 2051671 T3	01.02.1996
		JP 06-121864 A	06.05.1994
		JP 06-154388 A	03.06.1994
		JP 06-198023 A	19.07.1994
		JP 06-261967 A	20.09.1994
		JP 2735775 B2	02.04.1998
		JP 2786392 B2	13.08.1998
		JP 3499581 B2	23.02.2004
		US 5374070 A	20.12.1994
		US 5388844 A	14.02.1995
		US 5397137 A	14.03.1995
		US 5465984 A	14.11.1995
		US 5511804 A	30.04.1996
		US 5882019 A	16.03.1999
		US 5911423 A	15.06.1999
		US 5918888 A	06.07.1999
		US 6089579 A	18.07.2000
US 5755449 A	26.05.1998	EP 0656220 A2	07.06.1995
		EP 0656220 B1	01.07.1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/024059

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 07-185061 A	25.07.1995
KR 10-2004-0050246 A	16.06.2004	KR 20-0308217 Y1	26.03.2003
KR 10-2007-0117404 A	12.12.2007	None	
KR 20-0384502 Y1	16.05.2005	None	