



(22) Date de dépôt/Filing Date: 2004/12/10

(41) Mise à la disp. pub./Open to Public Insp.: 2005/06/11

(45) Date de délivrance/Issue Date: 2012/09/11

(30) Priorité/Priority: 2003/12/11 (DE10357877.3)

(51) Cl.Int./Int.Cl. *C10L 1/14* (2006.01),
C10L 1/10 (2006.01), *C10L 1/195* (2006.01),
C10L 1/196 (2006.01), *C10L 1/18* (2006.01),
C10L 1/22 (2006.01)

(72) Inventeurs/Inventors:
KRULL, MATTHIAS, DE;
SIGGELKOW, BETTINA, DE;
HESS, MARTINA, DE

(73) Propriétaire/Owner:
CLARIANT PRODUKTE (DEUTSCHLAND) GMBH, DE

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : MAZOUTS COMPOSES DE DISTILLATS MOYENS ET D'HUILES D'ORIGINE ANIMALE OU VEGETALE ET
POSSEDANT DE MEILLEURES PROPRIETES D'ECOULEMENT A FROID

(54) Title: FUEL OILS COMPOSED OF MIDDLE DISTILLATES AND OILS OF VEGETABLE OR ANIMAL ORIGIN AND
HAVING IMPROVED COLD FLOW PROPERTIES

$$Q = \sum_i w_{1i} \cdot n_{1i} + \sum_j w_{2j} \cdot n_{2j}$$

(57) Abrégé/Abstract:

The invention provides a fuel oil composition F) comprising F1) 89-50% by volume of a fuel oil of mineral origin and F2) 11-50% by volume of a fuel oil of vegetable and/or animal origin, and, as a cold additive, the constituents A) at least one copolymer composed of ethylene and 8-21 mol% of at least one acrylic or vinyl ester having a C₁-C₁₈-alkyl radical and B) at least one comb polymer containing structural units composed of B1) at least one olefin as monomer 1 which bears at least one C₈-C₁₈-alkyl radical on the olefinic double bond, and B2) at least one ethylenically unsaturated dicarboxylic acid as monomer 2 which bears at least one C₈-C₁₆-alkyl radical bonded via an ester moiety, where the sum Q (see above formula) of the molar averages of the carbon chain length distributions in the alkyl radicals of monomer 1 on the one hand and the alkyl radicals of the ester groups of monomer 2 on the other is from 21.0 to 28.0, where w₁ is the molar proportion of the individual chain lengths in the alkyl radicals of monomer 1, w₂ is the molar proportion of the individual chain lengths in the alkyl radicals of the ester groups of monomer 2, n₁ are the individual chain lengths in the alkyl radicals of monomer 1, n₂ are the individual chain lengths in the alkyl radicals of the ester groups of monomer 2, i is the serial variable for the individual chain lengths in the alkyl radicals of monomer 1, and j is the serial variable for the individual chain lengths in the alkyl radicals in the ester groups of monomer 2.

Abstract

Fuel oils composed of middle distillates and oils of vegetable or animal origin and having improved cold flow properties

5

The invention provides a fuel oil composition F) comprising

F1) 89-50% by volume of a fuel oil of mineral origin and

F2) 11-50% by volume of a fuel oil of vegetable and/or animal origin, and, as a cold additive, the constituents

10 A) at least one copolymer composed of ethylene and 8-21 mol% of at least one acrylic or vinyl ester having a C₁-C₁₈-alkyl radical and

B) at least one comb polymer containing structural units composed of

B1) at least one olefin as monomer 1 which bears at least one C₈-C₁₈-alkyl radical on the olefinic double bond, and

15 B2) at least one ethylenically unsaturated dicarboxylic acid as monomer 2 which bears at least one C₈-C₁₆-alkyl radical bonded via an ester moiety,

where the sum Q

$$Q = \sum_i w_{1i} \cdot n_{1i} + \sum_j w_{2j} \cdot n_{2j}$$

20

of the molar averages of the carbon chain length distributions in the alkyl radicals of monomer 1 on the one hand and the alkyl radicals of the ester groups of monomer 2 on the other is from 21.0 to 28.0, where

w₁ is the molar proportion of the individual chain lengths in the alkyl radicals of monomer 1,

25

w₂ is the molar proportion of the individual chain lengths in the alkyl radicals of the ester groups of monomer 2,

n₁ are the individual chain lengths in the alkyl radicals of monomer 1,

n₂ are the individual chain lengths in the alkyl radicals of the ester groups of monomer 2,

30

i is the serial variable for the individual chain lengths in the alkyl radicals of monomer 1, and

j is the serial variable for the individual chain lengths in the alkyl radicals in the ester groups of monomer 2.

Clariant GmbH

2003DE454

Dr. KM/sch


Description

- 5 Fuel oils composed of middle distillates and oils of vegetable or animal origin and having improved cold flow properties

The present invention relates to mineral fuel oils comprising constituents of vegetable or animal origin and having improved cold flow properties, and also to the use of an
 10 additive as a cold flow improver for such fuel oils.

In view of decreasing world crude oil reserves and the discussion about the environmentally damaging consequences of the use of fossil and mineral fuels, there is increasing interest in alternative energy sources based on renewable raw materials
 15 (biofuels). These include in particular natural oils and fats of vegetable or animal origin. These are generally triglycerides of fatty acids having from 10 to 24 carbon atoms and a calorific value comparable to conventional fuels, but are at the same time regarded as being less harmful to the environment. Biofuels, i.e. fuels derived from animal or vegetable material, are obtained from renewable sources and, when they are
 20 combusted, generate only as much CO₂ as had previously been converted to biomass. It has been reported that less carbon dioxide is formed in the course of combustion than by the equivalent amount of crude oil distillate fuel, for example diesel fuel, and that very little sulfur dioxide is formed. In addition, they are biodegradable.

- 25 Oils obtained from animal or vegetable material are mainly metabolism products which include triglycerides of monocarboxylic acids, for example acids having from 10 to 25 carbon atoms, and corresponding to the formula

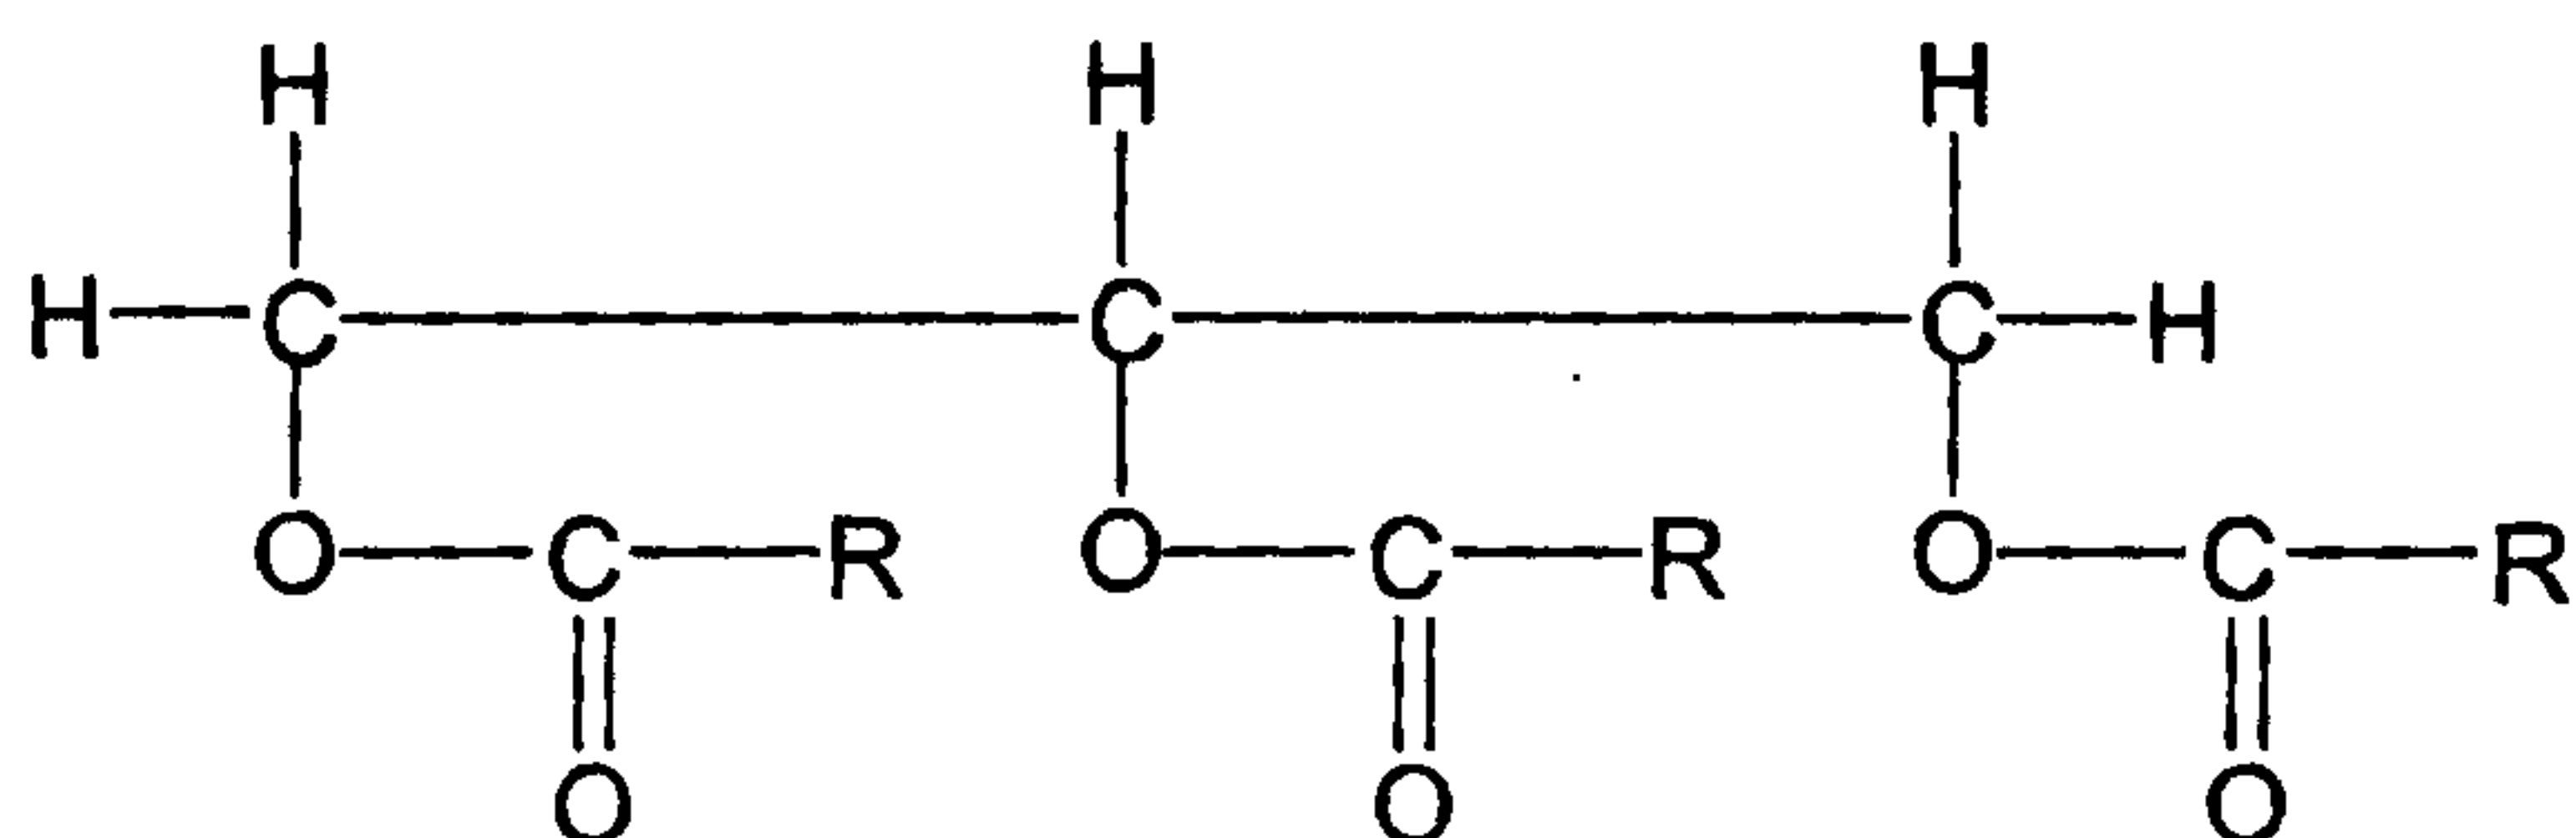

- 30 where R is an aliphatic radical which has from 10 to 25 carbon atoms and may be

saturated or unsaturated.

In general, such oils contain glycerides from a series of acids whose number and type vary with the source of the oil, and they may additionally contain phosphoglycerides.

5 Such oils can be obtained by processes known from the prior art.

As a consequence of the sometimes unsatisfactory physical properties of the triglycerides, the industry has applied itself to converting the naturally occurring triglycerides to fatty acid esters of low alcohols such as methanol or ethanol.

10

A hindrance to the use of fatty acid esters of lower monohydric alcohols as a replacement for diesel fuel alone has been found to be its behavior toward engine parts, especially various sealing materials, which lead time and time again to breakdowns of the engines operated using these fuels produced from renewable raw materials. To
15 circumvent these problems, preference is given to using these oils based on renewable raw materials as an additive to conventional middle distillates.

20

In addition, when triglycerides and also fatty acid esters of lower monohydric alcohols are used as a replacement for diesel fuel, alone or in a mixture with diesel fuel, a hindrance has been found to be the flow behavior at low temperatures. The causes of this are in particular their content of esters of saturated fatty acids and the high uniformity (less than 10 main components) of these oils in comparison to mineral oil middle distillates. For example, rapeseed oil methyl ester (RME) has a Cold Filter Plugging Point (CFPP) of -14°C , soya oil methyl ester a CFPP of -5°C , used fatty acid
25 methyl ester a CFPP of $+1^{\circ}\text{C}$ and animal fat a CFPP of $+9^{\circ}\text{C}$. It has hitherto often been impossible using the prior art additives, on the basis of mineral diesel comprising this ester or these esters, to reliably obtain a CFPP value of -20°C required for use as a winter diesel in Central Europe, or of -22°C or lower for special applications. This problem is increased when oils are used which comprise relatively large amounts of the
30 likewise readily available oils of sunflowers and soya.

EP-B-0 665 873 discloses a fuel oil composition which includes a biofuel, a fuel oil based on crude oil and an additive which comprises (a) an oil-soluble ethylene copolymer or (b) a comb polymer or (c) a polar nitrogen compound or (d) a compound in which at least one substantially linear alkyl group having from 10 to 30 carbon atoms

is bonded to a nonpolymeric organic radical, in order to provide at least one linear chain of atoms which includes the carbon atoms of the alkyl groups and one or more nonterminal oxygen atoms, or (e) one or more of components (a), (b), (c) and (d).

5 EP-B-0 629 231 discloses a composition which comprises a relatively large proportion of oil which consists substantially of alkyl esters of fatty acids which are derived from vegetable or animal oils or both, mixed with a small proportion of mineral oil cold flow improvers which comprises one or more of the following:

- 10 (I) comb polymer, the copolymer (which may be esterified) of maleic anhydride or fumaric acid and another ethylenically unsaturated monomer, or polymer or copolymer of α -olefin, or fumarate or itaconate polymer or copolymer,
 - (II) polyoxyalkylene ester, ester/ether or a mixture thereof,
 - (III) ethylene/unsaturated ester copolymer,
 - 15 (IV) polar, organic, nitrogen-containing paraffin crystal growth inhibitor,
 - (V) hydrocarbon polymer,
 - (VI) sulfur-carboxyl compounds and
 - (VII) aromatic pour point depressant modified with hydrocarbon radicals,
- 20 with the proviso that the composition comprises no mixtures of polymeric esters or copolymers of esters of acrylic and/or methacrylic acid which are derived from alcohols having from 1 to 22 carbon atoms.

EP-B-0 543 356 discloses a process for preparing compositions having improved low
25 temperature performance for use as fuels or lubricants, starting from the esters of naturally occurring long-chain fatty acids with monohydric C₁-C₆-alcohols (FAE), which comprises

- 30 a) adding PPD additives (pour point depressants) known per se and used for improving the low temperature performance of mineral oils in amounts of from 0.0001 to 10% by weight, based on the long-chain fatty acid esters FAE and
- b) cooling the nonadditized long-chain fatty acid esters FAE to a temperature below the Cold Filter Plugging Point and
- c) removing the resulting precipitates (FAN).

DE-A-40 40 317 discloses mixtures of fatty acid lower alkyl esters having improved cold stability comprising

- a) from 58 to 95% by weight of at least one ester within the iodine number range from 50 to 150 and being derived from fatty acids having from 12 to 22 carbon atoms and lower aliphatic alcohols having from 1 to 4 carbon atoms,
- b) from 4 to 40% by weight of at least one ester of fatty acids having from 6 to 14 carbon atoms and lower aliphatic alcohols having from 1 to 4 carbon atoms and
- c) from 0.1 to 2% by weight of at least one polymeric ester.

EP-B-0 153 176 discloses the use of polymers based on unsaturated dialkyl C₄-C₈-dicarboxylates having an average alkyl chain length of from 12 to 14 as cold flow improvers for certain crude oil distillate fuel oils. Mentioned as suitable comonomers are unsaturated esters, in particular vinyl acetate, but also α -olefins.

- EP-B-0 153 177 discloses an additive concentrate which comprises a combination of
- I) a copolymer having at least 25% by weight of an n-alkyl ester of a monoethylenically unsaturated C₄-C₈ mono- or dicarboxylic acid, the average number of carbon atoms in the n-alkyl radicals being 12 – 14, and another unsaturated ester or an olefin, with
 - II) another low temperature flow improver for distillate fuel oils.

EP-B-0 746 598 discloses comb polymers as a cold additive in fuel oils which have a cloud point of at most -10°C.

It has hitherto often been impossible using the existing additives to reliably adjust middle distillates comprising fatty acid esters to a CFPP value of -20°C required for use as a winter diesel in Central Europe or of -2°C and lower for special applications. An additional problem with the existing additives is lacking sedimentation stability of the additized oils. The paraffins and fatty acid esters precipitating below the cloud point sediment when the oil is stored below the cloud point for a prolonged period and lead to the formation of a phase having poorer cold properties on the bottom of the storage vessel.

29374-434

5

The present invention provides fuel oils having improved cold properties and comprising middle distillates and fatty acid esters, their CFPP values being at -20°C and below. Moreover, the sedimentation of precipitated paraffins and fatty acid esters in the course of prolonged storage of the fuel oil should be slowed or
5 prevented in the region of its cloud point or below.

It has now been found that, surprisingly, fuel oils composed of middle distillates and oils of vegetable and/or animal origin, which include an additive comprising ethylene copolymers and certain comb polymers, exhibit excellent cold properties.

10

The invention thus provides a fuel oil composition F) comprising

F1) 89-50% by volume of a fuel oil of mineral origin and

F2) 11-50% by volume of a fuel oil of vegetable and/or animal origin, and, as a cold additive, the constituents

15 A) at least one copolymer composed of ethylene and 8-21 mol% of at least one acrylic or vinyl ester having a C₁-C₁₈-alkyl radical and

B) at least one comb polymer containing structural units composed of

B1) at least one olefin as monomer 1 which bears at least one C₈-C₁₈-alkyl radical on the olefinic double bond, and

20 B2) at least one ethylenically unsaturated dicarboxylic acid as monomer 2 which bears at least one C₈-C₁₆-alkyl radical bonded via an ester moiety,

where the sum Q

25

$$Q = \sum_i w_{1i} \cdot n_{1i} + \sum_j w_{2j} \cdot n_{2j}$$

of the molar averages of the carbon chain length distributions in the alkyl radicals of monomer 1 on the one hand and the alkyl radicals of the ester groups of monomer 2 on the other is from 21.0 to 28.0, where

30 w₁ is the molar proportion of the individual chain lengths in the alkyl radicals of monomer 1,

w₂ is the molar proportion of the individual chain lengths in the alkyl radicals of the ester groups of monomer 2,

n₁ are the individual chain lengths in the alkyl radicals of monomer 1,

n_2 are the individual chain lengths in the alkyl radicals of the ester groups of monomer 2,

i is the serial variable for the individual chain lengths in the alkyl radicals of monomer 1, and

5 j is the serial variable for the individual chain lengths in the alkyl radicals of the ester groups of monomer 2.

The invention further provides the use of the above-defined additive comprising constituents A) and B) for improving the cold properties of fuel oil compositions F) comprising fuel oils of mineral (F1) and animal and/or vegetable (F2) origin.

The invention further provides a process for producing fuel oil compositions F) comprising fuel oils of mineral (F1) and animal and/or vegetable (F2) origin, having improved cold flow properties, by adding the above-defined additive comprising constituents A) and B) to the mixture of fuel oils of mineral (F1) and animal and/or vegetable (F2) origin.

Preferred oils of mineral origin are middle distillates. The mixing ratio between the fuel oils of animal and/or vegetable origin (which are also referred to hereinbelow as biofuels) and middle distillates is preferably from 88 to 65% by volume of middle distillate and from 12 to 35% by volume of biofuel. The inventive additives impart to these mixtures superior cold properties.

In a preferred embodiment of the invention, Q assumes values between 22.0 and 27.0, in particular from 23.0 to 26.0 and, for example, 23, 24, 24.5, 25 or 26.

Side chain length of olefins refers here to the alkyl radical diverging from the polymer backbone, i.e. the chain length of the monomeric olefin minus the two olefinically bonded carbon atoms. In the case of olefins having nonterminal double bonds, for example olefins having vinylidene moiety, the total chain length of the olefin minus the double bond merging into the polymer backbone correspondingly has to be taken into account.

Suitable ethylene copolymers A) are those which contain from 8 to 21 mol% of one or

more vinyl and/or (meth)acrylic esters and from 79 to 92 mol% of ethylene. Particular preference is given to ethylene copolymers having from 10 to 18 mol%, and especially from 12 to 16 mol%, of at least one vinyl ester. Suitable vinyl esters are derived from fatty acids having linear or branched alkyl groups having from 1 to 30 carbon atoms.

5 Examples include vinyl acetate, vinyl propionate, vinyl butyrate, vinyl hexanoate, vinyl heptanoate, vinyl octanoate, vinyl laurate and vinyl stearate, and also esters of vinyl alcohol based on branched fatty acids, such as vinyl isobutyrate, vinyl pivalate, vinyl 2-ethylhexanoate, vinyl isononanoate, vinyl neononanoate, vinyl neodecanoate and vinyl neoundecanoate. Likewise suitable as comonomers are esters of acrylic and
10 methacrylic acids having from 1 to 20 carbon atoms in the alkyl radical, such as methyl (meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, n- and isobutyl (meth)acrylate, and hexyl, octyl, 2-ethylhexyl, decyl, dodecyl, tetradecyl, hexadecyl and octadecyl (meth)acrylate, and also mixtures of two, three, four or else more of these comonomers.

15

Particularly preferred terpolymers of vinyl 2-ethylhexanoate, of vinyl neononanoate or of vinyl neodecanoate contain, apart from ethylene, preferably from 3.5 to 20 mol%, in particular from 8 to 15 mol%, of vinyl acetate, and from 0.1 to 12 mol%, in particular from 0.2 to 5 mol%, of the particular long-chain vinyl ester, the total comonomer content
20 being between 8 and 21 mol%, preferably between 12 and 18 mol%. In addition to ethylene and from 8 to 18 mol% of vinyl esters, further preferred copolymers additionally contain from 0.5 to 10 mol% of olefins such as propene, butene, isobutylene, hexene, 4-methylpentene, octene, diisobutylene and/or norbornene.

25 The copolymers A preferably have molecular weights which correspond to melt viscosities at 140°C of from 20 to 10 000 mPas, in particular from 30 to 5000 mPas, and especially from 50 to 1000 mPas. The degrees of branching determined by means of ¹H NMR spectroscopy are preferably between 1 and 9 CH₃/100 CH₂ groups, in particular between 2 and 6 CH₃/100 CH₂ groups, for example from 2.5 to 5 CH₃/100 CH₂ groups,
30 which do not stem from the comonomers.

The copolymers (A) can be prepared by customary copolymerization processes, for example suspension polymerization, solution polymerization, gas phase polymerization or high pressure bulk polymerization. Preference is given to carrying out the high

pressure bulk polymerization at pressures of from 50 to 400 MPa, preferably from 100 to 300 MPa, and temperatures from 100 to 300°C, preferably from 150 to 220°C. In a particularly preferred preparation variant, the polymerization is effected in a multizone reactor in which the temperature difference between the peroxide feeds along the tubular reactor is kept very low, i.e. < 50°C, preferably < 30°C, in particular < 15°C. The temperature maxima in the individual reaction zones preferably differ by less than 30°C, more preferably by less than 20°C and especially by less than 10°C.

The reaction of the monomers is initiated by free radical-forming initiators (free radical chain initiators). This substance class includes, for example, oxygen, hydroperoxides, peroxides and azo compounds, such as cumene hydroperoxide, t-butyl hydroperoxide, dilauroyl peroxide, dibenzoyl peroxide, bis(2-ethylhexyl) peroxydicarbonate, t-butyl perpivalate, t-butyl permaleate, t-butyl perbenzoate, dicumyl peroxide, t-butyl cumyl peroxide, di(t-butyl) peroxide, 2,2'-azobis(2-methylpropanonitrile), 2,2'-azobis(2-methylbutyronitrile). The initiators are used individually or as a mixture of two or more substances in amounts of from 0.01 to 20% by weight, preferably from 0.05 to 10% by weight, based on the monomer mixture.

The high pressure bulk polymerization is carried out in known high pressure reactors, for example autoclaves or tubular reactors, batchwise or continuously, and tubular reactors have been found to be particularly useful. Solvents such as aliphatic and/or aromatic hydrocarbons or hydrocarbon mixtures, benzene or toluene may be present in the reaction mixture. Preference is given to the substantially solvent-free procedure. In a preferred embodiment of the polymerization, the mixture of the monomers, the initiator and, if used, the moderator, are fed to a tubular reactor via the reactor entrance and also via one or more side branches. Preferred moderators are, for example, hydrogen, saturated and unsaturated hydrocarbons, for example propane or propene, aldehydes, for example propionaldehyde, n-butyraldehyde or isobutyraldehyde, ketones, for example acetone, methyl ethyl ketone, methyl isobutyl ketone, cyclohexanone, and alcohols, for example butanol. The comonomers and also the moderators may be metered into the reactor either together with ethylene or else separately via sidestreams. The monomer streams may have different compositions (EP-A-0 271 738 and EP-A-0 922 716).

Examples of suitable co- or terpolymers include:

ethylene-vinyl acetate copolymers having 10 - 40% by weight of vinyl acetate and 60 - 90% by weight of ethylene;

5 the ethylene-vinyl acetate-hexene terpolymers disclosed by DE-A-34 43 475;

the ethylene-vinyl acetate-diisobutylene terpolymers described in EP-B-0 203 554;

10 the mixture of an ethylene-vinyl acetate-diisobutylene terpolymer and an ethylene/vinyl acetate copolymer disclosed by EP-B-0 254 284;

the mixtures of an ethylene-vinyl acetate copolymer and an ethylene-vinyl acetate-N-vinylpyrrolidone terpolymer disclosed in EP-B-0 405 270;

15 the ethylene/vinyl acetate/isobutyl vinyl ether terpolymers described in EP-B-0 463 518;

the ethylene/vinyl acetate/vinyl neononanoate or vinyl neodecanoate terpolymers which, apart from ethylene, contain 10 - 35% by weight of vinyl acetate and 1 - 25% by weight of the particular neo compound, disclosed by EP-B-0 493 769;

20

the terpolymers of ethylene, a first vinyl ester having up to 4 carbon atoms and a second vinyl ester which is derived from a branched carboxylic acid having up to 7 carbon atoms or a branched but nontertiary carboxylic acid having from 8 to 15 carbon atoms, described in EP 0778875;

25

the terpolymers of ethylene, the vinyl ester of one or more aliphatic C₂- to C₂₀-monocarboxylic acids and 4-methylpentene-1, described in DE-A-196 20 118;

30 the terpolymers of ethylene, the vinyl ester of one or more aliphatic C₂- to C₂₀-monocarboxylic acids and bicyclo[2.2.1]hept-2-ene, disclosed in DE-A-196 20 119;

the terpolymers of ethylene and at least one olefinically unsaturated comonomer which contains one or more hydroxyl groups, described in EP-A-0 926 168.


Preference is given to using mixtures of the same or different ethylene copolymers. The polymers on which the mixtures are based more preferably differ in at least one characteristic. For example, they may contain different comonomers, different comonomer contents, molecular weights and/or degrees of branching. The mixing ratio
 5 of the different ethylene copolymers is preferably between 20:1 and 1:20, preferably from 10:1 to 1:10, in particular from 5:1 to 1:5.

The copolymers B are derived preferably from copolymers of ethylenically unsaturated dicarboxylic acids and derivatives thereof, such as lower esters and anhydrides.

10 Preference is given to maleic acid, fumaric acid, itaconic acid and especially maleic anhydride. Particularly suitable comonomers are monoolefins having from 10 to 20, in particular having from 12 to 18, carbon atoms. These are preferably linear and the double bond is preferably terminal, as, for example, in dodecene, tridecene, tetradecene, pentadecene, hexadecene, heptadecene and octadecene. The ratio of
 15 maleic anhydride to olefin or olefins in the polymer is preferably in the range from 1:1.5 to 1.5:1, and is especially equimolar.

It is possible for minor amounts of up to 20 mol%, preferably < 10 mol%, especially < 5 mol%, of further comonomers also to be present which are copolymerizable with
 20 maleic anhydride and the olefins mentioned, for example shorter- and longer-chain olefins, allyl polyglycol ethers, C₁-C₃₀-alkyl (meth)acrylates, styrenics or C₁-C₂₀-alkyl vinyl ethers. Equally, minor amounts of poly(isobutylenes) having molecular weights of up to 5000 g/mol are used, and preference is given to highly reactive variants having a high proportion of terminal vinylidene groups. These further comonomers are not taken
 25 into account in the calculation of the factor Q which is crucial for the effectiveness.

Alkyl polyglycol ethers correspond to the general formula

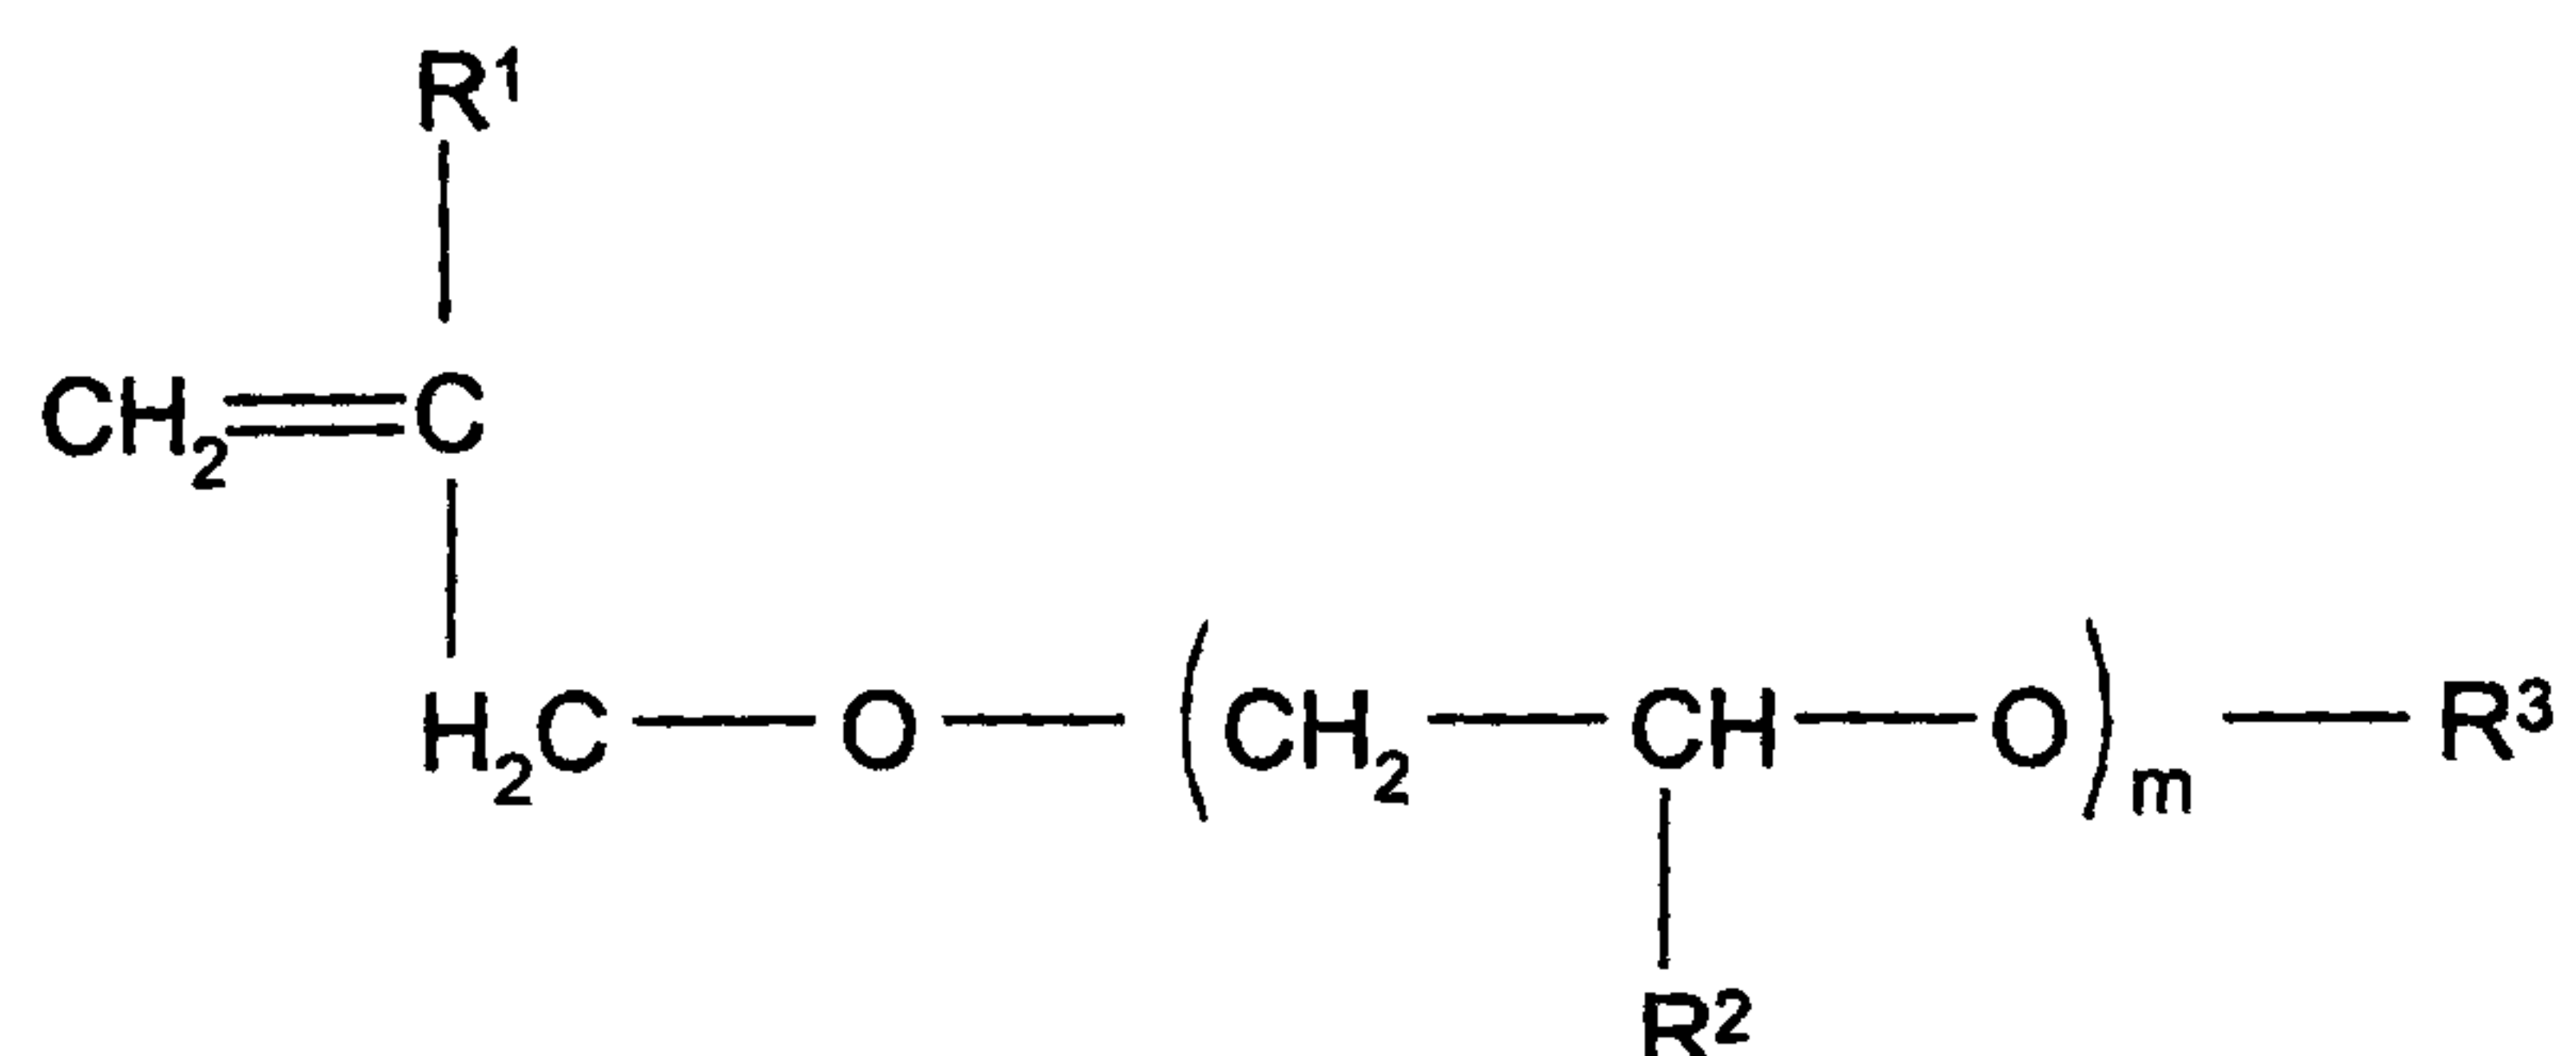

where

R^1 is hydrogen or methyl,

R^2 is hydrogen or C_1 - C_4 -alkyl,

m is a number from 1 to 100,

5 R^3 is C_1 - C_{24} -alkyl, C_5 - C_{20} -cycloalkyl, C_6 - C_{18} -aryl or $-C(O)-R^4$,

R^4 is C_1 - C_{40} -alkyl, C_5 - C_{10} -cycloalkyl or C_6 - C_{18} -aryl.

The inventive copolymers B) are prepared preferably at temperatures between 50 and 220°C, in particular from 100 to 190°C, especially from 130 to 170°C. The preferred
10 preparation process is solvent-free bulk polymerization, but it is also possible to carry out the polymerization in the presence of aprotic solvents such as benzene, toluene, xylene or of higher-boiling aromatic, aliphatic or isoaliphatic solvents or solvent mixtures such as kerosene or Solvent Naphtha. Particular preference is given to polymerizing in a small amount of moderating, aliphatic or isoaliphatic solvents. The proportion of
15 solvent in the polymerization mixture is generally between 10 and 90% by weight, preferably between 35 and 60% by weight. In the solution polymerization, the reaction temperature may be adjusted particularly simply by the boiling point of the solvent or by working under reduced or elevated pressure.

20 The average molecular mass of the inventive copolymers B is generally between 1200 and 200 000 g/mol, in particular between 2000 and 100 000 g/mol, measured by means of gel permeation chromatography (GPC) against polystyrene standards in THF. Inventive copolymers B have to be oil-soluble in dosages relevant in practice, i.e. they have to dissolve without residue at 50°C in the oil to be additized.

25

The reaction of the monomers is initiated by free radical-forming initiators (free-radical chain starters). This substance class includes, for example, oxygen, hydroperoxides and peroxides, for example cumene hydroperoxide, t-butyl hydroperoxide, dilauryl peroxide, dibenzoyl peroxide, bis(2-ethylhexyl) peroxodicarbonate, t-butyl perpivalate,
30 t-butyl permaleate, t-butyl perbenzoate, dicumyl peroxide, t-butyl cumyl peroxide, di(t-butyl) peroxide, and also azo compounds, for example 2,2'-azobis(2-methylpropanonitrile) or 2,2'-azobis(2-methylbutyronitrile). The initiators are used individually or as a mixture of two or more substances in amounts of from 0.01 to 20% by weight, preferably from 0.05 to 10% by weight, based on the monomer mixture.

The copolymers may be prepared either by esterifying maleic acid, fumaric acid and/or itaconic acid with the appropriate alcohols and subsequently copolymerizing, or by copolymerizing olefin or olefins with itaconic anhydride and/or maleic anhydride and subsequently esterifying. Preference is given to carrying out a copolymerization with anhydrides and esterifying the resulting copolymer after the preparation.

In both cases, the esterification is effected, for example, by reacting with from 0.8 to 2.5 mol of alcohol per mole of anhydride, preferably with from 1.0 to 2.0 mol of alcohol per mole of anhydride, at from 50 to 300°C. When approx. 1 mol of alcohol is used per mole of anhydride, monoesters are formed. Here, preference is given to esterification temperatures of from approx. 70 to 120°C. When larger amounts of alcohol are used, preferably 2 mol of alcohol per mole of anhydride, diesters are formed at 100-300°C, preferably 120-250°C. The water of reaction may be distilled off by means of an inert gas stream or removed by means of azeotropic distillation in the presence of an organic solvent. To this end, preferably 20-80%, in particular 30-70%, especially 35-55% by weight of at least one organic solvent is used. Here, copolymers having acid numbers of 30-70 mg KOH/g, preferably of 40-60 mg KOH/g, are regarded as monoesters. Copolymers having acid numbers of less than 40 mg, especially less than 30 mg KOH/g, are regarded as diesters. Particular preference is given to monoesters.

Suitable alcohols are in particular linear, but they may also contain minor amounts, for example up to 30% by weight, preferably up to 20% by weight and especially up to 10% by weight, of branched (in the 1- or 2-position) alcohols. Either shorter- or longer-chain alcohols may be used, but their proportion is preferably below 20 mol% and especially below 10 mol%, for example between 1 and 5 mol%, based on the total amount of the alcohols used. In the calculation of the Q factor, these shorter- and longer-chain alcohols, where present, are not taken into account, since they do not contribute to the effectiveness of the additives.

Particularly preferred alcohols are octanol, decanol, undecanol, dodecanol, tridecanol, tetradecanol, pentadecanol and hexadecanol.

The use of mixtures of different olefins in the polymerization and mixtures of different alcohols in the esterification allows the effectiveness to be further adapted to specific

fatty acid ester compositions.

In a preferred embodiment, mixtures of the copolymers B according to the invention are used, with the proviso that the average of the Q values of the mixing components in turn
5 assumes values of from 21.0 to 28.0, preferably values from 22.0 to 27.0 and especially values from 23.0 to 26.0.

The mixing ratio of the additives A and B according to the invention is (in parts by weight) from 20:1 to 1:20, preferably from 10:1 to 1:10, in particular from 5:1 to 1:2.

10

The additives according to the invention are added to oils in amounts of from 0.001 to 5% by weight, preferably from 0.005 to 1% by weight and especially from 0.01 to 0.5% by weight. They may be used as such or else dissolved or dispersed in solvents, for example aliphatic and/or aromatic hydrocarbons or hydrocarbon mixtures, for example
15 toluene, xylene, ethylbenzene, decane, pentadecane, petroleum fractions, kerosene, naphtha, diesel, heating oil, isoparaffins or commercial solvent mixtures such as Solvent Naphtha, ®Shellsol AB, ®Solvesso 150, ®Solvesso 200, ®Exxsol, ®Isopar and ®Shellsol D types. They are preferably dissolved in fuel oil of animal or vegetable origin based on fatty acid alkyl esters. The additives according to the invention preferably comprise
20 1 - 80%, especially 10 - 70%, in particular 25 - 60%, of solvent.

In a preferred embodiment, the fuel oil F2, which is frequently also referred to as biodiesel or biofuel, is a fatty acid alkyl ester composed of fatty acids having from 12 to 24 carbon atoms and alcohols having from 1 to 4 carbon atoms. Typically, a relatively
25 large portion of the fatty acids contains one, two or three double bonds.

Examples of oils F2 which are derived from animal or vegetable material and can be used in accordance with the invention are rapeseed oil, coriander oil, soya oil, cottonseed oil, sunflower oil, castor oil, olive oil, peanut oil, maize oil, almond oil,
30 palmseed oil, coconut oil, mustardseed oil, bovine tallow, bone oil, fish oils and used cooking oils. Further examples include oils which are derived from wheat, jute, sesame, shea tree nut, arachis oil and linseed oil. The fatty acid alkyl esters also referred to as biodiesel can be derived from these oils by processes disclosed by the prior art. Preference is given to rapeseed oil, which is a mixture of fatty acids partially esterified

with glycerol, since it is obtainable in large amounts and is obtainable in a simple manner by extractive pressing of rapeseeds. In addition, preference is given to the likewise widely available oils of sunflowers and soya, and also to their mixtures with rapeseed oil.

5

Particularly suitable biofuels F2) are lower alkyl esters of fatty acids. These include, for example, commercially available mixtures of the ethyl, propyl, butyl and in particular methyl esters of fatty acids having from 14 to 22 carbon atoms, for example of lauric acid, myristic acid, palmitic acid, palmitolic acid, stearic acid, oleic acid, elaidic acid, petroselic acid, ricinolic acid, elaeostearic acid, linolic acid, linolenic acid, eicosanoic acid, gadoleic acid, docosanoic acid or erucic acid, each of which preferably has an iodine number of from 50 to 150, in particular from 90 to 125. Mixtures having particularly advantageous properties are those which comprise mainly, i.e. comprise at least 50% by weight, of methyl esters of fatty acids having from 16 to 22 carbon atoms, and 1, 2 or 3 double bonds. The preferred lower alkyl esters of fatty acids are the methyl esters of oleic acid, linoleic acid, linolenic acid and erucic acid.

Commercial mixtures of the type mentioned are obtained, for example, by hydrolyzing and esterifying, or by transesterifying, animal and vegetable fats and oils with lower aliphatic alcohols. Equally suitable as starting materials are used cooking oils. To prepare lower alkyl esters of fatty acids, it is advantageous to start from fats and oils having a high iodine number, for example sunflower oil, rapeseed oil, coriander oil, castor oil, soya oil, cottonseed oil, peanut oil or bovine tallow. Preference is given to lower alkyl esters of fatty acids based on a novel type of rapeseed oil, more than 80% by weight of whose fatty acid component is derived from unsaturated fatty acids having 18 carbon atoms.

A biofuel is therefore an oil which is obtained from vegetable or animal material or both or a derivative thereof which can be used as a fuel and in particular as a diesel or heating oil. Although many of the above oils can be used as biofuels, preference is given to vegetable oil derivatives, and particularly preferred biofuels are alkyl ester derivatives of rapeseed oil, cottonseed oil, soya oil, sunflower oil, olive oil or palm oil, and very particular preference is given to rapeseed oil methyl ester, sunflower oil methyl ester and soya oil methyl ester. Particularly preferred as a biofuel or as a component in

biofuel are additionally also used fatty esters, for example used fatty acid methyl ester.

Suitable mineral oil components F1 are in particular middle distillates which are obtained by distilling crude oil and boil in the range from 120 to 450°C, for example kerosene, jet fuel, diesel and heating oil. Preference is given to using those middle distillates which contain 0.05% by weight of sulfur and less, more preferably less than 350 ppm of sulfur, in particular less than 200 ppm of sulfur and in special cases less than 50 ppm of sulfur, for example less than 10 ppm of sulfur. These are generally those middle distillates which have been subjected to refining under hydrogenating conditions, and therefore contain only small proportions of polyaromatic and polar compounds. They are preferably those middle distillates which have 95% distillation points below 370°C, in particular 350°C and in special cases below 330°C. Synthetic fuels, as obtainable, for example, by the Fischer-Tropsch process, are also suitable as middle distillates.

The additive can be added to the oil to be additized in accordance with prior art processes. When more than one additive component or coadditive component is to be used, such components can be introduced into the oil together or separately in any desired combination and sequence.

The inventive additives allow the CFPP value of mixtures of biodiesel and mineral oils to be improved much more efficiently than using the known prior art additives. The inventive additives are particularly advantageous in oil mixtures whose mineral oil component F1) has a boiling range between the 20% and the 90% distillation point of less than 120°C, in particular of less than 110°C and especially of less than 100°C. In addition, they are particularly advantageous in oil mixtures whose mineral oil component F1) has a cloud point of below -4°C, in particular from -6°C to -20°C, for example from -8°C to -20°C, as required for use in winter in particular. Equally, the pour point of the inventive mixtures is reduced by the addition of the inventive additives. The inventive additives are particularly advantageous in oil mixtures which contain more than 11% by volume of biofuel F2, preferably more than 12% by volume of biofuel F2 and especially more than 15% by volume of biofuel F2, for example from 15 to 35% by volume of biofuel F2. The inventive additives are additionally particularly advantageous in problematic oils whose biofuel component F2 contains a high proportion of esters of

saturated fatty acids of more than 4%, in particular of more than 5% and especially having from 7 to 25%, for example having from 8 to 20%, as present, for example, in oils from sunflowers and soya. Such biofuels preferably have a cloud point of above -5°C and especially above -3°C. Oil mixtures F) in which the inventive additives exhibit particularly advantageous action preferably have cloud points of above -9°C and especially of above -6°C. It is thus also possible using the inventive additives to adjust oil mixtures comprising rapeseed oil methyl ester and sunflower and/or soya oil fatty acid methyl ester to CFPP values of -22°C and below.


- 10 To prepare additive packages for specific solutions to problems, the inventive additives can also be used together with one or more oil-soluble coadditives which alone improve the cold flow properties of crude oils, lubricant oils or fuel oils. Examples of such coadditives are polar compounds which differ from the inventive polymers B and bring about paraffin dispersion (paraffin dispersants), alkylphenol condensates, esters and
15 ethers of polyoxyalkylene compounds, olefin copolymers, and also oil-soluble amphiphiles.

- For instance, the inventive additives may be used in a mixture with paraffin dispersants to further reduce the sedimentation under cold conditions of precipitated paraffins and
20 fatty acid esters. Paraffin dispersants reduce the size of the paraffin and fatty acid ester crystals and have the effect that the paraffin particles do not separate but remain dispersed colloiddally with a distinctly reduced tendency to sedimentation. Useful paraffin dispersants have been found to be both low molecular weight and polymeric oil-soluble compounds having ionic or polar groups, for example amine salts and/or amides.
- 25 Particularly preferred paraffin dispersants comprise reaction products of secondary fatty amines having from 20 to 44 carbon atoms, in particular dicocoamine, ditallow fat amine, distearylamine and dibehenylamine with carboxylic acids and derivatives thereof. Particularly useful paraffin dispersants have been found to be those obtained by reacting aliphatic or aromatic amines, preferably long-chain aliphatic amines, with
30 aliphatic or aromatic mono-, di-, tri- or tetracarboxylic acids or their anhydrides (cf. US 4 211 534). Equally suitable paraffin dispersants are amides and ammonium salts of aminoalkylenepolycarboxylic acids such as nitrilotriacetic acid or ethylenediamine-tetraacetic acid with secondary amines (cf. EP 0 398 101). Other paraffin dispersants are copolymers of maleic anhydride and α,β -unsaturated compounds which may

optionally be reacted with primary monoalkylamines and/or aliphatic alcohols (cf. EP 0 154 177) and the reaction products of alkenyl-spiro-bislactones with amines (cf. EP 0 413 279 B1) and, according to EP 0 606 055 A2, reaction products of terpolymers based on α,β -unsaturated dicarboxylic anhydrides, α,β -unsaturated compounds and polyoxyalkylene ethers of lower unsaturated alcohols.

Alkylphenol-aldehyde resins are described, for example, in Römpp Chemie Lexikon, 9th edition, Thieme Verlag 1988-92, volume 4, p. 3351ff. In the alkylphenol-aldehyde resins which can be used in the inventive additives, the alkyl radicals of the o- or p-alkylphenol may be the same or different and have 1 - 50, preferably 1 - 20, in particular 4 - 12, carbon atoms; they are preferably n-, iso- and tert-butyl, n- and isopentyl, n- and isohexyl, n- and isooctyl, n- and isononyl, n- and isodecyl, n- and isododecyl and octadecyl. The aliphatic aldehyde in the alkylphenol-aldehyde resin preferably has 1 - 4 carbon atoms. Particularly preferred aldehydes are formaldehyde, acetaldehyde and butyraldehyde, in particular formaldehyde. The molecular weight of the alkylphenol-aldehyde resins is 400 - 10 000 g/mol, preferably 400 - 5000 g/mol. A prerequisite is that the resins are oil-soluble.

In a preferred embodiment of the invention, these alkylphenol-formaldehyde resins are those which contain oligo- or polymers having a repeating structural unit of the formula

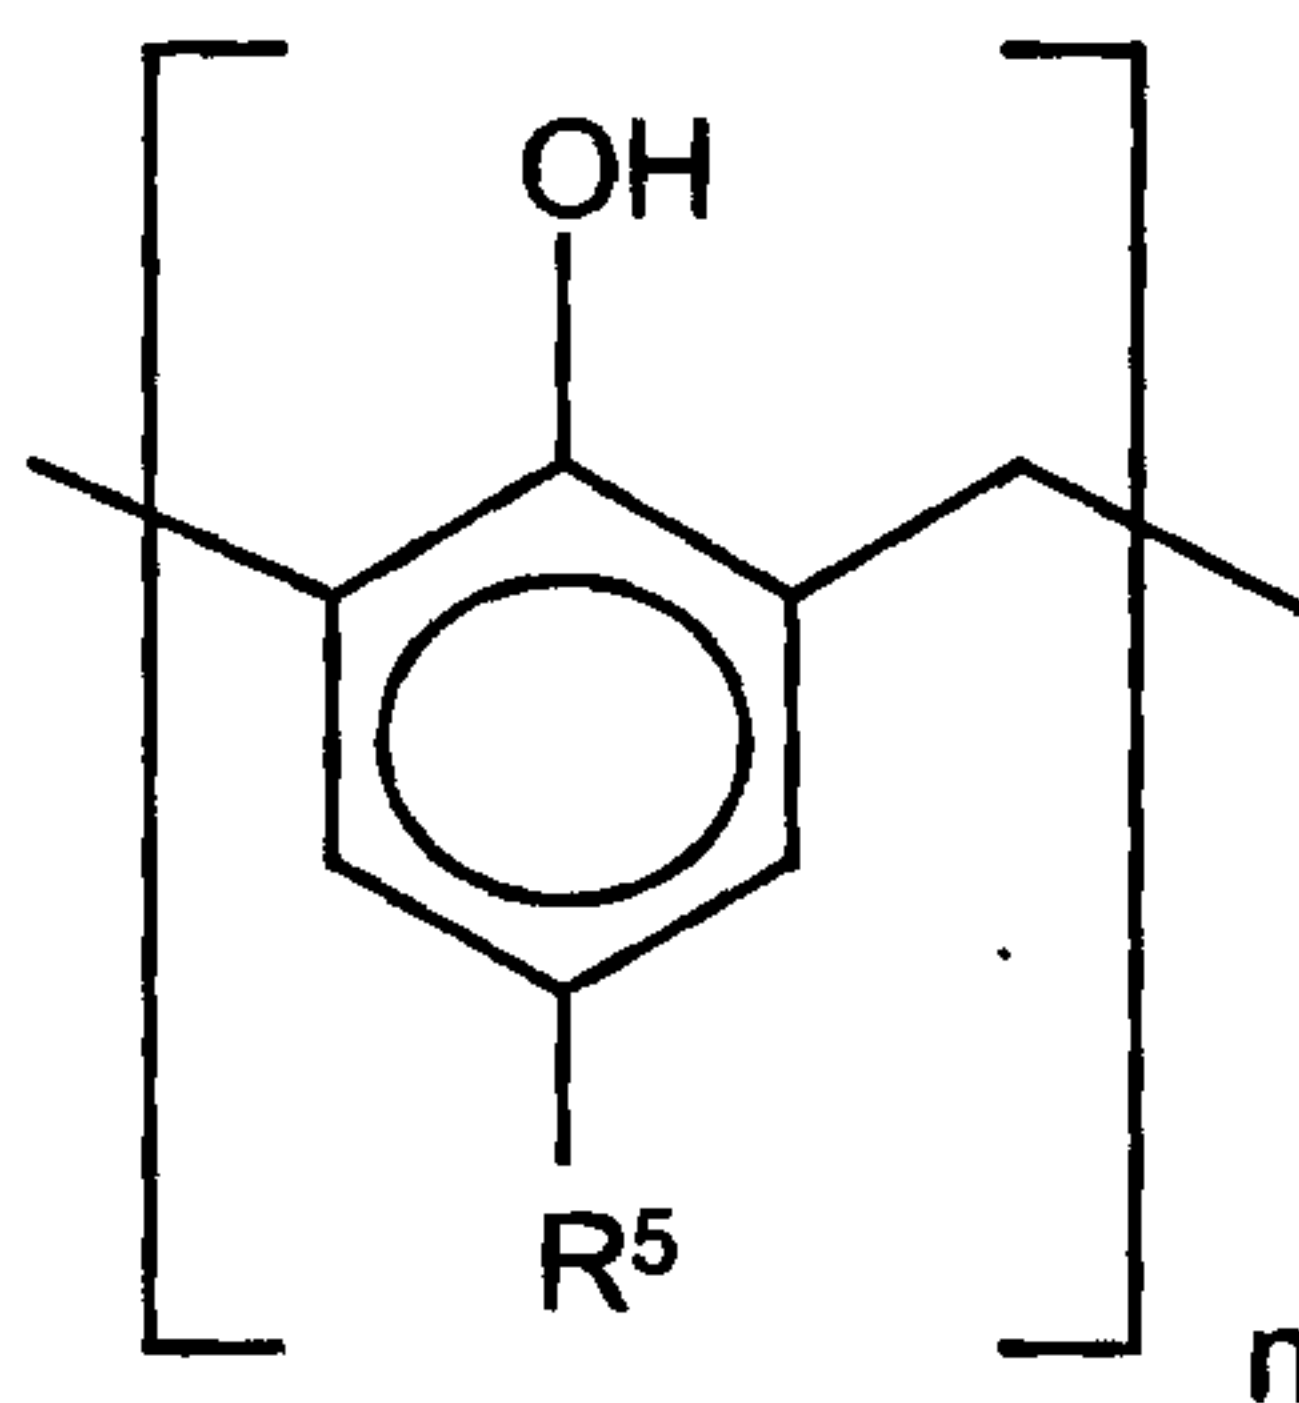

where R^5 is C_1 - C_{50} -alkyl or -alkenyl and n is a number from 2 to 100. R^5 is preferably C_4 - C_{20} -alkyl or -alkenyl and in particular C_6 - C_{16} -alkyl or -alkenyl. n is preferably a number from 4 to 50 and especially a number from 5 to 25.

Further suitable flow improvers are polyoxyalkylene compounds, for example esters, ethers and ether/esters which bear at least one alkyl radical having from 12 to 30 carbon atoms. When the alkyl groups stem from an acid, the rest stems from a polyhydric alcohol; when the alkyl radicals come from a fatty alcohol, the rest of the compound stems from a polyacid.

Suitable polyols are polyethylene glycols, polypropylene glycols, polybutylene glycols and their copolymers having a molecular weight of from approx. 100 to approx. 5000, preferably from 200 to 2000. Also suitable are alkoxylates of polyols, for example glycerol, trimethylolpropane, pentaerythritol, neopentyl glycol, and also the oligomers obtainable therefrom by condensation and having from 2 to 10 monomer units, for example polyglycerol. Preferred alkoxylates are those having from 1 to 100 mol, in particular from 5 to 50 mol, of ethylene oxide, propylene oxide and/or butylene oxide per mole of polyol. Particular preference is given to esters.

Fatty acids having from 12 to 26 carbon atoms are preferably used for reaction with the polyols to form the ester additives, although preference is given to using C₁₈ to C₂₄ fatty acids, especially stearic acid and behenic acid. The esters can also be prepared by esterification of polyoxyalkylated alcohols. Preference is given to fully esterified polyoxyalkylated polyols having molecular weights of from 150 to 2000, preferably from 200 to 1500. PEG-600 dibehenate and glycerol-ethylene glycol tribehenate are particularly suitable.

Olefin polymers suitable as a constituent of the inventive additive may be derived directly from monoethylenically unsaturated monomers or be prepared indirectly by hydrogenating polymers which are derived from polyunsaturated monomers such as isoprene or butadiene. In addition to ethylene, preferred copolymers contain structural units which are derived from α -olefins having from 3 to 24 carbon atoms and molecular weights of up to 120 000. Preferred α -olefins are propylene, butene, isobutene, n-hexene, isohexene, n-octene, isooctene, n-decene, isodecene. The comonomer content of olefins is preferably between 15 and 50 mol%, more preferably between 20 and 35 mol% and especially between 30 and 45 mol%. These copolymers may also contain small amounts, for example up to 10 mol%, of further comonomers, for example nonterminal olefins or nonconjugated olefins. Preference is given to ethylene-propylene

copolymers. The olefin copolymers may be prepared by known methods, for example by means of Ziegler or metallocene catalysts.

Further suitable olefin copolymers are block copolymers which contain blocks of
 5 olefinically unsaturated aromatic monomers A and blocks of hydrogenated polyolefins B. Particularly suitable block copolymers have the structure $(AB)_nA$ and $(AB)_m$ where n is a number between 1 and 10 and m is a number between 2 and 10.

The mixing ratio (in parts by weight) of the inventive additives with paraffin dispersants,
 10 comb polymers, alkylphenol condensates, polyoxyalkylene derivatives and olefin copolymers respectively is in each case from 1:10 to 20:1, preferably from 1:1 to 10:1, for example from 1:1 to 4:1.

The additives may be used alone or else together with other additives, for example with
 15 other pour point depressants or dewaxing assistants, with antioxidants, cetane number improvers, dehazers, deemulsifiers, detergents, dispersants, antifoams, dyes, corrosion inhibitors, conductivity improvers, sludge inhibitors, odorants and/or additives for lowering the cloud point.

20

Examples

Characterization of the test oils:

The CFPP value is determined to EN 116 and the cloud point to ISO 3015. Both
 25 properties are determined in °C.

Table 1: Characterization of the biofuels used (F2)

Oil No.		CP	CFPP
E 1	Rapeseed oil methyl ester	-2.3	-14°C
E2	80% rapeseed oil methyl ester + 20% sunflower oil methyl ester	-1.6	-10°C
E 3	90% rapeseed oil methyl ester + 10 % soya oil methyl ester	-2.0	-8°C

Table 2: Carbon chain distribution of the fatty acid methyl esters used to prepare the test oils (main constituents; area% by GC):

	C ₁₆	C ₁₆ '	C ₁₈	C ₁₈ '	C ₁₈ ''	C ₁₈ '''	C ₂₀	C ₂₀ '	C ₂₂	Σ saturated
RME	4.5	0.5	1.7	61.6	18.4	8.7	0.7	1.5	0.4	7.3
SFME	6.0	0.1	3.8	28.7	58.7	0.1	0.3	0.3	0.7	10.8
SoyaME	10.4	0.1	4.1	24.8	51.3	6.9	0.5	0.4	0.4	15.4

5

RME = Rapeseed oil methyl ester;

SFME = Sunflower oil methyl ester;

SoyaME = Soya oil methyl ester

10

Table 3: Characterization of the mineral oils used (F1)

	D 1	D 2	D 3
Initial boiling point	193°C	181°C	200°C
20% distillation	230°C	235°C	247°C
90% distillation	332°C	344°C	339°C
95 % distillation	348°C	361°C	358°C
(90-20)% distillation	102°C	109°C	92°C
Cloud point	-6.0°C	-8.2°C	-4.7°C
CFPP	-8°C	-12°C	-9°C
Sulfur content	20 ppm	32 ppm	9 ppm

15 The following additives were used:

Ethylene copolymers A

The ethylene copolymers used are commercial products having the characteristics specified in Table 4. The products were used as 65% dilutions in kerosene.

Table 4: Characterization of the ethylene copolymers used (A)

Example	Comonomer(s)	V140	CH ₃ /100 CH ₂
A1	13.6 mol% of vinyl acetate	130 mPas	3.7
A2	13.7 mol% of vinyl acetate and 1.4 mol% of vinyl neodecanoate	105 mPas	5.3
A3	i) 14.0 mol% of vinyl acetate and 1.6 mol% of vinyl neodecanoate and	97 mPas	4.7
	ii) 12.9 mol% of vinyl acetate in a i):ii) ratio of 6:1	145 mPas	5.4

5 Comb polymers B

The polymerization of maleic anhydride (MA) with α -olefins is effected in a relatively high-boiling aromatic hydrocarbon mixture at 160°C in the presence of a mixture of equal parts of tert-butyl peroxybenzoate and tert-butyl peroxy-2-ethylhexanoate as a free-radical chain starter. Table 5 lists various copolymers by way of example and the molar proportions of the monomers used to prepare them, and also the chain length and the molar amount (based on MA) of the alcohol used for derivatization and the factor Q calculated therefrom.

The esterifications are effected in the presence of Solvent Naphtha (from 40 to 50% by weight) at from 90 to 100°C to give the monoester and at from 160 to 180°C with azeotropic separation of the water of reaction to give the diester. The degree of esterification is inversely proportional to the acid number.

Table 5: Characterization of the comb polymers used (B)

Example	Comonomers	Alcohol	Q	Acid number [mg KOH/g]
B1	MA-co-C12/14- α -olefin (1:0.5:0.5)	C10	21.0	14.0
B2	MA-co-C12/14- α -olefin (1:0.5:0.5)	C12	23.0	51.1
B3	MA-co-C14/16- α -olefin (1:0.5:0.5)	C10	23.0	8.5

Example	Comonomers	Alcohol	Q	Acid number [mg KOH/g]
B4	MA-co-C14/16- α -olefin (1:0.5:0.5)	C12	25.0	48.2
B5	MA-co-C14/16- α -olefin (1:0.5:0.5)	C14	27.0	51.0
B6	MA-co-C14/16- α -olefin (1:0.5:0.5)	85% C12 15% C16	25.6	49.9
B7	MA-co-C16- α -olefin (1:1)	C12	26.0	12.3
B8	MA-co-C16- α -olefin (1:1)	C10	24.0	47.9
B9	MA-co-C14/16- α -olefin-co-allyl methyl polyglycol (1:0.45:0.45:0.1)	C12	25.0	45.8
B10 (C)	MA-co-C10- α -olefin (1:1)	C12	20.0	48.8
B11 (C)	MA-co-C14/16- α -olefin (1:0.5:0.5)	C16	29.0	16.5
B12 (C)	Fumarate-vinyl acetate	C14	n.a.	0.4

n.a. = not applicable

(C) = comparative example

5 Further flow improvers

The further flow improvers used C are commercial products having the characteristics specified in Table 6. The products were used as 50% dilutions in Solvent Naphtha.

Table 6: Characterization of the further flow improvers used

10

C3	Reaction product of a copolymer composed of C ₁₄ /C ₁₆ olefin and maleic anhydride with 2 equivalents of secondary tallow fat amine per maleic anhydride unit
C4	Reaction product of phthalic anhydride with 2 equivalents of di(hydrogenated tallow fat amine) to give an amide ammonium salt
C5	Nonylphenol resin prepared by condensation of a mixture of dodecylphenol with formaldehyde, Mw 2000 g/mol
C6	Mixture of 2 parts of C3 and 1 part of C5
C7	Mixture of equal parts of C4 and C5

Effectiveness of the additives

The CFPP value (to EN 116, in °C) of different biofuels as per the above table was determined after addition of 1200 ppm, 1500 ppm and 2000 ppm of additive mixture.

Percentages are based on parts by weight in the particular mixtures. The results

- 5 reproduced in Tables 5 to 7 show that the comb polymers having the inventive factor Q achieve outstanding CFPP reductions even at low dosages and offer additional potential at higher dosages.

Table 7: CFPP testing in a mixture of 75% by volume of test oil D1 and
10 25% by volume of test oil E1 (CP = -5.2°C; CFPP = -9°C)

Ex.	Flow improver	Comb polymer / coadditive	CFPP after addition of flow improver			
			50 ppm	100 ppm	150 ppm	200 ppm
1	A2	150 ppm B1	-15	-17	-19	-21
2	A2	150 ppm B2	-14	-18	-20	-22
3	A2	150 ppm B3	-18	-19	-19	-21
4	A2	150 ppm B4	-19	-21	-22	-23
5	A2	150 ppm B5	-20	-21	-21	-21
6	A1	150 ppm B6	-20	-20	-22	-23
7	A1	100 ppm B7	-19	-20	-20	-22
8	A1	100 ppm B8	-19	-19	-20	-21
9	A1	100 ppm B9	-21	-20	-22	-23
10	A2	75 ppm B4 75 ppm A4	-19	-21	-23	-26
11 (C)	A2	150 ppm B10	-12	-14	-17	-19
12 (C)	A2	150 ppm B11	-7	-11	-16	-18
13 (C)	A2	150 ppm B12	-10	-11	-15	-20
14 (C)	A2	-	-11	-16	-17	-19

Table 8: CFPP testing in a mixture of 70% by volume of test oil D2 and 30% by volume of test oil E3 (CP = -5.8°C; CFPP = -12°C)

Ex.	Ethylene copolymer	Comb polymer	Coadditive	CFPP			
				100 ppm	150 ppm	200 ppm	300 ppm
15	80% A3	20% B1	150 ppm C6	-20	-20	-21	-24
16	80% A3	20% B2	150 ppm C6	-20	-22	-25	-24
17	80% A3	20% B3	150 ppm C6	-20	-20	-24	-25
18	80% A3	20% B4	150 ppm C6	-20	-21	-23	-26
19	75% A3	25% B5	150 ppm C6	-19	-20	-20	-26
20	85% A1	15% B6	150 ppm C6	-20	-22	-24	-27
21	80% A1	20% B9	150 ppm C7	-20	-22	-25	-27
22 (C)	80% A3	20% B10	150 ppm C6	-19	-20	-19	-20
23 (C)	80% A3	20% B11	150 ppm C6	-9	-14	-18	-19
24 (C)	80% A1	20% B12	150 ppm C7	-15	-16	-18	-22
25 (C)	100% A1	—	150 ppm C6	-18	-19	-20	-22

5

In this test series, in each case a constant amount of coadditive and the specified amount of a mixture of ethylene copolymer and comb polymer were added to the oil.

Table 9: CFPP testing in a mixture of 80% by volume of test oil D3 and 20% by volume of test oil E2 (CP = -3.3°C; CFPP = -10°C)

Ex.	Ethylene copolymer	Comb polymer	CFPP			
			100 ppm	200 ppm	250 ppm	300 ppm
26	80% A3	20% B1	-17	-20	-25	-26
27	80% A3	20% B2	-21	-24	-23	-26
28	80% A3	20% B3	-21	-23	-25	-27
29	80% A3	20% B4	-20	-23	-26	-29
30	80% A3	20% B5	-16	-20	-26	-26
31	75% A1	25% B6	-20	-23	-26	-29
32	75% A1	25% B9	-21	-24	-25	-28
33 (C)	80% A3	20% B10	-17	-19	-22	-23
34 (C)	80% A3	20% B11	-10	-16	-17	-21
35 (C)	80% A1	20% B12	-15	-17	-19	-21
36 (C)	100% A1	—	-11	-20	-22	-22

29374-434

26

CLAIMS:

1. A fuel oil composition (F), comprising:

(F1) 89-50% by volume of a fuel oil of mineral origin; and

(F2) 11-50% by volume of a fuel oil of vegetable or animal origin, and,

5 as a cold additive, the constituents:

(A) at least one copolymer composed of ethylene and 8-21 mol% of at least one acrylic or vinyl ester having a C₁-C₁₈-alkyl radical; and

(B) at least one comb polymer containing structural units composed of:

10 (B1) at least one olefin as monomer (1) which bears at least one C₈-C₁₈-alkyl radical on the olefinic double bond, and

(B2) at least one ethylenically unsaturated dicarboxylic acid as monomer (2) which bears at least one C₈-C₁₆-alkyl radical bonded via an ester moiety, wherein the sum Q:

$$Q = \sum_i w_{1i} \cdot n_{1i} + \sum_j w_{2j} \cdot n_{2j}$$

15 of the molar averages of the carbon chain length distributions in the alkyl radicals of monomer (1) and the alkyl radicals of the ester groups of monomer (2) is from 21.0 to 28.0, wherein:

w₁ is the molar proportion of the individual chain lengths in the alkyl radicals of monomer (1),

20 w₂ is the molar proportion of the individual chain lengths in the alkyl radicals of the ester groups of monomer (2),

n₁ are the individual chain lengths in the alkyl radicals of monomer (1),

29374-434

27

n_2 are the individual chain lengths in the alkyl radicals of the ester groups of monomer (2),

i is the serial variable for the individual chain lengths in the alkyl radicals of monomer (1), and

5 j is the serial variable for the individual chain lengths in the alkyl radicals in the ester groups of monomer (2).

2. A fuel oil composition as claimed in claim 1, wherein Q is from 22.0 to 27.0.

3. A fuel oil composition as claimed in claim 1 or 2, wherein constituent (A), apart from ethylene, contains from 3.5 to 20 mol% of vinyl acetate and from 0.1
10 to 12 mol% of vinyl neononanoate, vinyl neodecanoate or vinyl 2-ethylhexanoate, and the total comonomer content is between 8 and 21 mol%.

4. A fuel oil composition as claimed in any one of claims 1 to 3, wherein constituent (A), in addition to ethylene and from 8 to 18 mol% of vinyl esters, also contains from 0.5 to 10 mol% of olefins selected from the group consisting of
15 propane, butane, isobutylene, hexene, 4-methylpentene, octene, diisobutylene and norbornene.

5. A fuel oil composition as claimed in any one of claims 1 to 4, wherein the copolymers which make up constituent (A) have melt viscosities between 20 and 10 000 mPas.

20 6. A fuel oil composition as claimed in any one of claims 1 to 5, wherein the copolymers which make up constituent (A) have degrees of branching between 1 and 9 $\text{CH}_3/100 \text{ CH}_2$ groups which do not stem from the comonomers.

7. A fuel oil composition as claimed in any one of claims 1 to 6, wherein the copolymers which make up constituent (B) contain comonomers which are
25 derived from esters or anhydrides of maleic acid, fumaric acid or itaconic acid.

29374-434

28

8. A fuel oil composition as claimed in any one of claims 1 to 7, wherein the esters of constituent (B) are derived from alcohols having linear alkyl radicals.

9. A fuel oil composition as claimed in any one of claims 1 to 8, wherein the average molecular mass of the copolymers (B) is between 1200 and 200 000 g/mol.

5 10. A fuel oil composition as claimed in any one of claims 1 to 9, wherein the copolymers which make up constituent (B) contain comonomers which are derived from α -olefins.

11. A fuel oil composition as claimed in any one of claims 1 to 10, wherein the mixing ratio (A):(B) is between 10:1 and 1:10.

10 12. A fuel oil composition as claimed in any one of claims 1 to 11, comprising polar nitrogen-containing paraffin dispersants.

13. A fuel oil composition as claimed in any one of claims 1 to 12, which contains 88-65% by volume of (F1) and 12-35% by volume of (F2).

14. A fuel oil composition as claimed in any one of claims 1 to 13, wherein
15 the fuel oil of animal or vegetable origin comprises one or more esters composed of monocarboxylic acid having from 14 to 24 carbon atoms and alcohol having from 1 to 4 carbon atoms.

15. A fuel oil composition as claimed in claim 14, wherein the alcohol is methanol or ethanol.

20 16. A fuel oil composition as claimed in any one of claims 1 to 15, wherein the fuel oil of animal or vegetable origin contains more than 4% by weight of esters of saturated fatty acids.

17. Use of an additive as defined in any one of claims 1 to 15, for improving the cold flow properties of mixtures of mineral fuel oils and fuel oils of animal or
25 vegetable origin.

29374-434

29

18. A process for producing a fuel oil compositions (F) comprising fuel oils of mineral (F1) and animal or vegetable (F2) origin, having improved cold flow properties, by adding an additive as defined in any one of claims 1 to 15, to the mixture of fuel oils of mineral (F1) and animal or vegetable (F2) origin.

$$Q = \sum_i w_{1i} \cdot n_{1i} + \sum_j w_{2j} \cdot n_{2j}$$