



(51) International Patent Classification:

G01N 29/14 (2006.01) G01N 29/28 (2006.01)
B06B 1/06 (2006.01) G10K 11/02 (2006.01)

(21) International Application Number:

PCT/EP2015/060071

(22) International Filing Date:

7 May 2015 (07.05.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1409418.9 28 May 2014 (28.05.2014) GB

(71) Applicant: AKTIEBOLAGET SKF [SE/SE]; S-41550
Göteborg (SE).(72) Inventors: ZIEGLER, Sebastian; Neubessinger Str. 16,
97535 Wasserlosen (DE). ERSKINE, Joseph; The
Beeches Wester Shieldhill, Falkirk FK1 3AT (GB).
HAMILTON, Keith; 28 Venturefair Avenue, Dunfer-
mline, Fife KY12 0PF (GB). MCGOOGAN, Gerard;
Seaneaglais, Main Street, Philipston EH49 6RA (GB).
SMITH, Tim; 30 Murrell Terrace, Aberdour, Fife KY3
0XH (GB). THOMSON, Allan; Woodend, Libberton,

South Lanarkshire, Lanark ML11 8LX (GB). TORRIE,
Mairi Joan; 7 Hillside Crescent, Edinburgh Lothian EH7
5DY (GB). VAN DER HAM, Andreas Clemens; Veiling-
straat 161, NL-3521 BE Utrecht (NL).

(74) Agents: TWEEDLIE, Diane et al.; SKF B.V., Kelvinbaan
16, NL-3439MT Nieuwegein (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: COUPLANT AND ARRANGEMENT OF COUPLANT, TRANSDUCER, AND CONSTRUCTION COMPONENT

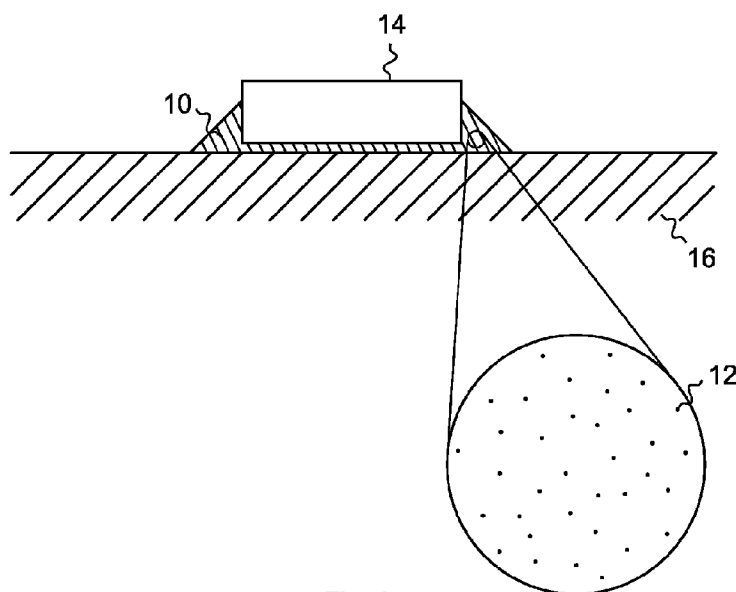


Fig. 1

(57) Abstract: Embodiments provide a couplant (10) and an arrangement of a couplant (10), a transducer (14), and a construction component (16). The couplant (10) is adapted to couple the transducer (14) to the surface of the construction component (16). The couplant (10) comprises basically 36% to 40% mass portion of hard metal (12).

WO 2015/180941 A1



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).

Couplant and Arrangement of Couplant, Transducer, and Construction Component

Embodiments of the present invention relate to monitoring of construction components in mechanical systems, more particularly but not exclusively to couplants of transducers or
5 sensors in mechanical systems.

Background

In mechanical systems monitoring of components can be very important. For example,
10 roller bearings may suffer from abrasion and may cause severe damage to mechanical systems when they break down. Therefore, the deterioration of these components can be monitored using transducers or sensors. Such sensors may comprise piezoelectric components or semiconductors, which convert a mechanical or acoustic vibration or oscillation into an electrical signal. The electrical signal can then be processed, for example, a frequency analysis can be carried out, in order to detect frequencies which indicate an abra-
15 sion or deterioration of the respective components. For example, a roller bearing, as it wears out, may generate characteristic vibrations, which, once detected, may indicate a forthcoming breakdown of the bearing. Such a signal can then be used to generate a warning, especially when further components will be affected by the bearing breakdown.

20 The application of bearings and according monitoring systems as described above is very broad. For example, any kind of vehicles use a large number of bearings, such of which are used to bear critical components. For example, thinking of trains, their axes make use of bearings, which may cause severe accidents and damages, when they break down. Another
25 application is, for example, power plants, such as off-shore wind power stations. The bearing of the rotors of such power stations is critical, especially when they are located off-shore, i.e. when they are not easily accessible. Therefore, there is a desire to monitor the bearing of such wind power stations in order to detect eventual failures early and to shut down the power station before severe damages occur. Steel works are another example of
30 an application of the above transducer systems. Wherever bearings are used to bear components of power units, may they be rotors of wind power stations, axes of combustion engines or engines of conveyor belts, there is a desire to be informed of a forthcoming failure as soon as possible.

Document US 3 663 842 A discloses an ultrasonic probe, which has a solid, flexible, elastic, graded acoustical impedance coupling device with fine geometrical and naturally shaped metal and glass component powders. Document GB 2 109 555 A discloses an ultrasound transducer, which is coupled to a work piece by an elastomeric member and measurements based on echoes returned from inhomogeneities within the work piece are initiated by detection of the echo from the interface between the work piece and the coupling member.

Summary

Embodiments are based on the finding that acoustic emission transducers can be used for monitoring of construction components. It is a further finding that there is a desire to determine the sensitivity of a monitoring system in order to evaluate whether a given detection level should give cause for concern. Acoustic emission sensors can generally be designed to respond to motion normal to the surface on which they are applied, and can be manufactured as resonant devices to increase sensitivity around a frequency range of particular interest.

Embodiments are further based on the finding that the structural composition of such a device is critical for its sensitivity. In some embodiments a transducer may comprise a piezoelectric element with a certain geometry and mechanical resonances, which outputs an electrical signal. Such an electrical signal may then be pre-amplified and further processed. The further processing may include analog digital conversion, filtering, transformations, etc. Embodiments are further based on the finding that the sensitivity of a transducer is further influenced by the way such a transducer or sensor is coupled to the surface in question. In other words it is a finding that in any given situation poor coupling or bad choice of the couplant can lead to large drops in sensitivity. Hence, it is a further finding that the couplant of such a system is a major source of uncertainty in assessing the system sensitivity. This sensitivity may be fairly high level in laboratory conditions, however, when taking such measurements in the field, for example on vehicles or in power plants, it is not uncommon to see order of magnitude variations in the overall sensitivity.

It is a further finding that a couplant should remove air between the face of the transducer or sensor, and the respective surface of the construction component. It is a further finding that when air gets trapped due to the microstructure of the two contacting surfaces, the sen-

sitivity of the transducer degrades. The acoustic impedance of air is far lower than that of the sensor face or test material and will cause considerable transmission losses at the interface. Moreover, it is a further finding that in addition to being of substantial higher acoustic impedance than air, a coupling layer should also be thin compared to the wavelength of the signal which is to be measured, as, for example, ultrasonic waves.

It is a further finding of embodiments that a hard metal introduced to the couplant can further lower the attenuation of the couplant between the transducer and the surface of the construction component. Acoustic emission may typically be measured in the frequency range of 100Hz to 500 kHz. The high frequency oscillations are hard to measure and therefore a good coupling between the sensor and the oscillation source may be desirable. If the coupling is not good, then the signal amplitude may decrease, which may in turn make it difficult to interpret these signals. The influencing factors are sensor geometry, couplant and surface properties of the target. Embodiments may provide a thread which allows mounting of sensors to a bearing housing, i.e. which allows generating a certain force or pressure between the surface of the sensor and the surface of the construction component.

Embodiments provide a couplant for coupling a transducer to a surface of a construction component. The couplant comprises basically 36% to 40% mass portion of hard metal. It is a finding that the portion of hard metal helps decreasing the impedance or the attenuation of the coupling layer between the transducer and the surface of a construction component, such as a housing of a bearing. Decreasing the attenuation allows for determining or detecting more reliable signals and hence may allow the system to be more reliable. Therewith, failures may be detected more reliably. A mass portion in the range of 36% to 40% may provide a particularly low impedance between the transducer and the surface of the construction component. The overall system may be made more robust. Furthermore, embodiments may allow detecting forthcoming failures of construction components sooner, such that further damages can be avoided more effectively.

Embodiments may provide the couplant with a mass portion of hard metal which is basically 37 to 39%, 37,5% to 38%, or 37,7%. In other words, it is a finding that a mass portion of hard metal of somewhat above 1/3 within the couplant, provides good coupling properties. That is to say when using 36-40% of hard metal within the couplant, a low impedance or a low attenuation of the coupling layer can be realized. Hence, in some embodiments,

basically 36-40% of hard metal may be used within the couplant, where about 37,7% showed to be an advantageous combination.

In embodiments, the hard metal portion may comprise basically any hard metal. For example, the hard metal portion may comprise at least one of or a combination of the group of tungsten, W, tungsten carbide, W₂C, WC, titanium nitride, TiN, titanium carbide, TiC, titanium carbide-nitride, Ti(C)N, titanium aluminum nitride, TiAlN, tantalum carbide TaC, cobalt, Co, and molybdenum, Mo. Embodiments can be based on the finding that such a hard metal may not be very compressive, therefore it elastically conducts the acoustic waves or vibrations through the couplant to the surface of the sensor or transducer. It is therefore a further finding that especially hard metals can provide low attenuation couplants. For example, a couplant using tungsten powder may provide the advantage that the attenuation as compared to the same couplant without tungsten powder can be decreased.

In embodiments the couplant may further comprise grease or a water-based gel. Such couplant can be used in embodiments that further have a mounting structure, such as a thread, a hole, a deepening, etc. for mounting the transducer or sensor and which may allow encapsulating the couplant. Such an encapsulation may as well be used to protect the couplant from other influences, such as salt water, e.g. when used in underwater application or in a vehicle exposed to de-icing salt, dust and dirt, heat, wetness, etc. Hence, in embodiments grease or gel can be used in the couplant together with the hard metal. For example, the transducer can be mounted using a thread or it can be screwed. In other embodiments, a clamp or a bracket can be used in order to mount the transducer to the construction component. Moreover, in some embodiments a spring can be used in order to provide a defined force between the transducer surface and the surface of the construction component.

In some embodiments the couplant can be used for hand measurement. In other words, a transducer is used to take occasional measurements on components, for example, for error control and trouble-shooting purposes. In such a scenario the couplant can be used in order to establish an acoustic coupling between the transducer and the component to be checked. In this scenario embodiments can enable a more reliable hand measurement. Moreover, as in conventional scenarios, high pressure or high force has to be applied to a transducer which is used for a hand measurement, this force can be reduced, as a better coupling can be achieved with the couplant at lower force.

In further embodiments, the couplant may as well comprise a curing material. In embodiments, the curing material may comprise at least one of or a combination of resin, epoxy, glue, PolyURrethane (PUR), silicone, adhesive, and sealing compound. In other words, it is a further finding of embodiments that a curing material such as a glue can be used in order to glue the transducer to the surface of the construction component. Moreover, the hard metal within the couplant is kept in place such that the low attenuation property of the couplant can be kept after curing the material, i.e. the curing material may avoid separation of the hard metal or changes in the concentration or distribution of the hard metal within the couplant. Embodiments may therewith provide the advantage that the transducer can be efficiently glued or mounted on the surface of a construction component while the hard metal within the couplant assures low attenuation or high coupling of acoustic waves between the surfaces of the construction component and the transducer. Embodiments may therefore provide the advantage that they make use of the synergy between the curing material and the hard metal within the same couplant.

In embodiments, the curing material when cured may have a hardness between basically 75 to 95 Shore D, 80 to 90 Shore D, or 84 to 86 Shore D. In other words, in embodiments, it may be advantageous to use a curing material with hardness within the above limits after curing, holding the hard metal powder or particles in place, such that an improved coupling of the two surfaces is achieved.

Embodiments further provide an arrangement of a transducer, a construction component and a couplant according to the above description. The transducer can be mounted to the construction component with the couplant between a surface of the construction component and a transducer. In some embodiments, the transducer can correspond to an acoustic emission sensor, which is coupled to the surface of the construction component. As described above, the couplant may then couple the two surfaces. In some embodiments, the transducer can be glued to the construction component with the couplant. In such embodiments, the synergy between the glue, offering an effective way to mount or attach the sensor to the target, and the hard metal within the couplant, allowing for a good acoustic coupling between the sensor and the surface, can be exploited.

In embodiments different transducer shapes may be utilized. For example, a transducer may have a flat transducer face or a rounded transducer face pointed towards a construction component. The rounded transducer face may correspond to a spherical or a partly spherical shape. In other words, embodiments may further exploit the finding that the surface shape of the transducer may affect the coupling. While a flat surface shape may provide a larger contact area, a rounded transducer face may enable a higher pressure in a small area. Embodiments may, in addition to the couplant and the hard metal, further make use of different transducer face shapes in order to further improve the coupling. In embodiments a transducer can be adapted to measure oscillations in a range of basically 1kHz to 1MHz, 10kHz to 750kHz, 500Hz to 10kHz, or 100kHz to 500kHz. That is to say, that in 10
embodiments a transducer may be adapted to measure acoustic waves as well as ultrasonic waves. Embodiments may therefore provide the advantage that a good coupling may be achieved with a coupling comprising the hard metal over a wide bandwidth. In embodiments, the construction component may correspond to a bearing, a roller bearing or a bearing housing. Moreover, in embodiments the construction component may be comprised in 15
a vehicle, such as a train, a car, a bus, in a power plant, such as a wind power station, an underwater power station, a steelwork, an automotive application, in a conveyor system, in a steel mill, in a rolling mill, etc.

20 In some embodiments the construction component may be a casted construction component. In other words, the construction component may be a cast iron or other material part which has a rather low hardness compared to the hard metal within the couplant. Embodiments may therewith provide the advantage that even a vibration from a softer part, such as a cast part or piece, can be coupled to the sensor. By using the curing material in the couplant, the curing material can be adapted to the surface and to the material, such as cast 25
iron, of the construction component. In other words, embodiments may provide the advantage that the curing material can be adapted to the construction component, such that the mechanical coupling of the transducer can be optimized. Moreover, the portion of the hard metal and the hard metal itself can be selected in a way such that an acoustic coupling 30
is improved or even optimized at the same time.

In further embodiments the couplant is adapted to couple the transducer with a roller bearing such that oscillations of the roller bearing are detectable from an output signal of the transducer. In other words, some embodiments may comprise further electrical compo-

nents, such as a preamplifier, an amplifier, a filter, a converter, any processing means, a processor, etc. in order to determine oscillations from the output signal of the transducer. Such oscillations may undergo further signal processing such as frequency analysis, filtering, analog-to-digital conversion, etc., in order to determine whether the roller bearing
5 generates any suspicious vibrations or oscillations.

Brief description of the Figures

Some other features or aspects will be described using the following non-limiting embodiments of apparatuses and/or methods by which of example only, and with reference to the
10 accompanying Figures, in which

Fig. 1 illustrates an embodiment of an arrangement of a transducer, a couplant and a construction component, and
15

Fig. 2 illustrates another embodiment of an arrangement with accordingly adapted processing.

Description of some embodiments

20 Various embodiments will now be described in more detail with reference to the accompanying drawings. In the Figures, the thicknesses of lines, layers and/or regions may be exaggerated for clarity.

Accordingly, while embodiments are capable of various modifications and alternative
25 forms, embodiments thereof are shown by way of example in the Figures and will herein be described in detail. It should be understood, however, that there is no intent to limit embodiments to the particular forms disclosed, but on the contrary, embodiments are to cover all modifications, equivalents, and alternatives falling within the scope of the invention.

30 Like numbers refer to like or similar elements throughout the description of the Figures. It will be understood that when an element is referred to as being “connected” or “coupled” to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being “directly connected” or “directly coupled” to another element, there are no intervening elements pre-

sent. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., “between” versus “directly between,” “adjacent” versus “directly adjacent,” etc.).

5 The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of example embodiments. As used herein, the singular forms “a,” “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises,” “comprising,” “includes” and/or “including,” when used herein, specify the presence of
10 stated features, integers, steps, operations, elements and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components and/or groups thereof.

Unless otherwise defined, all terms (including technical and scientific terms) used herein
15 have the same meaning as commonly understood by one of ordinary skill in the art to which embodiments belong. It will be further understood that terms, e.g., those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

20

In the following description some components will be displayed in multiple Figures carrying the same reference signs, but may not be described multiple times in detail. A detailed description of a component may then apply to that component for all its occurrences.

25 Fig. 1 illustrates an embodiment of an arrangement of a transducer 14, a construction component 16 and a couplant 10. The transducer 14 is mounted to the construction component 16 with a couplant 10 between the surface of the construction component 16 and a transducer 14. The couplant 10 couples the transducer 14 to the surface of the construction component 16. The couplant 10 comprises basically 36 to 40% of tungsten in the present
30 embodiment. The transducer 14 is implemented as an acoustic emission sensor and connected to the target 16 by the couplant 10. Moreover, it is assumed that the target surface, i.e. the surface of the construction component 16, has a roughness preferably between 0.8 $\mu\text{m Ra}$ or a range of 0.2 to 1.6 $\mu\text{m Ra}$ with a flat sensor 14 depending on the properties of

the couplant. As Fig. 1 shows, in the present embodiment, it is assumed that the transducer 14 has a flat transducer face.

In the present embodiment, the couplant 10 comprises a curing material. The curing material comprises a resin. In other words, the connection between the sensor 14 and the target 16 is done by a resin system 10 with an approximate hardness of 85 Shore D, mixed with more than 1/3 mass portion of tungsten powder. That is to say, the ratio between the resin and the tungsten powder is less than 2:1, e.g. 1.66:1. The resin can correspond to epoxy resin. The epoxy resin couples the transducer 14 and the construction component 16. In other words, the couplant 10 is directly coupled to the surface of the transducer 14 and to the surface of the construction component 16. A design of experiments in accordance with a six sigma quality process was conducted where epoxy to tungsten ratio was an input, amplitude and frequency response were outputs. The experiment concluded a ratio of 37.7% was optimum for the coupling of the sensor to metal surface within a 500Hz to 10kHz pass band. The couplant may alter the signal impedance properties for acoustic signal propagation. The couplant may further enable a better match of the junction impedance between metal and epoxy and between epoxy and sensor for reducing the effects of acoustic signal reflection.

In another embodiment, the sensor 14 can be screwed onto a construction component 16. In that case, instead of a curing material, a grease or water-based gel may be used comprising according hard metal portions. Fig. 1 depicts an embodiment wherein the transducer 14 is glued to the construction component 16 with the couplant 10. The magnification window 12 shows the hard metal particles or powder within the couplant. In the present embodiment, the acoustic emission sensor 14 is adapted to measure frequencies between 100kHz and 500kHz, 500Hz and 100kHz.

Fig. 2 illustrates another embodiment of an arrangement of a transducer 14, a construction component 16 and a couplant 10. As shown in Fig. 2, the construction component 16 corresponds to an outer ring 16 of a roller bearing to which the transducer 14, which is again implemented as an acoustic emission sensor 14, is glued using the couplant 10. In other embodiments, the transducer 14 can also be coupled using the couplant 10 to a bearing housing or any other housing. Such a housing may correspond to a casted construction component. In the embodiment shown in Fig. 2, the couplant 10 is adapted to couple the

transducer 14 with the roller bearing 16 such that oscillations of the roller bearing are detectable from an output signal of the transducer 14. This is indicated in Fig. 2 by the further components 20, 22, 24. As illustrated by Fig. 2 the outputs of the acoustic emission sensor 14 are coupled to an amplifier 20 having an amplification gain of g . The output of the amplifier is then converted by the analog/digital converter 22 (A/D) before the digital samples are then further processed by the microprocessor 24 (μ P). In the present embodiment, it is assumed that the frequency analysis is carried out by the microprocessor, looking for signal parts at frequencies, which are indicative of the roller bearing 16 to wear off, i.e. to a forthcoming breakdown. These frequency parts of the signals are then compared against a threshold, and if they exceed the threshold an according alarm signal is generated as indicated in Fig. 2.

Embodiments may provide the advantage that the coupling between the sensor 14 and the target 16 result in better signal amplitudes at the output of the sensor 14. Embodiments may therewith allow a use of less powerful and cheaper amplification electronics. Moreover, embodiments may allow for a more reliable detection of suspicious vibrations or oscillations in mechanical systems.

The description and drawings merely illustrate the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within its scope. Furthermore, all examples recited herein are principally intended expressly to be only for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor(s) to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass equivalents thereof.

It should be appreciated by those skilled in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudo code, and the like represent various processes which may be substantially represented in computer readable medium and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

Reference Signs

	10	Couplant
5	12	Hard metal
	14	Transducer
	16	Construction component
	20	Amplifier
	22	Analog/Digital converter
10	24	Micro processor

Claims

Couplant and Arrangement of Couplant, Transducer, and Construction Component

5

1. A couplant (10) for coupling a transducer (14) to a surface of a construction component (16), the couplant (10) comprising 36% to 40% mass portion of hard metal (12).

2. The couplant (10) of claim 1, wherein the mass portion is 37%-39%, 37,5%-38%, or
10 37,7%.

3. The couplant (10) of claim 1, the hard metal (12) portion comprises at least one of or a combination of the group of tungsten (W), tungsten carbide (W₂C, WC), titanium nitride (TiN), titanium carbide (TiC), titanium carbide-nitride (Ti(C)N), titanium aluminum nitride
15 (TiAlN), tantalum carbide (TaC), cobalt (Co), and molybdenum (Mo).

4. The couplant (10) of one of the preceding claims, further comprising grease or a water-based gel.

20 5. The couplant (10) of one of the preceding claims, further comprising a curing material.

6. The couplant (10) of claim 5, wherein the curing material comprises at least one of or a combination of resin, epoxy, glue, polyurethane (PUR), silicone, adhesive, and sealing compound.

25

7. The couplant (10) of claim 5, wherein the curing material when cured has a hardness between 75 to 95 Shore D, 80 to 90 Shore D, or 84 to 86 Shore D.

8. An arrangement of a transducer (14), a construction component (16) and a couplant
30 (10) according to one of the preceding claims, the transducer (14) being mounted to the construction component (16) with the couplant (10) between a surface of the construction component (16) and the transducer (14).

9. The arrangement of claim 8, wherein the transducer (14) corresponds to an acoustic emission sensor.
10. The arrangement of claim 8, wherein the transducer (14) is glued to the construction component (16) with the couplant (10).
11. The arrangement of claim 8, wherein the transducer (14) has a flat transducer face or a rounded transducer face pointed towards the construction component (16).
12. The arrangement of claim 8, wherein the transducer (14) is adapted to measure oscillations in a range of 1kHz to 1MHz, 10kHz to 750kHz, 500Hz to 10kHz, or 100kHz to 500kHz.
13. The arrangement of claim 8, wherein the construction component (16) corresponds to a bearing, a roller bearing, or a bearing housing.
14. The arrangement of claim 8, wherein the construction component (16) is a casted construction component (16).
15. The arrangement of claim 8, wherein the couplant (10) is adapted to couple the transducer (14) to the construction component (16) corresponding to a roller bearing such that oscillations of the roller bearing are detectable from an output signal of the transducer (14).

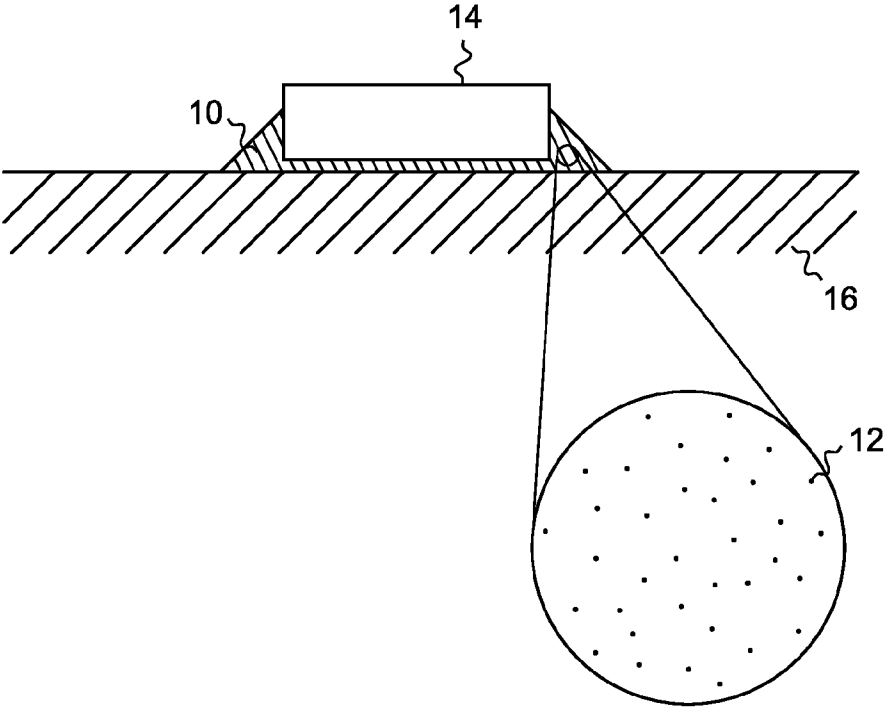


Fig. 1

2 / 2

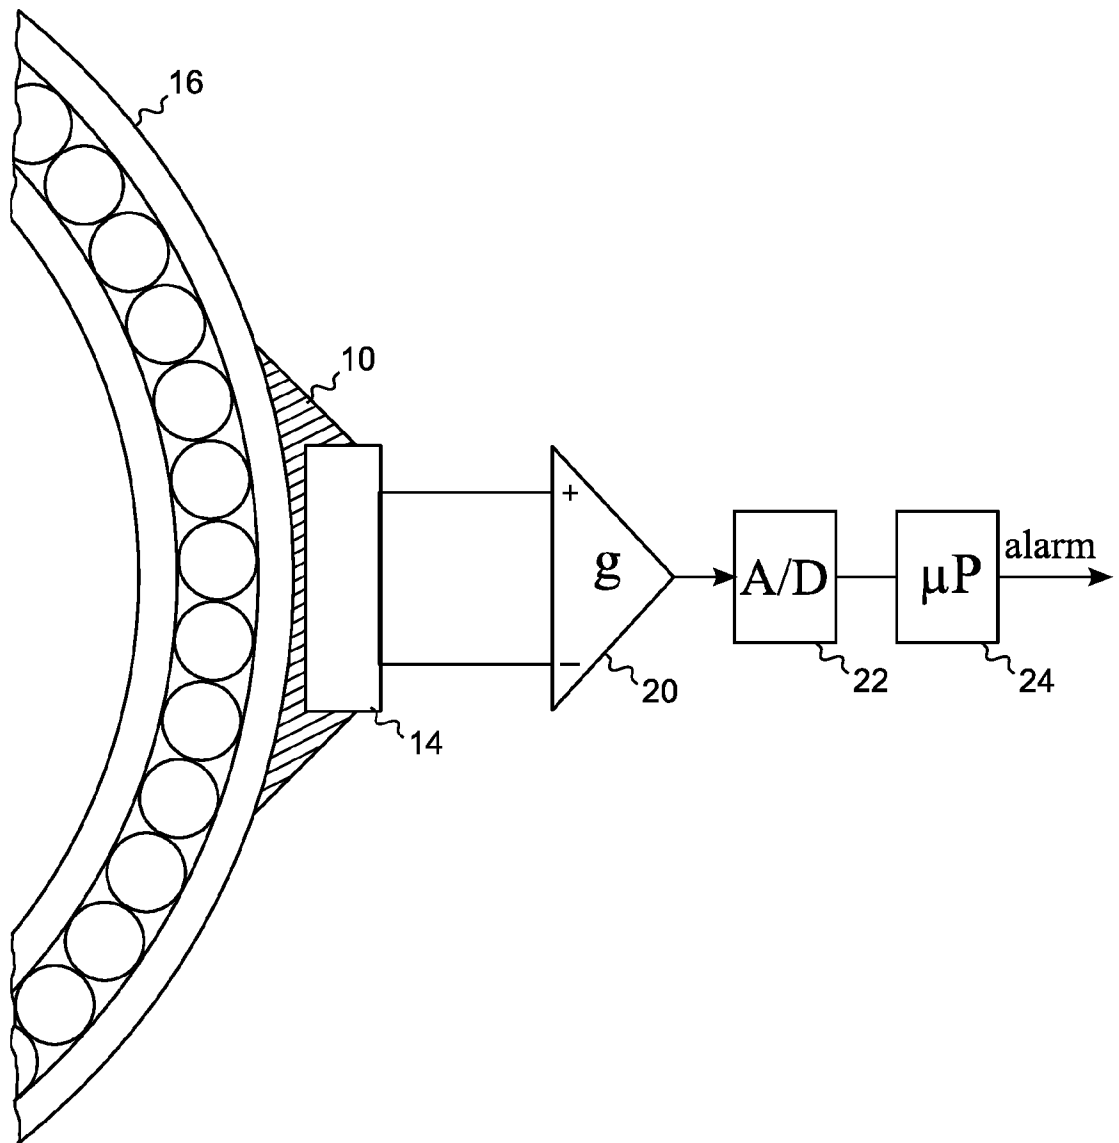


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/060071

A. CLASSIFICATION OF SUBJECT MATTER

INV. G01N29/14 B06B1/06 G01N29/28 G10K11/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01N B06B G10K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/221805 A1 (OGURA TAKASHI [JP] ET AL) 29 August 2013 (2013-08-29) abstract; figures 1-9 paragraphs [0069] - [0072] -----	1,2,4-7
X	EP 0 401 643 A2 (INTERATOM [DE]) 12 December 1990 (1990-12-12) abstract; claim 1; figure 1 column 3, line 23 - line 28 -----	1,2,5-7
X	US 2 427 348 A (BOND WALTER L ET AL) 16 September 1947 (1947-09-16) abstract column 2, line 15 - column 3, line 47 ----- -/--	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 July 2015

Date of mailing of the international search report

30/07/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Uttenthaler, Erich

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/060071

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 663 842 A (MILLER DARROW L) 16 May 1972 (1972-05-16) abstract; figures 1-3 column 3, line 31 - column 4, line 19 -----	1,3-7
X	WO 2013/160165 A2 (SKF AB [SE]) 31 October 2013 (2013-10-31) abstract; figures 1-2 page 7, paragraph 3 - page 8, paragraph 5 page 1, paragraph 1 - paragraph 2 -----	1,3-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/060071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013221805 A1	29-08-2013	US 2013221805 A1	29-08-2013
		WO 2012144226 A1	26-10-2012
EP 0401643 A2	12-12-1990	DE 8906992 U1	04-10-1990
		EP 0401643 A2	12-12-1990
US 2427348 A	16-09-1947	NONE	
US 3663842 A	16-05-1972	NONE	
WO 2013160165 A2	31-10-2013	AU 2013251814 A1	30-10-2014
		AU 2013251854 A1	06-11-2014
		CN 104303036 A	21-01-2015
		CN 104395725 A	04-03-2015
		EP 2841911 A2	04-03-2015
		EP 2841912 A2	04-03-2015
		WO 2013160165 A2	31-10-2013
		WO 2013160172 A2	31-10-2013