



(43) International Publication Date
18 September 2014 (18.09.2014)

- (51) International Patent Classification:
A61F 2/00 (2006.01)
- (21) International Application Number:
PCT/EP2014/000468
- (22) International Filing Date:
21 February 2014 (21.02.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10 2013 004 574.6 11 March 2013 (11.03.2013) DE
- (71) Applicant: **JOHNSON & JOHNSON MEDICAL GMBH** [DE/DE]; Robert-Koch-Strasse 1, 22851 Norderstedt (DE).
- (72) Inventors: **PRIEWE, Jörg**; Kumbbogen 43, 24113 Kiel (DE). **HARMS, Volker**; Grädenerstrasse 15, 20257 Hamburg (DE).
- (74) Agents: **BOTH, Georg** et al.; Uexküll & Stolberg, Beselerstrasse 4, 22607 Hamburg (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CL, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SURGICAL IMPLANT

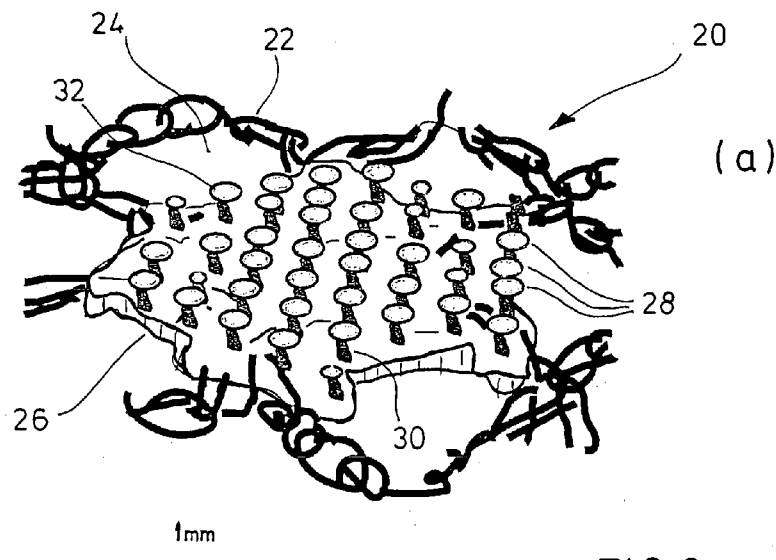


FIG. 3

(57) Abstract: A surgical implant (20) comprises a flexible basic structure (22) having a face and a plurality of resorbable film pieces (26) attached to the face of the basic structure (22). Each film piece (26) comprises a plurality of solid protrusions (28) emerging from the respective film piece (26) in a direction away from the basic structure (22).



Surgical Implant

The invention relates to a surgical implant, in particular to a tissue reinforcing implant for repair of inguinal hernias and/or ventral/incisional hernias.

5 Hernia repair is one of the most common surgical procedures, with approximately 6.4 million procedures performed globally every year. Approximately 3.1 million hernias (48%) are repaired with flat mesh annually.

10 The mesh serving as a surgical implant reinforces the area of the hernia. To achieve a safe fixation, the mesh can be sutured to the bodily tissue close to the hernia. However, the suturing step delays the surgical procedure and can cause post-surgical pain to the patient, e.g. due to nerve damage.

15

WO 2003/099160 A discloses a surgical implant comprising a knobbed film which can be connected to a surgical mesh. The knobs are hollow and increase the flexibility of the film. The knobbed film can be produced from a resorbable polymer film
20 using a thermal deforming process. Depending on the design, the knobs may increase or decrease the friction between the implant and the bodily tissue, thus achieving a fixation effect or enhanced mobility, respectively.

25 EP 2 476 444 A describes a medical device including a porous substrate and a film formed within the pores of the substrate. This device does not exhibit self-fixation properties.

30 WO 2011/026987 A discloses a prosthetic fabric (mesh) comprising an arrangement of yarns and barbs protruding outwards relative to a face of the fabric. The barbs, which serve as a fixation aid, may be formed from yarns or, as hooks produced

- 2 -

from a biocompatible material, are attached to the fabric. The other face of the fabric comprises a microporous layer made of a bio-resorbable material. The barbs are generally sharp due to a cutting process. To decrease the tendency of this product to adhere to itself, e.g. when folded for delivery through a trocar sleeve, the barbs are covered with a coating made of a water-soluble material, which dissolves during the surgical operation. Nevertheless, the handling of the product may be difficult.

10

WO 99/45860 A describes generally hard biocompatible substrates comprising an array of surface projections of nanometer dimensions, which prevent cells from attachment.

15

US 6,106,558 discloses a neuro-decompression device utilizing particular surface topographies to disrupt scar tissue formation around nerves. The device comprises protrusions formed in a foamed basis material.

20

The problem of the invention is to provide a surgical implant, in particular for the repair of hernias, which reduces the need for suturing and can be handled during a surgical procedure in an easy, quick and safe way.

25

This problem is solved by a surgical implant according to claim 1. Claim 21 is directed to a process of manufacturing such surgical implant. Advantageous embodiments of the invention follow from the dependent claims.

30

The surgical implant according to the invention comprises a flexible basic structure having a face and a plurality of resorbable film pieces attached to the face of the basic structure. Each film piece comprises a plurality of solid protrusions emerging from the respective film piece in a direction away from the basic structure.

35

In advantageous embodiments of the invention, the basic structure comprises a mesh-like structure having pores. The term "mesh-like structure" is to be understood rather general and includes a porous flexible sheet in general and more particularly, e.g., meshes (surgical meshes), tapes, perforated films, non-woven fabric, woven fabric, knitted sheets, knitted tapes, braided sheets, braided tapes, collagenous fibrillar sheets, mesh pouches and mesh plugs. In mesh pouches or mesh plugs, a mesh is folded or rolled and optionally fixed to itself at some points or areas, or a corresponding structure is provided from several mesh pieces. Other examples for porous basic structures are foams and sponges.

For example, the basic structure can comprise a surgical mesh having pores, wherein the above face is formed by one side of the surgical mesh. In this case, the implant can be used, e.g., for hernia repair. It is also conceivable to use the surgical implant according to the invention as, e.g., a pelvic mesh or a breast implant. In such cases, the basic structure of the implant is adapted to the desired purpose. Generally, it is not required that resorbable film pieces are attached over the entire face of the mesh-like structure or, more general, of the basic structure.

All the film pieces of the implant may have the same size. In other embodiments, the film pieces have different sizes. Generally, the presence of the film pieces does not significantly affect the flexibility of the basic structure because the film pieces are independent pieces which do not form a continuous layer. In contrast thereto, a surgical implant designed, e.g., as a composite of a surgical mesh and a film layer covering the whole surface of the surgical mesh would be generally stiffer, which could be disadvantageous, depending on the kind of surgery contemplated.

The protrusions provide to the surgical implant self-fixating properties on biological soft tissue. They mechanically grip into the soft tissue, which results in enhanced resistance to shear forces as well as peel forces, in particular if the protrusions are solid. Generally, there is no need for securing the implant additionally by sutures, which decreases the risk of injury and pain to the patient and facilitates the surgical procedure and reduces the time needed therefore. Nevertheless, if required, additional sutures might be applied.

In advantageous embodiments of the inventions, at least one protrusion is rod-like, pillar-like or mushroom-shaped. A shape defined by a respective body and a respective head, the body emerging from the film piece and terminating in the head, and the head projecting laterally with respect to the body, is a kind of mushroom shape, but somewhat more general. Such mushroom-like protrusions can exhibit a particular effective self-fixation effect. Here and in the following, the term "at least one" includes embodiments in which there are many protrusions on the surgical implant and/or in which all protrusions have the same shape. Of course, the implant might also comprise protrusions of different shapes or sizes or protrusions provided in different area densities on respective film pieces.

Preferably, at least one film piece comprises a protrusion having a longitudinal axis which emerges from the film piece at an angle relative to the surface of the film piece in the range of from 50° to 90° or in the range of from 70° to 90°.

The protrusions may have a large variety in dimensions. For example, at least one protrusion can have a length, measured along a longitudinal axis of the protrusion, in the range of

- 5 -

from 20 μm to 5000 μm or in the range of from 100 μm to 500 μm or of from 20 μm to 400 μm .

5 If the total area of all film pieces is not too large, the flexibility of the basic structure is not much decreased by the presence of the film pieces. In advantageous embodiments, 10% to 50% of the area of the face of the basic structure are covered by film pieces, which also discloses all intermediate values in this range.

10

On the other hand, if the total area of all film pieces comprising protrusions is not too small, the desired self-fixation effect will be achieved. The optimum area also depends on the properties of the protrusions and the biological 15 tissue in question. Generally, an area of greater than 5% of the area of the face of the basic structure might already be sufficient.

In advantageous embodiments of the invention, the basic structure 20 comprises a mesh-like structure having pores, as already mentioned before. In this case, at least one film piece may have a size being equal to or greater than the size of a pore of the mesh-like structure. For example, 90% of the film pieces could have a size greater than the mesh pores. It is 25 not required that the circumference line of a particular film piece coincides with the lines defined by the material of the mesh. For example, the film pieces may be designed as strips or crosses which, e.g., cover a crossing point of the mesh-like structure, or just do not cover a crossing point but are 30 attached to other lines of the mesh structure. If the pores of the mesh-like structure are large enough, it is also conceivable that a film piece has a size smaller than the size of a pore of the mesh-like structure.

- 6 -

A mesh-like basic structure is preferably macro-porous with typical pore dimensions of greater than 0.5 mm, which supports good tissue integration. Other pore sizes are conceivable as well, however. As already indicated above, a mesh or mesh-like
5 basic structure can be provided in any kind known in the art, e.g., warp-knitted or weft-knitted or crochet-knitted or woven. A design as perforated film or foil is also conceivable. Any filaments of the mesh may be bio-absorbable or non-absorbable, depending on the material. Thus, the mesh can be
10 absorbable (resorbable), non-absorbable or partially absorbable. The filaments can be designed as mono-filaments or as multi-filaments. Tape yarns and drawn film tapes are conceivable as well. Any blends, mixtures or composites of materials and designs are also possible. Moreover, the filaments can be
15 coated. A mesh designed as a perforated sheet is conceivable as well. Generally, the mesh-like structure is flexible and has an areal basic shape. For example, it can be based on a commercially available hernia repair mesh.

20 Preferably, the film pieces are arranged in a regular pattern. Examples are a centric pattern (in which the film pieces are arranged in one or more than one concentric rings about a common center) or, if the basic structure comprises a mesh, in an inverted grid or inverted mesh pattern (in which the film
25 pieces follow the mesh pattern and have sizes in the order of one or more than one mesh pore).

The film pieces can be provided in a large variety of shapes (e.g., as hexagon, rounded hexagon, triangle, rounded triangle,
30 rectangle, rounded rectangle, square, rounded square, circle, ellipse, or cross-shaped, snake-like, spiral-like, etc.) and sizes (e.g. with a typical length or width dimension in the range of from 0.7 mm to 50 mm or of from 2 mm to 5 mm). The variety in patterns has already been mentioned above and
35 can be extended to irregular patterns as well.

- 7 -

Typically (but not exclusively), each film piece is surrounded by an area of the basic structure free from other film pieces, wherein this area has a width, e.g., in the range of from 1 mm to 50 mm or in the range of from 1 mm to 9 mm. However, it is also conceivable that film pieces touch each other.

Moreover, film pieces may be connected to each other via struts, e.g. in pairs (e.g. with one strut between the members of the pair), in small groups or in larger groups. Such struts can be made from the same material as the film pieces. If the struts are relatively narrow, they will form connectors which are not stiff and do not deteriorate the flexibility behavior of the implant.

The film pieces can have a thickness, e.g., in the range of from 5 μm to 250 μm , or in the range of from 10 μm to 200 μm . This is the thickness of the film in an area between protrusions. Generally, the thickness may vary and can be significantly smaller than the thickness of an originally flat film layer used to produce the film pieces including protrusions (see below for examples) because, during the production process, part of the material of the original film layer can be transferred to the protrusions.

Preferably, the film pieces and the respective protrusions are made in one piece, see below for examples of manufacturing processes.

If the basic structure comprises a mesh-like structure having the face and an opposite face and comprising pores, a film can also be attached to the opposite face. This film may have a variety of properties. For example, it may be provided as single piece, e.g. as a contiguous film covering part of or the whole opposite face of the mesh-like structure. Or it may be

provided as a plurality of film pieces, similar to the film pieces at the face. Moreover, the film at the opposite face may be resorbable or non-resorbable. It may comprise protrusions in order to achieve a self-fixation effect, or it may be
5 more or less smooth, without protrusions. If the film has barrier properties, bodily tissue can be prevented from growing into the pores of the mesh-like structure.

In another advantageous embodiment of the invention, the effect of film pieces provided with protrusions on both sides
10 (face and opposite face) of the basic structure is achieved by one layer of film pieces. In this case, the basic structure is mesh-like and the film pieces extend into the mesh pores present in the basic structure, wherein protrusions emerge from
15 the film pieces in both directions, away from the face of the basic structure and away from the opposite face of the basic structure. An example of a manufacturing process for such implant is presented further below.

20 The film pieces are resorbable because some time after the surgical operation, the self-fixation effect is not needed any more. If the film pieces have disintegrated or have been absorbed at that time, tissue growth at the basic structure and the healing process may be improved. If the basic structure is
25 also resorbable, preferably the film pieces are faster resorbable than the basic structure.

Suitable materials for the resorbable film pieces are well known in the art. The selection of the film material depends,
30 e.g., on the resorption period. Considering processes of manufacturing the implant according to the invention, it may also depend on the melting temperature of the film material relative to that of the material of the basic structure (see below). For example, the film pieces may comprise poly-p-
35 dioxanone ("PDS"), copolymers of glycolide and ϵ -caprolactone

(e.g., "Monocryl" of Johnson & Johnson Medical GmbH) and/or copolymers of glycolide and lactide (in particular in the ratio 90:10, "Vicryl" of Johnson & Johnson Medical GmbH). Generally, a large variety of synthetic bioabsorbable polymer materials can be used, for example polyhydroxy acids (e.g., polylactides, polyglycolides, polyhydroxybutyrates, polyhydroxyvalerates), copolymers of lactide and trimethylene carbonate, copolymers of glycolide, lactide and trimethylene carbonate, polycaprolactones, polydioxanones, synthetic (but also natural) oligo- and polyamino acids, polyphosphazenes, polyanhydrides, polyorthoesters, polyphosphates, polyphosphonates, polyalcohols, polysaccharides, polyethers. However, naturally occurring materials such as collagens and gelatine or naturally derived materials such as bioabsorbable gel films cross-linked with omega 3 fatty acids or oxygenized regenerated cellulose (ORC) are conceivable as well.

Suitable materials for the basic structure are also well known in the art. Non-resorbable or very slowly resorbable substances include, e.g., polyalkenes (e.g. polypropylene or polyethylene), fluorinated polyolefins (e.g. polytetrafluoroethylene (PTFE) or polyvinylidene fluoride), polyamides, polyurethanes, polyisoprenes, polystyrenes, polysilicones, polycarbonates, polyarylether ketones (PEEKs), polymethacrylic acid esters, polyacrylic acid esters, aromatic polyesters, polyimides as well as mixtures and/or co-polymers of these substances. Other advantageous materials, many of them being resorbable, include polyhydroxy acids, polylactides, polyglycolides, copolymers of lactide and trimethylene carbonate, copolymers of glycolide, lactide and trimethylene carbonate, polyhydroxybutyrates, polyhydroxyvalerates, polycaprolactones, polydioxanones, poly-p-dioxanone, synthetic and natural oligo- and polyamino acids, polyphosphazenes, polyanhydrides, polyorthoesters, polyphosphates, polyphosphonates, polyalcohols, polysaccharides, polyethers, cellulose, bacterial cellu-

- 10 -

lose, polyamides, aliphatic polyesters, aromatic polyesters, copolymers of polymerizable substances thereof, resorbable glasses. Particularly advantageous materials include polypropylene (non-resorbable), blends of polyvinylidene fluoride and copolymers of vinylidene fluoride and hexafluoropropene (non-resorbable, e.g. "Pronova" of Johnson & Johnson Medical GmbH) PTFE (non-resorbable; including ePTFE and cPTFE), polysilicones (non-resorbable), poly-p-dioxanone ("PDS", resorbable), copolymers of glycolide and lactide (resorbable), in particular copolymers of glycolide and lactide in the ratio 90:10 ("Vicryl", resorbable), copolymers of glycolide and ϵ -caprolactone ("Monocryl", resorbable). Biologic materials such as allograft and xenograft are conceivable as well.

15 In summary, the surgical implant according to the invention has a plurality of advantages. The self-fixation properties result in a better comfort to the patient due to a reduced risk of chronic pain that may be associated with suture fixation. The basic structure, e.g. a surgical mesh, is securely held in place during the tissue integration period so that mesh migration is prevented. Afterwards, the film pieces including the protrusions may be absorbed.

Moreover, the time efficiency during the surgical operation is improved. In particular, the surgical implant can be easily prepared and handled intra-operatively. Generally, because of the design of the protrusions, the implant does not tend to adhere to itself when in a rolled or folded state. Thus, the implant is well suitable for laparoscopic placement. It can be forwarded to the site of surgery through a trocar sleeve and easily be unrolled or unfolded thereafter, without sticking to itself. Moreover, although the implant is self-fixating, it allows for repositioning as it is generally possible to peel the implant off from bodily tissue and position it again at a different or displaced location. Since it is generally not re-

- 11 -

quired to fix the implant by sutures, the surgical procedure tends to be shorter. If nevertheless desired, the implant can be additionally fixated by, e.g., suturing.

5 Prior art films or self-fixating films connected to a surgical mesh may impart stiffness which reduces the conformity to anatomical structures and also reduces the number of attachment points at an uneven tissue structure. In contrast thereto, the surgical implant according to the invention largely preserves
10 the flexibility and elasticity of the basic structure and conforms well, and at the same time sticks well to anatomical structures even if these are not plan.

If the surgical implant is designed as a soft-tissue implant,
15 e.g. a hernia implant, and is adapted to fix itself at least partially in soft tissue such as muscle or fat, the friction between the surgical implant and the soft tissue can be increased in at least one direction (measured essentially in the plane of the implant) by a factor of 2 or more, compared to a
20 corresponding implant without protrusions.

In a particularly advantageous embodiment, the surgical implant according to the invention comprises a basic structure designed as a long-term stable soft-tissue repair mesh comprising pores having a size of at least 1 mm, and the total
25 area of all film pieces is less than 25% of the area of the face of the basic structure. The protrusions are mushroom-shaped, are made in one piece with the respective film pieces and have a length, measured along a longitudinal axis of the
30 respective protrusion, in the range of from 300 μm to 500 μm . Optionally, additional film pieces with protrusions can be provided on the opposite side of the mesh.

A surgical implant according to the invention may be manufactured by using the following steps: providing a mold contain-
35

ing an array of cavities, each cavity having the shape of one protrusion; filling the mould with a fluid material forming the film pieces and the protrusions according to a pattern defining the shapes and locations of the film pieces; hardening
5 the fluid material; attaching the film pieces to a basic structure, with the protrusions pointing away from the basic structure; removing the mold.

The order of how these steps are listed above does not necessarily represent the sequence in which the steps are executed
10 when the process of manufacturing according to the invention is performed, which is explained in more detail further below.

The mold is preferably flexible and comprises, e.g., silicone, polyurethane, a natural rubber or a synthetic rubber. Silicone, e.g., is very flexible and thermo-stable. The mold is basically planar and provides a surface for forming the film pieces. Extending from this surface, there are cavities, each one having the shape of one protrusion. A silicone mold, e.g.,
15 can be manufactured, e.g., by using a mechanically produced master (a positive of the array of protrusions) of a metal or a polymer as a master mold, which is filled with silicone precursors and reacted. Due to the large elasticity of silicone, the master mold can be removed after the reaction is finished,
20 and in use of the mold the mold can be separated from the protrusions formed by the mold, even in case of laterally projecting parts of the protrusions.

In advantageous embodiments of the process, the pattern defining the shapes and locations of the film pieces is determined
30 by a mask placed between the basic structure and the material to be filled in the mold.

The steps of filling the mold with a fluid material which forms film pieces including the protrusions, of hardening the
35

- 13 -

fluid material and of attaching the film pieces to a basic structure, in particular a surgical mesh, may be performed essentially at the same time, for example in the following way:

5 In this advantageous embodiment, the process uses a layered assembly comprising, in this order: the mold, a surgical mesh (e.g. of polypropylene) as the basic structure, the mask, a sheet of material (e.g. of poly-p-dioxanone) for the film pieces having a lower melting point than the surgical mesh,
10 and a flexible plate device having a closed surface. The sheet of material is heated to a temperature being higher than its melting point and lower than the melting point of the surgical mesh so that the sheet becomes fluid. Then the mold and the plate device are pressed towards each other, the plate device
15 serving as a counter-part or kind of anvil, whereby the material for the film pieces is transferred through the mask into the mold and, at the same time, embeds the surgical mesh. After decreasing the temperature, the fluid material solidifies (which is the hardening step mentioned above) so that the mold
20 can be removed, due to its high elasticity. In this way, the film pieces are shaped by the mask and firmly connected to the surgical mesh, and the protrusions are formed, all steps occurring virtually simultaneously.

25 In a variant of the latter embodiment, the initial positions of the surgical mesh and the sheet of material for the film pieces are interchanged. In this case, the material for the film pieces is transferred into the mold and embedded in the surgical mesh in those areas which are not shielded by the
30 mask.

The flexible plate device can comprise a closed surface. Alternatively, it may be designed as a second mold, which is flexible and contains an array of cavities, each cavity having
35 the shape of one protrusion. This second mold is similar to

- 14 -

the other mold and can be used to prepare protrusions on the opposite face of the mesh to produce a surgical mesh implant comprising protrusions on both faces.

5 Depending on the materials used and the details of the process, the hardening step may be performed by evaporation of a solvent, by cooling (as in the examples above) or by reacting reactants forming the film and the protrusions.

10

In the following, some aspects of the invention are further disclosed in general terms.

Examples of applications

15

Soft tissue repair implants such as surgical meshes are mainly used when a defect or weakness exists in soft tissue or a tissue hole has to be filled or covered:

20

(a) Ventral and inguinal hernias occur when a tissue, a structure, or part of an organ protrudes through an abnormal opening in the body. It is most commonly associated with the projection of the intestine through a weak point in the abdominal wall. Hernia repair devices could be made in different shapes and from different materials, in the form of flat devices, basically flat but curved devices, pouches, bags or folded into plugs.

25

30

(b) Surgical meshes, tapes or slings are used in the field of pelvic disorders like stress urinary incontinence or pelvic organ prolaps. In these applications, there may be a need to place the fabric in contact with the vaginal wall (e.g., a pelvic mesh) or in contact with the urethra such as with the GYNECARE® TVT system from Ethicon, Inc., wherein the inventive

- 15 -

assembly might support the locking in certain regions of the tape or mesh.

(c) Durapatches are used after brain surgery to cover and close the dura mata. The dura mater is the tough, inflexible fibrous sheath, which is the outermost of three layers that surround the brain and spinal cord. Commercial grafts are made up of either biologic (includes xenografts and allografts) or synthetic material. The inventive micro-protruded film patches in certain areas on one of the both sides might help to keep the implant in place.

(d) Rotator cuff reinforcement grafts are most often used in cases where existing tissue can no longer be used or treated to support the rotator cuffs functions.

(e) Absorbable pouches are used in the field of trauma surgery as a liver compression device to reduce bleeding, like "Vicryl Mesh bag A".

(f) Grafts in the field of breast reconstruction are used with the "TRAM-flap" procedure, where an autogeneous tissue reconstruction of the breast is performed with the transverse rectus abdominus myocutaneous (TRAM) flap from the chest. The abdominal wall donor site for the muscle flap might develop a potential abdominal wall weakness, bulging, and hernia. To prevent hernia, most surgeons will use a synthetic mesh when closing the abdomen. Fabrics such as absorbable meshes like "Vicryl" mesh or "TiGr matrix" are also used in breast augmentation or reconstruction i.e. in oncoplastic surgery which is defined as a combination of tumor excision, with appropriate margin including lymphectomy or mastectomy, and immediate reconstruction of the breast (Koo et al. 2011 "Results from Over One Year of Follow-Up for Absorbable Mesh Insertion in Partial

- 16 -

Mastectomy "Yonsei Med J 52(5):803-808, 2011). The inventive devices will help to minimize sutures, tacks or glues.

5 (g) Soft tissue repair devices are used as a filler, to bulk tissue e.g. in cosmetic surgery to remove wrinkles or in fistula surgery to fill the fistula channels. Depending on the intended use, absorbable materials might be used.

Film piece size and shape

10

Film pieces are preferably in the millimeter range of 1mm-10mm, not introducing much stiffness to the basic structure and having a thickness of $5\mu\text{m}$ - $500\mu\text{m}$. The film pieces can have any shape, e.g. circle, oval, triangle, rectangle, 15 square, pentagon, hexagon, cross, star.

The film-piece stiffness, shape, and overall thickness, and the film piece edges could be used, additionally to the micro-protrusions, to impart additional features like palpatetibility 20 to give orientation.

Film piece pattern and spacing

Depending on the intended implant use, the film pieces might 25 be arranged peripherally, centrally, or over the whole area. Preferably the total film area, compared to the implant face area, is less than 50%, particularly less than 25% for the total area pattern. For implants having only a central-area or peripheral film pattern, the total film area might be further 30 reduced to geometric considerations. The film piece pattern could be used to adjust parameters like bending stiffness in different directions. Preferably the film piece pattern does not impart much stiffness to the implant to allow conformability also with uneven structures or does not negatively impact

features like rolling and unrolling or folding and unfolding during laparoscopic surgery.

Film piece connection to basic structure

5

The film pieces can be connected to each other, in the case of a sandwich placement, and/or to the basic structure in a variety of different conventional ways, e.g., sewn, embroidered, bonded (including by thermal means), or welded thermally including ultrasonically. The welding techniques also include, 10 in a broader sense, thermal deformation of at least one of the films (below the melting point of the film). An absorbable melt glue such as polydioxanone as a relatively low melting bioabsorbable polymer might be used as a gluing member for 15 other film piece materials. Other soluble polymers such as polylactide, polycaprolactone or copolymers thereof might be used as solvent glues. Reactive glues like cyanoacrylates or isocyanates or oxiranes may also be used, if biocompatible.

20 Particularly preferred is a one-step process of micro-protrusion generation and connection to a porous tissue repair structure (basic structure). In the case of large-pore meshes, the film pieces are extending preferably over at least one part of the pore edge.

25

The micro-protruded film pieces are preferably enveloping/surrounding the basic structure at least in part. This helps to attach the film piece members even to low-attaching surfaces like PTFE or Polypropylene without any surface pre- 30 treatment.

Film piece micro-protrusions

The micro-protrusions are solid and preferably in the range of 20 μ m to 800 μ m, preferably 50 μ m-500 μ m, particular preferably
5 250 μ m-350 μ m, out of the film piece area.

The micro-protrusions alter the attachment to mammalian or human soft tissue during implant placement and or ingrowths.

10 Micro-protrusions are protruding preferably 45°-90° from the surface of the film pieces and could have a complex structure, like mushroom, curved rod, etc.

Preferred micro-mushrooms with a density of about 288 protrusions per cm² of film piece area were prepared. For example, mushrooms were determined by scanning electron microscopy having a height of 288 μ m, a foot thickness of 410 μ m diameter, a narrowed middle section of 177 μ m diameter, and a head section of 410 μ m diameter with a rim thickness of the mushroom head of
20 about 12 μ m.

Active ingredients

For example, it may be advantageous to provide an implant of
25 the present invention that has at least one biologically active or therapeutic ingredient which can optionally be released locally after the implantation. Substances which are suitable as active or therapeutic agents may be naturally occurring or synthetic, and include and are not limited to, for
30 example, antibiotics, antimicrobials, antibacterials, antiseptics, chemotherapeutics, cytostatics, metastasis inhibitors, antidiabetics, antimycotics, gynecological agents, urological agents, anti-allergic agents, sexual hormones, sexual hormone inhibitors, haemostyptics, hormones, peptide-hormones, antide-
35 pressants, vitamins such as Vitamin C, antihistamines, naked

- 19 -

DNA, plasmid DNA, cationic DNA complexes, RNA, cell constituents, vaccines, cells occurring naturally in the body or genetically modified cells. The active or therapeutic agent may be present in various forms including in an encapsulated form or in an adsorbed form. With such active agents, the patient outcome may be improved or a therapeutic effect may be provided (e.g., better wound healing, or inflammation inhibition or reduction).

10 One preferred class of active agents is antibiotics that include such agents as gentamicin or ZEVTERA™ (ceftobiprole medocaryl) brand antibiotic (available from Basilea Pharmaceutica Ltd., Basel Switzerland). Other active agents that may be used are highly effective, broad-band antimicrobials against
15 different bacteria and yeast (even in the presence of bodily liquids) such as octenidine, octenidine dihydrochloride (available as active ingredient in Octenisept® disinfectant from Schülke & Mayer, Norderstedt, Germany), polyhexamethylene biguanide (PHMB) (available as active ingredient in Lavasept®
20 from Braun, Switzerland), triclosan, copper (Cu), silver (Ag), nanosilver, gold (Au), selenium (Se), gallium (Ga), taurolidine, N-chlorotaurine, alcohol-based antiseptics such as Listerine(R) mouthwash, N a-lauryl-L-arginine ethyl ester (LAE), myristamidopropyl dimethylamine (MAPD, available as an
25 active ingredient in SCHERCODINE™ M), oleamidopropyl dimethylamine (OAPD, available as an active ingredient in SCHERCODINE™ O), and stearamidopropyl dimethylamine (SAPD, available as an active ingredient in SCHERCODINE™ S), fatty acid monoesters, and most preferably octenidine dihydrochloride (hereinafter
30 referred to as octenidine), Taurolidine, and PHMB.

One preferred class of active agents are local anesthetics that includes such agents as: Ambucaine, Benzocaine, Butacaine, Procaine/Benzocaine, Chlorprocaine, Cocaine, Cyclo-
35 methycaine, Dimethocaine/Larocaine, Etidocaine, Hydroxypro-

- 20 -

caine, Hexylcaine, Isobucaine, Paraethoxycaine, Piperocaine, Procainamide, Propoxycaine, Procaine/Novocaine, Proparacaine, Tetracaine/Amethocaine, Lidocaine, Articaine, Bupivacaine, Dibucaine, Cinchocaine/Dibucaine, Etidocaine, Levobupivacaine, 5 Lidocaine/Lignocaine, Mepivacaine, Metabutoxycaine, Piridocaine, Prilocaine, Propoxycaine, Pyrrocaine, Ropivacaine, Tetracaine, Trimecaine, Tolycaine, combinations thereof, e.g., Lidocaine/prilocaine (EMLA) or naturally derived local anesthetics including Saxitoxin, Tetrodotoxin, Menthol, Eugenol 10 and pro-drugs or derivatives thereof.

Additionally, a contrast agent may be incorporated into the devices of the present invention. Such a contrast agent may be a gas or gas creating substance for ultrasound contrast or MRI 15 contrast, such as metal complexes like GdDTPA or superparamagnetic nanoparticles (Resovist™ or Endorem™) as taught in EP 1 324 783 B1, which is incorporated by reference. X-Ray visible substances might be included as shown in the EP 1 251 794 B1 (incorporated by reference) including pure zirconium dioxide, 20 stabilized zirconium dioxide, zirconium nitride, zirconium carbide, tantalum, tantalum pentoxide, barium sulphate, silver, silver iodide, gold, platinum, palladium, iridium, copper, ferric oxides, not very magnetic implant steels, non-magnetic implant steels, titanium, alkali iodides, iodated 25 aromatics, iodated aliphatics, iodated oligomers, iodated polymers, alloys of substances thereof capable of being alloyed. The contrast agents may be included in or on a mesh, or in or on the film pieces.

30 Basic Structure

Depending upon the intended use of the tissue repair device, a biocompatible long-term-stable polymer may be used to manufacture the soft-tissue repair member (basic structure). By a 35 long-term-stable polymer is meant a non-resorbable biocompati-

- 21 -

ble polymer, or a bioabsorbable polymer which absorbs or degrades slowly, for example which possesses at least 50% of its original tearing strength in vivo 60 days after implantation. The latter group includes substances such as polyamides, which
5 generally are regarded as resistant, as they are not designed as resorbable materials, but are attacked over time by body tissue and tissue fluids. Preferred materials for the fabric repair member include polyhydroxy acids, polylactides, polyglycolides, polyhydroxy butyrates, polyhydroxy valerates,
10 polycaprolactones, polydioxanones, synthetic and natural oligo- and polyamino acids, polyphosphazenes, polyanhydrides, polyorthoesters, polyphosphates, polyphosphonates, polyalcohols, polysaccharides, polyethers, cellulose, bacterial cellulose, polyamides, aliphatic polyesters, aromatic polyesters,
15 copolymers of polymerizable substances thereof, resorbable glasses. Particularly preferred materials for the fabric repair member include polypropylene and mixtures of polyvinylidene fluoride and copolymers of vinylidene fluoride and hexafluoropropene, PTFE, ePTFE, and cPTFE, silicone, but other
20 conventional biocompatible materials are also useful. The fabric repair members may be constructed from monofilaments, multifilaments, or combinations thereof. The fabric repair member may contain, in addition to a long-term stable polymer, a resorbable polymer (i.e., bioabsorbable or biodegradable). The
25 resorbable and the long-term stable polymer preferably contain monofilaments and/or multifilaments. The terms resorbable polymers and bioabsorbable polymers can be used synonymously. The term bioabsorbable is defined to have its conventional meaning.

30

If only short-time tissue support is needed, like for fistula plugs, the fabric repair member may be manufactured from a bioabsorbable polymer or bioabsorbable polymers without any long-term- stable polymers.

35

Optionally the basic structure might be prepared from a biologic material such as allograft, xenograft.

Additional layer or layers

5

Tissue repair or reinforcing implants, such as meshes, may be designed to enable tissue in-growth on one side (e.g., by having open pores or interstices) and resist tissue ingrowth on the opposing side (e.g., by having a smooth surface such as a
10 film or non-porous layer, conventionally referred to in the art as an adhesion barrier). This is important when the mesh implants are used or implanted in the abdominal area, for example in hernia repair procedures, where adhesion of the peritoneum (i.e., tissue ingrowth) to the implant is desired while
15 tissue ingrowth or adhesions on the visceral side is unwanted (i.e., anti-adhesion). Several conventional products are known in the art and commercially available having one basically smooth side which is an adhesion barrier and one porous or
20 rough side for tissue in-growth. The products may be completely absorbable, completely non-absorbable, or partially absorbable and partially non-absorbable. The products may be composites of multiple mesh layers and adhesion resistant barriers. Certain implants are ready for use out of the package (e.g., Proceed[®] Hernia Mesh, PhysioMesh[®]; Gore DualMesh[®], and
25 Bard Composix[®] Mesh) and other mesh implants are required to be pre-soaked for several minutes in water or saline solution prior to implantation in order to swell the adhesion barrier and make the implant sufficiently soft for implantation and placement in the patient (e.g., Sepramesh[®]; Parietex[®] Compos-
30 ite).

Additional layer/layers might be added to the surgical implant either between multiple-protruded film pieces and the basic structure or on the opposite side, or on both locations, which
35 would result in the following assemblies:

- 23 -

film pieces + additional layer + basic structure or
film pieces + basic structure + additional layer or
film pieces + additional layer + basic structure + additional layer.

5

The additional layer or layers could have different effects on the tissue repair implant like imparting stiffness or improving tissue regeneration or ingrowth.

10 The additional layers that are used to manufacture the tissue repair implant devices of the present invention should have a thickness that is sufficient to effectively prevent adhesions from forming. The thickness will typically range from about 1
15 μm to about 500 μm , and preferably from about 5 μm to about 50
20 μm . The films suitable for use as the first or optional second films of the tissue repair devices of the present invention include both bioabsorbable and non-absorbable films. The films are preferably polymer-based and may be made from various conventional biocompatible polymers. Non-resorbable or very
25 slowly resorbable substances include polyalkenes (e.g. polypropylene or polyethylene), fluorinated polyolefins (e.g. polytetrafluoroethylene or polyvinylidene fluoride), polyamides, polyurethanes, polyisoprenes, polystyrenes, polysilicones, polycarbonates, polyarylether ketones (PEEKs), polymethacrylic acid esters, polyacrylic acid esters, aromatic polyesters, polyimides as well as mixtures and/or co-polymers of
30 these substances. Also useful are synthetic bioabsorbable polymer materials, for example polyhydroxy acids (e.g. polylactides, polyglycolides, polyhydroxybutyrates, polyhydroxyvalerates), polycaprolactones, polydioxanones, synthetic and natural oligo- and polyamino acids, polyphosphazenes, polyhydrides, polyorthoesters, polyphosphates, polyphosphonates, polyalcohols, polysaccharides, polyethers. However, naturally
35 derived materials such as collagens, gelatin or natural-derived materials such as bioabsorbable omega3-fatty-acid-

crosslinked gel films or oxygenized regenerated cellulose (ORC) can also be used.

5 The films used in the tissue repair devices of the present invention may cover the entire outer surfaces of the repair fabric member (basic structure) or a part thereof. In some cases, it is beneficial to have films overlapping the borders of the repair fabric. The term border used herein means a peripheral edge or central edge if there is a hole in the mesh, e.g., for
10 receiving an anatomical structure like the bowel for treating or preventing parastomal hernia or the spermic cord.

The films may be perforated before or after assembling the device, or the films may be manufactured in such a manner that
15 they contain pores. However, it will be appreciated by those skilled in the art that precautions have to be taken to prevent damage to the fabric member or the second film when perforating an assembled device.

20 The films can be joined together in various conventional manners, for example by sewing, gluing, welding, and laminating. The joining/connection can be about the periphery, in the center region, or over the whole assembly as a point linear or overall connection, making sure that the pores of the top and
25 bottom films are substantially offset.

The films can be connected to each other and/or to the repair fabric member (basic structure) in variety of different conventional ways, e.g., sewn, embroidered, bonded (including by
30 thermal means) in partial regions (e.g., in points or along lines or strips, such as the peripheral edge), or welded thermally including ultrasonically. The welding techniques also include, in the wider sense, thermal deformation of at least one of the films (below the melting point of one film). The

- 25 -

implant can optionally have embroidered structures designed as reinforcements, e.g. rib-like structures.

Particularly preferred for the devices of the present invention is a film-to-film connection using heat lamination techniques, optionally by using an additional biocompatible melt glue such as polydioxanone as a relatively low-melting bioabsorbable polymer. Other soluble polymers such as polylactide, polycaprolactone or copolymers thereof might be used as solvent glues. Reactive glues like cyanoacrylates or isocyanates or oxiranes may also be used if biocompatible.

In the following, the invention is further explained by means of embodiments. The drawings show in

Figure 1 in part (a) a three-dimensional view of an embodiment of the surgical implant according to the invention and in part (b) an enlarged view of a film piece comprising protrusions of this embodiment,

Figure 2 a three-dimensional view of a variant of the embodiment of Figure 1,

Figure 3 another embodiment of the surgical implant according to the invention, i.e. in part (a) an enlarged three-dimensional view of a film piece including mushroom-shaped protrusions and in part (b) a plan view of part of the implant,

Figure 4 in parts (a) to (h) three-dimensional representations of several embodiments of protrusions for film pieces of surgical implants according to the invention,

- 5 Figure 5 another embodiment of the surgical implant according to the invention, i.e. in part (a) a plan view of part of the film piece pattern of the implant, in part (b) a magnified view of a film piece according to part (a) and in part (c) a three-dimensional view of the film piece of part (b),
- 10 Figure 6 another embodiment of the surgical implant according to the invention, i.e. in part (a) a plan view of part of the film piece pattern of the implant, in part (b) a magnified view of a film piece according to part (a) and in part (c) a three-dimensional view of the film piece of part (b),
- 15 Figure 7 a schematic illustration of an embodiment of a process of manufacturing a surgical implant according to the invention, see Example 1,
- 20 Figure 8 a diagram illustrating a geometric calculation related to the embodiment of the surgical implant according to the invention described in Example 1,
- 25 Figure 9 a top view of the embodiment of the surgical implant according to the invention described in Example 3,
- Figure 10 a schematic illustration of another embodiment of a process of manufacturing a surgical implant according to the invention, see Example 4, and
- 30 Figure 11 a schematic illustration of another embodiment of a process of manufacturing a surgical implant according to the invention, see Example 7.
- 35 Figure 1 illustrates a surgical implant 1, which comprises a flexible basic structure designed as a surgical mesh 2 serving

as a soft-tissue repair sheet. The face of the mesh 2 pointing upwards in the three-dimensional view of Figure 1(a) is designated by 3. In the embodiment, the mesh 2 includes pores 4 of a hexagonal shape, which are arranged in a honeycomb pattern.

5

A plurality of film pieces 6 is attached to face 3 of the mesh 4. In the embodiment, the film pieces 6 do not adhere to each other. Each film piece 6 carries a plurality of solid protrusions 8 emerging from the respective film piece 6 in a direction away from the mesh 2, as is best visible in the magnified view of Figure 1(b). In the embodiment, the protrusions 8 are rod-like, the angle between the longitudinal axis of each protrusion 8 and the surface of the film piece 6 being about 90°. The film pieces 6 have a hexagonal shape as well, but the area of a film piece 6 is greater than that of a pore 8.

10
15

A variant of the surgical implant 1 is shown in Figure 2 and designated by 10. The surgical implant 10 is basically designed like surgical implant 1 so that for corresponding parts the same reference numerals are used as in Figure 1. In addition to the implant 1, however, the implant 10 comprises a barrier sheet 12 attached to the opposite face 13 of mesh 2. The barrier sheet 12 is designed as a non-porous film and is to prevent ingrowth of bodily tissue via the opposite face 13 into mesh 2 after implantation of the surgical implant 10. In the embodiment, the barrier sheet 12 is larger than the mesh 2, which results in the presence of margins 14 around mesh 2. The margins 14 may assist the handling of implant 10.

20
25

Figure 3 shows another embodiment of the surgical implant, which is designated by 20 and can be manufactured as described in Example 1 further below. Figure 3(a) is a drawing according to a microscopic picture of a film piece carrying a plurality of protrusions, and Figure 3(b) is a plan view of part of the

30

- 28 -

implant 20, which, in the embodiment, extends beyond the limits indicated in Figure 3(b).

5 The implant 20 comprises a mesh-like basic structure 22 having rhombic pores 24. Its face carries a plurality of hexagonal film pieces 26. The area of each film piece 26 is somewhat larger than the area of one pore 24. A plurality of protrusions 28 emerges from the upper face of each film piece 26. The protrusions 28 are mushroom-like, each protrusion 28 including a stem 30 and a head 32 laterally projecting with respect to the stem 30.

Figure 3(a) shows that the fibers of the mesh 22 are almost completely embedded in the material of the film pieces 26.

15

In the embodiment, the mesh 22 is a commercial "Ultrapro" mesh of Ethicon, which is a lightweight, monofil, partially resorbable surgical mesh made of fibers of polypropylene (non-resorbable) and "Monocryl" (see above; resorbable) having a pore width of about 2.27 mm in one direction and a pore width of about 3.17 mm in a direction perpendicularly thereto. The film pieces 26 are hexagonal having a width in the range of about 3.7 mm to 4.1 mm. The distance between adjacent film pieces 26 is about 4.4 mm. The film pieces 26 cover about 20% of the area of the face of mesh 22. They extend over crossing points of the pores 24. The film pieces 26 including the protrusions 28 are made of poly-p-dioxanone (PDS), which is resorbable. For further details, see Example 1 below.

30 Figure 4, in parts (a) to (h), displays several types of solid protrusions, which are all designated by reference numeral 40. Most of the protrusions 40 comprise a stem 42 (some of them a stem with a pronounced foot section 43) and a head 44, which at least partially projects laterally with respect to the stem 42, see Figures 4(a) to 4(e) and 4(g). Some protrusions in-

35

clude a spike 46 extending beyond the head 44, see Figures 4(c), 4(e) and 4(g). The protrusion according Figure 4(f) is completely designed as a spike. Figure 4(h) shows a protrusion shaped as a bent rod 48. A particularly advantageous form is
5 like a mushroom, see Figure 4(d).

In detail: In Figure 4(a), the stem 42 and the head 44 are hexagonal, with the head 44 symmetrically projecting laterally with respect to the stem 42. In Figure 4(b), stem 42 and head
10 44 are hexagonal, while the head 44 is asymmetrically arranged with respect to the stem 42. In Figure 4(c), the protrusion is similar to that of Figure 4(b), but carries a trigonal pyramidal spike. The protrusion of Figure 4(d) is mushroom-like and has a frusto-conical foot section 43, a tapered middle section
15 of the stem 42 and a relatively flat head 44. In Figure 4(e), the protrusion is similar to that of Figure 4(d), but has an additional pyramidal spike. The protrusion of Figure 4(f) comprises a circular base section 43 with a diameter decreasing down into a sharp tip or spike 46. Figure 4(g) shows a mushroom-like protrusion similar to that of Figure 4(e), wherein
20 the head 44 includes some cuts. The protrusion of Figure 4(h) is shaped as a bent rod 48 made of three straight sections angled with respect to each other; in a variant, it is smoothly bent along its entire length.

25

Figure 5 illustrates another embodiment of the surgical implant, which is designated by 50. In Figure 5(a), the pattern of film pieces 56 is shown, which have a triangular shape each (see Figure 5(b)) and comprise essentially cuboidal protrusions (see Figure 5(c)). The arrangement of the film pieces 56
30 defines three lines intersecting at respective angles of 60°, which provides for an increased flexibility of the basic structure of the implant 50 in some directions.

- 30 -

Surgical implant 60 shown in Figures 6(a) to 6(c) is similar to the implant 50. In this case, however, the distance between film pieces 66 is smaller than that between the film pieces 56, and the protrusions are shaped as longitudinally extending ledges 68.

Some examples follow, which also relate to manufacturing processes of the implant.

10

Example 1: "UltraPro" mesh with ~30% in area hexagonal PDS film pieces with micro-protrusions

Figure 7 schematically illustrates an embodiment of a manufacturing process of a surgical implant, i.e. a process of manufacturing the implant 20 already described by means of Figure 3.

In a first step, a mold 70 containing an array of cavities 71, each cavity having the shape of one protrusion, was made from a 2-component silicone precursor kit (elastomeric kit). To this end, a positive form (master) of polypropylene comprising on one surface 288 mushroom-shaped protrusions/cm² with a total height of approximately 250 μm, a head diameter of approximately 375 μm, a stem diameter of approximately 200 μm and a foot diameter of approximately 340 μm was used. The liquid silicone elastomer was cast over the polypropylene master and, while keeping a horizontal position, cured at elevated temperatures (50°C to 80°C) in an oven for several hours. After cooling to room temperature, the silicone mold, comprising mushroom-shaped negatives of the protrusions, could be removed from the polypropylene master.

As basic structure of the implant, an "UltraPro" mesh (Ethicon) was used (surgical mesh 72 in Figure 7), which is a com-

- 31 -

posite mesh containing about equal parts of polypropylene fibers and resorbable "Monocryl" (polyglycolic acid) fibers. The mesh could be fixated in a metal frame form to prevent movement and shrinkage.

5

The mold 70 was placed in a metal form with the cavities 71 facing up, followed by the surgical mesh 72. Next, a hexagonally perforated thin rubber layer (schematically shown as mask 74 in Figure 7) was placed on top of the mesh 72, followed by
10 a sheet 76 of a material having a lower melting point than the material of the mesh 72. In the example, the sheet was a film of poly-p-dioxanone (PDS) having a thickness of 150 μm . Finally, a plate device 78 (in the example, a soft closed-cell foam material) was placed on top of the sheet 76.

15

This assembly was placed in a heat press and allowed to heat to a temperature slightly below 130°C for several minutes under a pressure of about 5 bar. Under these conditions, the poly-p-dioxanone material of sheet 76 got very soft and penetrated the hexagonal openings in the mask 74 and the pores of
20 mesh 72 and filled the cavities 71 in mold 70, thus forming hexagonal film pieces well attached to the mesh and including protrusions. After cooling down the assembly to ambient temperatures (or a temperature below 50°C), the pressure could be
25 released and the mold 70, the mask 74 and the plate device 78 taken away. Because of its high flexibility, the silicone mold 70 could be removed from the protrusions without problems.

Multiple micro-protrusions were identified under a scanning
30 electron microscope with a total height of about 290 μm , a head width of about 360 μm with a perimeter thickness of about 20 μm , and a stem diameter of about 150 μm to 200 μm .

The resulting surgical implant was flexible and conformable
35 like the basic mesh 72. No remarkable stiffness was intro-

duced. A handling test on a pig stomach showed a good attachment to tissue, like fat or muscle, and at the same time no self-attaching properties compromising the handling during, e.g., rolling or folding.

5

In detail: A surgical implant manufactured as described in Example 1 and having a size of 7cm x 9cm exhibited in a bench top test on a pig stomach a good attachment to muscle or fatty tissue, after a slight pressing force had been exerted to the tissue for a short period of time. The shear force (determined with a spring scale) was about 1.1 N. The implant could be easily removed and placed again without losing much attachment force.

15 The implant could also be easily rolled, passed through a trocar, unrolled in the abdominal cavity and placed against the abdominal wall according to a TAPP procedure. In TAPP the surgeon enters the peritoneal cavity and places a mesh through a peritoneal incision over possible hernia sites. The implant of Example 1 attached well to the tissue, could be easily handled and did not undesirably stick to the bowel during handling.

The total area of all film pieces turned out to be about 30% of the area of the surface of the basic structure (mesh 72). Surprisingly, even such a relatively small total film piece area exhibited a good tissue attachment to muscle and fascia, see above, without negatively compromising the elasticity and flexibility of the implant in a handling test.

30 The total film piece area was determined by a geometrical calculation, see Figure 8, assuming the shape of an equilateral hexagon for each film piece and equal sizes for all film pieces. $a = r = 2.065$ mm was determined by means of a microscope. Using $h = [(1/2)\sqrt{3}]a$, the area A of one hexagon is

$$35 \quad A = 6 (1/2) a [(1/2)\sqrt{3}] a = 1.5 \sqrt{3} a^2 = 11.08 \text{ mm}^2.$$

- 33 -

A rectangular piece of the surgical implant of Example 1 having a size of 60mm x 110mm contained $8 \times 13 = 104$ film pieces. Thus, the above ratio is $104 \times 11.08 / (60 \times 110) = 0.175$ or 17.5%.

5

Example 2: "TiGr-Matrix" with ~20% in area hexagonal PDS film pieces with micro-protrusions

TiGr-Matrix® by Novus Scientific is a composite mesh made from long- and short-term multifilament absorbable fibers. Fast absorbing fibers consist of a copolymer of glycolide, lactide and trimethylene carbonate and are basically absorbed within 4 months. Long-term absorbing fibers are made from a copolymer of lactide and trimethylene carbonate and are completely absorbed within about 3 years.

A surgical implant was prepared as described in Example 1, but using a 7cmx11cm piece of TiGr-Matrix® instead of the "Ultra-Pro" mesh as basic structure. The film pieces were irregularly rounded and were firmly attached to the basic structure.

The resulting implant was only slightly stiffer than the basic structure mesh during handling and could be easily rolled up and unrolled without major mesh-to-mesh self-attachment.

25

Example 3: Porous cPTFE sheet between circular PDS film pieces having protrusions on one side

Omyra® mesh by B. Braun is a mesh-like film for hernia repair. It is made of a condensed polytetrafluoroethylene (cPTFE), where star-shaped pores of about 2,4mm are cut out to introduce mesh-like properties into the cPTFE film.

30

- 34 -

Nine film pieces of PDS film (8mm diameter, thickness about 150 μm) were placed on one face of a 7cm x 7cm perforated cPTFE patch (Omyra[®] mesh), the spaces between the film pieces being about 1cm. 9 similar film pieces were placed on the
5 other face of the patch, just opposite the first film pieces. This assembly was arranged between the silicone mold from example 1 and one non-textured silicon pad from example 1. The whole assembly was placed between two metal plates in a heat press and heated, pressed for about 5 Minutes at about 120°C
10 and allowed to cool down in the press to ambient temperatures. In this way, protrusions were formed on the film pieces at one face of the cPTFE patch, whereas these film pieces were firmly fused with the counterpart film pieces at the opposite face of the patch, the patch sheet being embedded in-between. The
15 counterpart film pieces were smooth. The protrusions were easily palpable with a finger to find the correct face for positioning the implant. Overall characteristics regarding bending during handling were not altered. In the film areas, the cPTFE struts were embedded with about 60 μm PDS film on both
20 sides (in the protrusion-free micro-regions). Total thickness of the PDS film with protrusions was about 560 μm , with mushroom-like micro-protrusions of about 250 μm height, 390 μm width at the heads and 190 μm at the stems. The total film piece area is calculated to be about 10% of the total sheet area.

25

Figure 9 shows the surgical implant (designated by 90) prepared in Example 3. It comprises the Omyra[®] mesh as basic structure 92, which includes reinforcement lines 94, and nine film pieces 96.

30

Example 4: Light-weight PP mesh with palpable film pieces

A light-weight polypropylene (PP) mesh having a comparable
35 knitting structure as the UltraPro[®] mesh available from Ethi-

- 35 -

con, Inc., Somerville, New Jersey U.S.A., used in Example 1, but without the absorbable Monocryl® filaments (polyglecaprone 25) was prepared. This mesh (basic structure) was heat-laminated similar to Example 1, but with a slightly different
5 setup, see Figure 10.

From bottom to top, the layers are: a silicon mold 100 containing an array of cavities 101, each cavity having the shape of one protrusion, a sheet 106 of PDS for forming the film
10 pieces including the protrusions, a rubber mask 104, the above PP mesh as basic structure 102, and a plan elastic plate device 108 of silicon (without cavities). In this case, protrusions are formed all over the mold 100 and the sheet 106, but the mask 104 shields part of the mesh 102 so that only film
15 pieces (with protrusions) attach to the mesh.

The protrusions of the film pieces were easily palpable (even with gloves), which enables a side differentiation.

20 The surgical implant prepared in Example 4 was tested in a rat skin friction model comparable to WO 2006/092236 A1, having a 500g (5N) pre-load on the rat skin. The maximum friction force was about 13N for a 5cmx10cm contact area.

25

Example 5: Light-weight PP mesh with palpable film pieces on both faces

In a first step, the surgical implant of Example 4 was prepared. Afterwards, the PP mesh including the film pieces (with
30 protrusions) was placed between two silicon molds and laminated and cooled down again.

This resulted in a surgical implant comprising a mesh-like basic structure having film pieces with protrusions on both
35

- 36 -

faces. The implant was flexible and could be attached on both sides to tissue or fat structures.

5 Example 6: Porous cPTFE sheet between rectangular PDS film pieces with protrusions

A 10cm x 10cm perforated cPTFE patch (Omyra[®] mesh, B. Braun, as also used in Example 3) was placed together with five film
10 pieces on each side, respective pairs opposing each other, of PDS film (thickness 150 μ m, each one 1cm x 1cm square; four pieces in the corners and one in the center of the patch) between two silicone molds prepared as in Example 1. This assembly was placed between two metal plates in a heat press and
15 heated, pressed for about 5 Minutes at about 120°C and allowed to cool down in the press to ambient temperatures.

The resulting surgical implant comprised film pieces with protrusions on both faces of the cPTFE patch, the latter being
20 well embedded in the PDS mass of the film pieces.

Example 7: Light-weight PP mesh with film pieces having
25 protrusions on both sides

As the basic structure, a light-weight polypropylene (PP) mesh as prepared in Example 4 was used.

Figure 11 schematically shows the set-up for manufacturing the
30 surgical implant of Example 7. The layers in Figure 11 are, from bottom to top: a silicon mold 110 containing an array of cavities 111, each cavity having the shape of one protrusion, a sheet 116 of PDS for forming the film pieces including protrusions, a rubber mask 114, the above PP mesh as basic structure 112,
35 another rubber mask 115 and a second mold 118 con-

- 37 -

taining an array of cavities, each cavity having the shape of one protrusion.

5 In a heat lamination process similar to that of Example 4, the PDS material is pressed into the pores of mesh 112 and the cavities of both molds 110 and 118, whereas the masks 114 and 115 shield the mesh 112 at both sides and define clean border-
lines of the film pieces. In this way, the film pieces formed
10 comprise protrusions on both faces and are well attached to the mesh 112.

The appearance of the film pieces was determined under the microscope: A flat film piece area showed a thickness of 240 μ m to 290 μ m in different areas of the film piece, top protrusions
15 were about 290 μ m high and bottom protrusions were about 320 μ m high. The mushroom-like protrusions with a head width of about 360 μ m and a smallest stem width of about 160 μ m were not aligned between both faces. The protrusions were facing away
20 from both mesh faces.

The resulting surgical implant showed fixation properties on both sides to soft tissue like, fat, muscle, or fascia. The implant was not sticking to itself when tightly rolled up and then unrolled, which is important for laparoscopic surgery.
25

Claims

1. Surgical implant, comprising
5 - a flexible basic structure (2; 22; 92) having a face (3)
 and
 - a plurality of resorbable film pieces (6; 26; 56; 66;
 96) attached to the face (3) of the basic structure (2;
 22; 92),
 - wherein each film piece (6; 26; 56; 66; 96) comprises a
10 plurality of solid protrusions (8; 28; 40; 58; 68) emerg-
 ing from the respective film piece (6; 26; 56; 66; 96) in
 a direction away from the basic structure (2; 22; 92).
2. Surgical implant according to claim 1, characterized in
15 that the basic structure (2; 22; 92) comprises a mesh-like
 structure having pores (4; 24).
3. Surgical implant according to claim 2, characterized in
 that at least one film piece (6; 26; 56; 66; 96) has a
20 size being equal to or greater than the size of a pore (4;
 24) of the mesh-like structure (2; 22; 92).
4. Surgical implant according to anyone of claims 1 to 3,
 characterized in that at least one protrusion (8; 28; 40;
25 58; 68) comprises a property selected from the following
 list: being rod-like; being pillar-like; being mushroom-
 shaped; comprising a shape defined by a respective body
 and a respective head, the body emerging from the film
 piece and terminating in the head, and the head projecting
30 laterally with respect to the body.
5. Surgical implant according to anyone of claims 1 to 4,
 characterized in that at least one film piece (6; 26; 56;
 66; 96) comprises a protrusion (8; 28; 40; 58; 68) having
35 a longitudinal axis which emerges from the film piece (6;

- 39 -

26; 56; 66; 96) at an angle relative to the surface of the film piece (6; 26; 56; 66; 96) in one of the following ranges: 50° to 90°, 70° to 90°.

- 5 6. Surgical implant according to anyone of claims 1 to 5, characterized in that the total area of all film pieces (6; 26; 56; 66; 96) is less than 50% of the area of the face of the basic structure (2; 22; 92), optionally less than a value selected from the following list: 45%, 40%,
10 35%, 30%, 25%, 20%, 15%, 10%.
7. Surgical implant according to claim 6, characterized in that the total area of all film pieces (6; 26; 56; 66; 96) is greater than 5% of the area of the face of the basic
15 structure (2; 22; 92), optionally greater than a value selected from the following list: 10%, 15%, 20%, 25%, 30%, 35%, 40%, 45%, provided the lower limit of the total area of all film pieces (6; 26; 56; 66; 96) selected from this list is smaller than the upper limit according to claim 6.
20
8. Surgical implant according to anyone of claims 1 to 7, characterized in that the film pieces (6; 26; 56; 66; 96) are arranged in a regular pattern.
- 25 9. Surgical implant according to anyone of claims 1 to 8, characterized in that at least one of the film pieces (6; 26; 56; 66; 96) has a geometric shape selected from the following list: hexagon, rounded hexagon, triangle, rounded triangle, rectangle, rounded rectangle, square,
30 rounded square, cross-shaped, circle, ellipse, snake-like, spiral-like.
10. Surgical implant according to anyone of claims 1 to 9, characterized in that at least one film piece (6; 26; 56;

- 40 -

66; 96) has a length dimension in one of the following ranges: 0.7 mm to 50 mm, 2 mm to 5 mm.

- 5 11. Surgical implant according to anyone of claims 1 to 10, characterized in that at least one film piece (6; 26; 56; 66; 96) is surrounded by an area of the basic structure (2; 22; 92) free from other film pieces (6; 26; 56; 66; 96), wherein preferably this area has a width in one of the following ranges: 1 mm to 50 mm, 1 mm to 9 mm.
- 10 12. Surgical implant according to anyone of claims 1 to 11, characterized in that film pieces are connected to each other via struts.
- 15 13. Surgical implant according to anyone of claims 1 to 12, characterized in that the film pieces (6; 26; 56; 66; 96) and the respective protrusions (8; 28; 40; 58; 68) are made in one piece.
- 20 14. Surgical implant according to anyone of claims 1 to 13, characterized in that at least one protrusion (8; 28; 40; 58; 68) has a length, measured along a longitudinal axis of the protrusion (8; 28; 40; 58; 68), in one of the following ranges: 20 μm to 5000 μm , 100 μm to 500 μm , 200 μm to 400 μm .
- 25 15. Surgical implant according to anyone of claims 1 to 14, characterized in that the basic structure (2) comprises a mesh-like structure having the face (3) and an opposite face (13) and comprising pores (4), wherein a film (12) is attached to the opposite face (13), which film (12) comprises one feature out of each of the following groups of features: provided as single piece, provided as plurality of film pieces; being resorbable, being non-resorbable;
- 30

- 41 -

comprising protrusions, not comprising protrusions; having barrier properties, not having barrier properties.

- 5 16. Surgical implant according to anyone of claims 1 to 14, characterized in that the basic structure comprises a mesh-like structure (112) having the face and an opposite face and comprising pores and in that the film pieces extend into the pores, wherein protrusions as defined in claim 1 emerge from the film pieces in both directions, away from the face of the mesh-like structure (112) and away from the opposite face of the mesh-like structure (112).
- 10
- 15 17. Surgical implant according to anyone of claims 1 to 16, characterized in that at least one film piece (6; 26; 56; 66; 96) comprises a material selected from the following list: synthetic bioabsorbable polymer materials, polyhydroxy acids, polylactides, polyglycolides, copolymers of glycolide and lactide, copolymers of glycolide and lactide in the ratio 90:10, copolymers of lactide and trimethylene carbonate, copolymers of glycolide, lactide and trimethylene carbonate, polyhydroxybutyrates, polyhydroxyvalerates, polycaprolactones, copolymers of glycolide and ϵ -caprolactone, polydioxanones, poly-p-dioxanone, synthetic and natural oligo- and polyamino acids, polyphosphazenes, polyanhydrides, polyorthoesters, polyphosphates, polyphosphonates, polyalcohols, polysaccharides, polyethers, collagen, gelatin, bioabsorbable gel films cross-linked with omega 3 fatty acids, oxygenized regenerated cellulose.
- 20
- 25
- 30
- 35 18. Surgical implant according to anyone of claims 1 to 17, characterized in that the basic structure (2; 22; 92) comprises at least one of the materials selected from the following list: polyalkenes, polypropylene, polyethylene, fluorinated polyolefins, polytetrafluoroethylene, PTFE,

ePTFE, cPTFE, polyvinylidene fluoride, blends of polyvinylidene fluoride and copolymers of vinylidene fluoride and hexafluoropropene, polyamides, polyurethanes, polyisoprenes, polystyrenes, polysilicones, polycarbonates, polyarylether ketones, polymethacrylic acid esters, polyacrylic acid esters, aromatic polyesters, polyimides, polyhydroxy acids, polylactides, polyglycolides, copolymers of glycolide and lactide, copolymers of glycolide and lactide in the ratio 90:10, copolymers of lactide and trimethylene carbonate, copolymers of glycolide, lactide and trimethylene carbonate, polyhydroxybutyrates, polyhydroxyvalerates, polycaprolactones, copolymers of glycolide and ϵ -caprolactone, polydioxanones, poly-p-dioxanone, synthetic and natural oligo- and polyamino acids, polyphosphazenes, polyanhydrides, polyorthoesters, polyphosphates, polyphosphonates, polyalcohols, polysaccharides, polyethers, polyamides, aliphatic polyesters, aromatic polyesters, polyurethanes, copolymers of polymerizable substances thereof, resorbable glasses, cellulose, bacterial cellulose, allograft, xenograft, collagen, gelatin, silk.

19. Surgical implant according to anyone of claims 1 to 18, characterized in that the surgical implant (1; 10; 20; 50; 60; 90) is adapted to be rolled or folded for laparoscopic placement, moved to a site of surgery through a trocar sleeve and unrolled or unfolded without sticking to itself.
20. Surgical implant according to anyone of claims 1 to 19, characterized in that the surgical implant (1; 10; 20; 50; 60; 90) is designed as a soft-tissue implant, preferably a hernia implant, and is adapted to fix itself at least partially in soft tissue such as muscle or fat, with the friction between the surgical implant and the soft tissue

being increased in at least one direction by a factor of 2 or more, compared to a corresponding implant without protrusions.

- 5 21. Surgical implant according to claim 1 or 15, characterized in that
- the basic structure (2; 22; 92) is designed as a long-term stable soft-tissue repair mesh comprising pores (4; 24) having a size of at least 1 mm,
 - 10 - the total area of all film pieces (6; 26; 56; 66; 96) is less than 25% of the area of the face of the basic structure (2; 22; 92), and
 - the protrusions (8; 28; 40; 58; 68) are mushroom-shaped, are made in one piece with the respective film pieces (6; 15 26; 56; 66; 96) and have a length, measured along a longitudinal axis of the respective protrusion (8; 28; 40; 58; 68), in the range of from 300 μm to 500 μm .
22. Process of manufacturing a surgical implant according to claim 1, characterized by the steps:
- 20 - providing a mold (70; 100; 110) containing an array of cavities (71; 101; 111), each cavity (71; 101; 111) having the shape of one protrusion,
 - filling the mold (70; 100; 110) with a fluid material 25 (76; 106; 116) forming the film pieces and the protrusions according to a pattern defining the shapes and locations of the film pieces,
 - hardening the fluid material,
 - attaching the film pieces to a basic structure (72; 102; 30 112), with the protrusions pointing away from the basic structure (72; 102; 112),
 - removing the mold (70; 100; 110).
23. Process according to claim 22, characterized in that the 35 mold (70; 100; 110) is flexible and comprises at least one

- 44 -

of the following materials: flexible material, silicone, polyurethane, natural rubbers, synthetic rubbers.

24. Process according to claim 22 or 23, characterized in that
5 the pattern defining the shapes and locations of the film pieces is determined by a mask (74; 104; 114) placed between the basic structure (72; 102; 112) and the material (76; 106; 116) to be filled in the mold (70; 100; 110).
- 10 25. Process according to claim 24, characterized by the steps:
- providing a layered assembly comprising, in this order: the mold (70), a surgical mesh (72) as the basic structure, the mask (74), a sheet of material (76) for the film pieces having a lower melting point than the surgical
15 mesh, a flexible plate device (78),
- heating the sheet of material (76) to a temperature higher than its melting point and lower than the melting point of the surgical mesh (72),
- pressing the mold (70) and the plate device (78) towards
20 each other, whereby the material (76) for the film pieces is transferred through the mask (74) into the mold (70) and embeds the surgical mesh (72),
- lowering the temperature and removing the mold (70).
- 25 26. Process according to claim 24, characterized by the steps:
- providing a layered assembly comprising, in this order: the mold (100; 110), a sheet of material (106; 116) for the film pieces having a lower melting point than the surgical
30 mesh (102; 112), the mask (104; 114), a surgical mesh (102; 112) as the basic structure, a flexible plate device (108; 118),
- heating the sheet of material (106; 116) to a temperature higher than its melting point and lower than the melting point of the surgical mesh (102; 112),

- 45 -

- pressing the mold (100; 110) and the plate (108; 118) device towards each other, whereby the material (106; 116) for the film pieces is transferred into the mold (100; 110) and embedded in the surgical mesh (102; 112) in those areas which are not shielded by the mask (104; 114),
5 - lowering the temperature and removing the mold (100; 110).

27. Process according to claim 25 or 26, characterized in that
10 the flexible plate device (108; 118) has one of the following properties: comprising a closed surface (108); being designed as a second mold (118), which is flexible and contains an array of cavities, each cavity having the
15 shape of one protrusion.

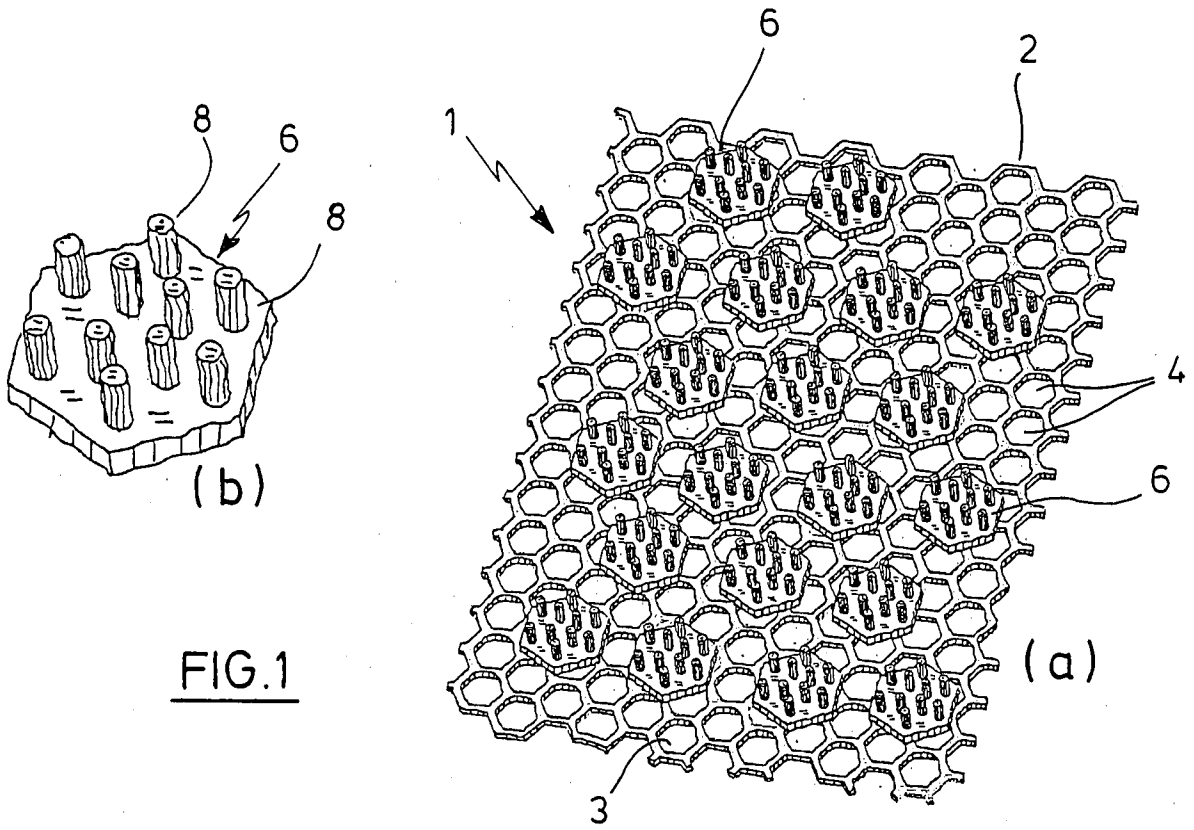


FIG. 1

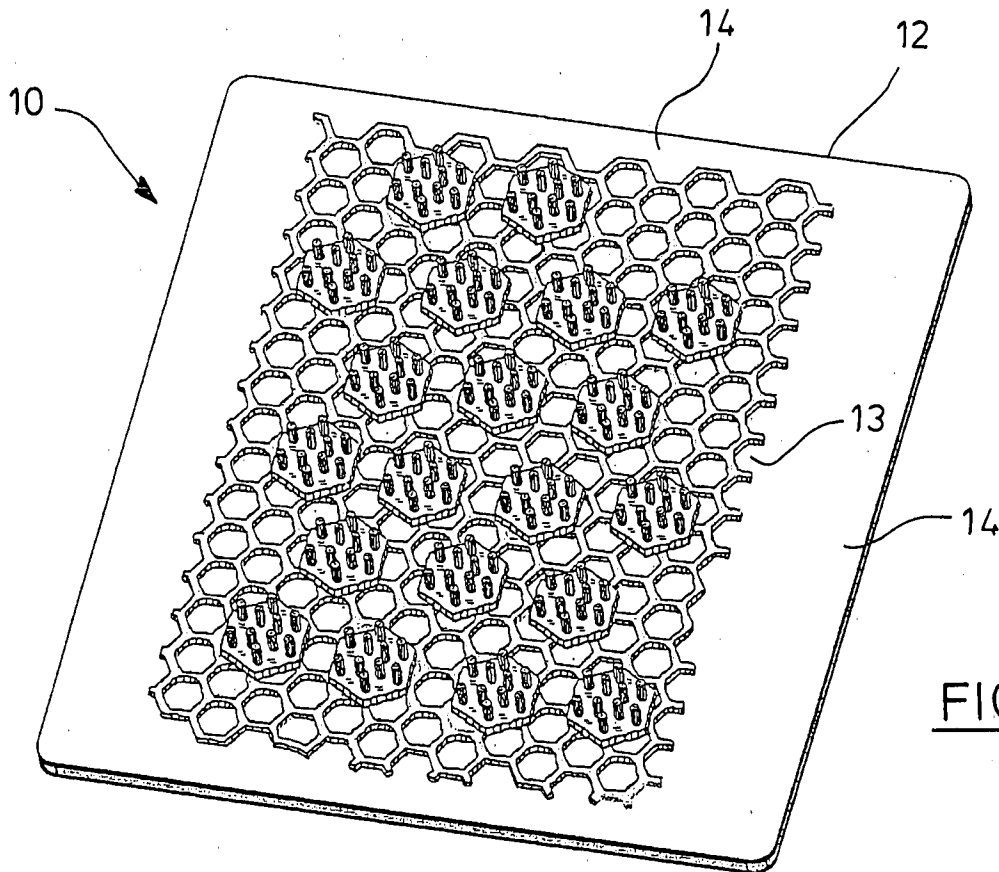


FIG. 2

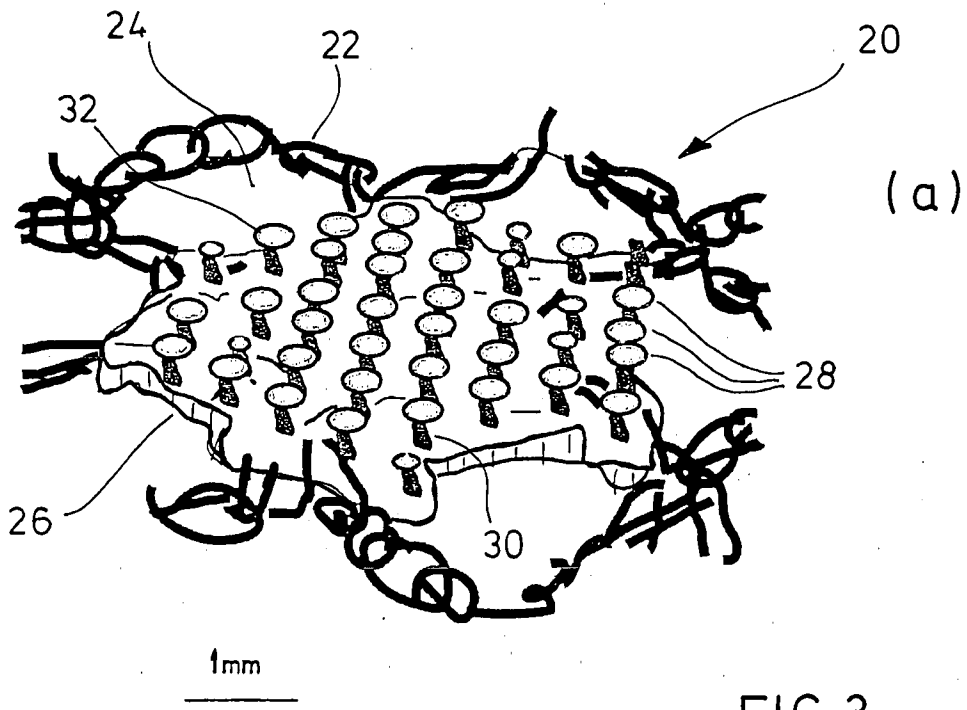
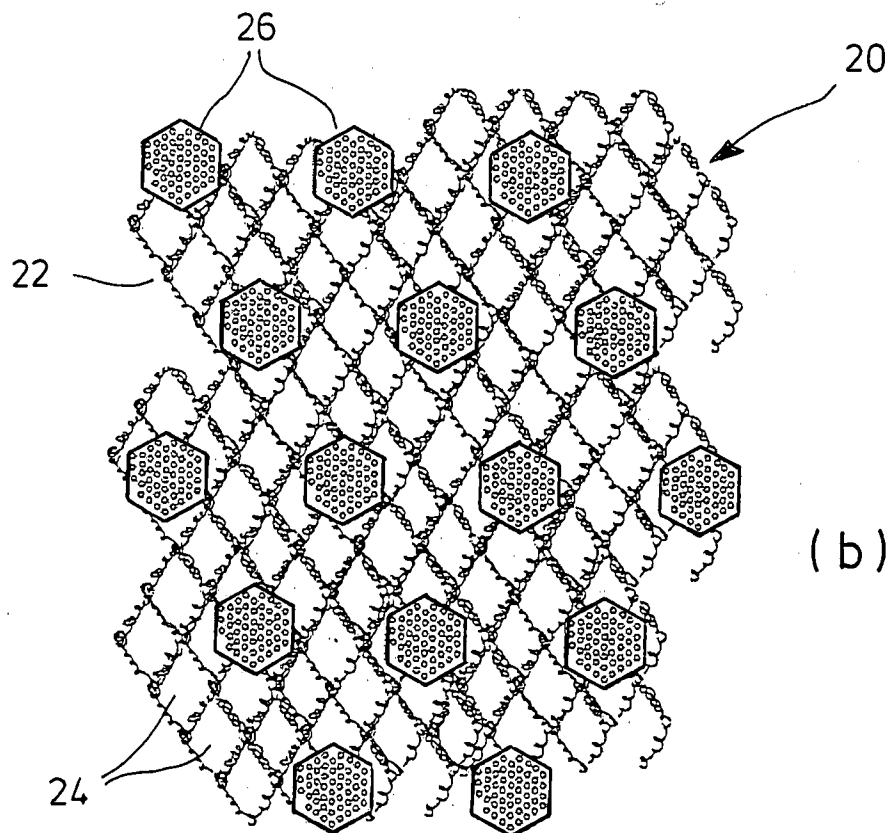


FIG. 3



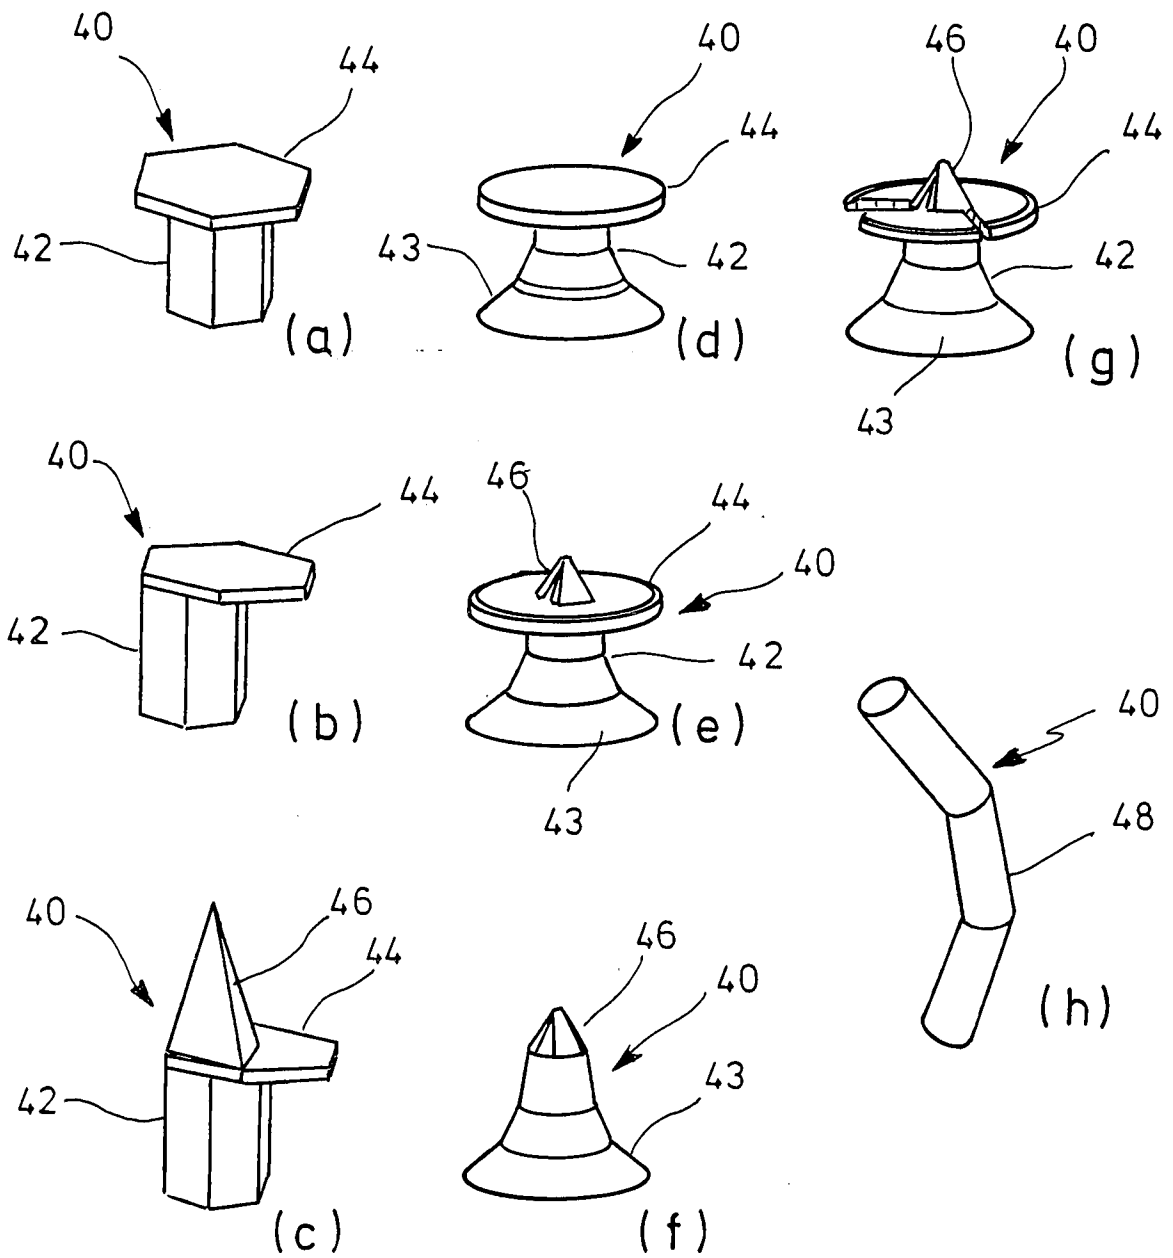


FIG. 4

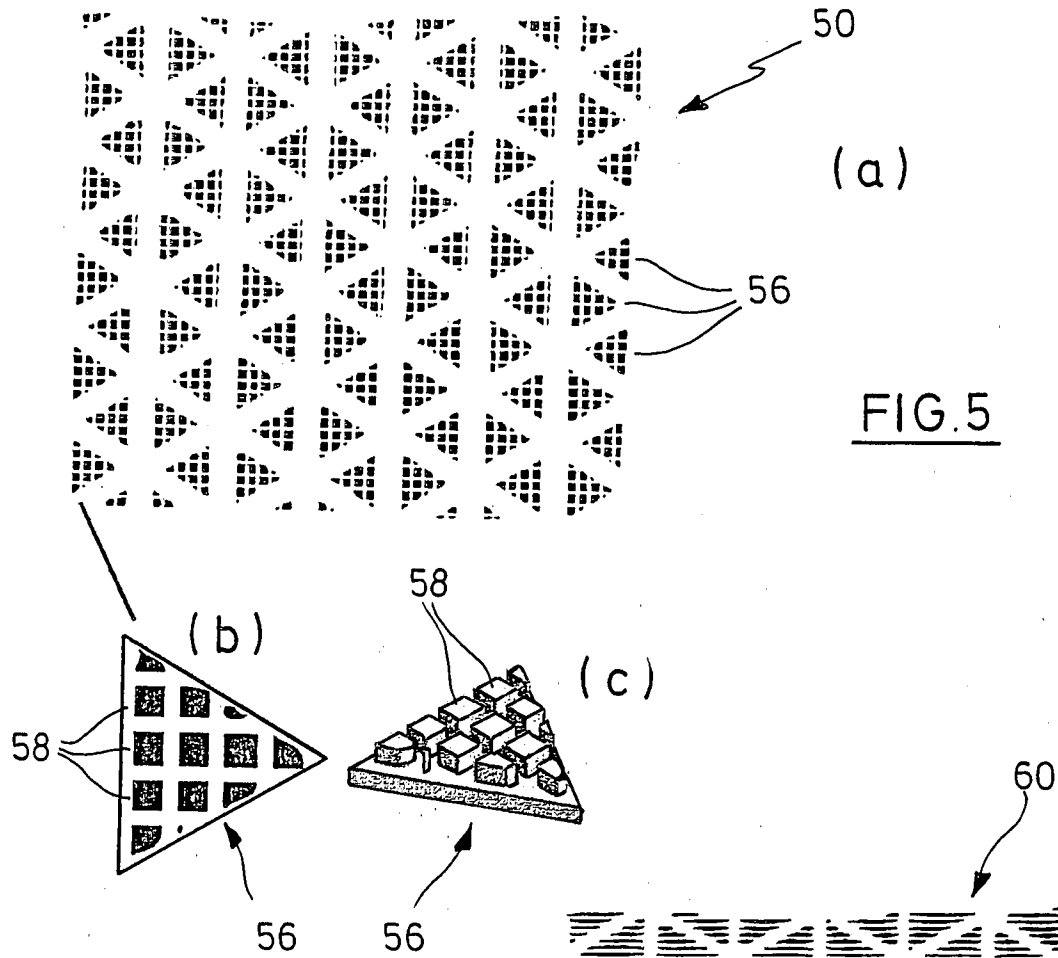


FIG. 5

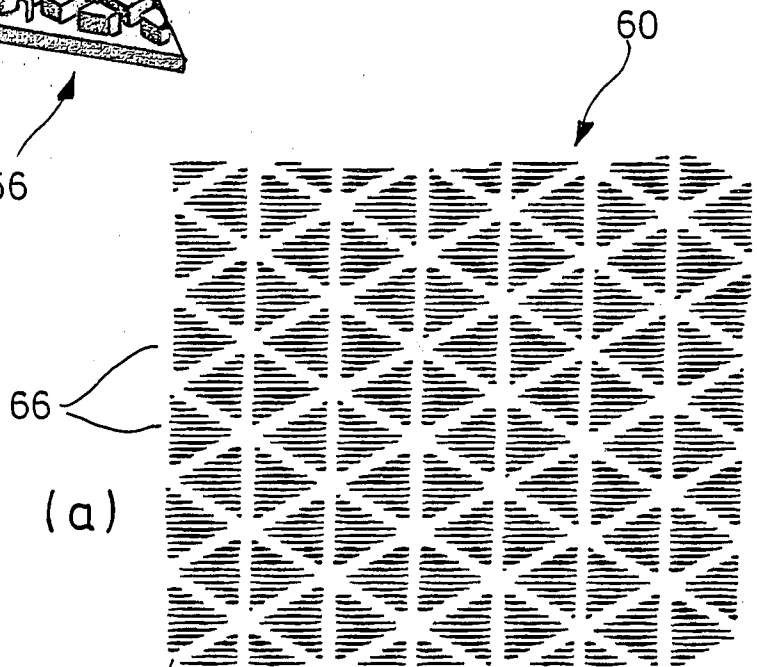
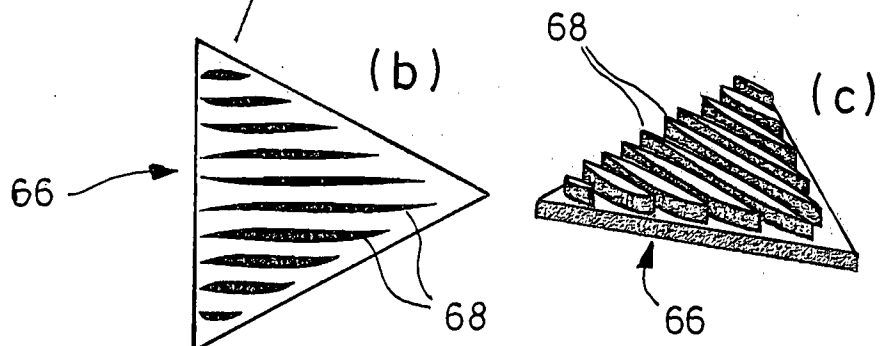


FIG. 6



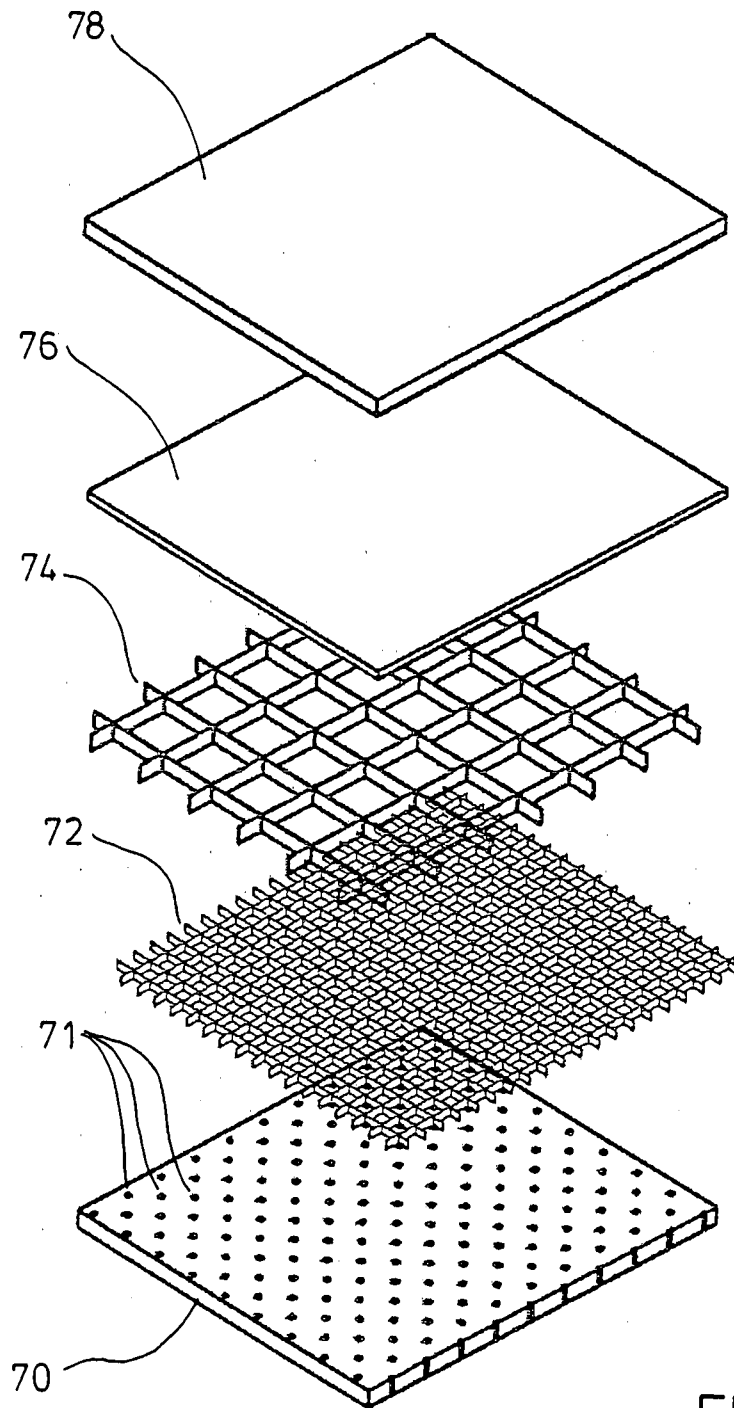
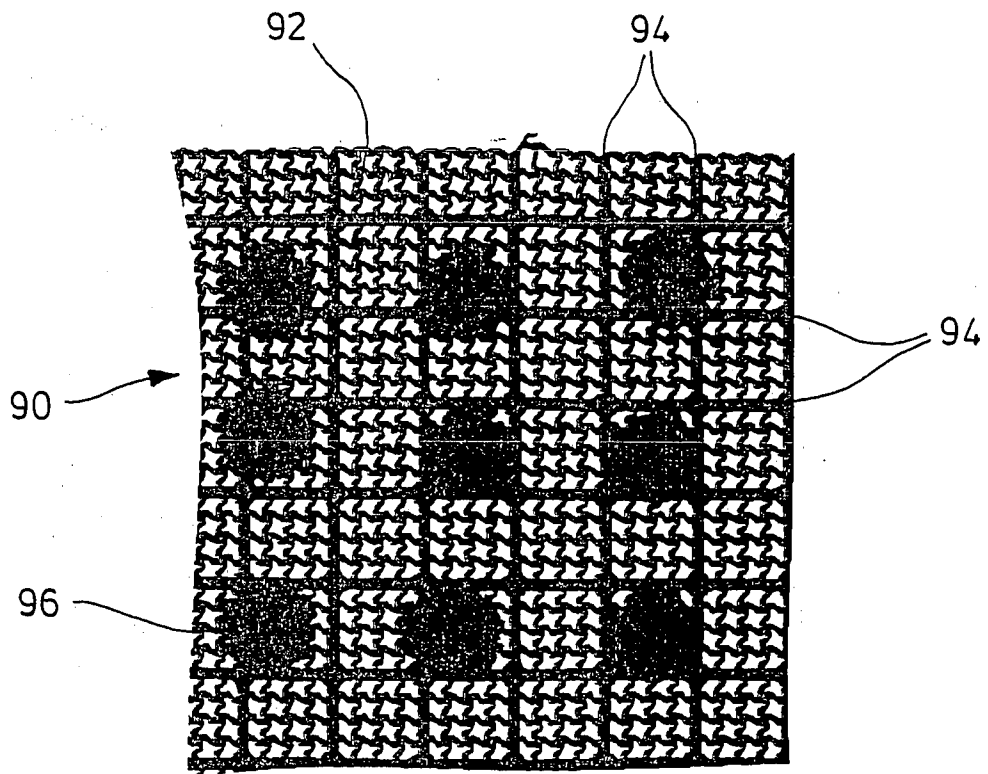
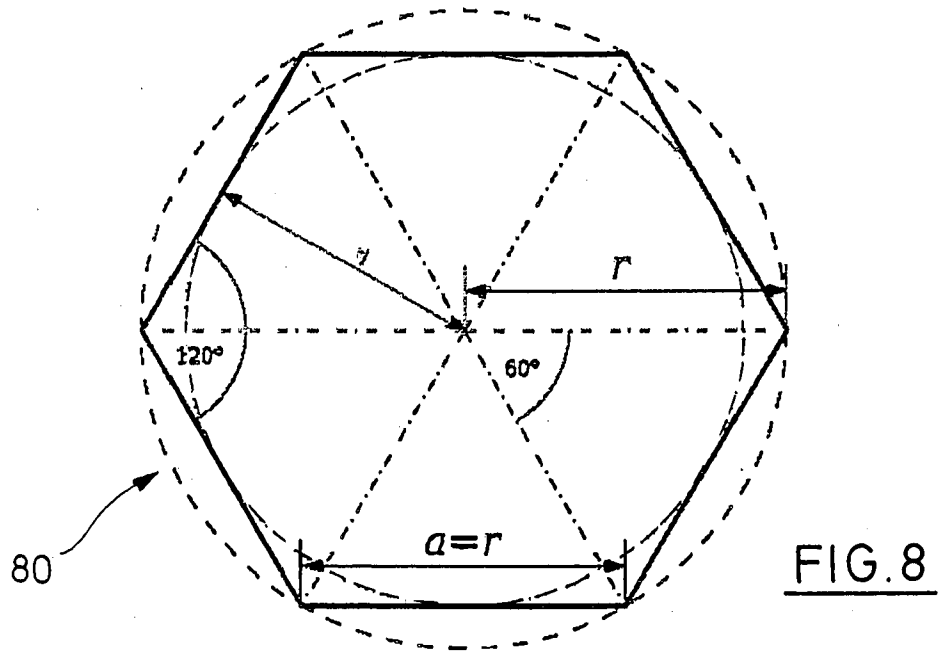


FIG. 7



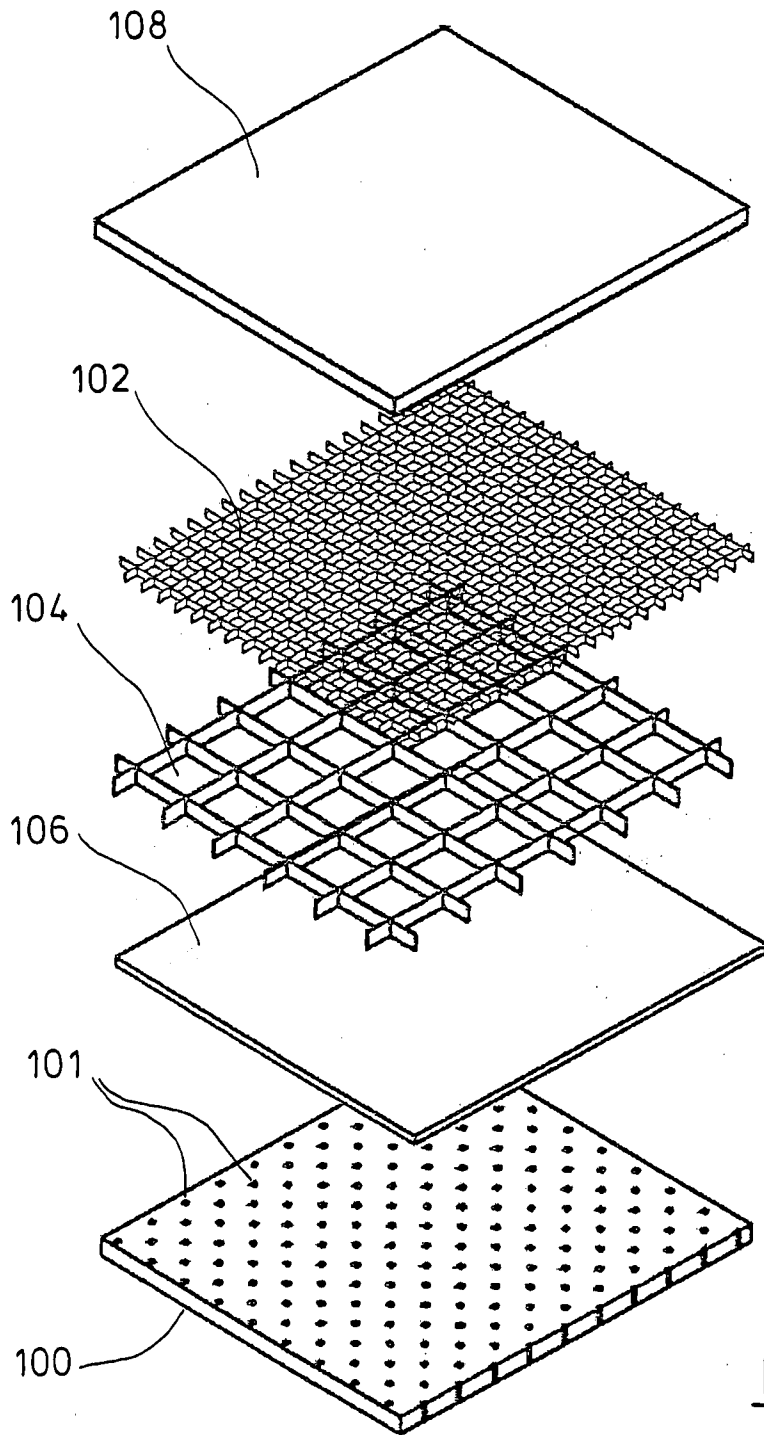


FIG. 10

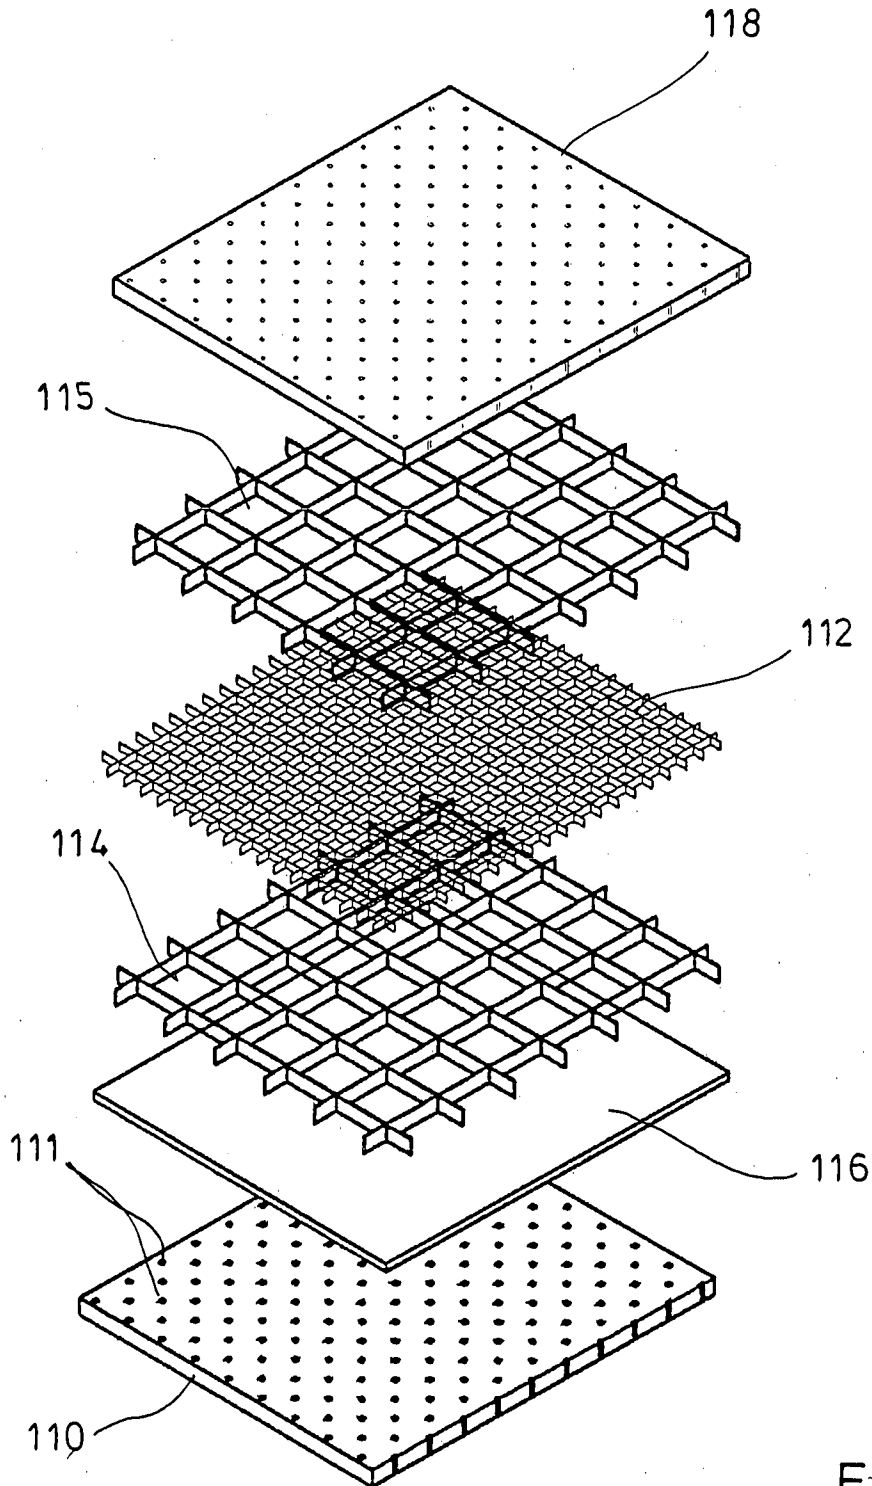


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/000468

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61F2/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| Y | US 2002/077661 A1 (SAADAT VAHID [US]) 20 June 2002 (2002-06-20) paragraphs [0025] - [0027], [0056]; figure 1 | 1-27 |
| Y | US 2008/109017 A1 (HERWECK STEVE A [US] ET AL) 8 May 2008 (2008-05-08) paragraphs [0127], [0128], [0135]; figure 11a | 1-27 |
| A | WO 2010/093333 A1 (UNIV NANYANG [SG]; BOEY YIN CHIANG FREDDY [SG]; WANG ZHENG [SG]; TANG) 19 August 2010 (2010-08-19) paragraph [0039] | 1-27 |
| A | WO 03/099160 A1 (ETHICON GMBH [DE]; PRIEWE JOERG [US]) 4 December 2003 (2003-12-04) cited in the application the whole document | 1-27 |

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 May 2014

Date of mailing of the international search report

06/06/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Skorovs, Peteris

INTERNATIONAL SEARCH REPORT

Information on patent family members

| |
|---|
| International application No PCT/EP2014/000468 |
|---|

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|-------------------------|------------------|
| US 2002077661 A1 | 20-06-2002 | US 2002077661 A1 | 20-06-2002 |
| | | US 2006200062 A1 | 07-09-2006 |
| ----- | | | |
| US 2008109017 A1 | 08-05-2008 | US 2008109017 A1 | 08-05-2008 |
| | | WO 2008097418 A2 | 14-08-2008 |
| ----- | | | |
| WO 2010093333 A1 | 19-08-2010 | CN 102316823 A | 11-01-2012 |
| | | EP 2395941 A1 | 21-12-2011 |
| | | JP 2012517319 A | 02-08-2012 |
| | | US 2012010636 A1 | 12-01-2012 |
| | | US 2014044861 A1 | 13-02-2014 |
| | | WO 2010093333 A1 | 19-08-2010 |
| ----- | | | |
| WO 03099160 A1 | 04-12-2003 | AU 2003232258 A1 | 12-12-2003 |
| | | DE 10222872 A1 | 04-12-2003 |
| | | WO 03099160 A1 | 04-12-2003 |
| ----- | | | |