




(86) **Date de dépôt PCT/PCT Filing Date:** 2014/04/14
(87) **Date publication PCT/PCT Publication Date:** 2014/10/23
(45) **Date de délivrance/Issue Date:** 2019/01/22
(85) **Entrée phase nationale/National Entry:** 2015/10/08
(86) **N° demande PCT/PCT Application No.:** US 2014/033920
(87) **N° publication PCT/PCT Publication No.:** 2014/172232
(30) **Priorité/Priority:** 2013/04/15 (US61/811,918)

(51) **Cl.Int./Int.Cl.** **A61B 5/15** (2006.01),
A61B 5/153 (2006.01), **A61B 5/154** (2006.01),
A61B 5/155 (2006.01), **A61B 5/157** (2006.01),
B01L 3/00 (2006.01), **G01N 33/48** (2006.01)
(72) **Inventeurs/Inventors:**
BURKHOLZ, JONATHAN KARL, US;
DAVIS, BRYAN GARRET, US
(73) **Propriétaire/Owner:**
BECTON, DICKINSON AND COMPANY, US
(74) **Agent:** PIASETZKI NENNIGER KVAS LLP

(54) **Titre : DISPOSITIF MEDICAL POUR LE PRELEVEMENT D'UN ECHANTILLON BIOLOGIQUE**
(54) **Title: MEDICAL DEVICE FOR COLLECTION OF A BIOLOGICAL SAMPLE**

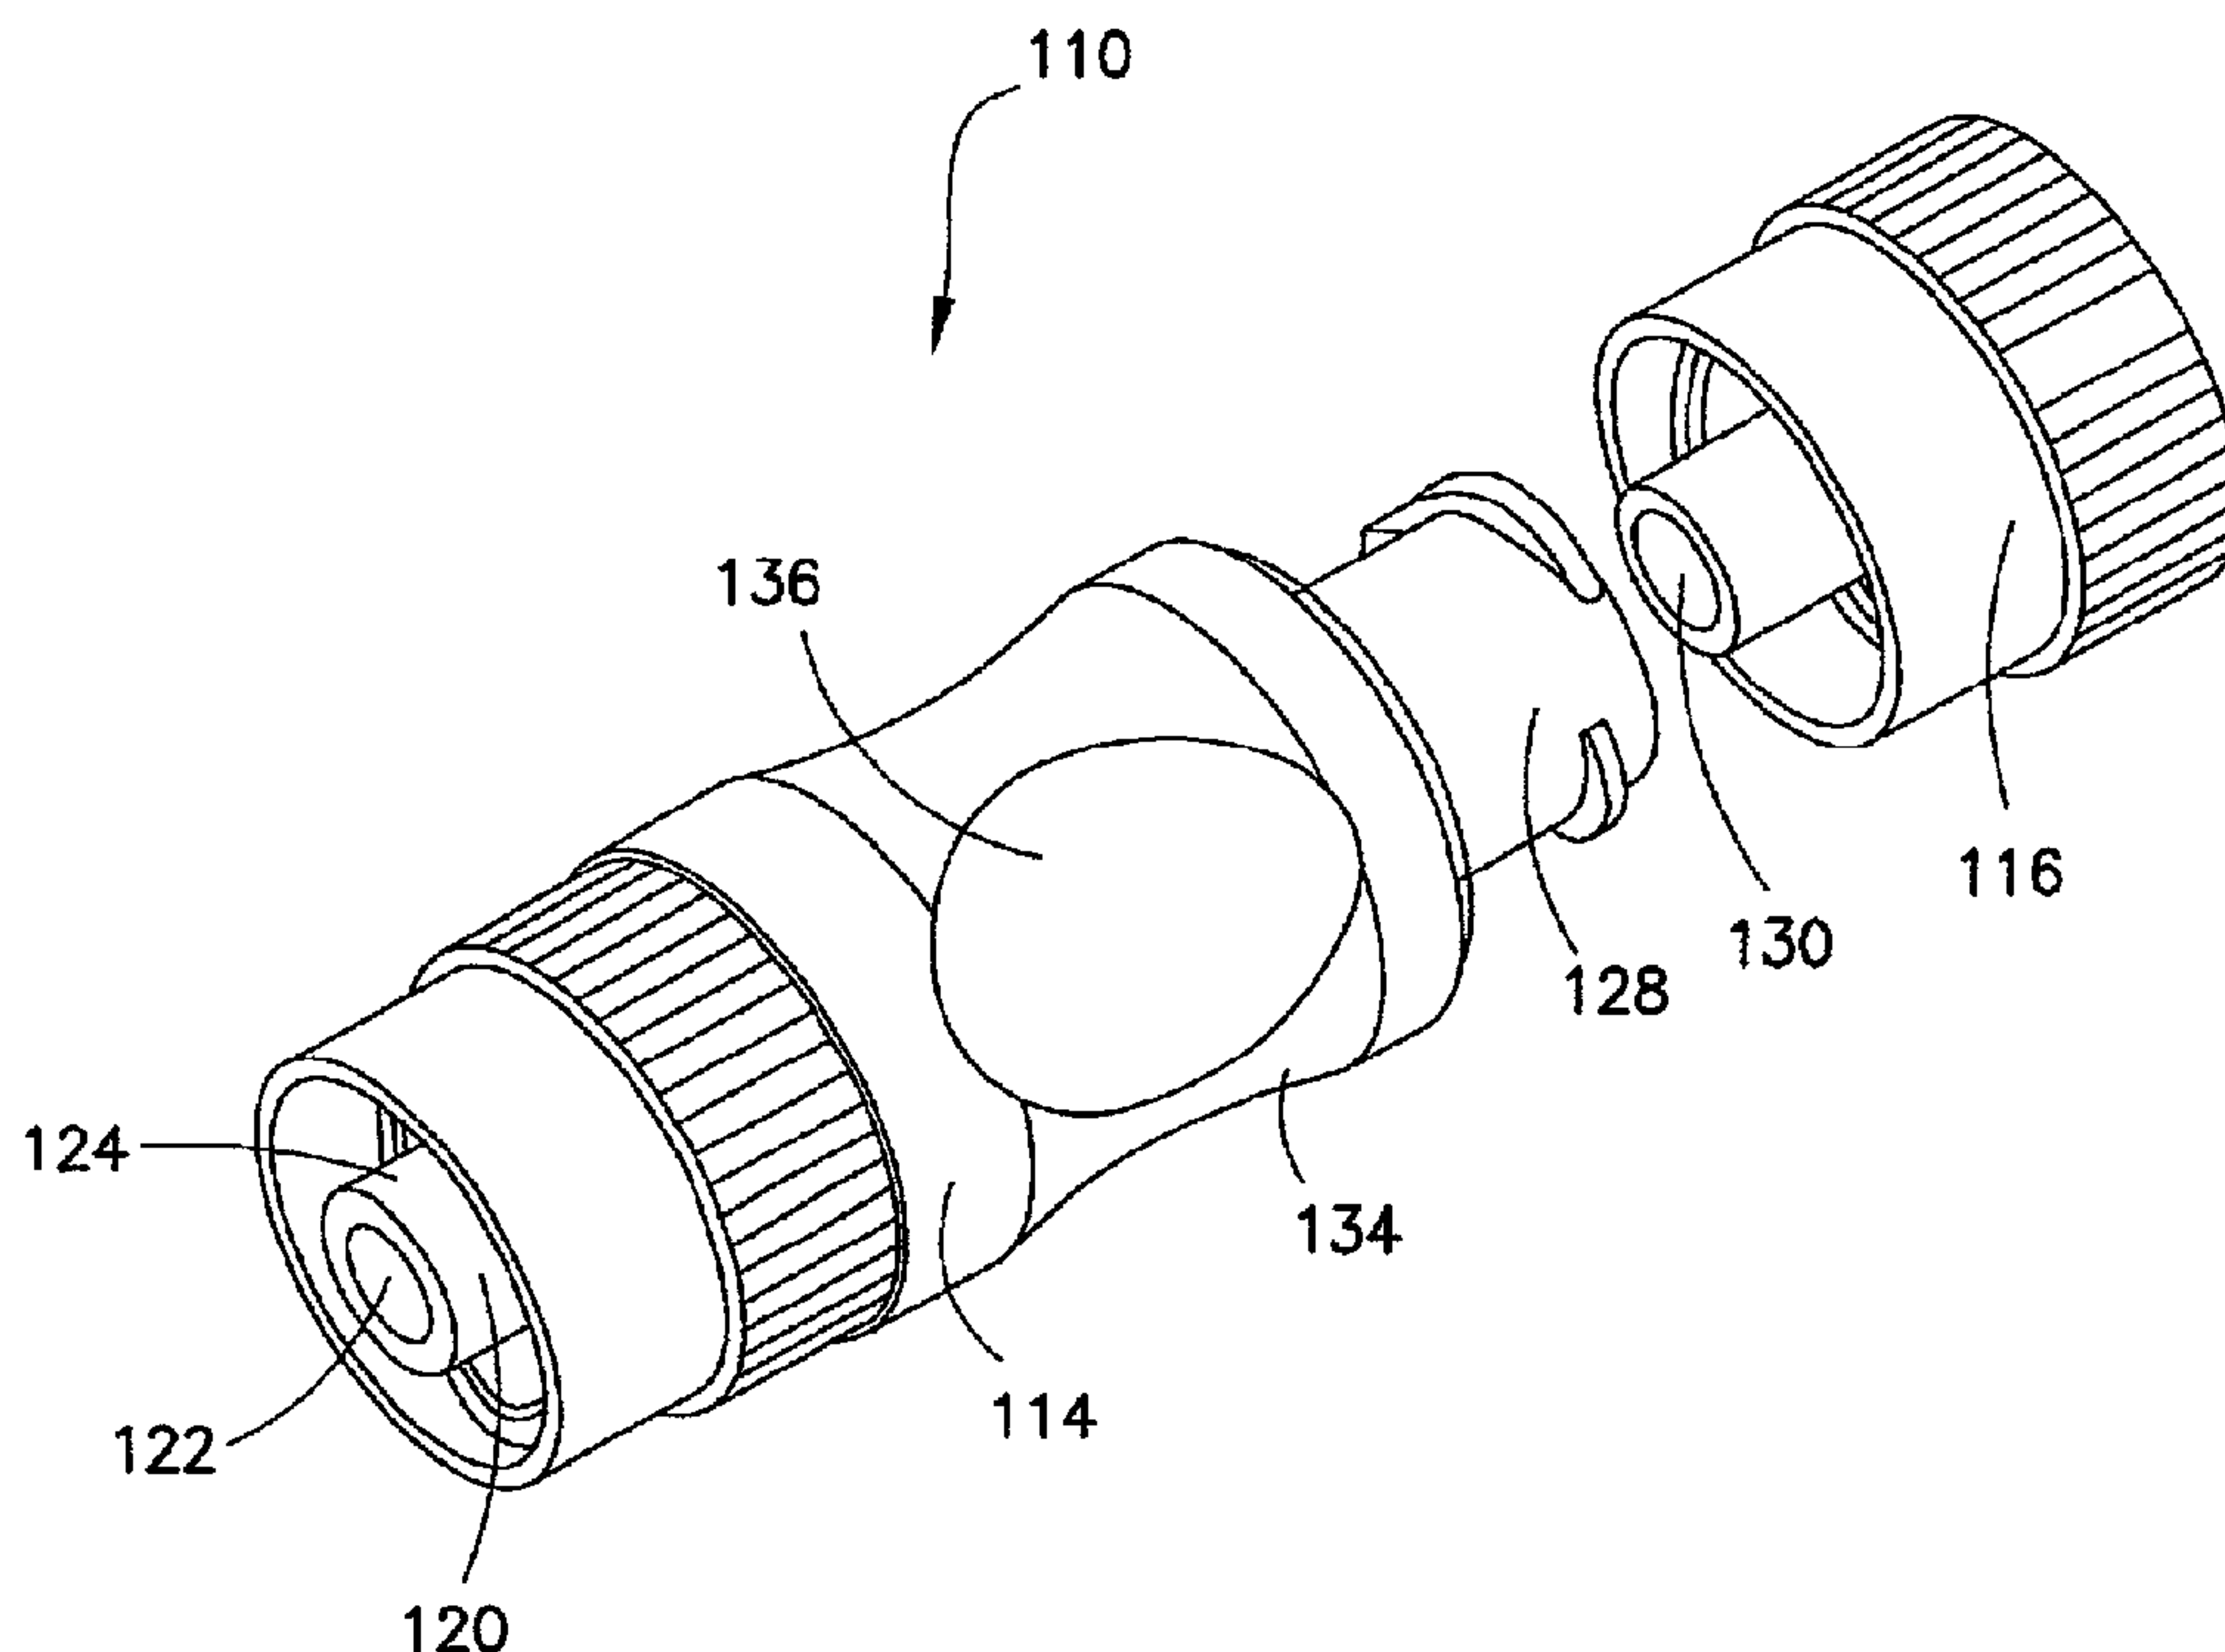

(57) **Abrégé/Abstract:**

A biological fluid sampling device for collecting a blood sample from a separate vascular access device and for ejecting a portion of the collected sample to a point-of-care testing device for analysis is provided. The biological fluid sampling device includes a body enclosing a reservoir. The reservoir has an internal volume sufficient to contain enough blood for use in a diagnostic test. The sampling device further includes: an access lumen extending from a distal end of the body for establishing fluid communication between a separate vascular access device and the reservoir; an outflow lumen also in fluid communication with the reservoir; and a removable vented cap attached to the outflow lumen including a gas permeable vent in gaseous communication between the reservoir and ambient air. In addition, several sample and transfer devices are provided for obtaining a sample from a subject and transferring the sample to a point-of-care testing device.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 October 2014 (23.10.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/172232 A1

(51) International Patent Classification:

A61B 5/15 (2006.01) *A61B 5/157* (2006.01)
A61B 5/153 (2006.01) *G01N 33/49* (2006.01)
A61B 5/154 (2006.01) *G01N 33/50* (2006.01)
A61B 5/155 (2006.01) *B01L 3/00* (2006.01)

(21) International Application Number:

PCT/US2014/033920

(22) International Filing Date:

14 April 2014 (14.04.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/811,918 15 April 2013 (15.04.2013) US

(71) Applicant: **BECTON, DICKINSON AND COMPANY**
[US/US]; One Becton Drive, Franklin Lakes, New Jersey
07417 (US).

(72) Inventors: **BURKHOLZ, Jonathan, Karl**; 3610 Hermes
Drive, Salt Lake City, Utah 84124 (US). **DAVIS, Bryan,
Garret**; 1 Quietwood Lane, Sandy, Utah 84092 (US).

(74) Agents: **MILES, Kirk, M.** et al.; The Webb Law Firm,
One Gateway Center, 420 Fort Duquesne Boulevard, Suite
1200, Pittsburgh, Pennsylvania 15222 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MEDICAL DEVICE FOR COLLECTION OF A BIOLOGICAL SAMPLE

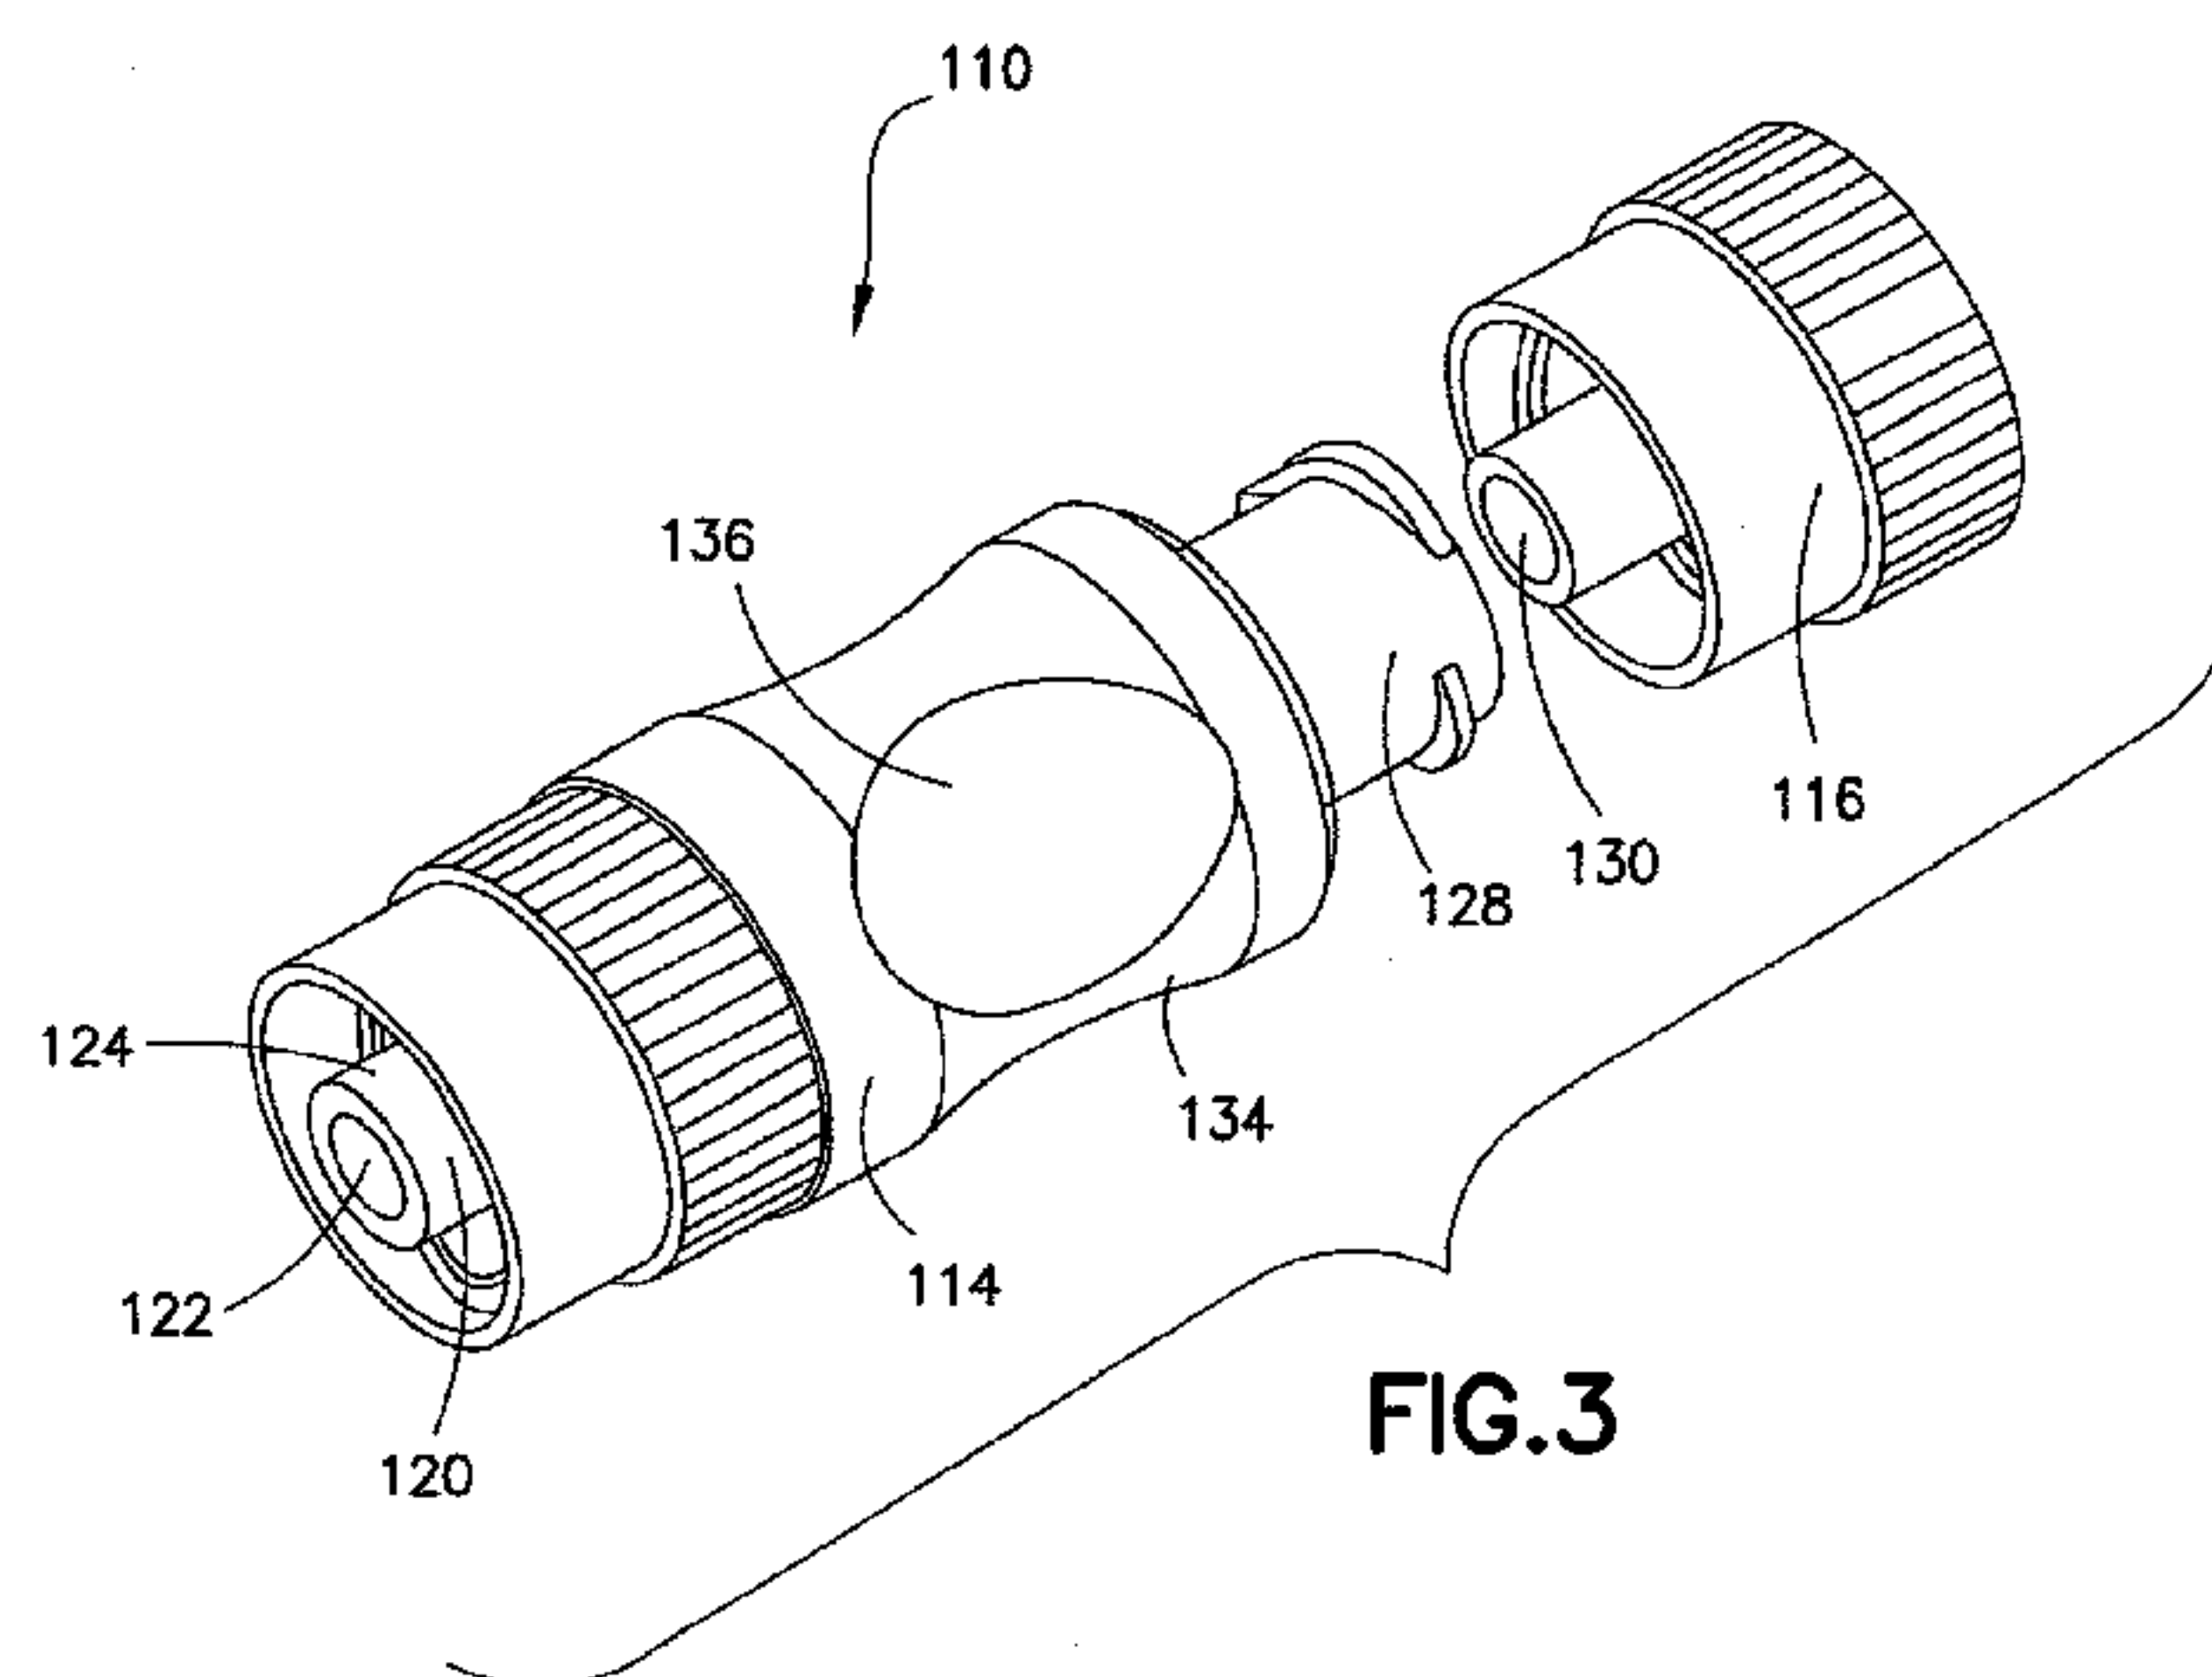


FIG. 3

(57) Abstract: A biological fluid sampling device for collecting a blood sample from a separate vascular access device and for ejecting a portion of the collected sample to a point-of-care testing device for analysis is provided. The biological fluid sampling device includes a body enclosing a reservoir. The reservoir has an internal volume sufficient to contain enough blood for use in a diagnostic test. The sampling device further includes: an access lumen extending from a distal end of the body for establishing fluid communication between a separate vascular access device and the reservoir; an outflow lumen also in fluid communication with the reservoir; and a removable vented cap attached to the outflow lumen including a gas permeable vent in gaseous communication between the reservoir and ambient air. In addition, several sample and transfer devices are provided for obtaining a sample from a subject and transferring the sample to a point-of-care testing device.

MEDICAL DEVICE FOR COLLECTION OF A BIOLOGICAL SAMPLE

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to devices, assemblies, and systems adapted for use with vascular access devices, for collecting biological samples for use in point-of-care testing, and for filling specimen collection containers for use in conventional laboratory testing.

2. Description of Related Art

[0002] Blood sampling is a common health care procedure involving the withdrawal of at least a drop of blood from a patient. Blood samples are commonly taken from hospitalized, homecare, and emergency room patients either by finger stick, heel stick, or venipuncture. Once collected, blood samples may be analyzed to obtain medically useful information including chemical composition, hematology, coagulation, etc.

[0003] Blood tests determine the physiological and biochemical states of the patient, such as disease, mineral content, drug effectiveness, and organ function. Blood tests may be performed in a clinical laboratory or at the point-of-care near the patient. One example of point-of-care blood testing is the routine testing of a patient's blood glucose levels which involves the extraction of blood via a finger stick and the mechanical collection of blood into a diagnostic cartridge. Thereafter, the diagnostic cartridge analyzes the blood sample and provides the clinician a reading of the patient's blood glucose level. Other devices are available which analyze blood gas electrolyte levels, lithium levels, and ionized calcium levels. Some other point-of-care devices identify markers for acute coronary syndrome (ACS) and deep vein thrombosis/pulmonary embolism (DVT/PE).

[0004] Despite the rapid advancement in point-of-care testing and diagnostics, blood sampling techniques have remained relatively unchanged. Blood samples are frequently drawn using hypodermic needles or vacuum tubes attached to a proximal end of a needle or a catheter assembly. In some instances, clinicians collect blood from a catheter assembly using a needle and syringe that is inserted into the catheter to withdraw blood from a patient through the inserted catheter. These procedures utilize needles and vacuum tubes as intermediate devices from which the collected blood sample is typically withdrawn prior to testing. These processes are thus device intensive, utilizing multiple devices in the process of obtaining, preparing, and testing blood samples. Each additional device increases the time

and cost of the testing process. A simplified device for providing blood for point-of-care testing is, therefore, desired. Additionally, since point-of-care tests are often supplemented with further conventional laboratory testing, it is also desirable to have a blood sampling and collection assembly that can be used to collect a blood sample for traditional laboratory testing and a second sample for point-of-care testing. These features are accomplished through the device, assembly, and system of the present invention.

SUMMARY OF THE INVENTION

[0005] In view of the above-described shortcomings within the prior art, a biological fluid sampling device for point-of-care testing, an extravascular system for collecting fluid samples, and methods of use thereof are provided herein. Further details and advantages of the present invention will be understood from the following detailed description read in conjunction with the accompanying drawings.

[0006] In accordance with an embodiment of the present invention, a biological fluid sampling device, such as a blood sampling device, includes a housing enclosing a biological fluid reservoir defining an interior, and an access lumen extending from a portion of the housing and establishing fluid communication between the separate vascular access device and the interior of the reservoir. The device also includes an outflow lumen extending from a portion of the housing, with the outflow lumen having a first end provided in fluid communication with the interior of the reservoir and a second end. The device also includes a vented cap removably disposed over the second end of the outflow lumen, the vented cap comprising a gas permeable vent in gaseous communication between the interior of the reservoir and an ambient environment.

[0007] In certain configurations, the device also includes a luer lock at least partially surrounding the access lumen. The vented cap may include a luer lock for insertion in the outflow lumen. The vented cap may also include a fastener for removably connecting a portion of the cap to a portion of the housing. The interior of the reservoir may be configured for receiving a fluid sample therein. The housing may also include a compressible portion and compression of the compressible portion may expel a fluid sample from the interior of the reservoir through the access lumen.

[0008] In certain configurations, the access lumen is disposed at a distal end of the housing and the outflow lumen is disposed at a proximal end of the housing. The reservoir may also contain a sample stabilizer. In still other configurations, the housing may have a visual identifier which corresponds to a specific sample stabilizer. The visual identifier may be a

specific color. Optionally, the vent may include at least one of a porous plug, a permeable membrane, and small vent holes.

[0009] In accordance with another embodiment of the present invention, a biological fluid sampling and collection assembly, such as a blood sampling and collection assembly, may include a biological fluid sampling device. The biological fluid sampling device includes a housing enclosing a biological fluid reservoir defining an interior, and an access lumen extending from a portion of the housing and establishing fluid communication between a separate vascular access device and the interior of the reservoir. The device may also include an outflow lumen extending from a portion of the housing, with the outflow lumen having a first end provided in fluid communication with the interior of the reservoir and a second end. The assembly may also include a sample collection device including an adapter for accessing an interior of a sample container and for establishing fluid communication between the biological fluid reservoir and an interior of the sample container. This allows fluid communication between the interior of the reservoir and the interior of the sample container. The sample collection device may also include a flow restrictor engaged with the adapter. The flow restrictor may be transitionable from an open position, in which fluid communication is permitted between the biological fluid reservoir and the interior of the sample container, to a closed position, in which the biological fluid reservoir is in fluid isolation from the interior of the sample container.

[0010] In certain configurations, the biological fluid reservoir contains a fluid and when the flow restrictor is in the open position, the fluid passes from the biological fluid reservoir to the interior of the sample container. The flow restrictor is in the open position when the sample container is engaged with the adapter, and the flow restrictor is in the closed position when the sample container is removed from the adapter.

[0011] In other configurations, the assembly further includes a vented cap removably disposed over the second end of the outflow lumen. The vented cap includes a gas permeable vent in gaseous communication between the interior of the reservoir and an ambient environment. The sample container may be a vacuum evacuated container. The assembly may further include the separate vascular access device in fluid communication with the access lumen.

[0012] In still other configurations, the assembly includes an adapter connected between the separate vascular access device and the biological sampling device. The adapter may include a housing, a main lumen enclosed within the housing having a main outflow port, a side port including a side lumen extending from and in fluid communication with the main

lumen, and a valve transitionable from a first position in which fluid flow is permitted through the main lumen and fluid flow is prevented through the side lumen, to a second position in which fluid flow through both the main lumen and side lumen is permitted. The valve may be transitioned from the first position to the second position by insertion of a tubular member into the side lumen through the side port.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The following description is provided to enable those skilled in the art to make and use the described embodiments contemplated for carrying out the invention. Various modifications, equivalents, variations, and alternatives, however, will remain readily apparent to those skilled in the art. Any and all such modifications, variations, equivalents, and alternatives are intended to fall within the spirit and scope of the present invention.

[0014] **FIG. 1** is a perspective view of a biological fluid sampling device, a sample container collection device, and a separate vascular access device in accordance with an embodiment of the present invention.

[0015] **FIG. 2** is a perspective view of the biological fluid sampling device of **FIG. 1** including a vented cap.

[0016] **FIG. 3** is a perspective view of the biological fluid sampling device of **FIG. 1** with a vented cap detached from the body of the device.

[0017] **FIG. 4** is a perspective cross-sectional view of the biological fluid sampling device of **FIG. 1** with the vented cap detached from the body of the device.

[0018] **FIG. 5** is a perspective view of an assembly including the biological fluid sampling device and specimen container collection device including a specimen collection container in accordance with an embodiment of the present invention.

[0019] **FIG. 6** is a cross-sectional perspective view of the assembly of **FIG. 5**.

[0020] **FIG. 7** is a cross-sectional perspective view of the assembly of **FIG. 5** with the sample collection container removed from the assembly.

[0021] **FIG. 8** is a perspective view of a system including a biological fluid sampling device, a sample container collection device, a side port connector, and a separate vascular access device in accordance with an embodiment of the present invention.

[0022] **FIG. 9** is a perspective view of the assembly of **FIG. 8** with the side port, sampling device, and collection device detached from one another.

[0023] **FIG. 10** is a side view of the side port, sampling device, and collection device of **FIG. 8**.

[0024] FIG. 11 is a cross-sectional view of the side port of FIG. 8.

[0025] FIG. 12 is a cross-sectional view of the side port of FIG. 8 with the sampling device extending therefrom.

[0026] FIG. 13 is a perspective view of a system including two biological fluid sampling devices, a side port connector, and a separate vascular access device connected to the side port device in accordance with an embodiment of the present invention.

[0027] FIG. 14 is a schematic perspective view of a user dispensing a biological fluid from the sampling device of FIG. 1, to a testing apparatus, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0028] For the purpose of facilitating understanding of the invention, the accompanying drawings and description illustrate preferred embodiments thereof, from which the invention, various embodiments of its structures, construction and method of operation, and many advantages may be understood and appreciated.

[0029] For purposes of the description hereinafter, the terms “upper”, “lower”, “right”, “left”, “vertical”, “horizontal”, “top”, “bottom”, “lateral”, “longitudinal”, and derivatives thereof shall relate to the invention as it is oriented in the drawing figures. However, it is to be understood that the invention may assume alternative variations and step sequences, except where expressly specified to the contrary. It is also to be understood that the specific devices and processes illustrated in the attached drawings, and described in the following specification, are simply exemplary embodiments of the invention. Hence, specific dimensions and other physical characteristics related to the embodiments disclosed herein are not to be considered as limiting.

[0030] The present invention relates to a biological fluid sampling device, such as a blood sampling device 110, used to collect a blood sample for use in point-of-care testing and analysis. The blood sampling device 110 is configured as part of a larger extravascular system 10, and is configured to receive the fluid sample from a separate vascular access device 12. An exemplary extravascular system is depicted in FIG. 1. The system includes the blood sampling device 110, a sample container collection device 112, and the vascular access device 12. The vascular access device 12 may include numerous components such as an intravascular needle 14, an over-the-needle catheter 16, and needle shielding structure 18, as well as integrated extension tubing 20 terminating in a luer access adapter 22 or port, as is known in the art.

[0031] Exemplary vascular access devices include both straight and ported intravenous catheters such as the AUTOGUARD™ shielded catheter commercially available from Becton, Dickinson, and Company, integrated peripheral intravenous catheters, winged needle sets, and blood collections sets. An IV access set, such as the BD NEXIVA™ Closed Intravenous (IV) Catheter System commercially available from Becton, Dickinson, and Company may also be used to create a closed access system. Similarly, an enclosed luer adapter port such as the BD Q-SYTE™ Luer Access Split Septum, also commercially available from Becton, Dickinson, and Company, may be used to entirely enclose the luer access adapter 22 between the sampling device 110 and vascular access device 12. Alternatively, the sampling device 110 may be directly connected to an intravenous catheter hub, without additional components such as extension tubing 20, to reduce the number of components and simplify the collection and sampling process.

[0032] The vascular access device 12 may further include a flow restrictor, such as a clamp 24, to restrict blood flow through the extension tubing 20 when the sampling device 110 and/or collection device 112 are removed from the extravascular system 10. Alternatively, the luer access adapter 22 may include an integral valve or septum which automatically closes to restrict fluid flow after the sampling device 110 is removed from the extravascular system 10. As will be described in greater detail below, the present invention is intended to include various modular components which can be combined to form numerous extravascular systems based on the types of blood samples to be collected. It is also intended herein, that an integrated unit of both the luer access adapter 22 and the sampling device 110 may be provided within the scope of the present invention. Alternative configurations of an extravascular system 10, within the scope of the present invention and including multiple blood sampling devices and/or specimen container collection devices, are depicted in FIGS. 8 and 13.

[0033] The blood sampling device 110 includes a housing body 114, which may be formed by injection molding or blow molding, and a removeable vented end cap 116 as shown in FIG. 2. The blood sampling device 110 can, in some cases, reduce the number of components required to draw a diagnostic blood sample from a patient. This is because the blood sampling device 110 combines the ability to perform the processes of venting the extravascular system and obtaining a blood sample into a single device. More specifically, the blood sampling device 110 is configured to vent air from the extravascular system 10, thereby drawing blood from the vascular access device 12 through extension tubing 20 to the sampling device 110. External power sources such as motorized pumps, as are known in the

art, may also be used to push blood through the extravascular system 10 to the sampling device 110. The blood sampling device 110 may also receive blood via a wicking means disposed within a distal end of the device, for drawing blood into the device. The blood is retained within a reservoir 118, as shown in FIG. 4, of the sampling device 110.

[0034] Once the blood sampling device 110 is removed from the extravascular system 10, blood may be expelled from the sampling device 110, as described in greater detail below, to a point-of-care testing device 30 (shown in FIG. 14) such as a test strip, glass slide, diagnostic cartridge, or other testing device for testing and analysis. Test strips, glass slides, and diagnostic cartridges are point-of-care testing devices that receive a blood sample and test that blood for one or more physiological and biochemical states. Examples of testing cartridges include the i-STAT® testing cartridge commercially available from the Abbot group of companies. Testing cartridges such as the i-STAT® cartridges may be used to test for a variety of conditions including the presence of chemicals and electrolytes, hematology, blood gas concentrations, coagulation, or cardiac markers. The results of tests using such cartridges are quickly provided to the clinician.

[0035] With reference to FIGS. 2-4, the structure of the biological sampling device will now be described in greater detail. The housing body 114 of the biological sampling device 110 includes a narrow tubular portion 120 having an access lumen 122 configured to establish fluid communication with the separate vascular access device 12. For example, the narrow tubular portion 120 may be a male luer lock connection 124 adapted for insertion into the female luer access adapter 22 of the vascular access device 12. The reservoir 118 is enclosed within the housing body 114 and includes an internal volume sufficient to contain enough blood for use in a diagnostic test, for example, an internal volume of between about 0.1 mL and about 10 mL. Because different blood tests require different quantities of blood, in some embodiments, the reservoir 118 is sized to retain a quantity of blood needed for a specific test or a specific number of tests. The reservoir 118 may be provided with various sample stabilizers, such as blood preservatives, reagents, or anti-coagulants (e.g., heparin) to maintain the blood and to ensure its usefulness for certain intended blood tests. Optionally, the housing body 114 of the blood sampling device 110 may be provided as a specific color to signal to a user that the reservoir 118 of the sampling device 110 includes the blood preserving chemical. Blood sampling devices without the preservative may have a different housing body color to signal to the user that the blood sampling device does not include such chemicals.

[0036] The reservoir 118 is in fluid communication with both the access lumen 122 and an outflow lumen 126, generally disposed on an opposite end of the housing body 114 from the access lumen 122. The outflow lumen 126 may be enclosed by a connection structure such as a threaded port 128. As shown in the embodiments depicted in FIGS. 2-4, the threaded port 128 and outflow lumen 126 are connected to the removable end cap 116.

[0037] The removable cap 116 is configured to be attached to the threaded port 128 and includes an inner channel 130 extending through a portion of the end cap 116 which is in fluid communication with the outflow lumen 126 and reservoir 118. The inner channel 130 is provided with a gas permeable vent 132 which permits gas to pass therethrough but which prevents passage of a fluid such as blood. The vent 132 may include various structures capable of providing these properties, such as porous plugs, permeable membranes, and/or structures containing a plurality of small venting holes. The vent 132 may include a permeable portion formed from a combination of glass, polyethylene terephthalate (PET), microfiber material, and/or other synthetic materials made of high-density polyethylene fibers. The vent 132 may be hydrophobic or hydrophilic. Optionally, the vent 132 may include layers of different materials to enable the vent 132 to be both hydrophobic and air permeable.

[0038] After a sufficient portion of blood for testing is collected in the sampling device 110, the sampling device 110 may be removed from the extravascular system 10. In certain configurations of the extravascular system 10 as depicted in FIG. 1, a clamp 24 may be closed to restrict further blood flow through the extension tubing 20 before removing the sampling device 110. Alternatively, the extravascular system 10 may include a valve or septum for automatically restricting fluid flow from the vascular access device 12 once the sampling device 110 is removed.

[0039] Once removed from the extravascular system 10, the blood sampling device 110 is configured to eject at least a portion of the collected blood sample from the reservoir 118. For example, in a preferred and non-limiting embodiment, the blood sampling device 110 includes a compressible portion 134. In certain embodiments, the housing body 114 is formed from a flexible or semi-flexible material such that the entire housing body 114 is compressible. Alternatively, the compressible portion 134 may only include a smaller section of the housing body 114 which flexes when pressed. The compressible portion 134 may include ridges or other gripping members 136 to facilitate gripping, holding, and manipulation by a user. In a further non-limiting embodiment, the compressible portion 134 is disposed between two substantially rigid sections, such that the compressible portion 134

compresses when the rigid sections are pressed by a user. In this configuration, the rigid portions provide structural strength and stability for the sampling device 110. The compressible portion 134 of the housing body 114 may be achieved by thinning the wall of the housing body 114 to increase flexibility. Alternatively, the housing body 114 may be formed by a two-shot molding technique in which a flexible material is overmolded around a distal section of the housing body 114. In either case, the compressible portion 134 is more flexible than the rigid sections and configured to deflect inwardly toward the reservoir 118.

[0040] In certain configurations, the sampling device 110 is configured to retain blood when uncompressed and to eject an amount of blood when compressed. As such, once removed from the extravascular system 10, blood is naturally retained within the reservoir 118 of the blood sampling device 110 until the compressible portion 134 is compressed by a clinician. When in the uncompressed position, blood is retained within the reservoir 118 by the combination of the surface tension of the blood against the perimeter of the access lumen 122 and the fluid pressure within the reservoir 118. Accordingly, the longitudinal length of the tubular portion 120 and perimeter distance of the access lumen 122 are chosen so that when pressure is within a certain range, blood is retained within the reservoir 118. When the internal volume of the reservoir 118 is reduced, the pressure is increased beyond the retention range and blood is permitted to flow from the sampling device 110 through the access lumen 122. The blood can be ejected to a point-of-care testing device 30, such as a blood test strip, diagnostic cartridge, or onto another type of blood testing/analysis device.

[0041] In certain embodiments of the sampling device 110, the sampling device 110 may include multiple chambers within the reservoir 118. Each chamber may have an individual corresponding compressible portion 134 for dispensing only the fluid contained in the respective chamber. In this way, the sampling device 110 may contain individual samples useful for different types of testing. For example, the chambers may have different volumes as needed for particular tests. Additionally, some chambers may include chemicals, blood preservatives, or specific reagents for specific testing needs.

[0042] It is also noted that while the sampling device 110 is still connected to the extravascular system 10, the compressible portion 134 of the sampling device 110 may be used to assist in drawing blood from the vascular access device 12 into the reservoir 118. For example, a user may “pump” the compressible portion 134 of the sampling device 110 to assist in pulling the blood sample into the reservoir 118.

[0043] With reference to FIGS. 5-7, in certain configurations, the removable end cap 116 of the blood sampling device 110 is removed and the sampling device 110 is instead

connected to the sample container collection device **112** through the threaded port **128** and outflow lumen **126**. The sample container collection device **112** may be a vacuum tube collection system (e.g., a Vacutainer). A sample container **138** may be a vacuum evacuated test tube having a pierceable closure or other suitable medical container, as is known in the art. The sample container collection device **112** is configured to establish fluid communication between the separate vascular access device **12** and the sample container **138** through the sampling device **110** so that the sample container **138** may be filled with a blood sample. It is noted, that when the container is a vacuum evacuated tube, the pressure difference between the interior of the tube and the extravascular system **10** can assist in drawing fluid through the extravascular system **10** and into the sample container **138**. The filled sample container **138** may be sent to a clinical laboratory for performing certain blood tests as is commonly done in the healthcare industry.

[0044] The sample container collection device **112** includes a generally cylindrical body **140** having a fastener **142** for connecting the collection device **112** to the body of the sampling device **110**. For example, the collection device **112** may be configured to attach to the threaded port **128** of the sampling device **110** through a corresponding threaded cap **144**. The cylindrical body **140** defines an interior region **146** having an open end **148** which receives the sample container **138**. A filling adapter **150** extends within the interior region **146** from the threaded cap **144**, positioned at the base of the collection device **112**, into the interior region **146**. The filling adapter **150** may include an elongated needle cannula **152** having a sharpened tip **154** for piercing a closure **139** of the sample container **138**.

[0045] The collection device **112** is configured such that the sample container **138** is inserted through the open end **148** of the interior region **146**, closure **139** side first, and brought into contact with the needle tip **154** of the filling adapter **150**. The tip **154** of the needle cannula **152** may be permitted to pierce the closure **139** to access an interior volume of the sample container **138**. In this way, blood is permitted to flow from the vascular access device **12**, through the sampling device **110**, and through the filling adapter **150** into the internal volume of the sample container **138**, thereby filling the sample collection container **138**.

[0046] In certain configurations, a flow restrictor such as a septum **156** is disposed within a lumen of the filling adapter **150**. When the sample container **138** is affixed to the collection device **112**, the septum **156** is transitioned to the open position to permit fluid to pass therethrough for filling the sample container **138**. When the sample container **138** is removed, the septum **156** is permitted to transition to the closed position, thereby blocking

fluid access through the needle cannula **152**. It is noted that the septum **156** functions in a similar manner to the vented end cap **116** of the embodiment of the sampling device **110** described above. More specifically, when the septum **156** is in the open position, with an evacuate tube connected to the device, air is allowed to vent from the system into the vacuum tube or sample collection container such that air within the extravascular system **10** is vented from the extravascular system **10** through the needle cannula **152**. When the valve **156** is in the closed position, fluid flow and air is restricted, thereby preventing air from vacating the system and blood from filling the sampling device. Essentially, when the adapter **150** is connected with a blood sampling device, the blood sampling device is filled with blood via a vacuum tube upon connection with the adapter.

[0047] Once a sufficient portion of blood is retained within the reservoir **118**, the sampling device **110** and connected collection device **112** can be removed from the extravascular system **10**. Blood can be ejected through the access lumen **122** of the sampling device **110** for testing and analysis according to the process described above. As was the case with the biological sampling device **110** described above, the reservoir **118** and access lumen **122** are configured to retain blood within a predetermined fluid pressure range. When the compressible portion of the sampling device **110** is deflected inwardly toward the reservoir **118**, the pressure within the reservoir **118** is increased, thereby causing the fluid to be ejected from the sampling device **110** through the access lumen **122**. The blood is prevented from being ejected through the outflow lumen **126** by the closed septum **156**.

[0048] With reference now to **FIGS. 8-10**, a further embodiment of an extravascular system **10** including the vascular access device **12** having a through-portion **210** and a side port **212** is depicted. The through portion **210** includes a main outflow port **214** in addition to the side port **212**. The main outflow port **214** and/or the side port **212** may include female luer lock connections configured to receive a corresponding narrow tubular portion **120** of a blood sampling device **110**, as is depicted in **FIG. 8**.

[0049] By including a blood sampling device **110** in each of the main outflow port **214** and the side port **212**, blood samples may be collected for different types of testing and analysis. For example, the sampling devices **110** may be configured to collect different volumes of blood. Alternatively, one blood sampling device **110** may include a preservative or anti-coagulant for modifying the composition of the collected blood while the second sampling device **110** may not include any such chemical components. In certain embodiments, the side port **212** may be used to access a blood sample which the blood sampling device remains connected to the adapter and the vascular access device.

[0050] In one non-limiting embodiment, the sampling device 110, which is free of preservative chemicals, may be connected to the sample container collection device 112. In this configuration, a blood sample having a preservative for point-of-care testing, a blood sample without a preservative for additional point-of-care testing, and a blood sample contained within a sample container 138 for conventional laboratory testing may be collected at the same time through the same vascular access device 12. There is no need for additional finger pricks or needle insertions to obtain the required samples from the patient. In certain embodiments, the sampling devices 110 may be color coded so that a user can easily distinguish which sampling device 110 includes additional preserving chemicals and which sampling device does not.

[0051] With reference to FIGS. 11 and 12, cross sectional views of the blood sampling device 110 having a through portion 210 and sampling device 110 are depicted. The through portion 210 includes a main lumen 216 extending from the luer access adapter 22 of the main outflow port 214 and the blood sampling device 110 also includes a side lumen 218 extending to the side outflow port 212. The device may further include an internal transitionable valve 220. As shown in FIG. 11, the valve 220 is configured so that in the unbiased, closed position, fluid flow through the main lumen 216 from the luer access adapter 22 to the main outflow port 214 is permitted; fluid flow through the side lumen 218 to the side port 212 is prevented. This configuration permits blood to flow directly to the sample container collection device 112 so that sample containers 138 may be filled easily and, if necessary, continuously. As shown in FIG. 12, the valve 220 is transitioned to a second position when the narrow tubular portion 120 and access lumen 122 of the sampling device 110 are inserted into the side port 212. More specifically, the narrow tubular portion 120 contacts a portion of the valve 220 and pushes the valve 220 out of the way. When the valve 220 is pushed out of the way, fluid communication between the main lumen 216 and side lumen 218 is established thereby permitting the sampling device 110, inserted through the side port 212, to fill with blood for testing.

[0052] With reference to FIG. 13, a further embodiment of the extravascular system 10 is depicted including both the main outflow port 214 and the side port 212 connected to sampling devices 110 with end caps 116 affixed thereto. The sampling devices 110 are not connected to a sample container collection device 112 as was depicted in FIG. 8. In this configuration, the sampling devices 110 can be filled and used for different testing and analysis procedures. As described above, one sampling device 110 may include a

preservative chemical and the other may not. The sampling devices 110 may be color coded to clarify which sampling device is intended for use in which testing or analysis procedure.

[0053] Having described the components of the blood sampling device 110, sample container collection device 112, and various configurations for extravascular systems 10, a method of collecting a blood sample using an extravascular system 10 will now be described. A clinician establishes a vascular access site on a patient using any known means for establishing such access such as a needle 14, catheter 16, or blood collection set as is known in the art. The needle 14 and/or catheter 16 may include a shielding structure 18 for shielding a user from the needle 14 as well as other safety structures as are known in the art. Extension tubing 20 is connected to the vascular access device 12 and extends from the vascular access site to an open end of the tube having a port or luer access adapter 22. The luer access adapter 22 may include a valve or septum 156 to prevent flow of fluid from the access site when the luer access adapter 22 is not connected to another device. Alternatively, the tubing may have a flow restrictor, such as a clamp 24, which can be manually transitioned from a fluid allowing a position in which fluid flow is restricted. The clinician can transition the clamp 24 as necessary to perform the desired procedure.

[0054] Once the vascular access device 12 is in place, the clinician inserts the narrow tubular portion 120 of the sampling device 110 into the female luer access adapter 22 of the vascular access device 12 to establish fluid communication between the vascular access device 12 and sampling device 110. In certain configurations, the sampling device 110 is provided with the vented end cap 116 already attached. As blood is drawn into the extravascular system 10, air within the system is vented through the end cap 116, thereby drawing blood toward the sampling device 110. Alternatively, the sampling device 110 may be provided with a sample container collection device 112 attached thereto. In that case, air is vented through the sampling device 110 and exits the extravascular system 10 through the needle cannula 152 of the collection device 112.

[0055] If a collection device 112 is connected to the extravascular system 10, the clinician will permit blood to flow through the sampling device 110 and into the sample container 138. When the container 138 is filled with a desired amount of blood, the sample container 138 is removed from the collection device 112. Removing the sample collection container 138 causes the septum 156 of the collection device 112 to seal, thereby preventing further flow of blood through the needle cannula 152. The clinician may insert additional sample containers 138 on the collection device 112 to collect additional blood samples. Once the required

number of sample containers **138** is filled, the septum **156** is closed and blood collects in the reservoir **118** of the sampling device **110**.

[0056] In either of the above described configurations, the next step is removing the sampling device **110** from the vascular access device **12**. In certain configurations, before removing the sampling device **110**, the clinician must close the flow restrictor or clamp **24** to prevent additional fluid flow through the extension tubing **20**. Alternatively, the female luer access adapter **22** may include an automatically closeable valve or septum **156** which closes to prevent further fluid flow through the extravascular system **10**. When the sampling device **110** is removed from the female luer access adapter **22**, blood is retained within the reservoir **118** of the sampling device **110** by the surface tension of the blood relative to the inner peripheral wall of the access lumen **122**. The clinician then moves the sampling device **110** to a point-of-care testing device **30** such as a test strip. As is shown in FIG. 14, the clinician compresses the sampling device **110** causing the compressible portion **134** to deflect inwardly toward the reservoir **118**, thereby reducing the inner volume of the reservoir **118** and increasing the fluid pressure within the reservoir **118**. When a specific internal fluid pressure is reached, a portion of the blood contained in the reservoir **118** is ejected from the reservoir **118** through the access lumen **122** and narrow tubular portion **120** of the sampling device **110**. The ejected blood is permitted to collect on the test strip or within the diagnostic testing cartridge. The clinician may then analyze the blood sample using the point-of-care testing device **30** and record relevant results for further analysis.

[0057] The present blood sampling device **110**, extravascular system **10**, and method of use thereof, significantly reduces the number of components required in order to obtain a diagnostic blood sample following vascular access using an IV or similar blood collection set. As described herein, embodiments of the blood sampling device **110**, specimen container collection device **112**, and extravascular system **10** may be used to obtain, prepare, and directly test blood samples during normal process of venous access. The extravascular system **10** may also be used to fill a standard sample container **138** to send to a laboratory for traditional testing. These embodiments facilitate the entire blood sampling process for clinicians by reducing the number of process steps and reducing the amount of time between sampling and obtaining test results.

[0058] As discussed hereinabove, various point-of-care testing devices **30** are known in the art. Such point-of-care testing devices **30** include test strips, glass slides, diagnostic cartridges, or other testing devices for testing and analysis. Test strips, glass slides, and diagnostic cartridges are point-of-care testing devices **30** that receive a blood sample and test

that blood for one or more physiological and biochemical states. There are many point-of-care devices **30** that use cartridge based architecture to analyze very small amounts of blood bedside without the need to send the sample to a lab for analysis. This saves time in getting results over the long run but creates a different set of challenges versus the highly routine lab environment. Examples of such testing cartridges include the i-STAT[®] testing cartridge from the Abbot group of companies. Testing cartridges such as the i-STAT[®] cartridges may be used to test for a variety of conditions including the presence of chemicals and electrolytes, hematology, blood gas concentrations, coagulation, or cardiac markers. The results of tests using such cartridges are quickly provided to the clinician.

[0059] Although the invention has been described in detail for the purpose of illustration based on what is currently considered to be the most practical and preferred embodiments, it is to be understood that such detail is solely for that purpose and that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover modifications and equivalent arrangements that are within the spirit and scope of the appended claims. For example, it is to be understood that the present invention contemplates that, to the extent possible, one or more features of any embodiment can be combined with one or more features of any other embodiment.

THE INVENTION CLAIMED IS

1. A biological fluid sampling device engageable with a separate vascular access device, comprising:

a housing enclosing a biological fluid reservoir, the reservoir defining an interior;

an access lumen extending from a portion of the housing and establishing fluid communication between the separate vascular access device and the interior of the reservoir;

an outflow lumen extending from a portion of the housing, the outflow lumen having a first end provided in fluid communication with the interior of the reservoir and a second end; and

a vented cap removably disposed over the second end of the outflow lumen, the vented cap comprising a gas permeable vent in gaseous communication between the interior of the reservoir and an ambient environment.

2. The biological fluid sampling device of claim 1, further comprising a luer lock at least partially surrounding the access lumen.

3. The biological fluid sampling device of claim 1, wherein the vented cap comprises a luer lock for insertion in the outflow lumen.

4. The biological fluid sampling device of claim 3, wherein the vented cap comprises a fastener for removably connecting a portion of the cap to a portion of the housing.

5. The biological fluid sampling device of claim 1, wherein the interior of the reservoir is configured for receiving a fluid sample therein.

6. The biological fluid sampling device of claim 5, wherein the housing comprises a compressible portion, wherein compression of the compressible portion expels the fluid sample from the interior of the reservoir through the access lumen.

7. The biological fluid sampling device of claim 1, wherein the access lumen is disposed at a distal end of the housing and the outflow lumen is disposed at a proximal end of the housing.

8. The biological fluid sampling device of claim 1, wherein the reservoir contains a sample stabilizer.

9. The biological fluid sampling device of claim 8, wherein the housing has a visual identifier which corresponds to a specific sample stabilizer.

10. The biological fluid sampling device of claim 9, wherein the visual identifier is a specific color.

11. The biological fluid sampling device of claim 1, wherein the vent comprises at least one of a porous plug, a permeable membrane, and small vent holes.

1/13



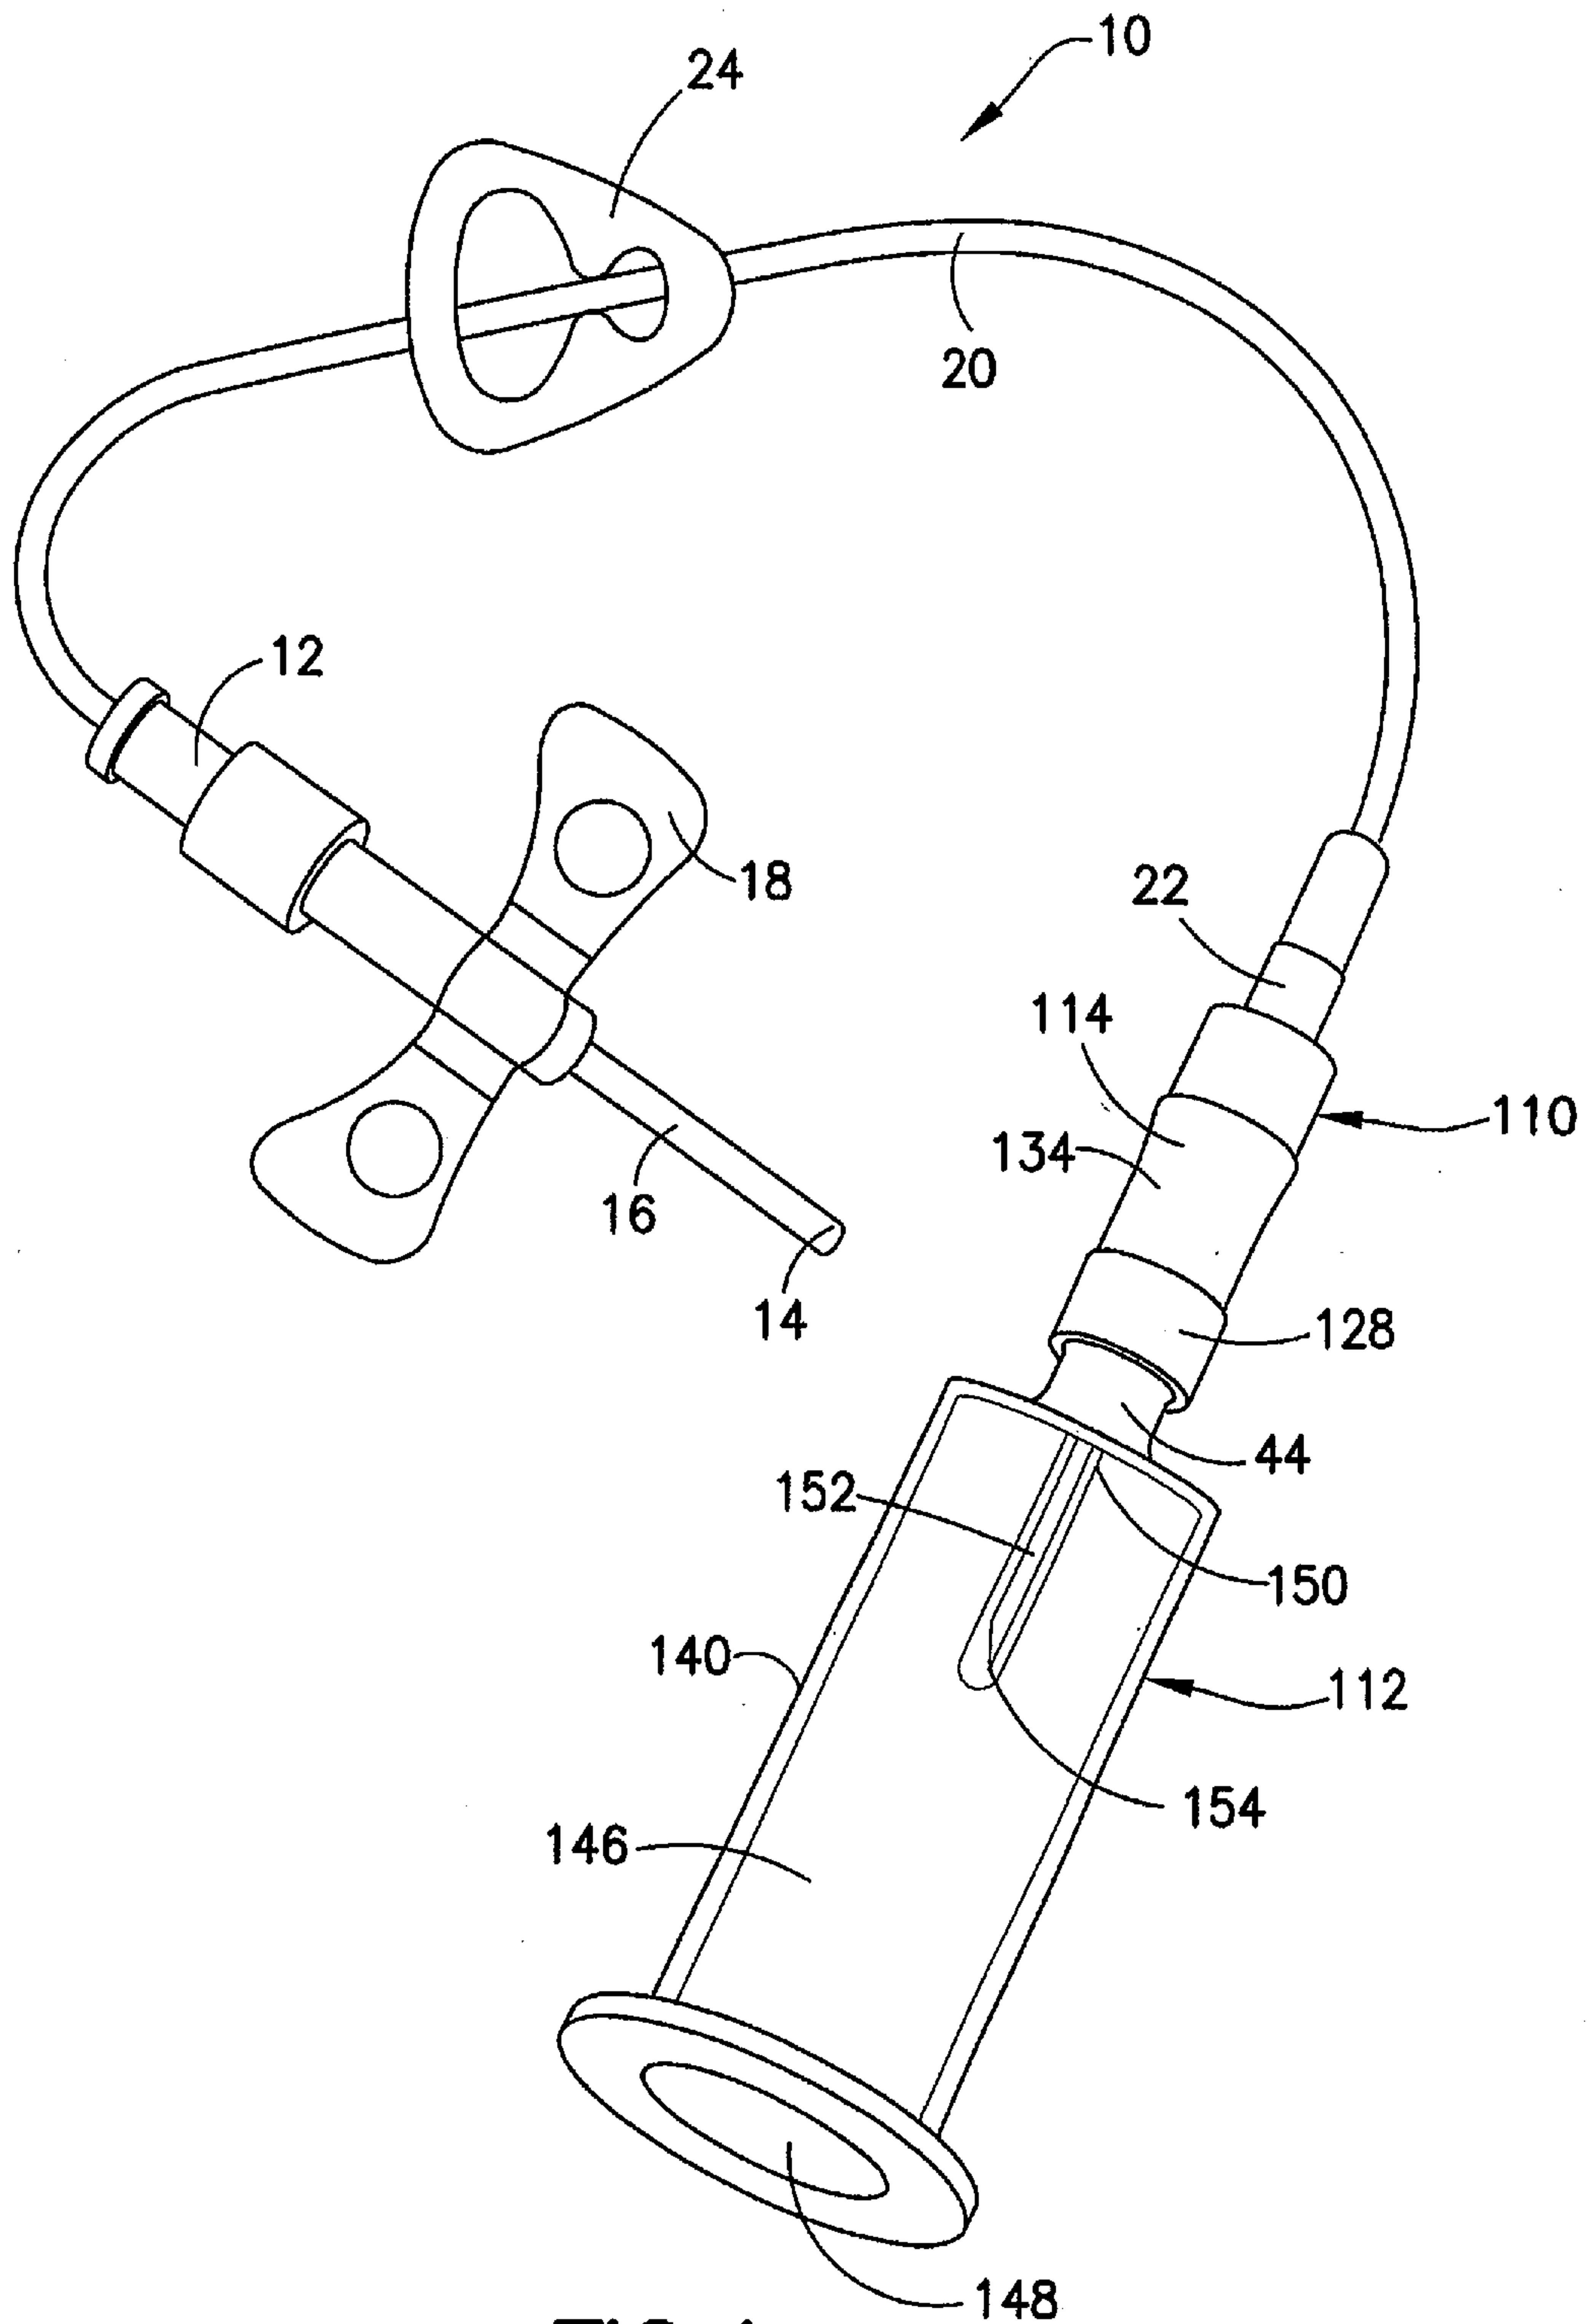



FIG. 1

2/13


**FIG. 2**


3/13

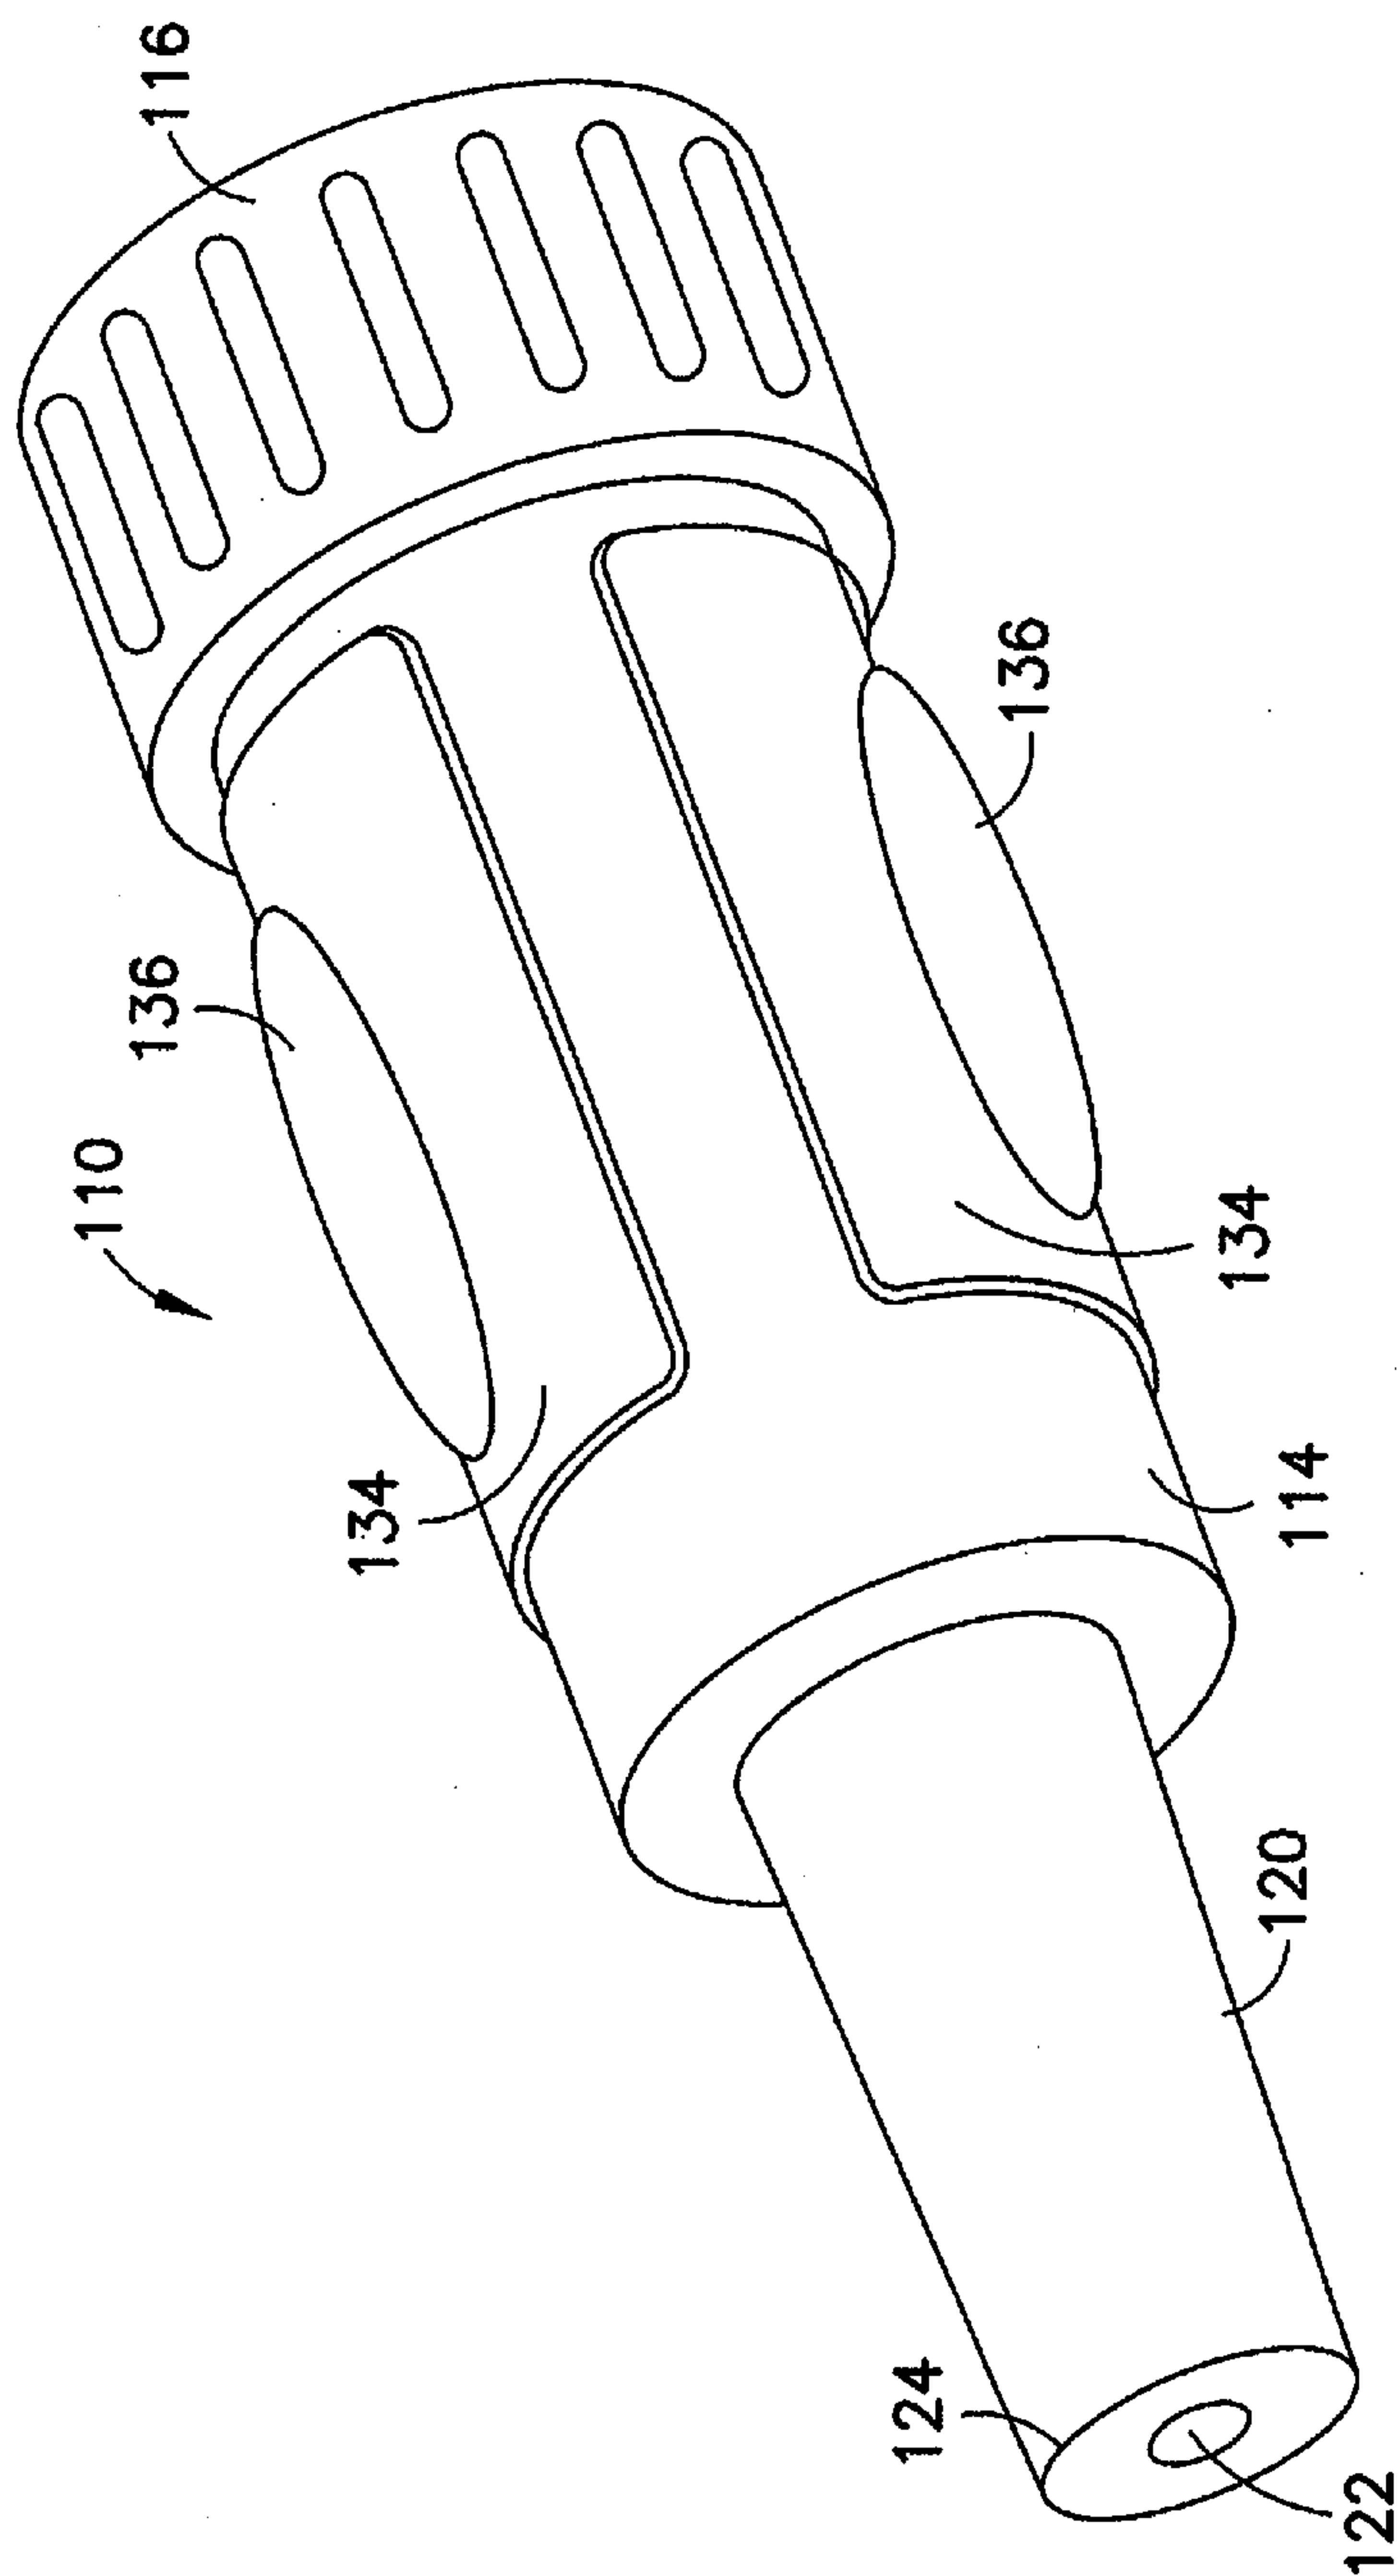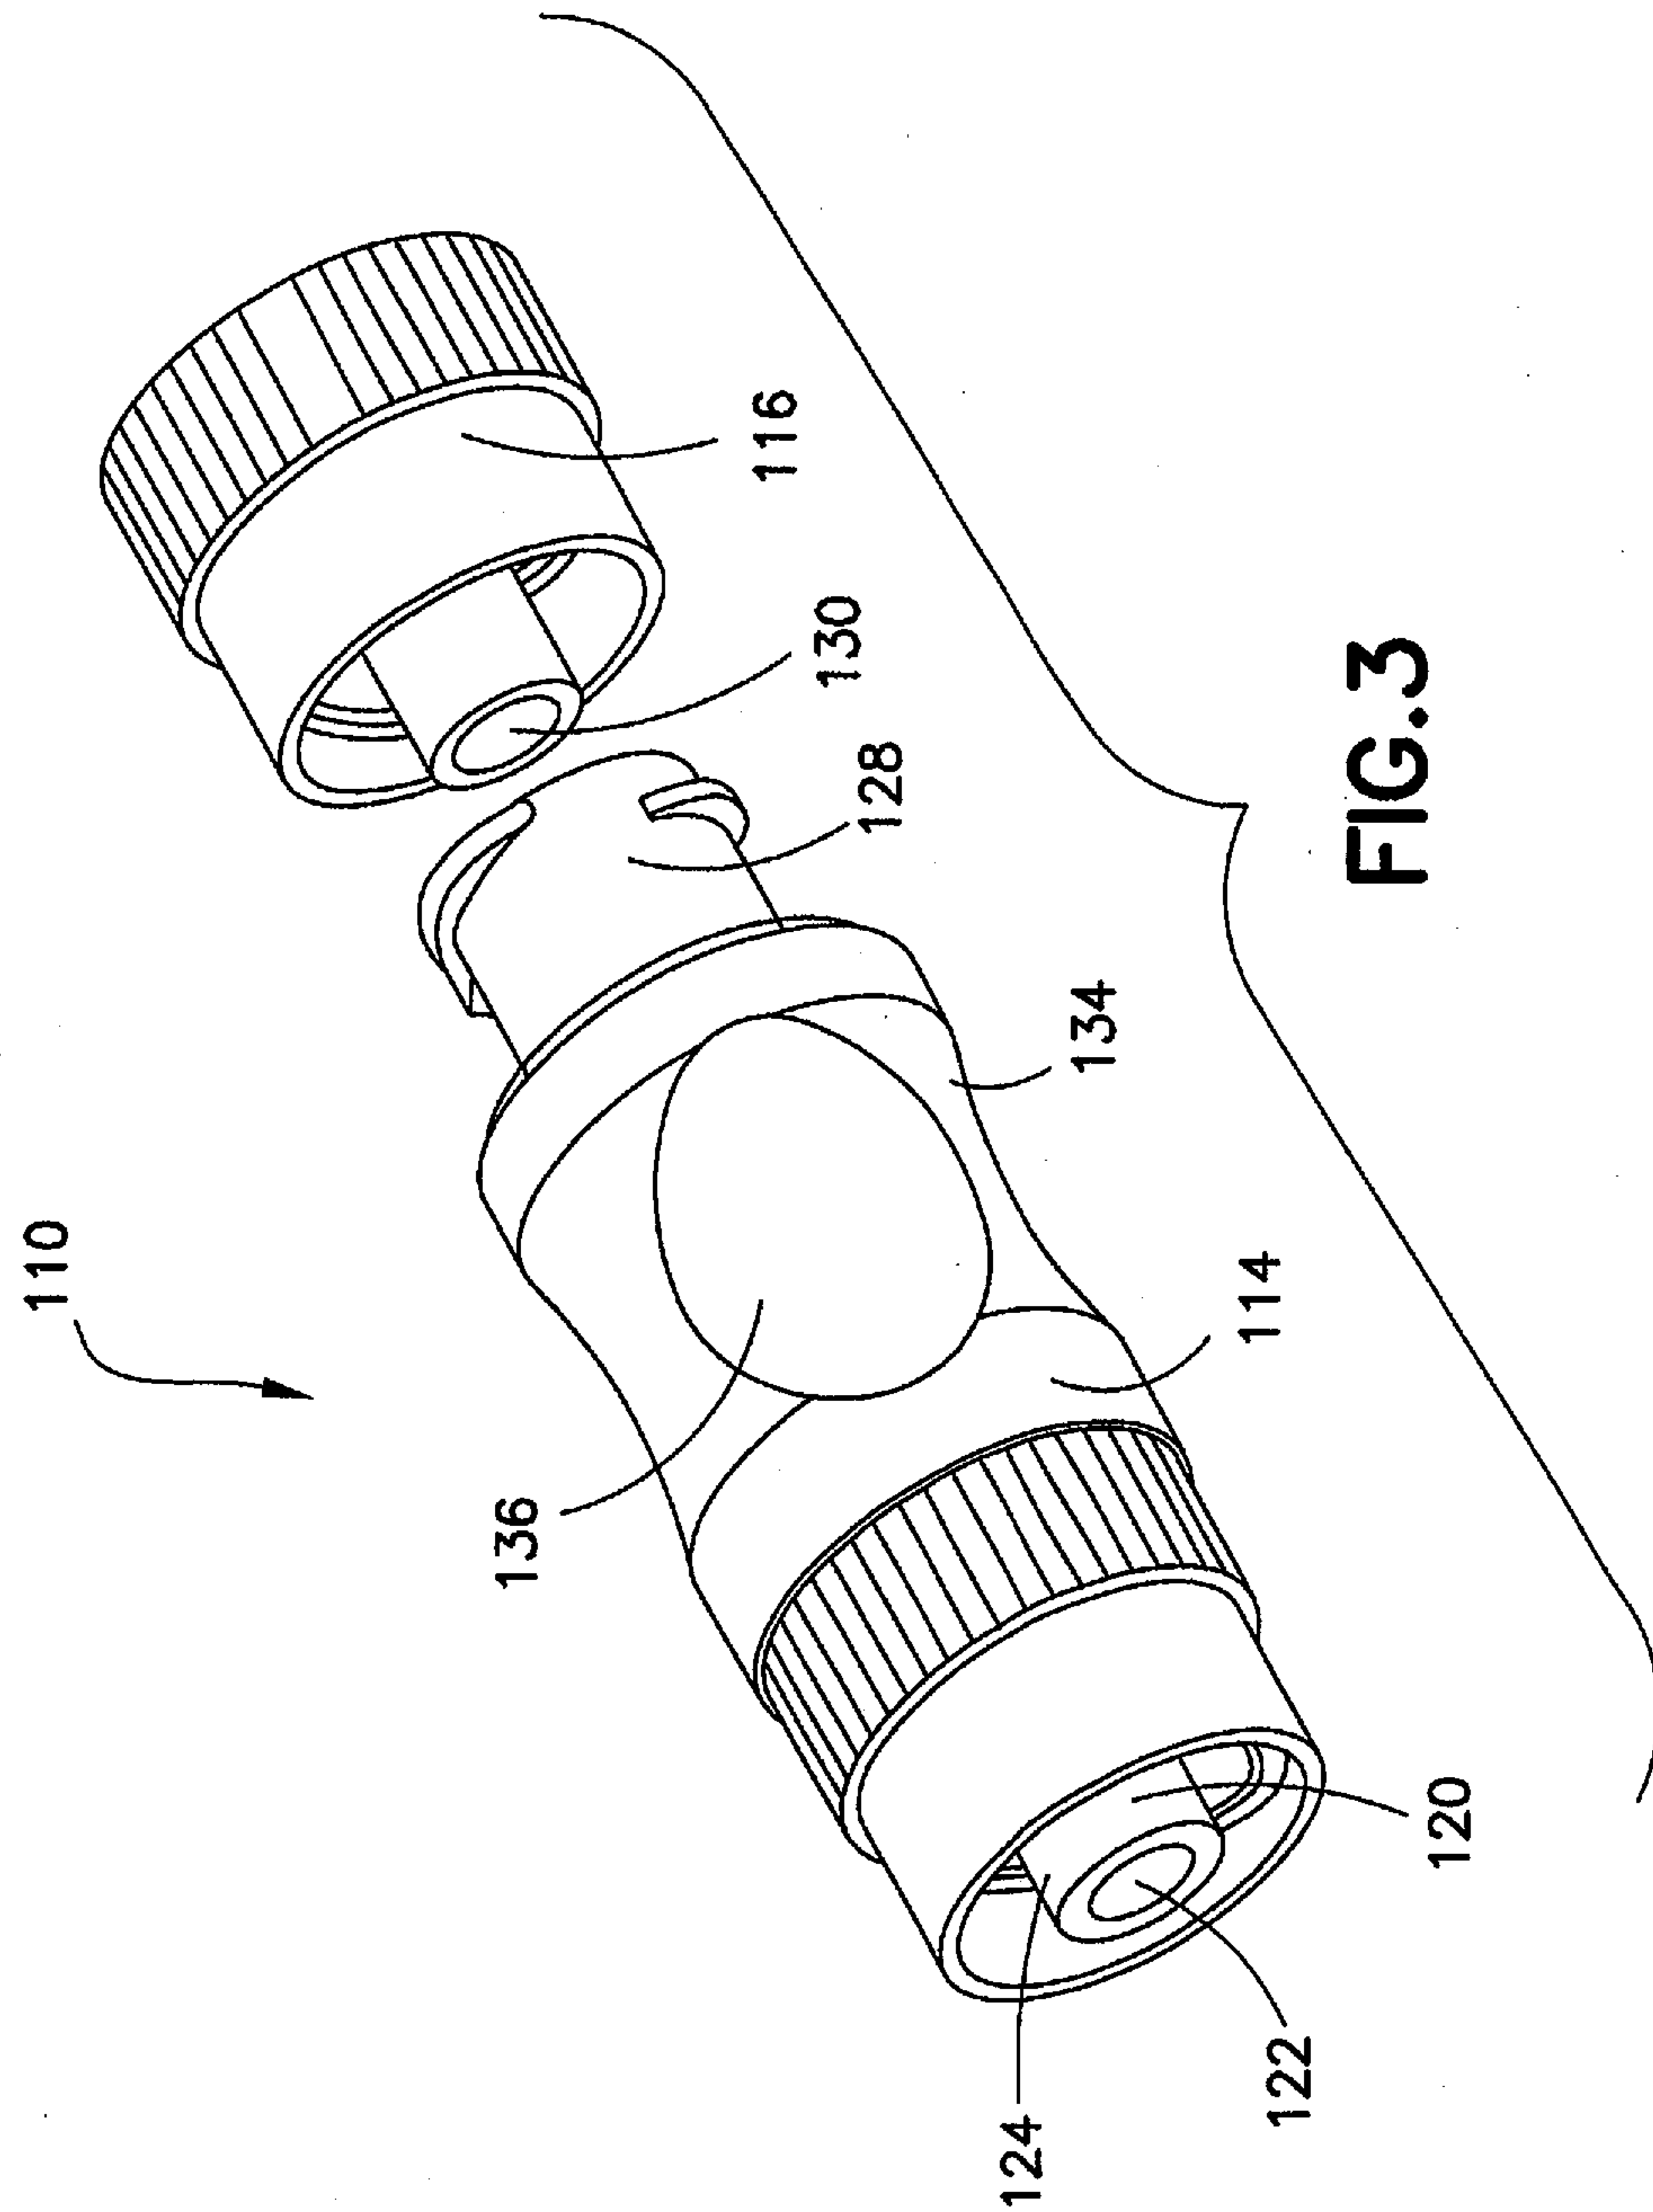

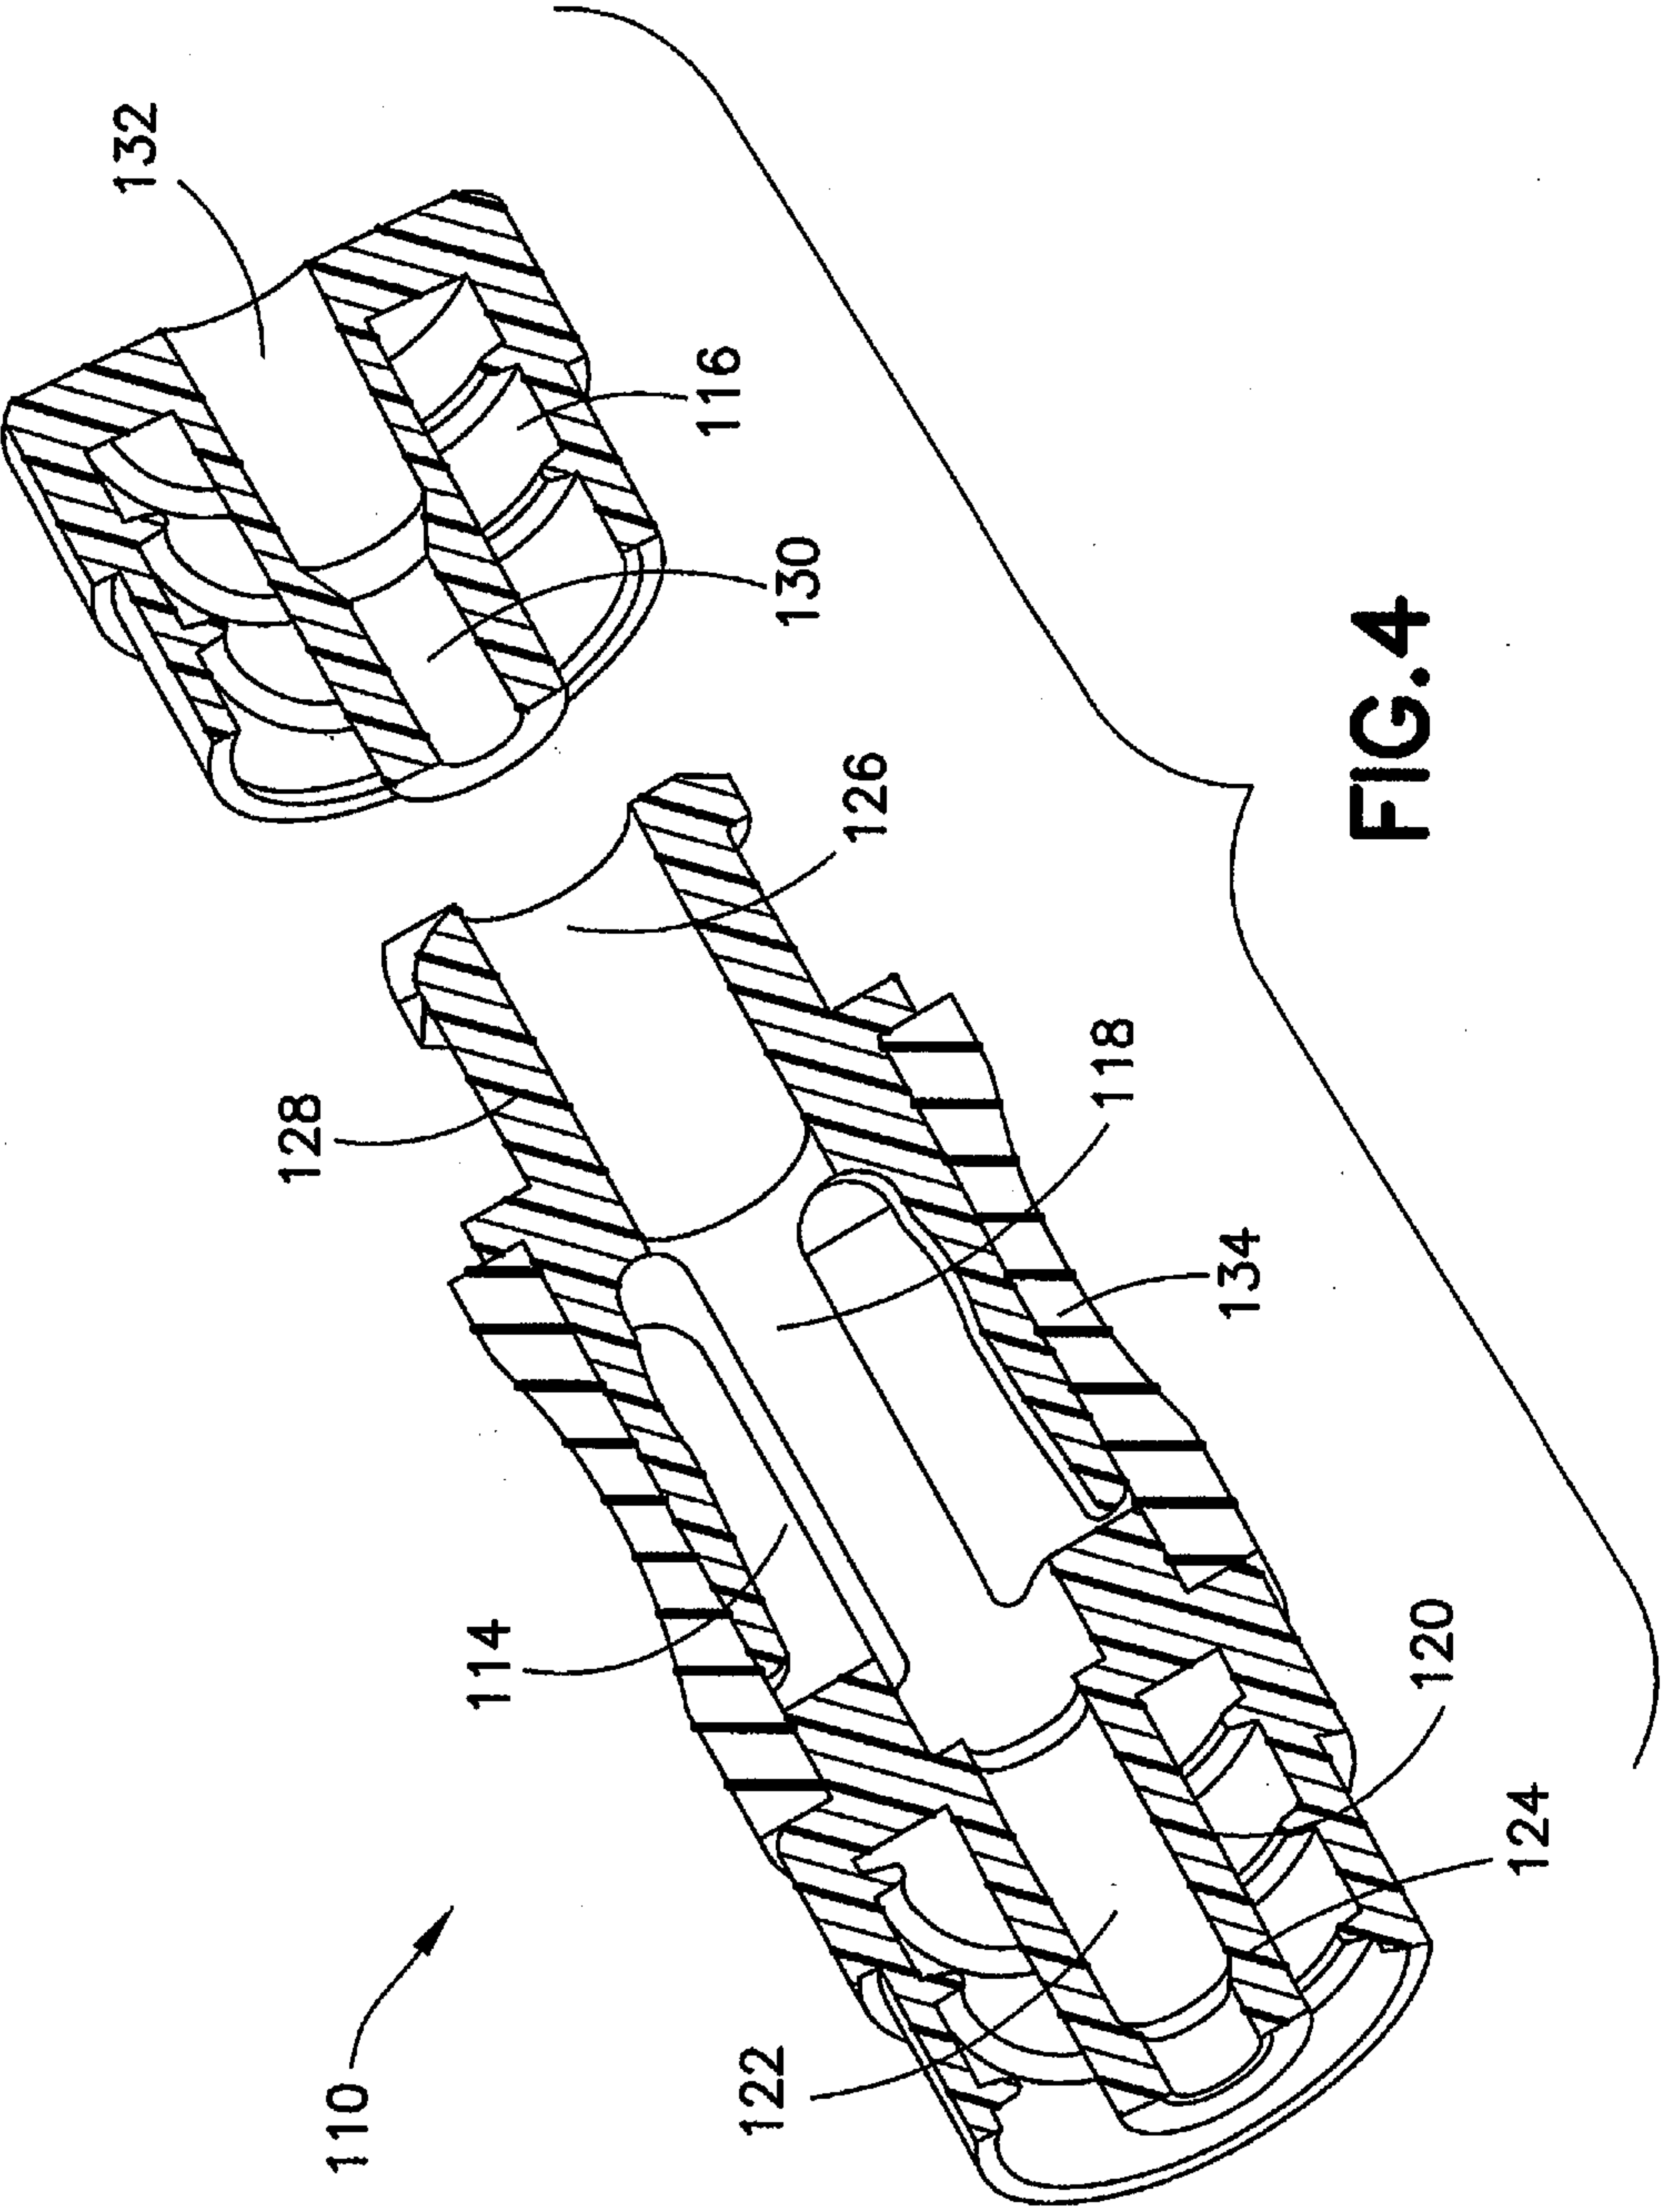



5/13

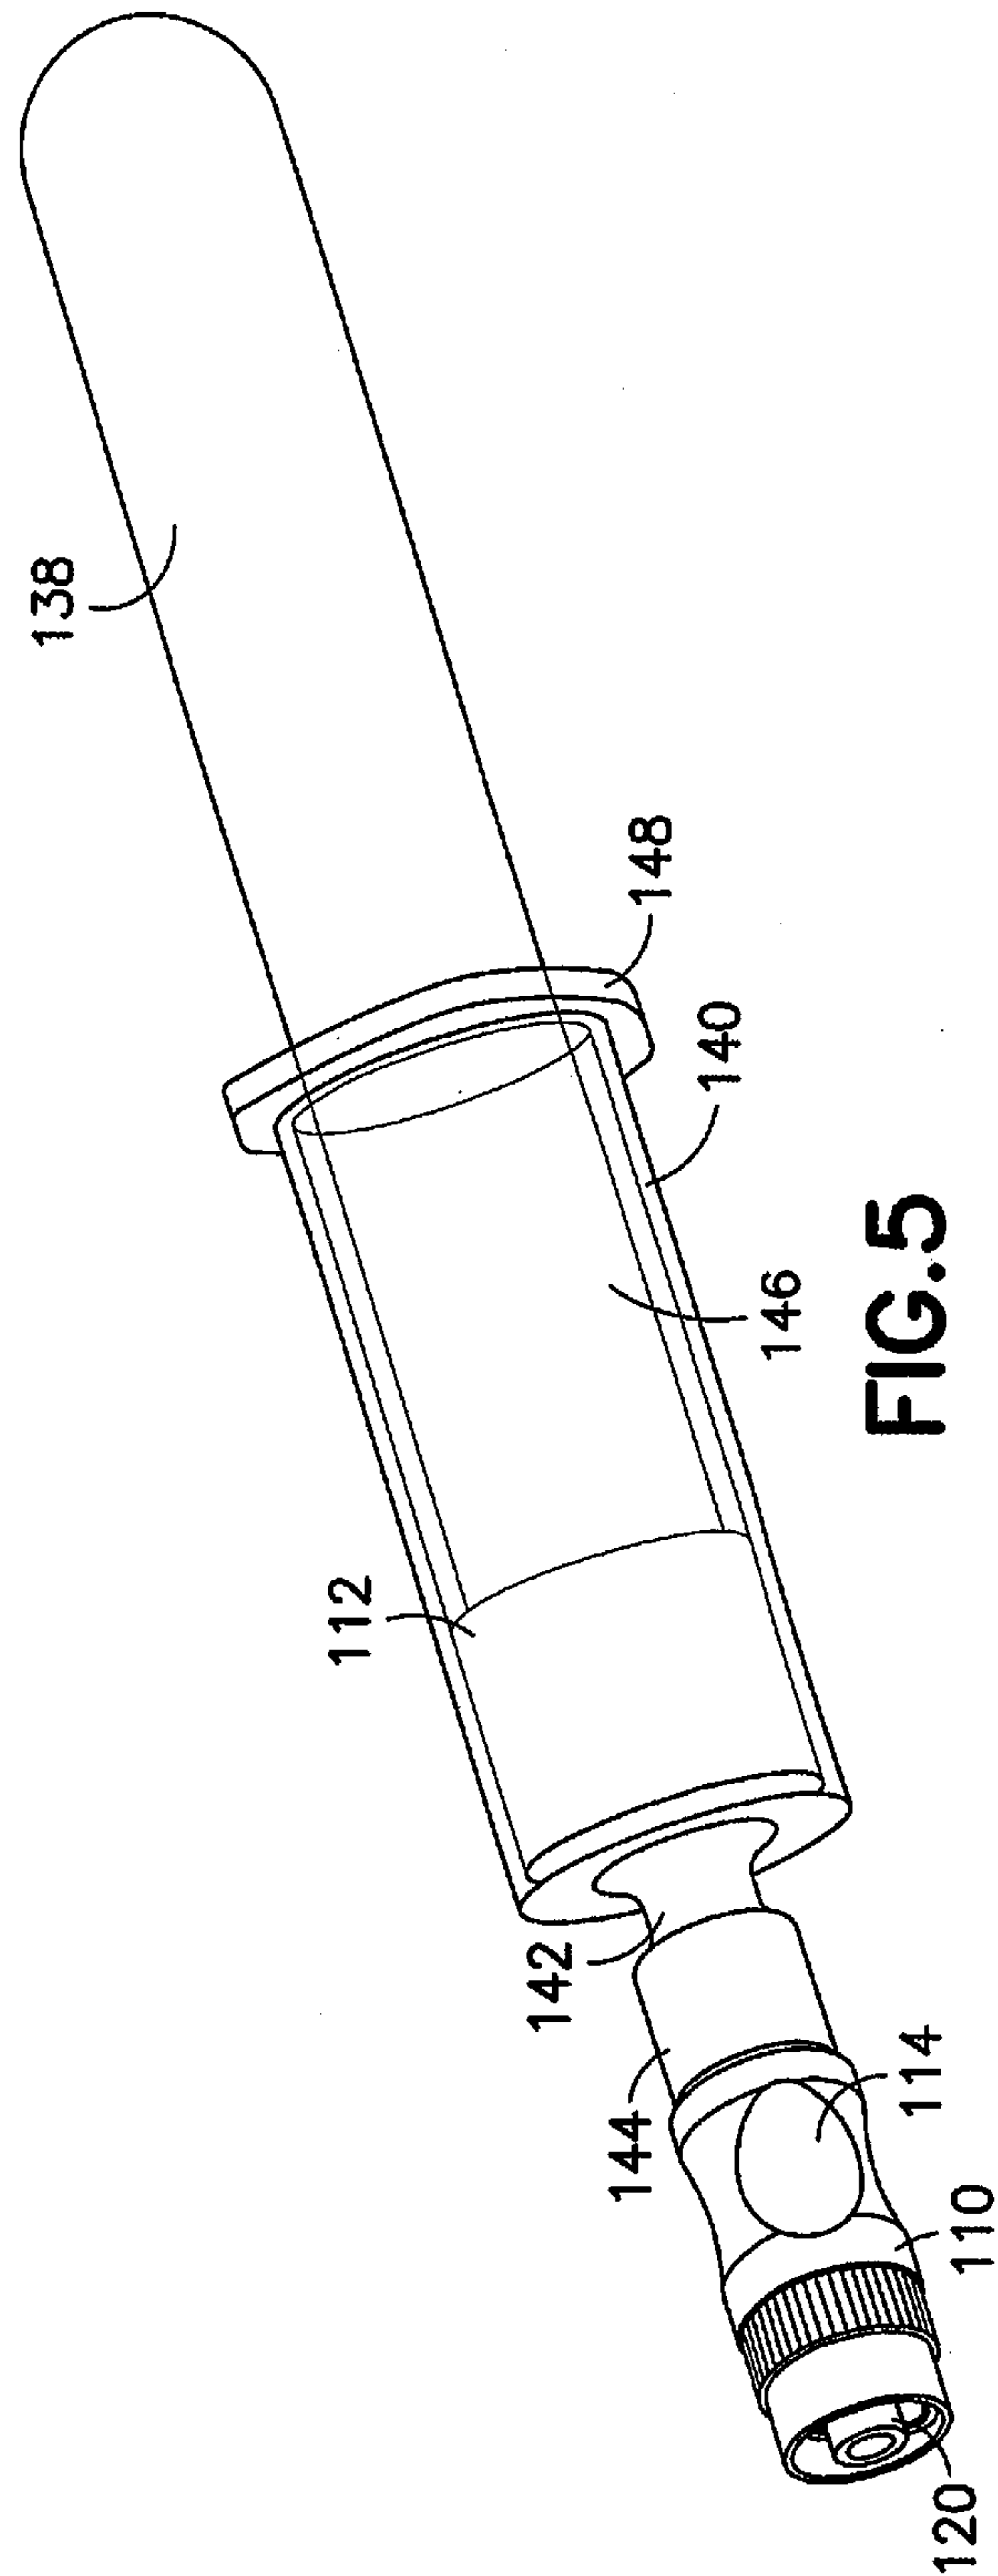


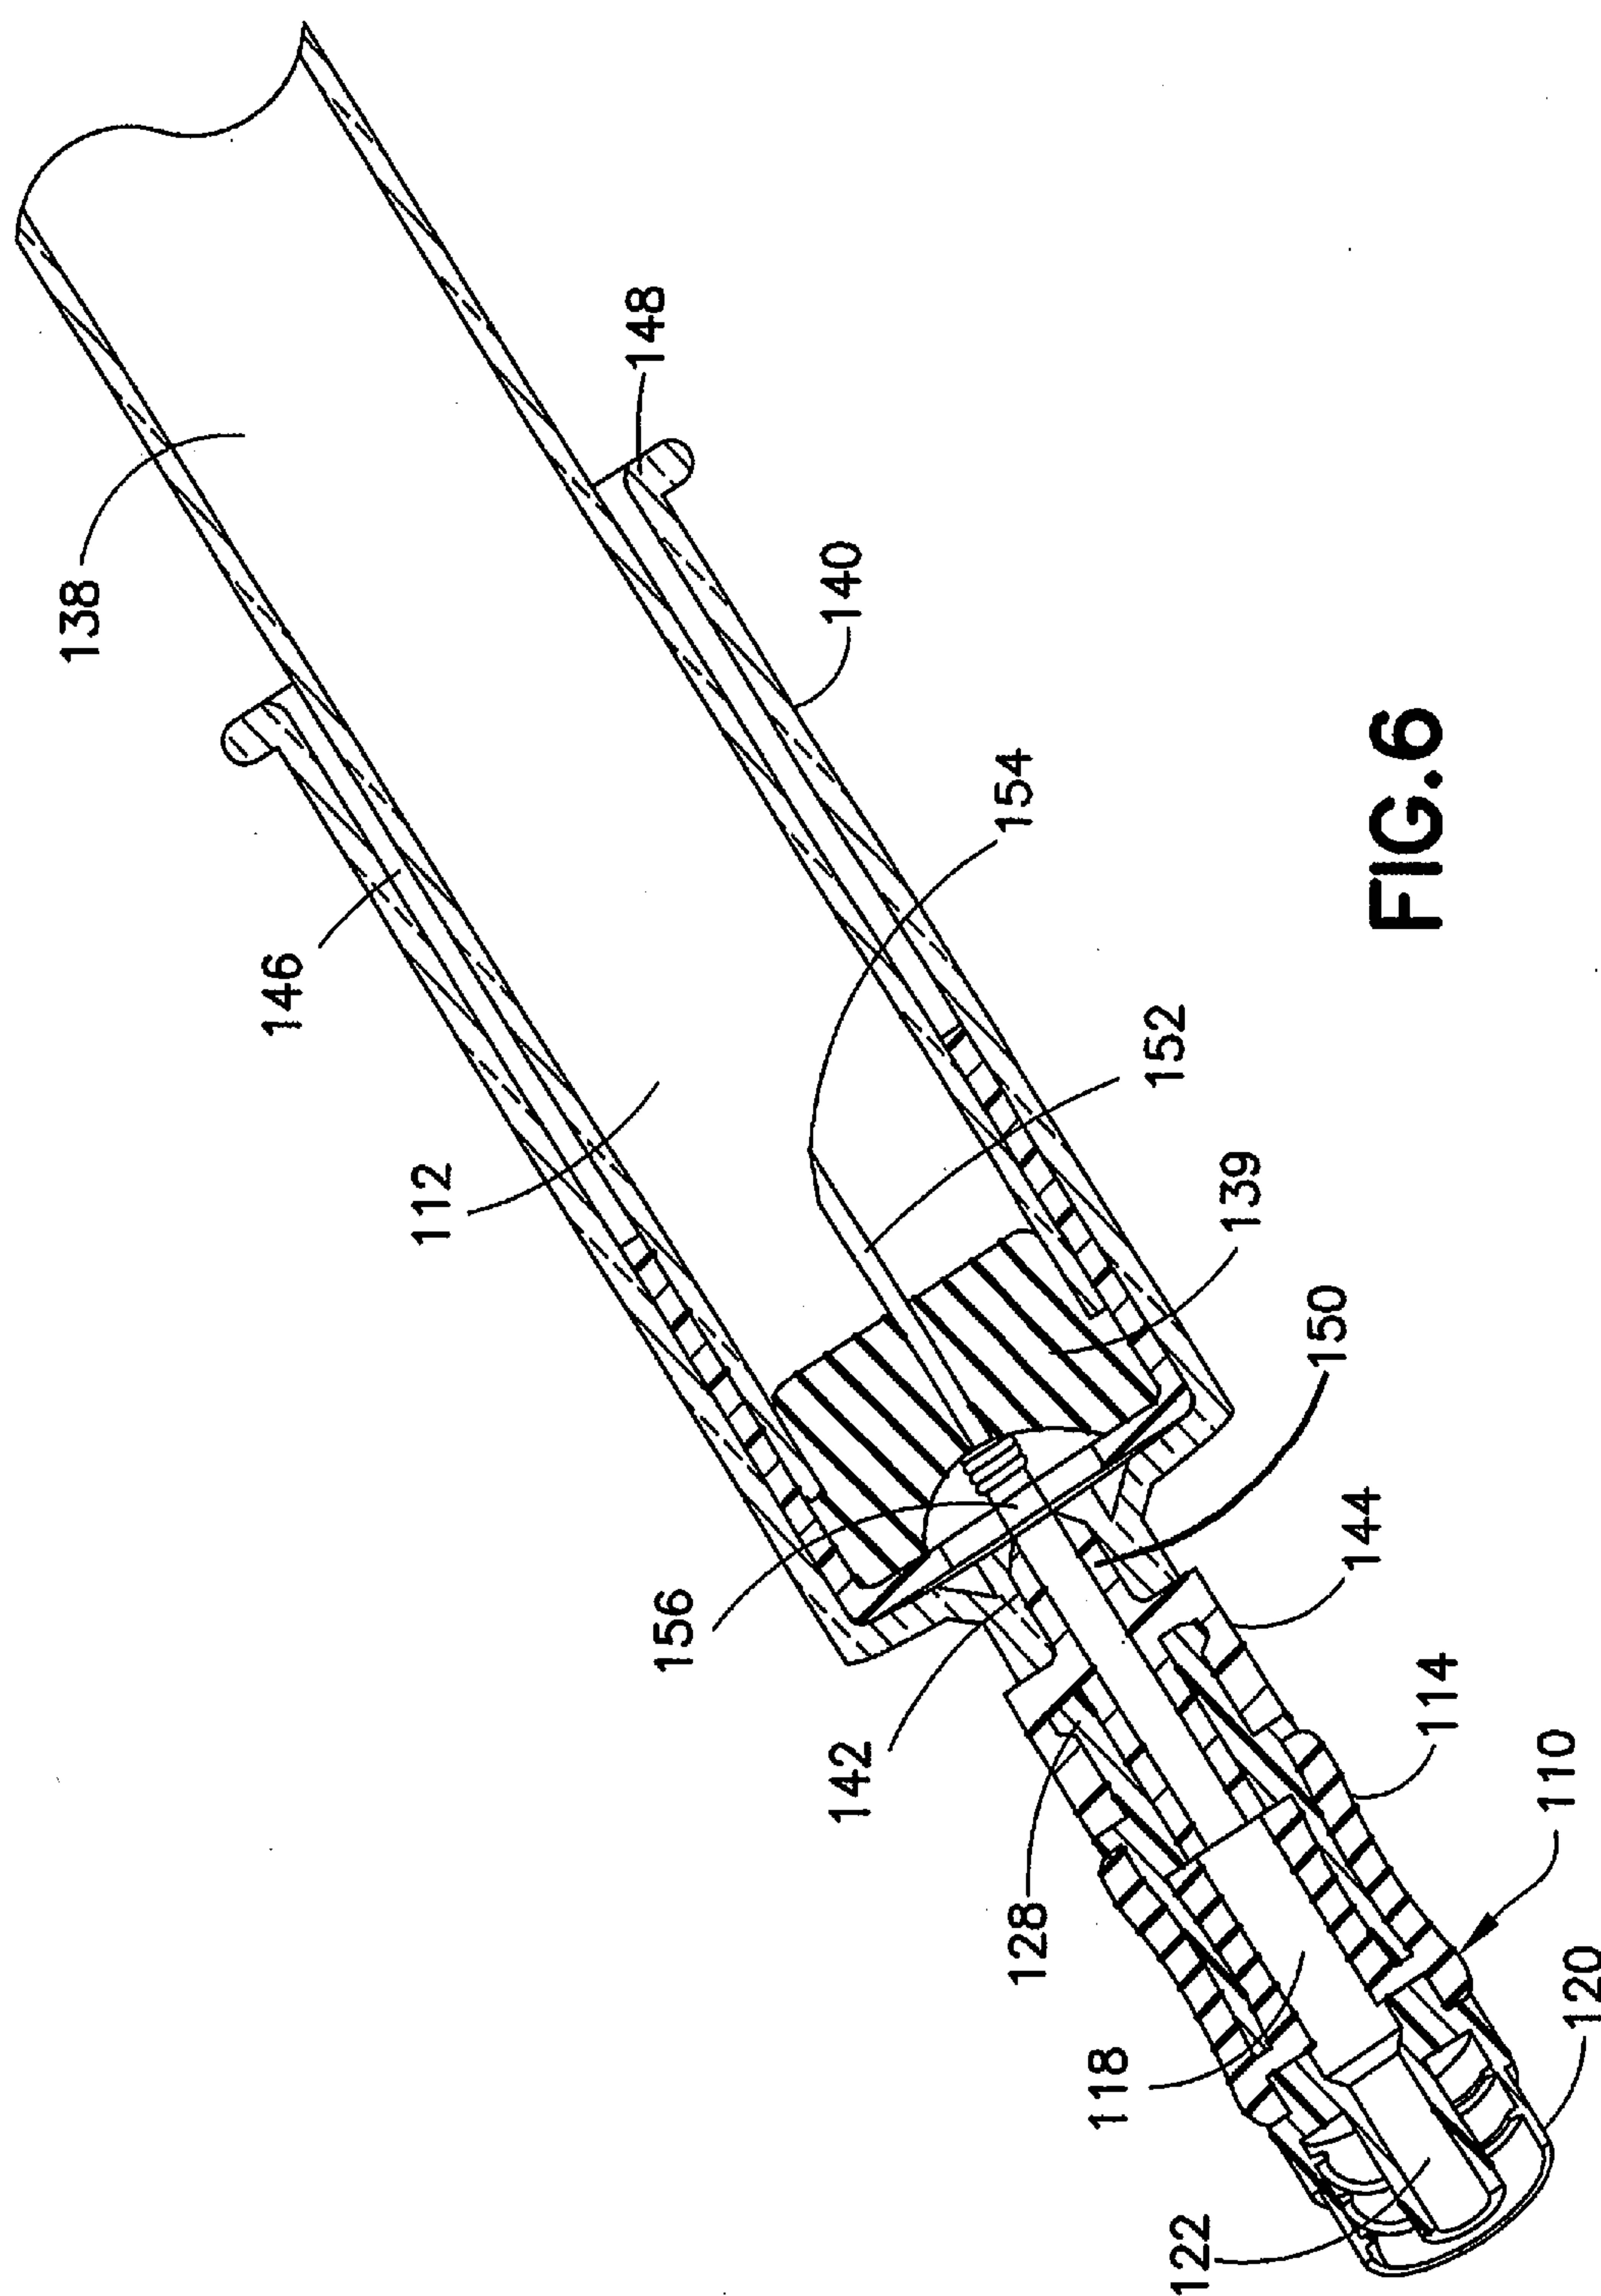


7/13

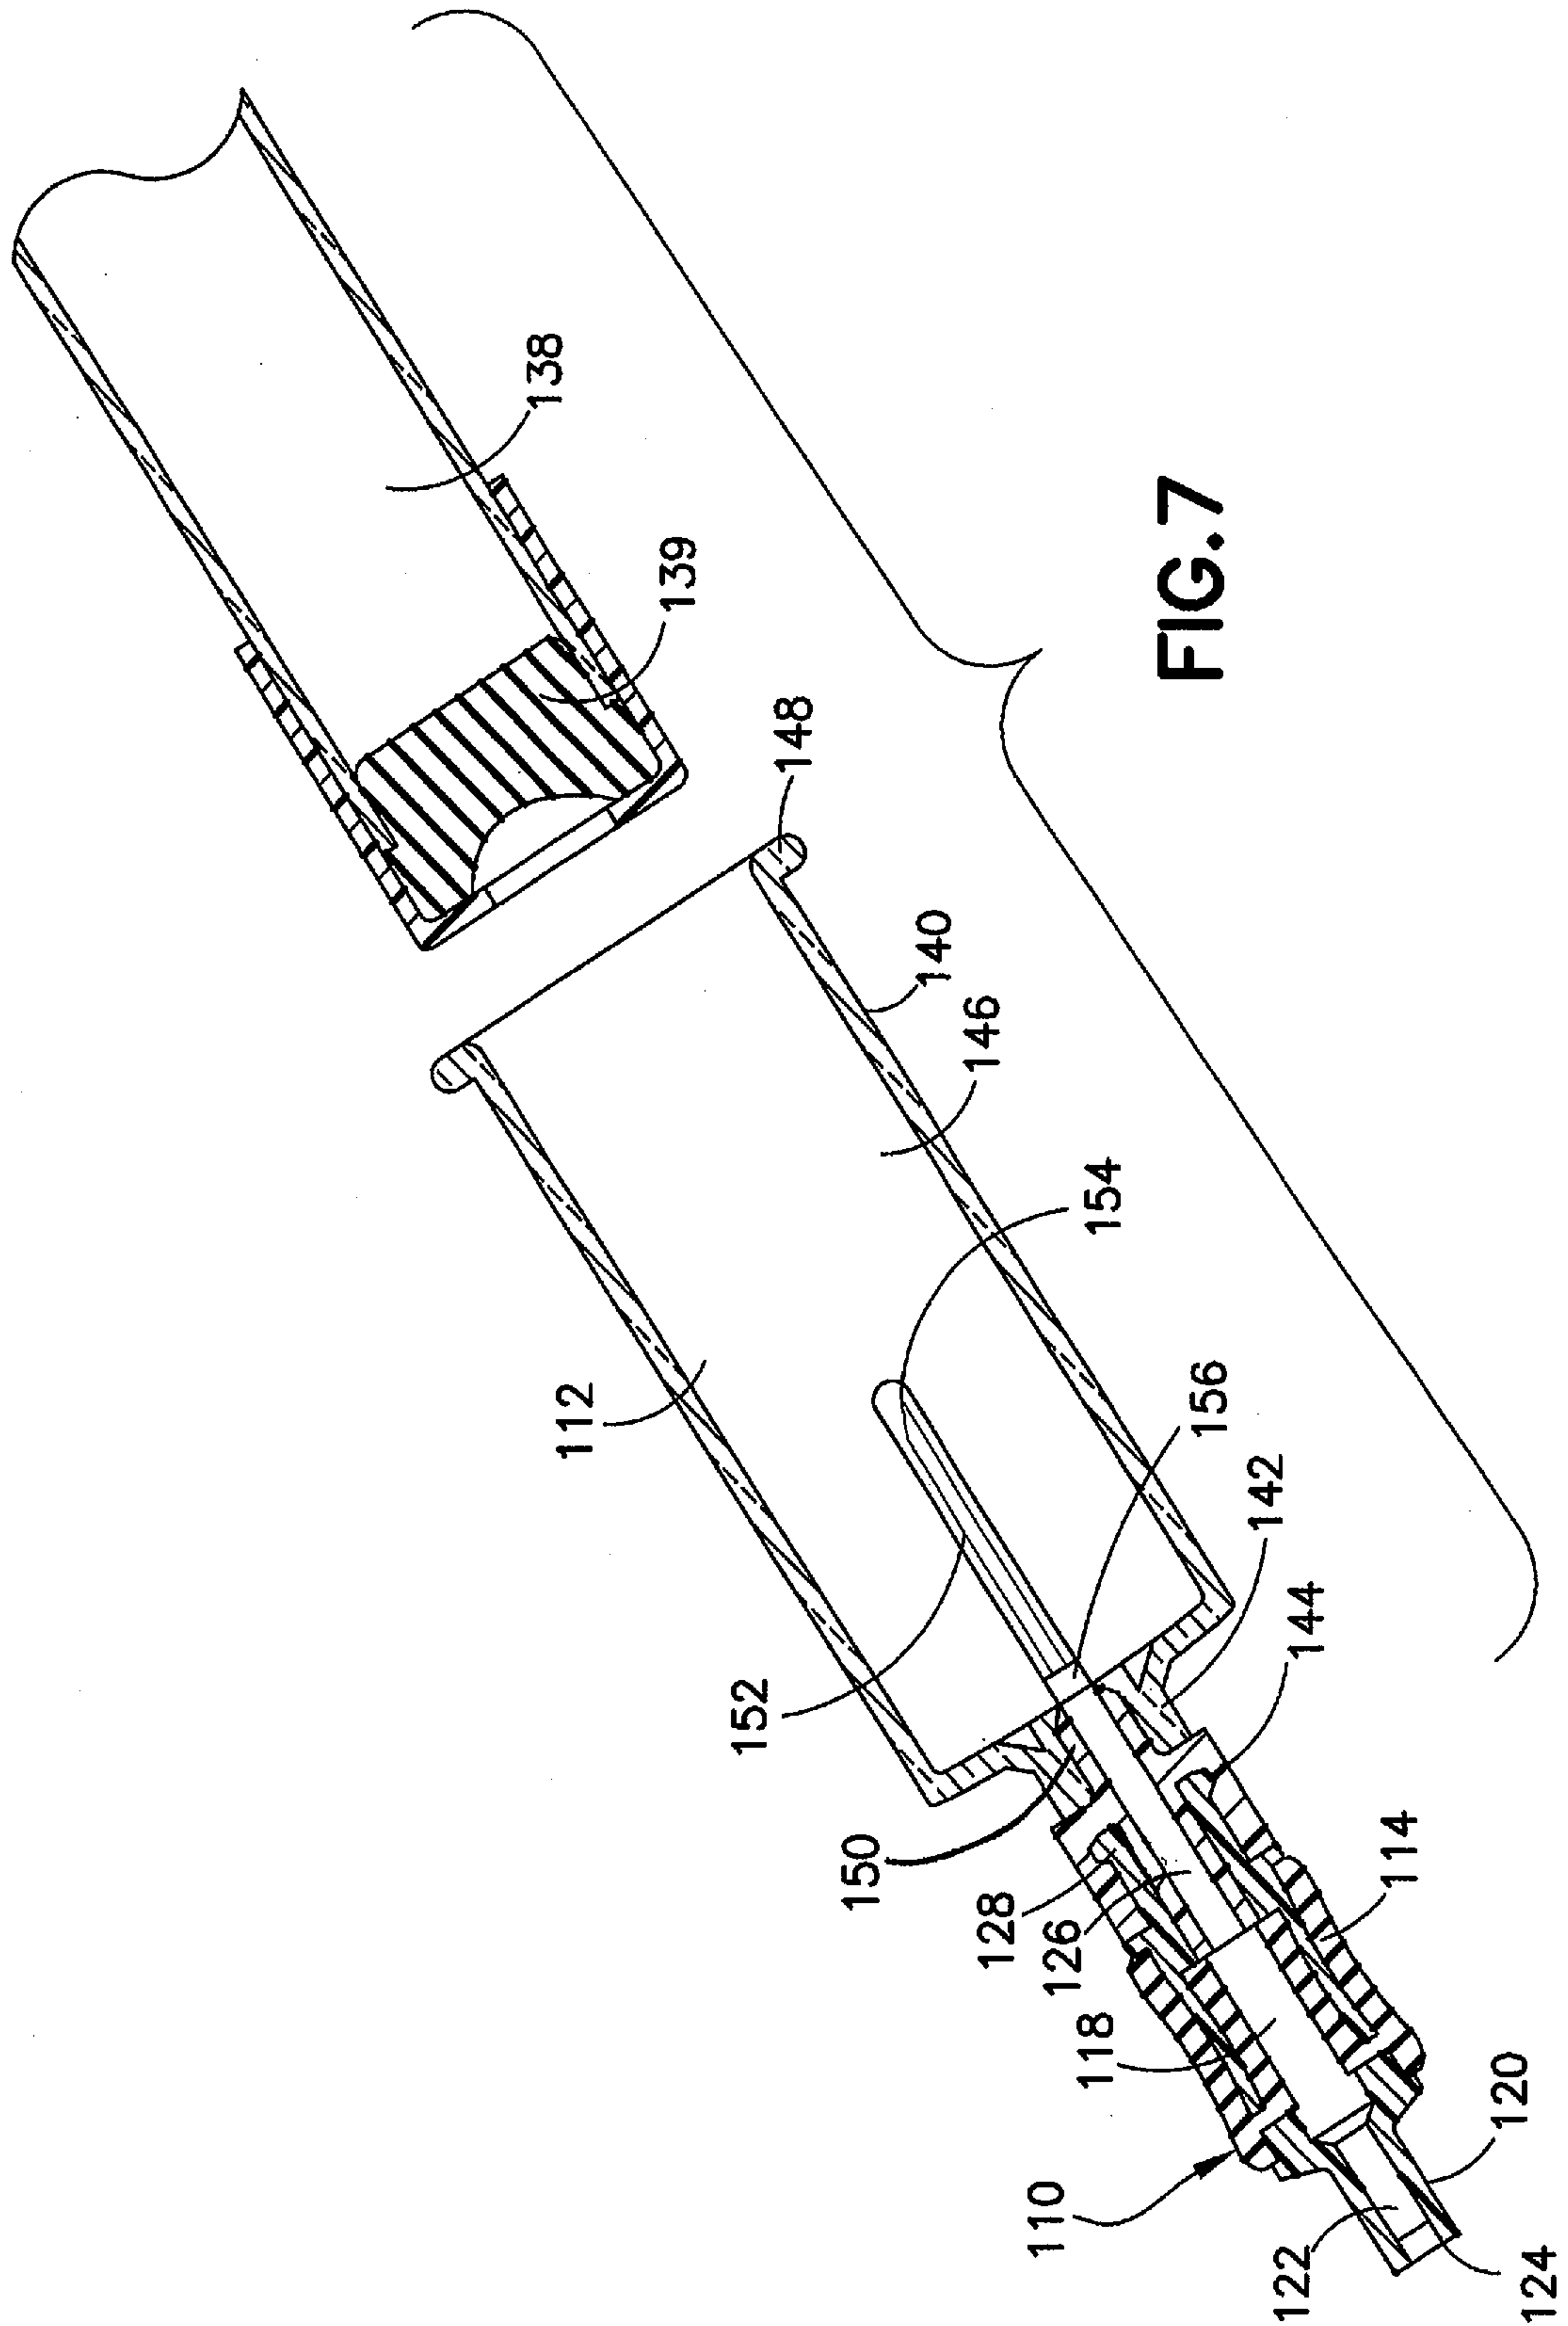

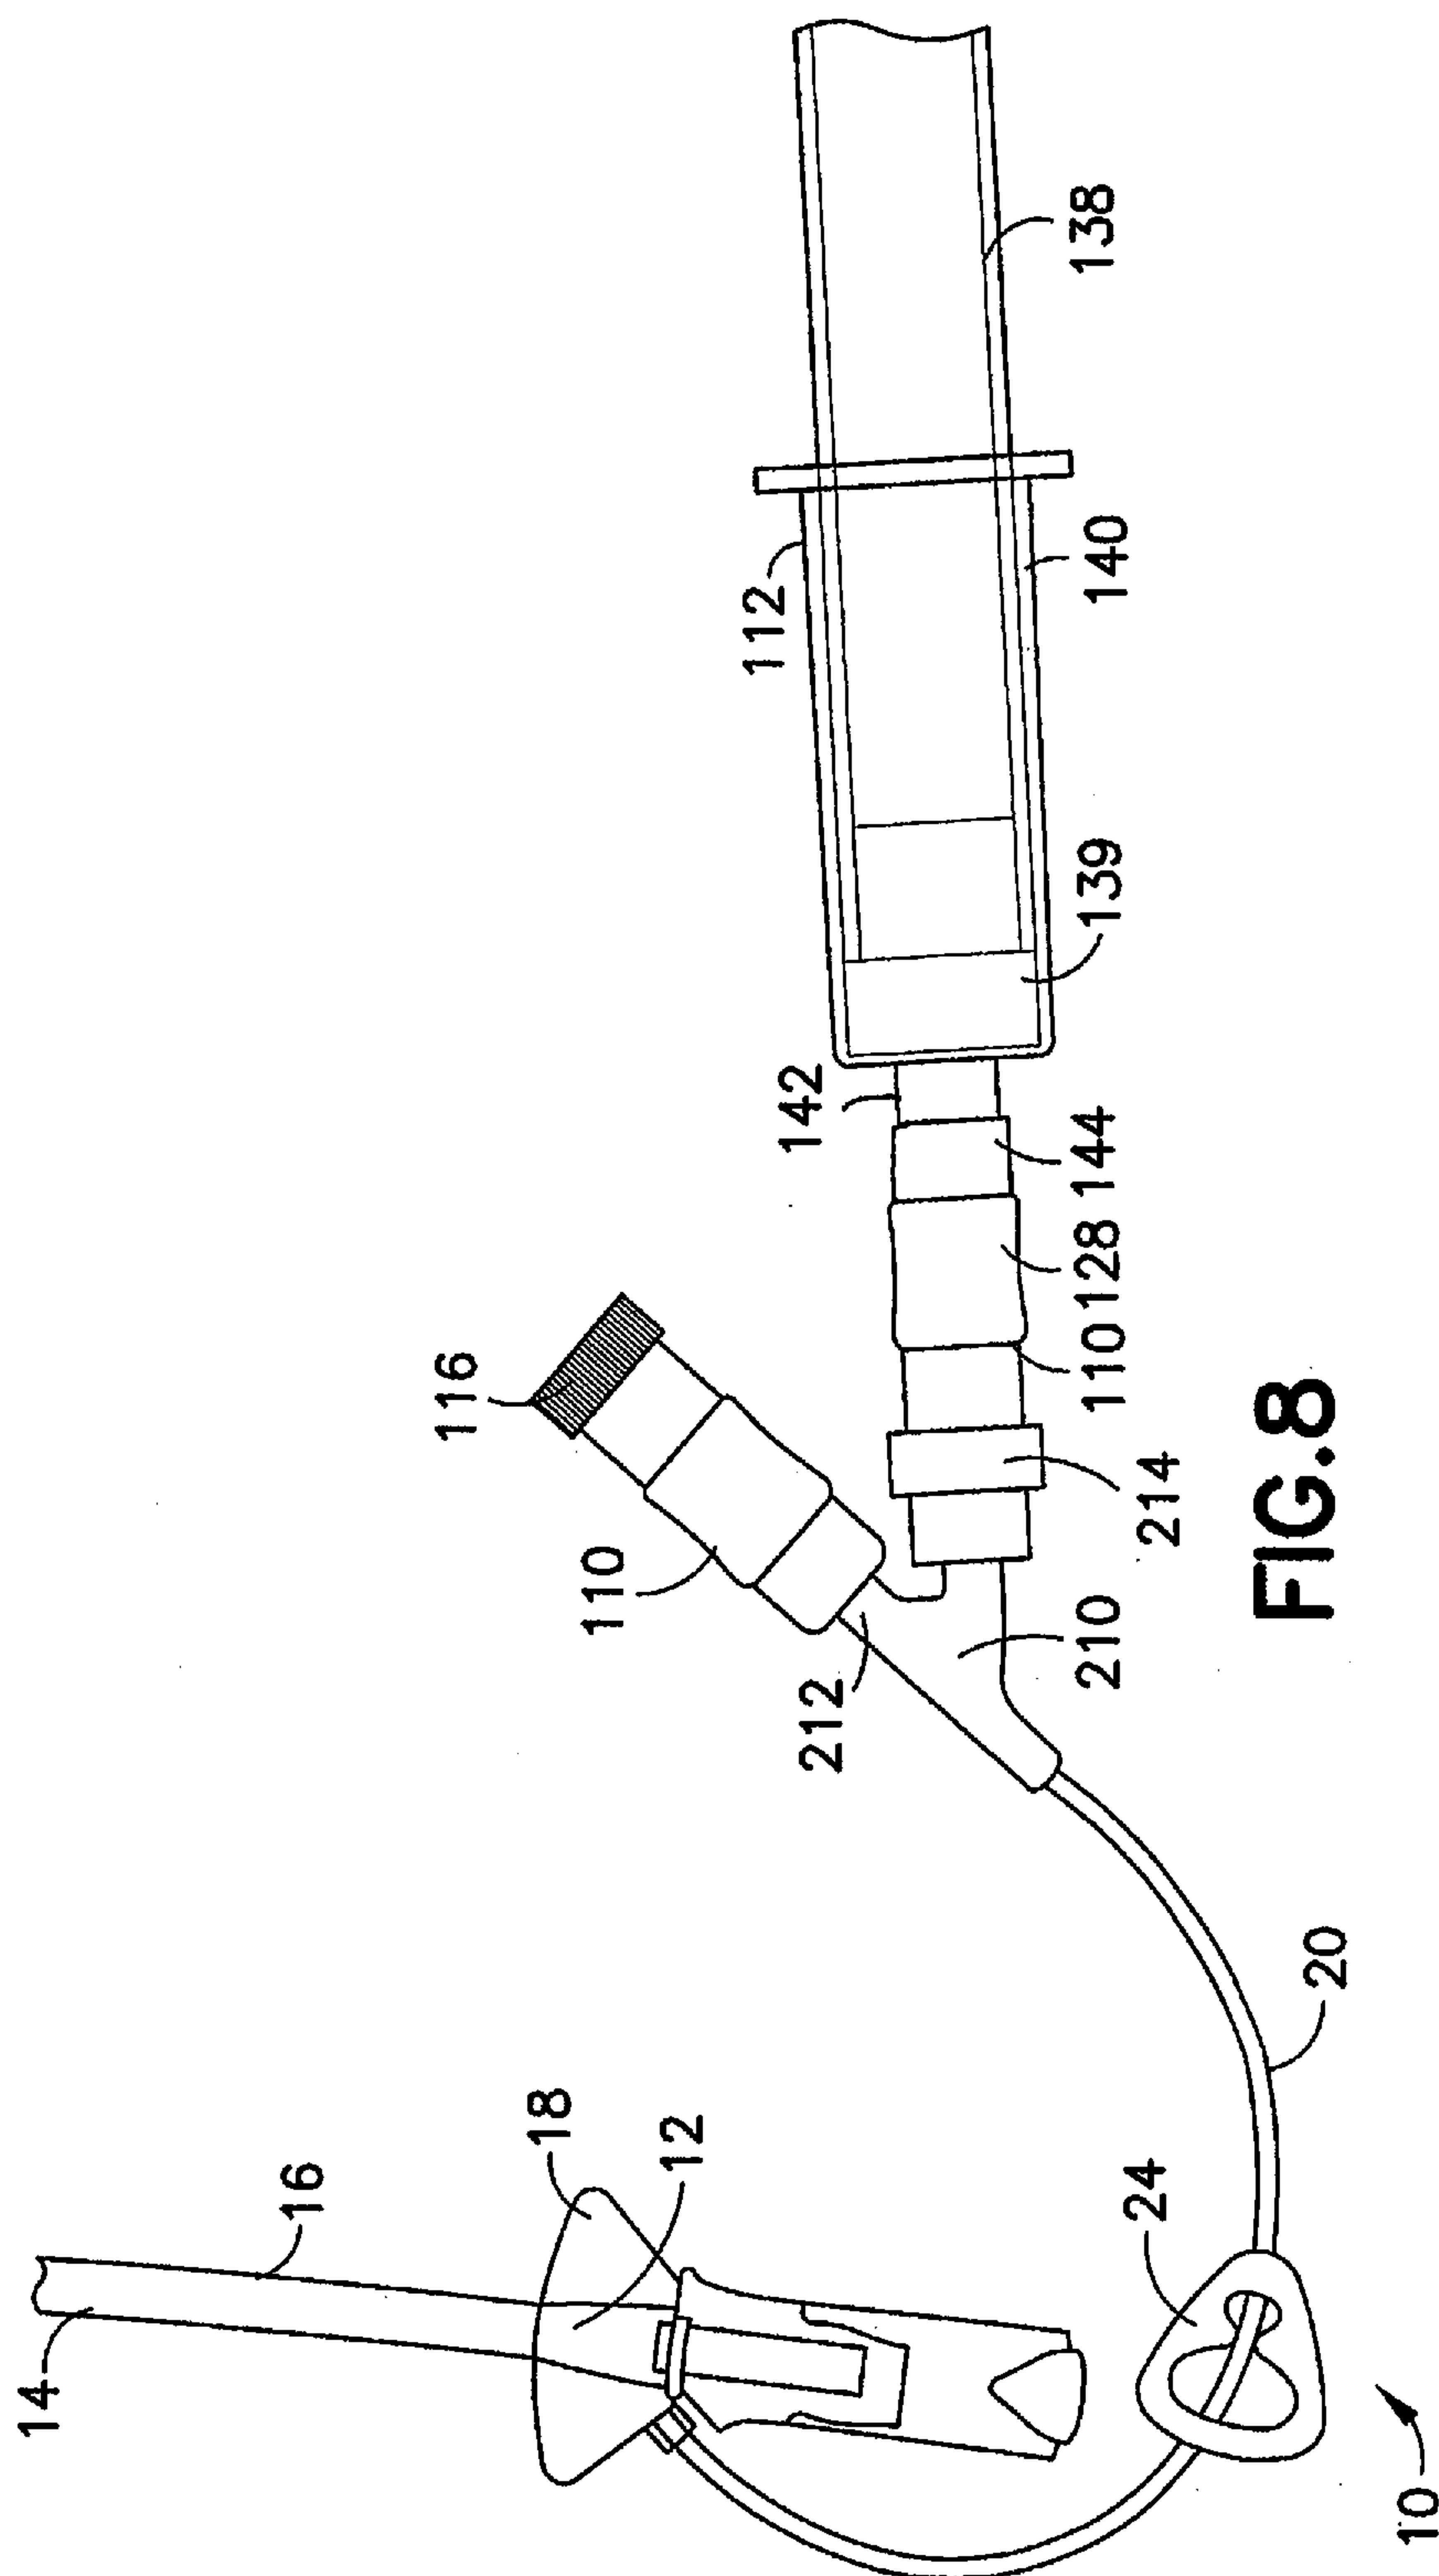

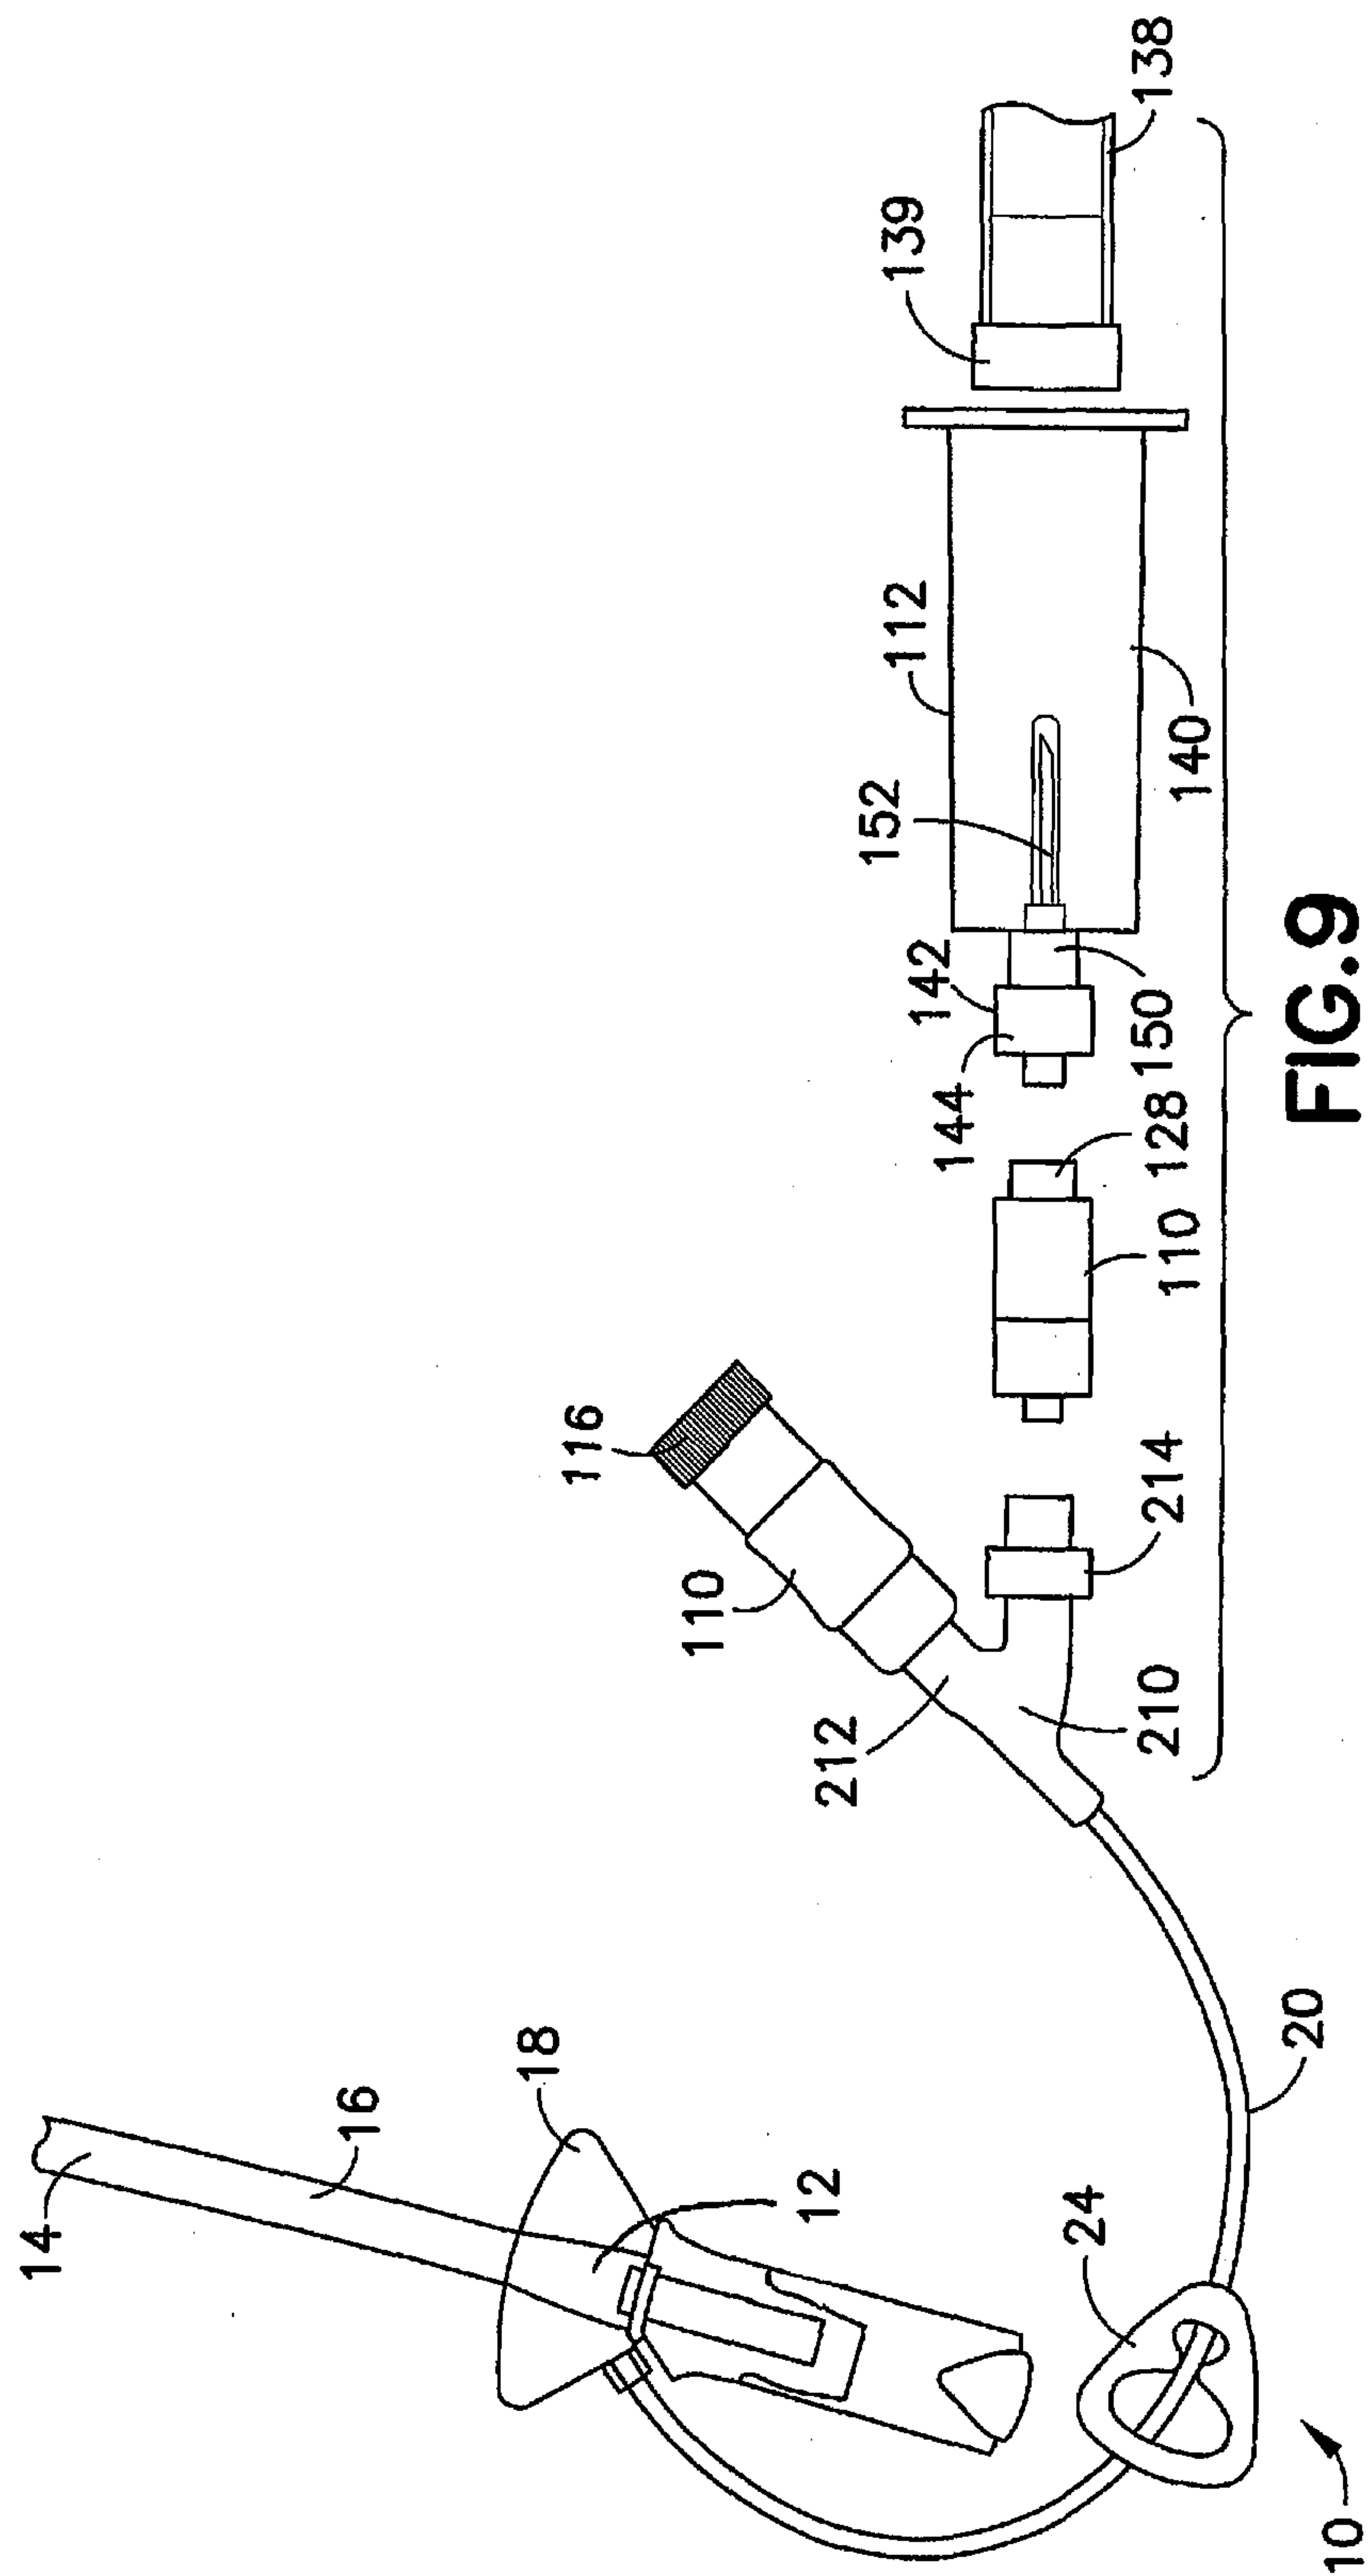

10/13

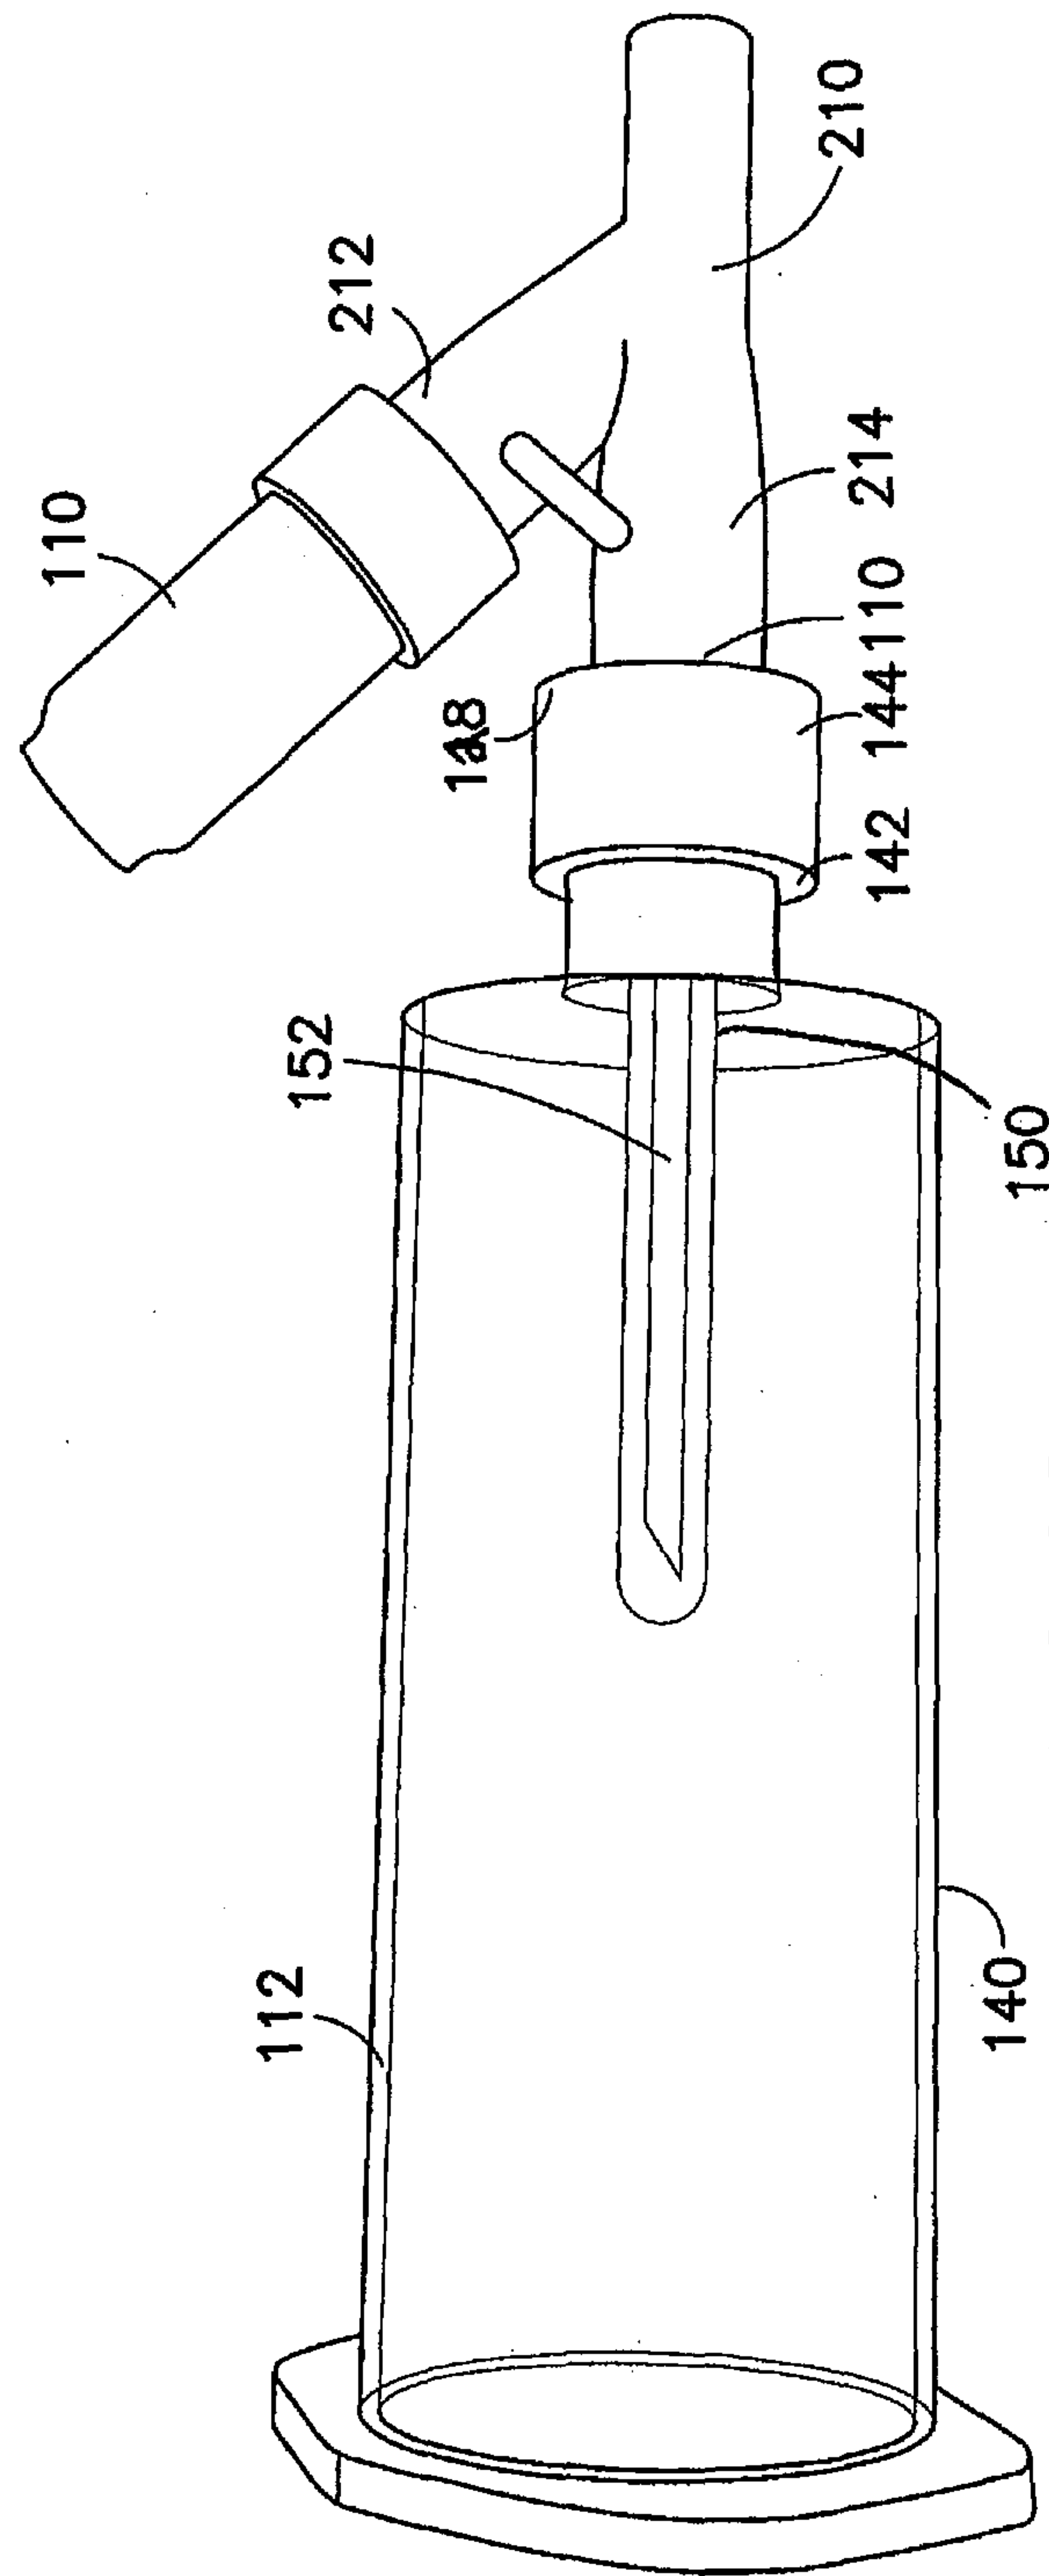**FIG. 10**

11/13

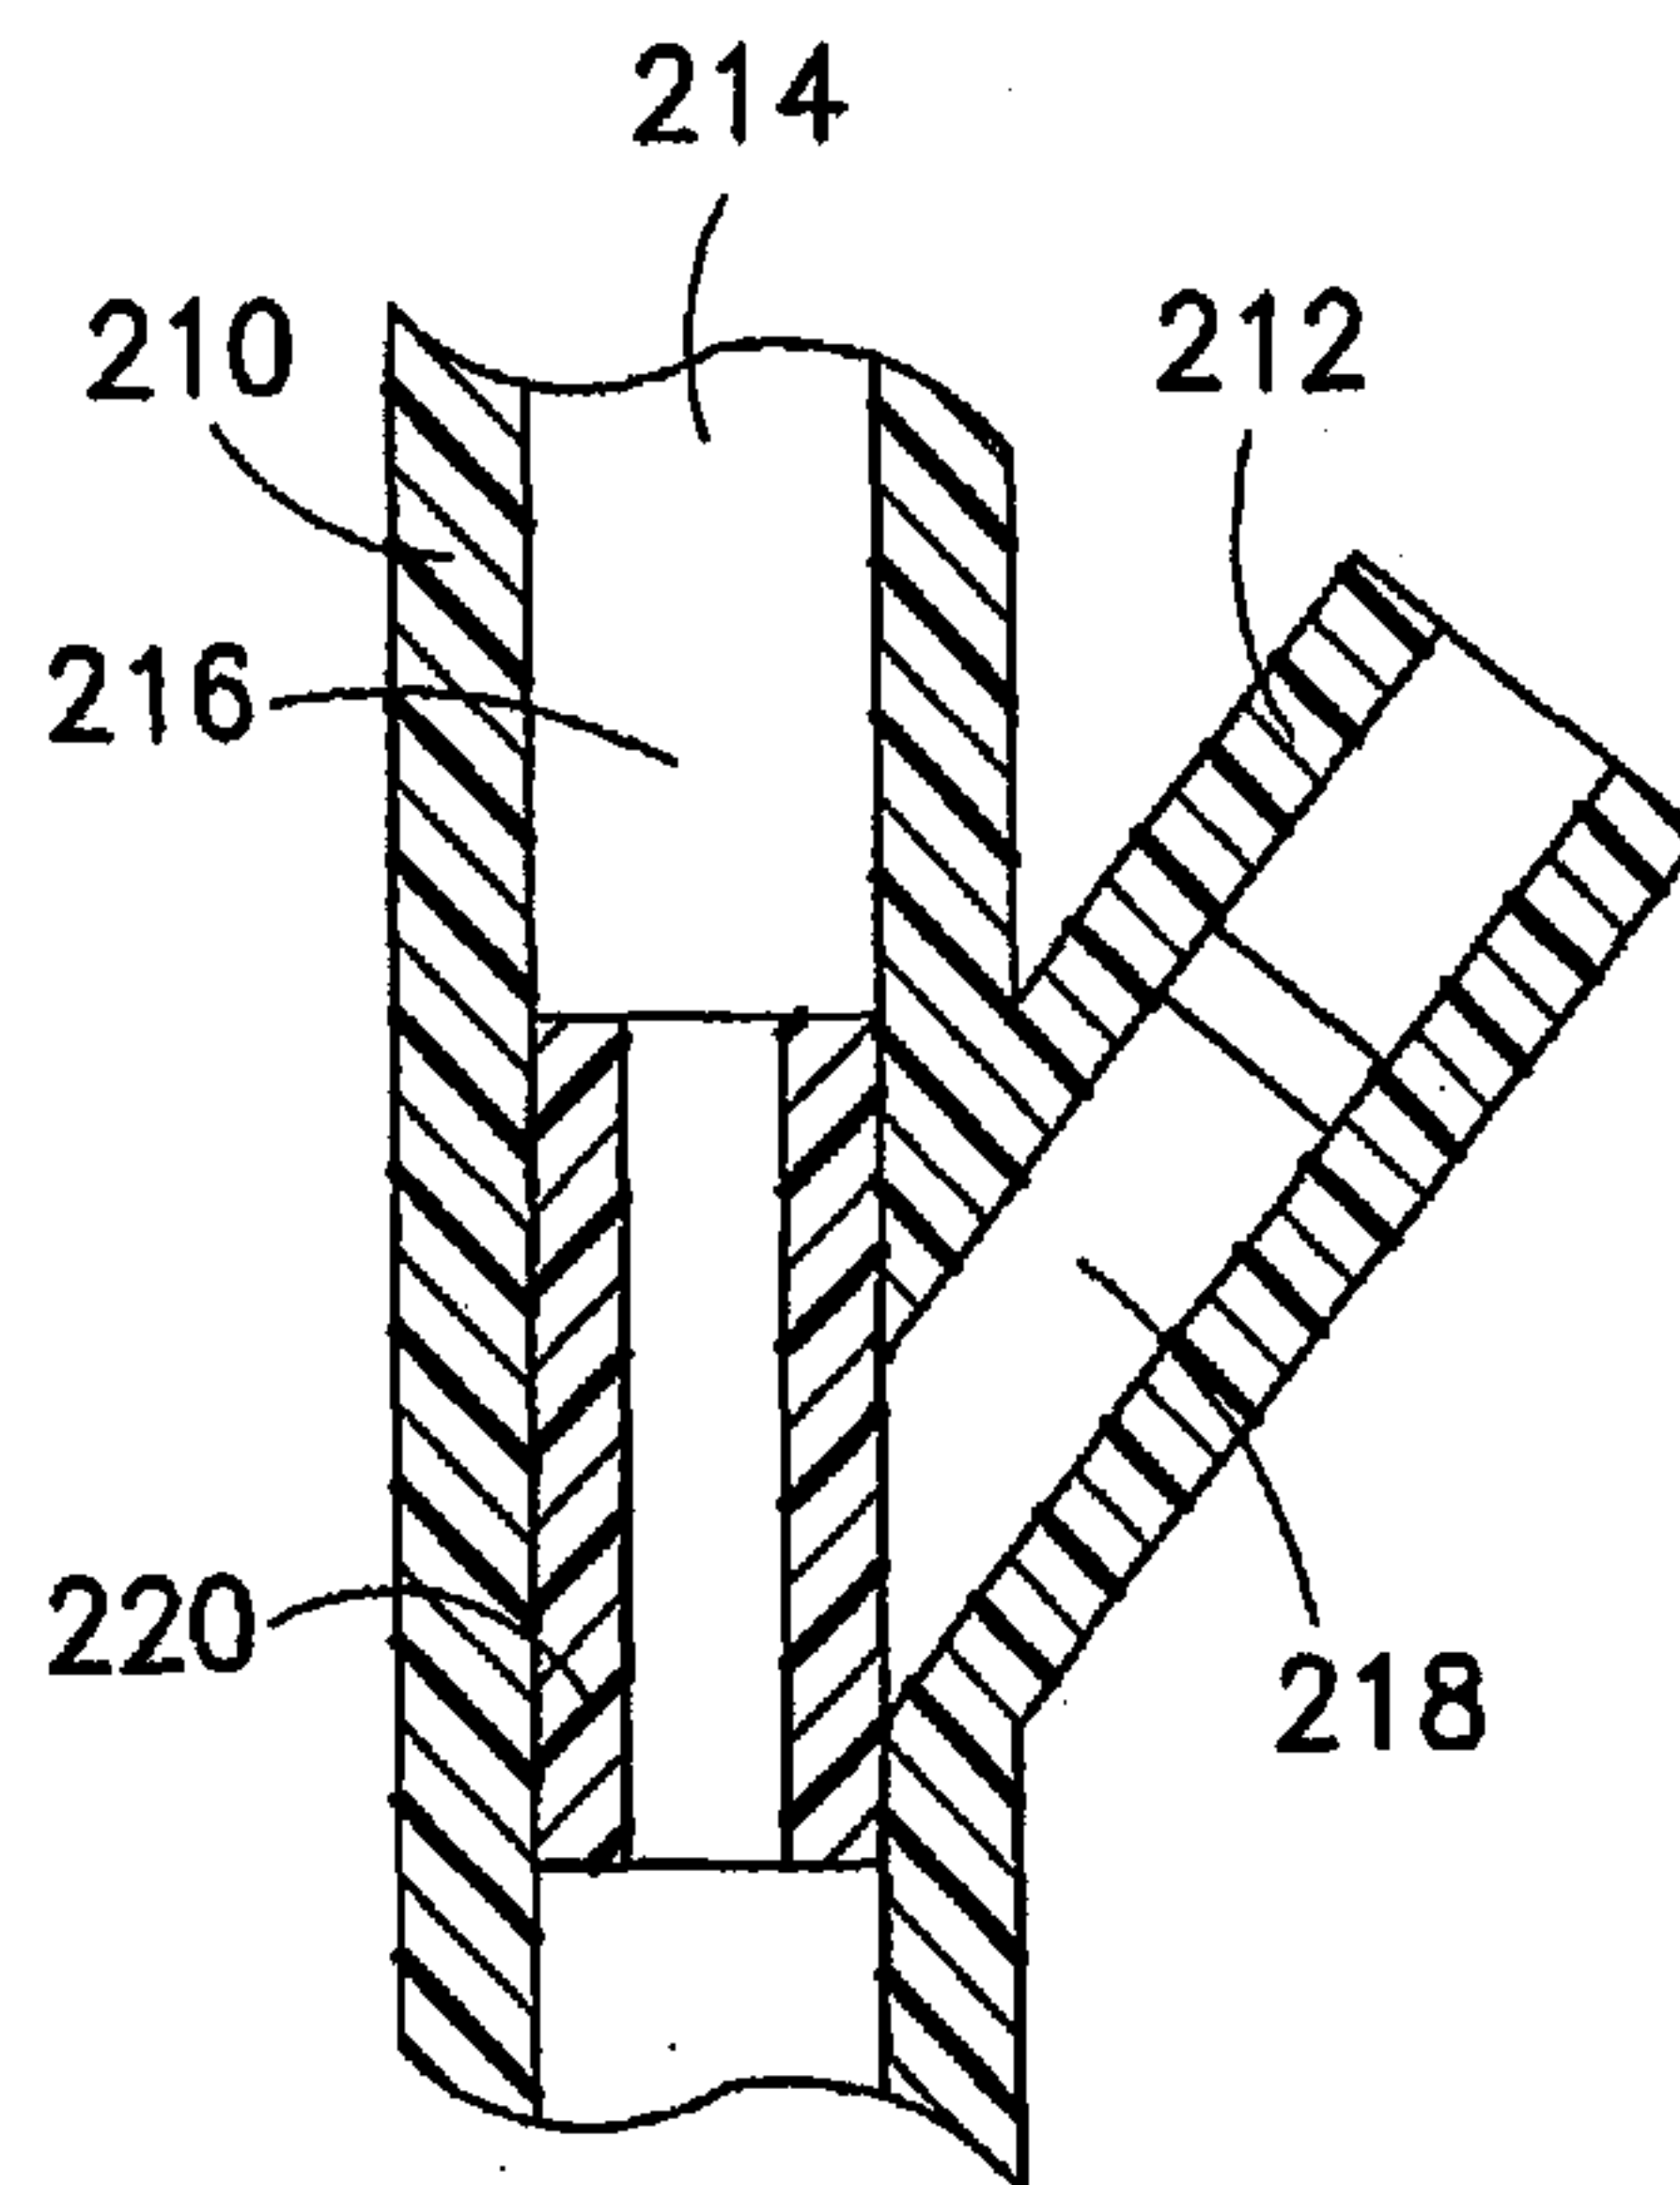


FIG. 11


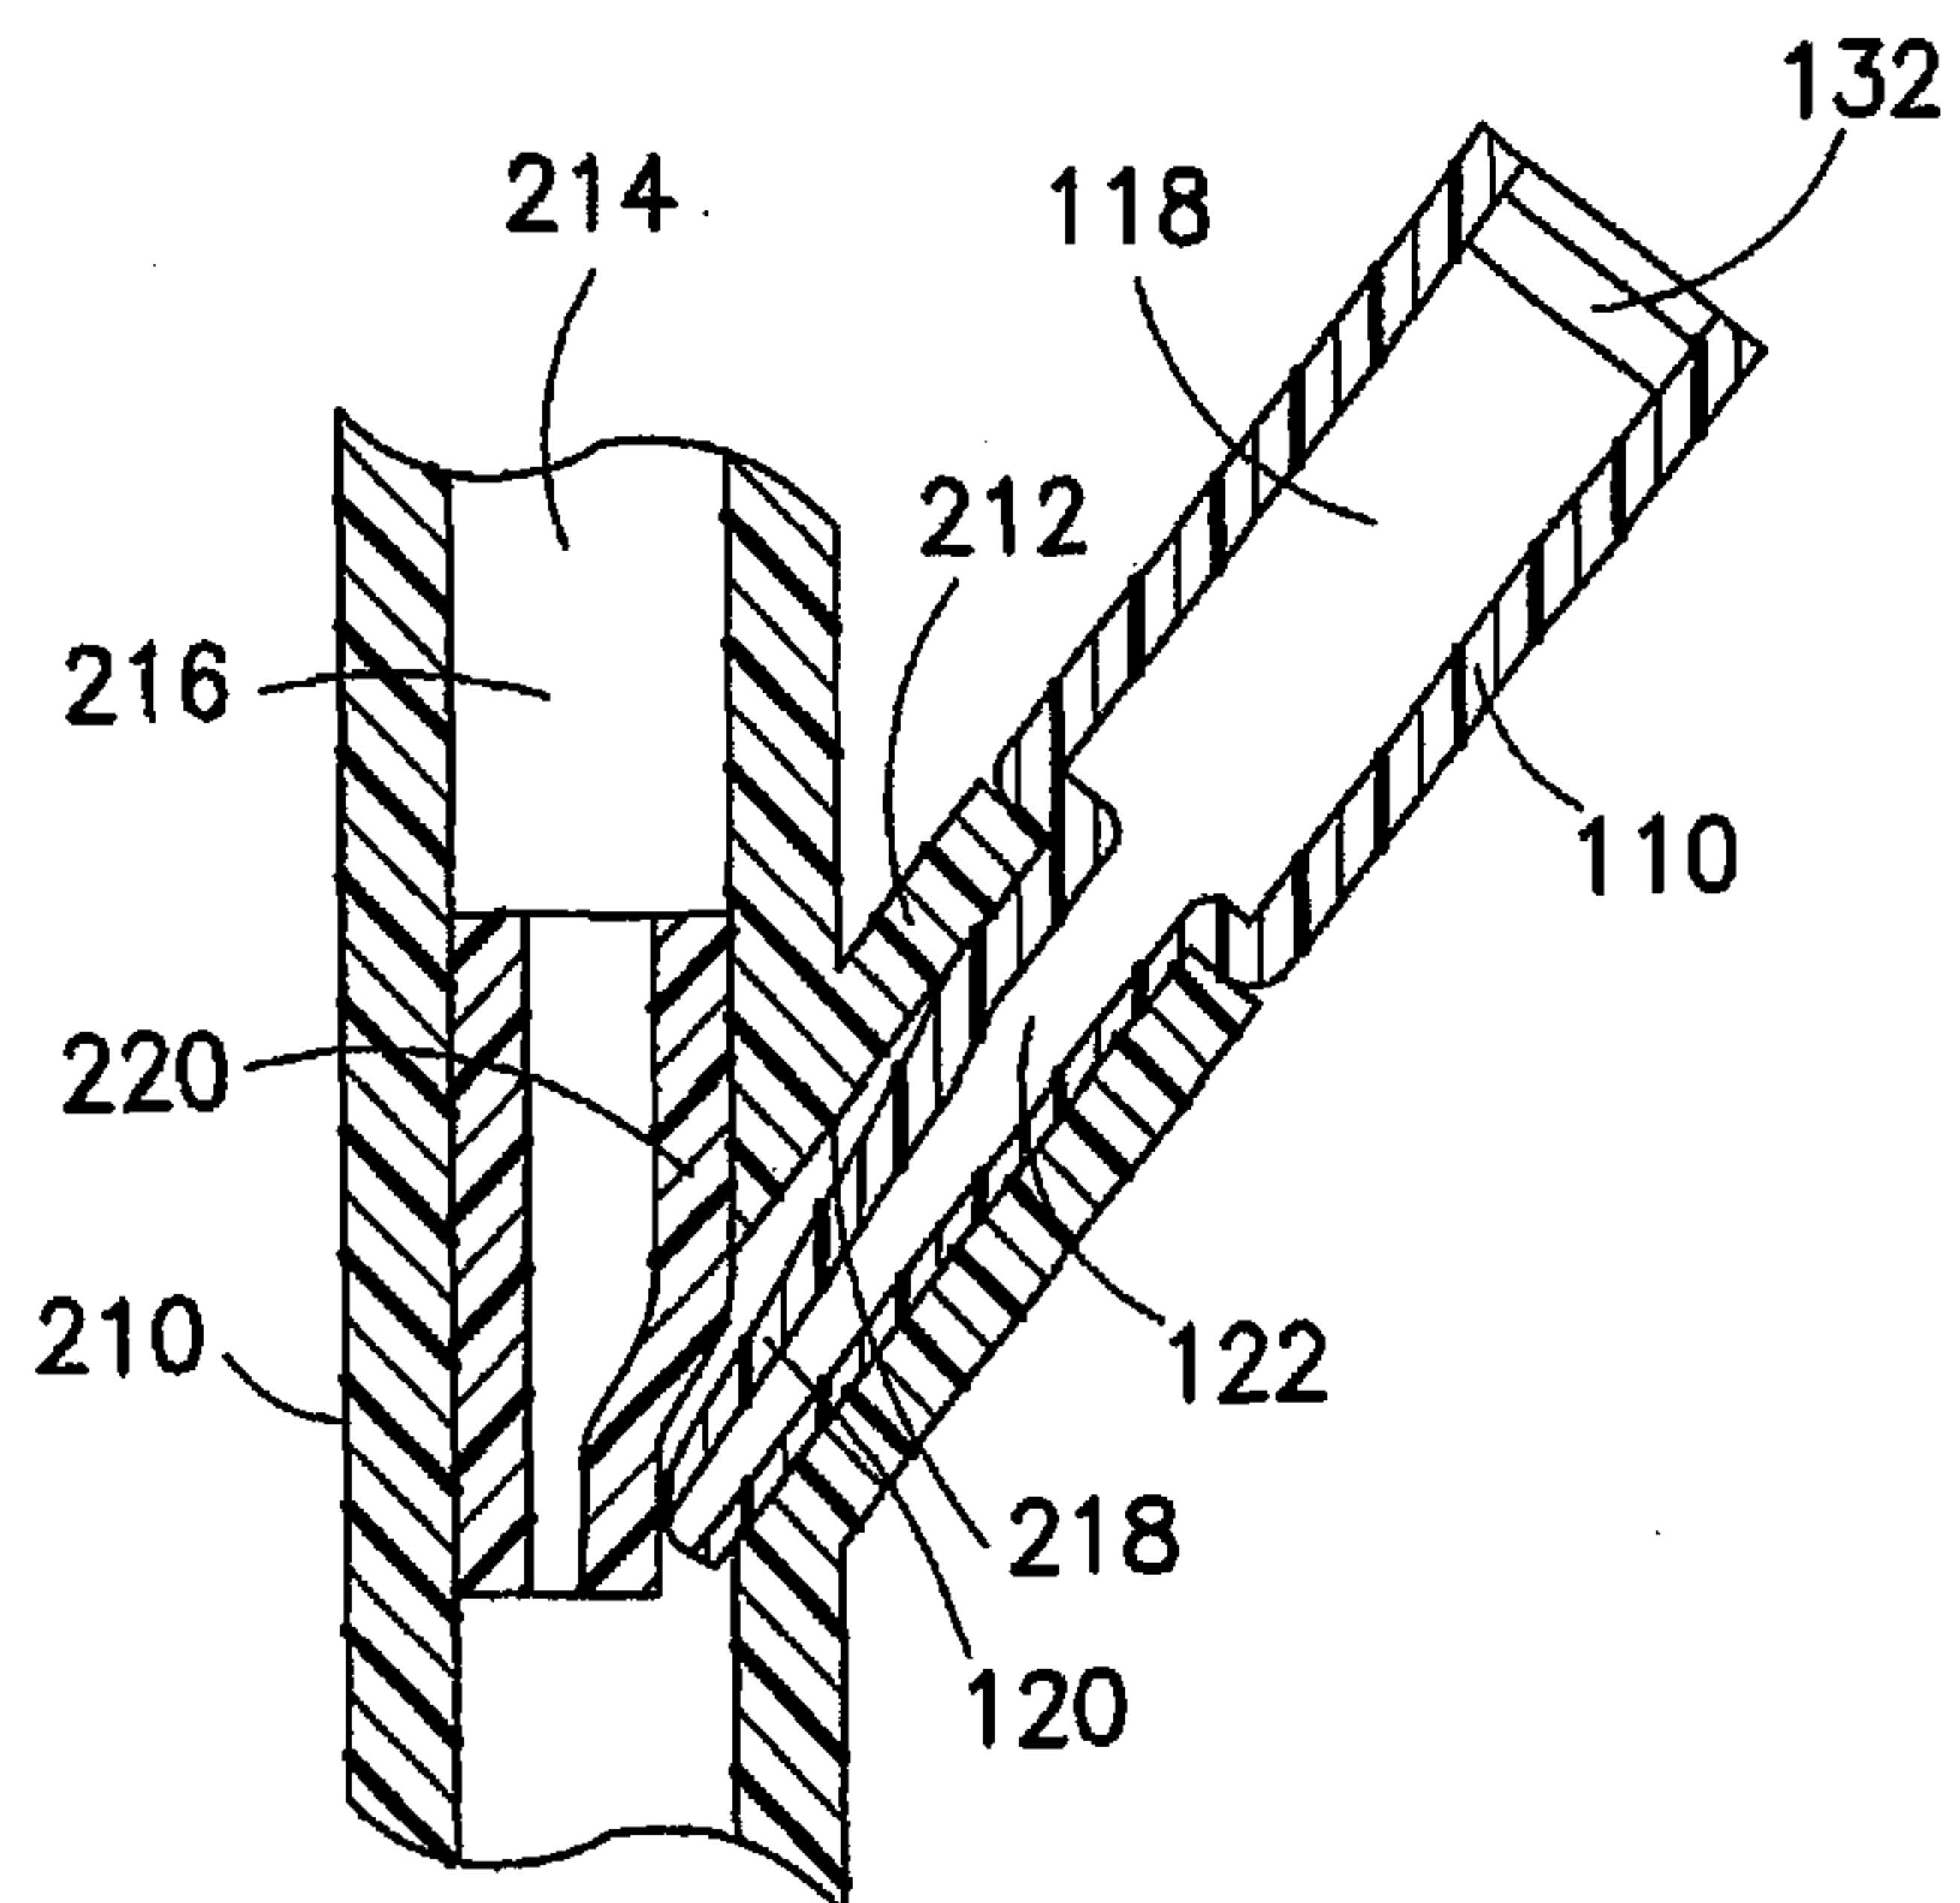


FIG. 12

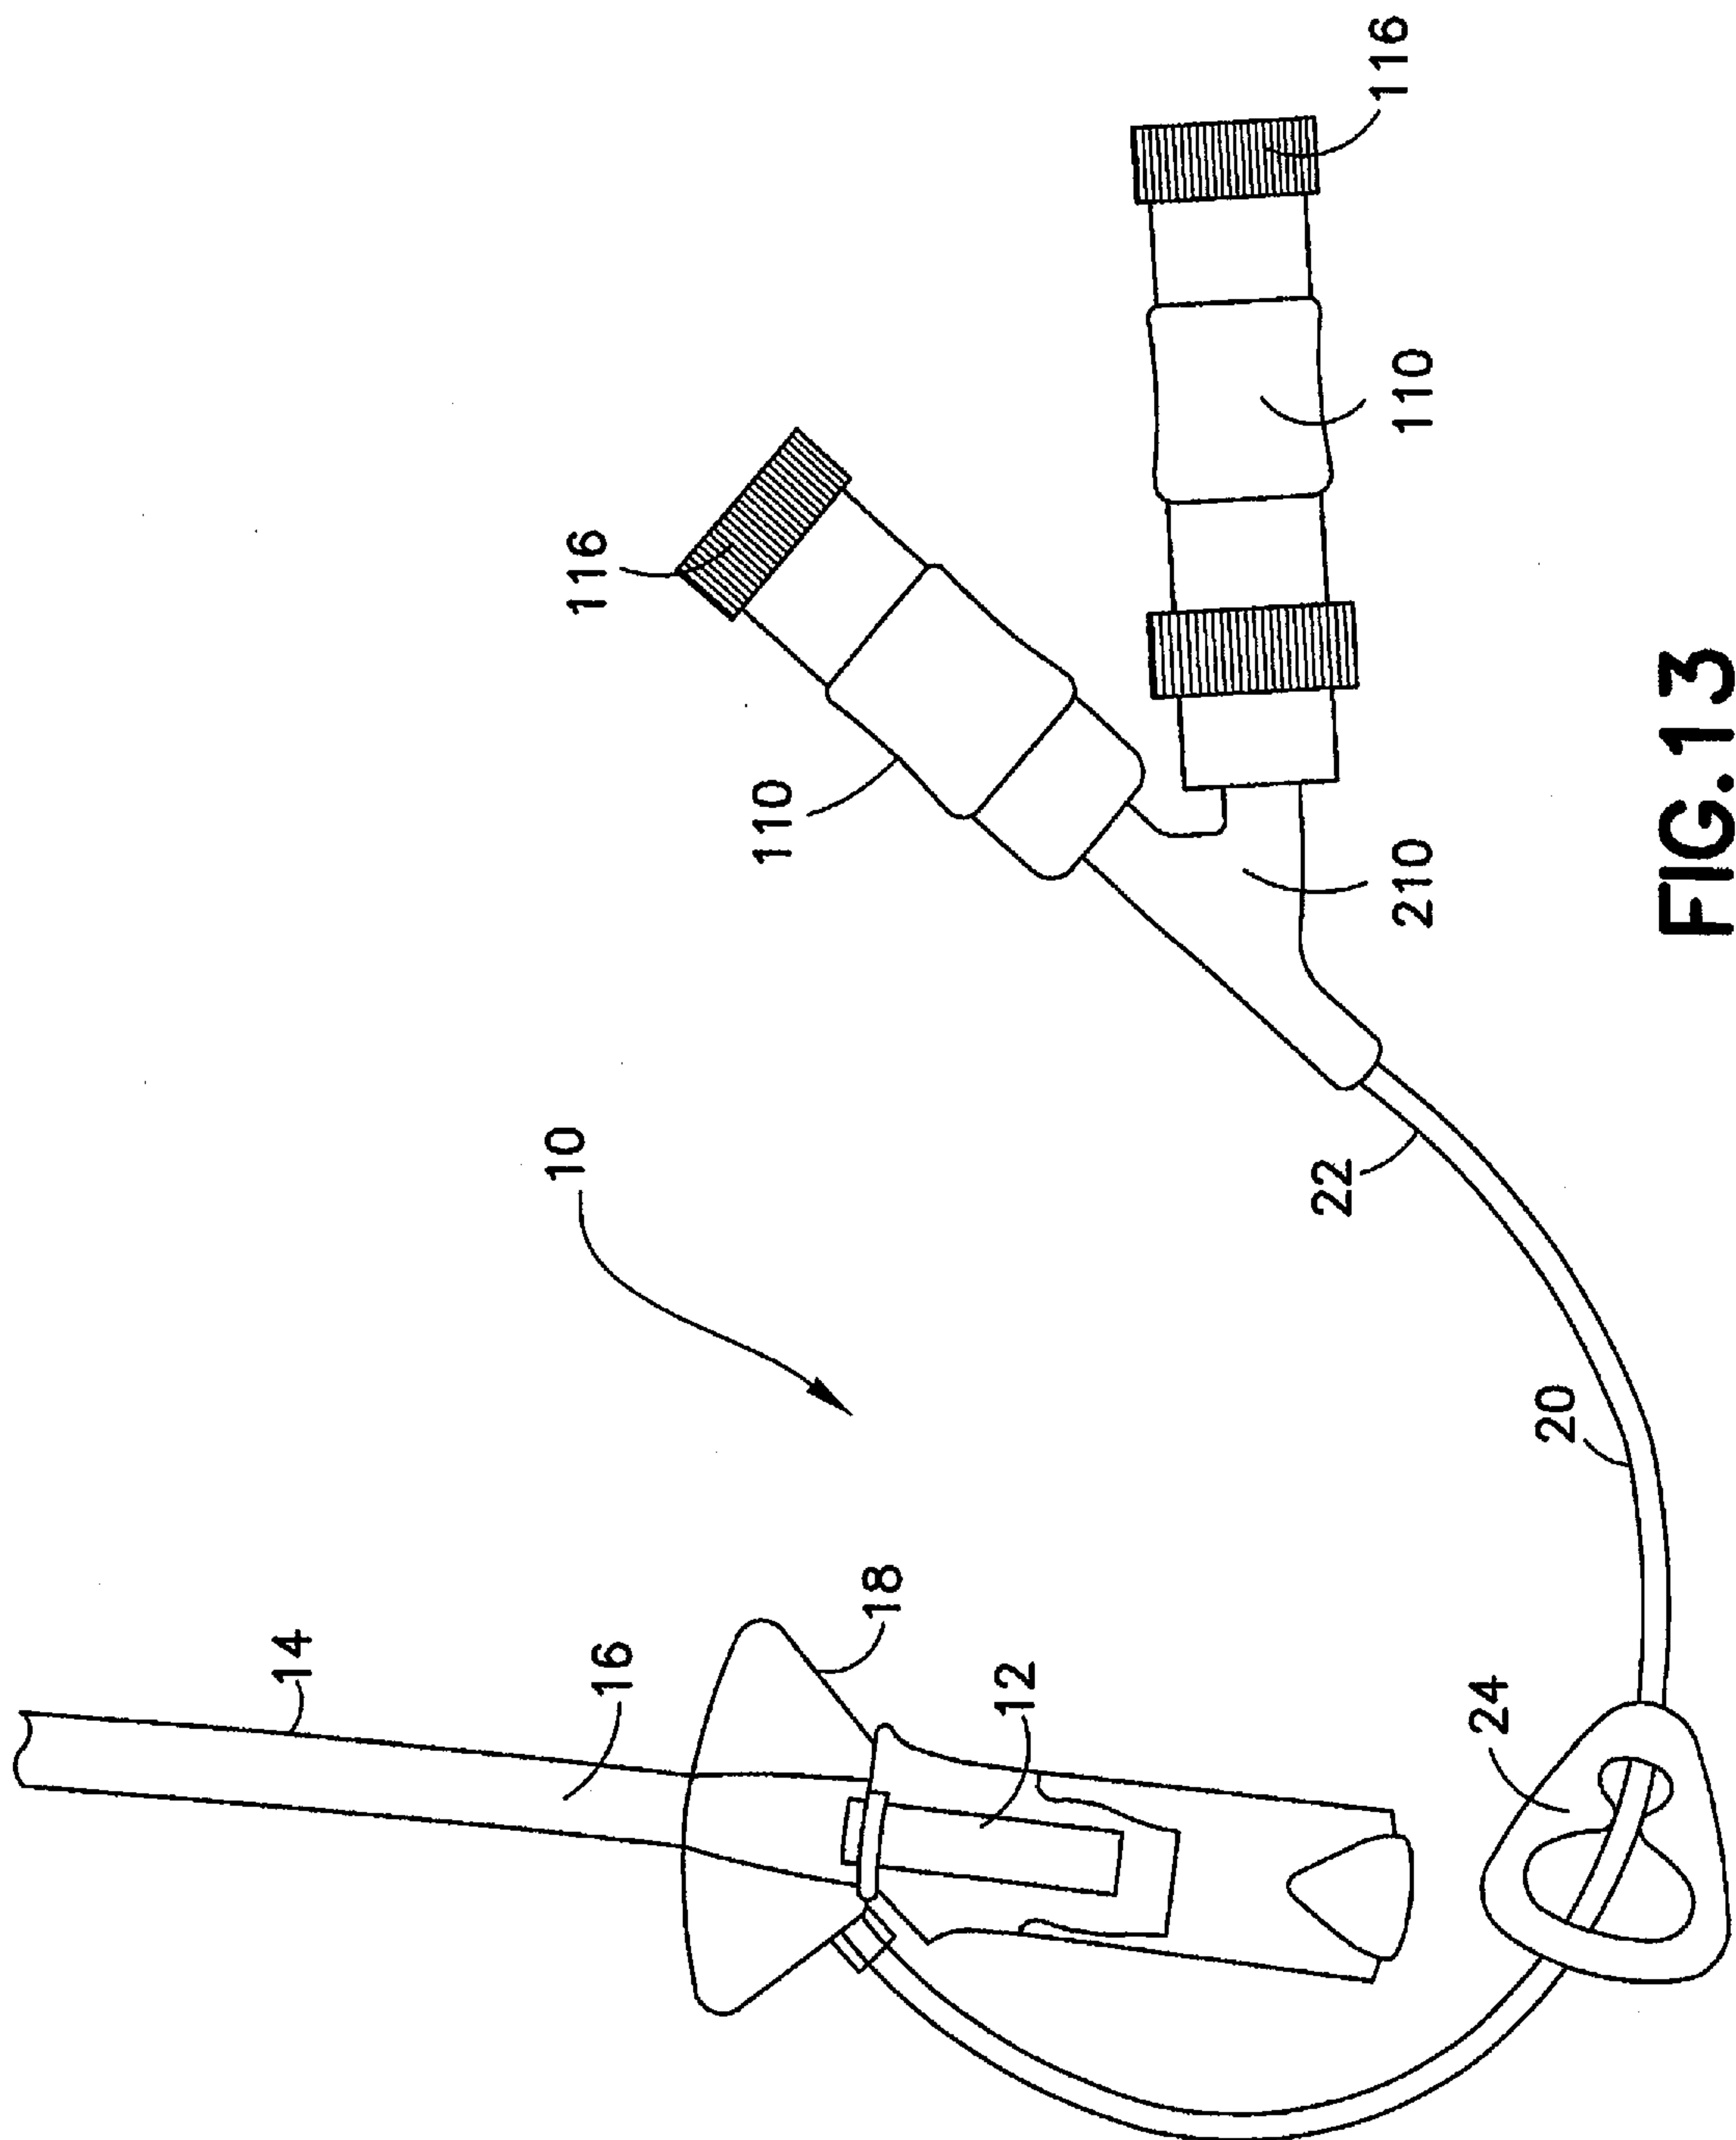

13/13

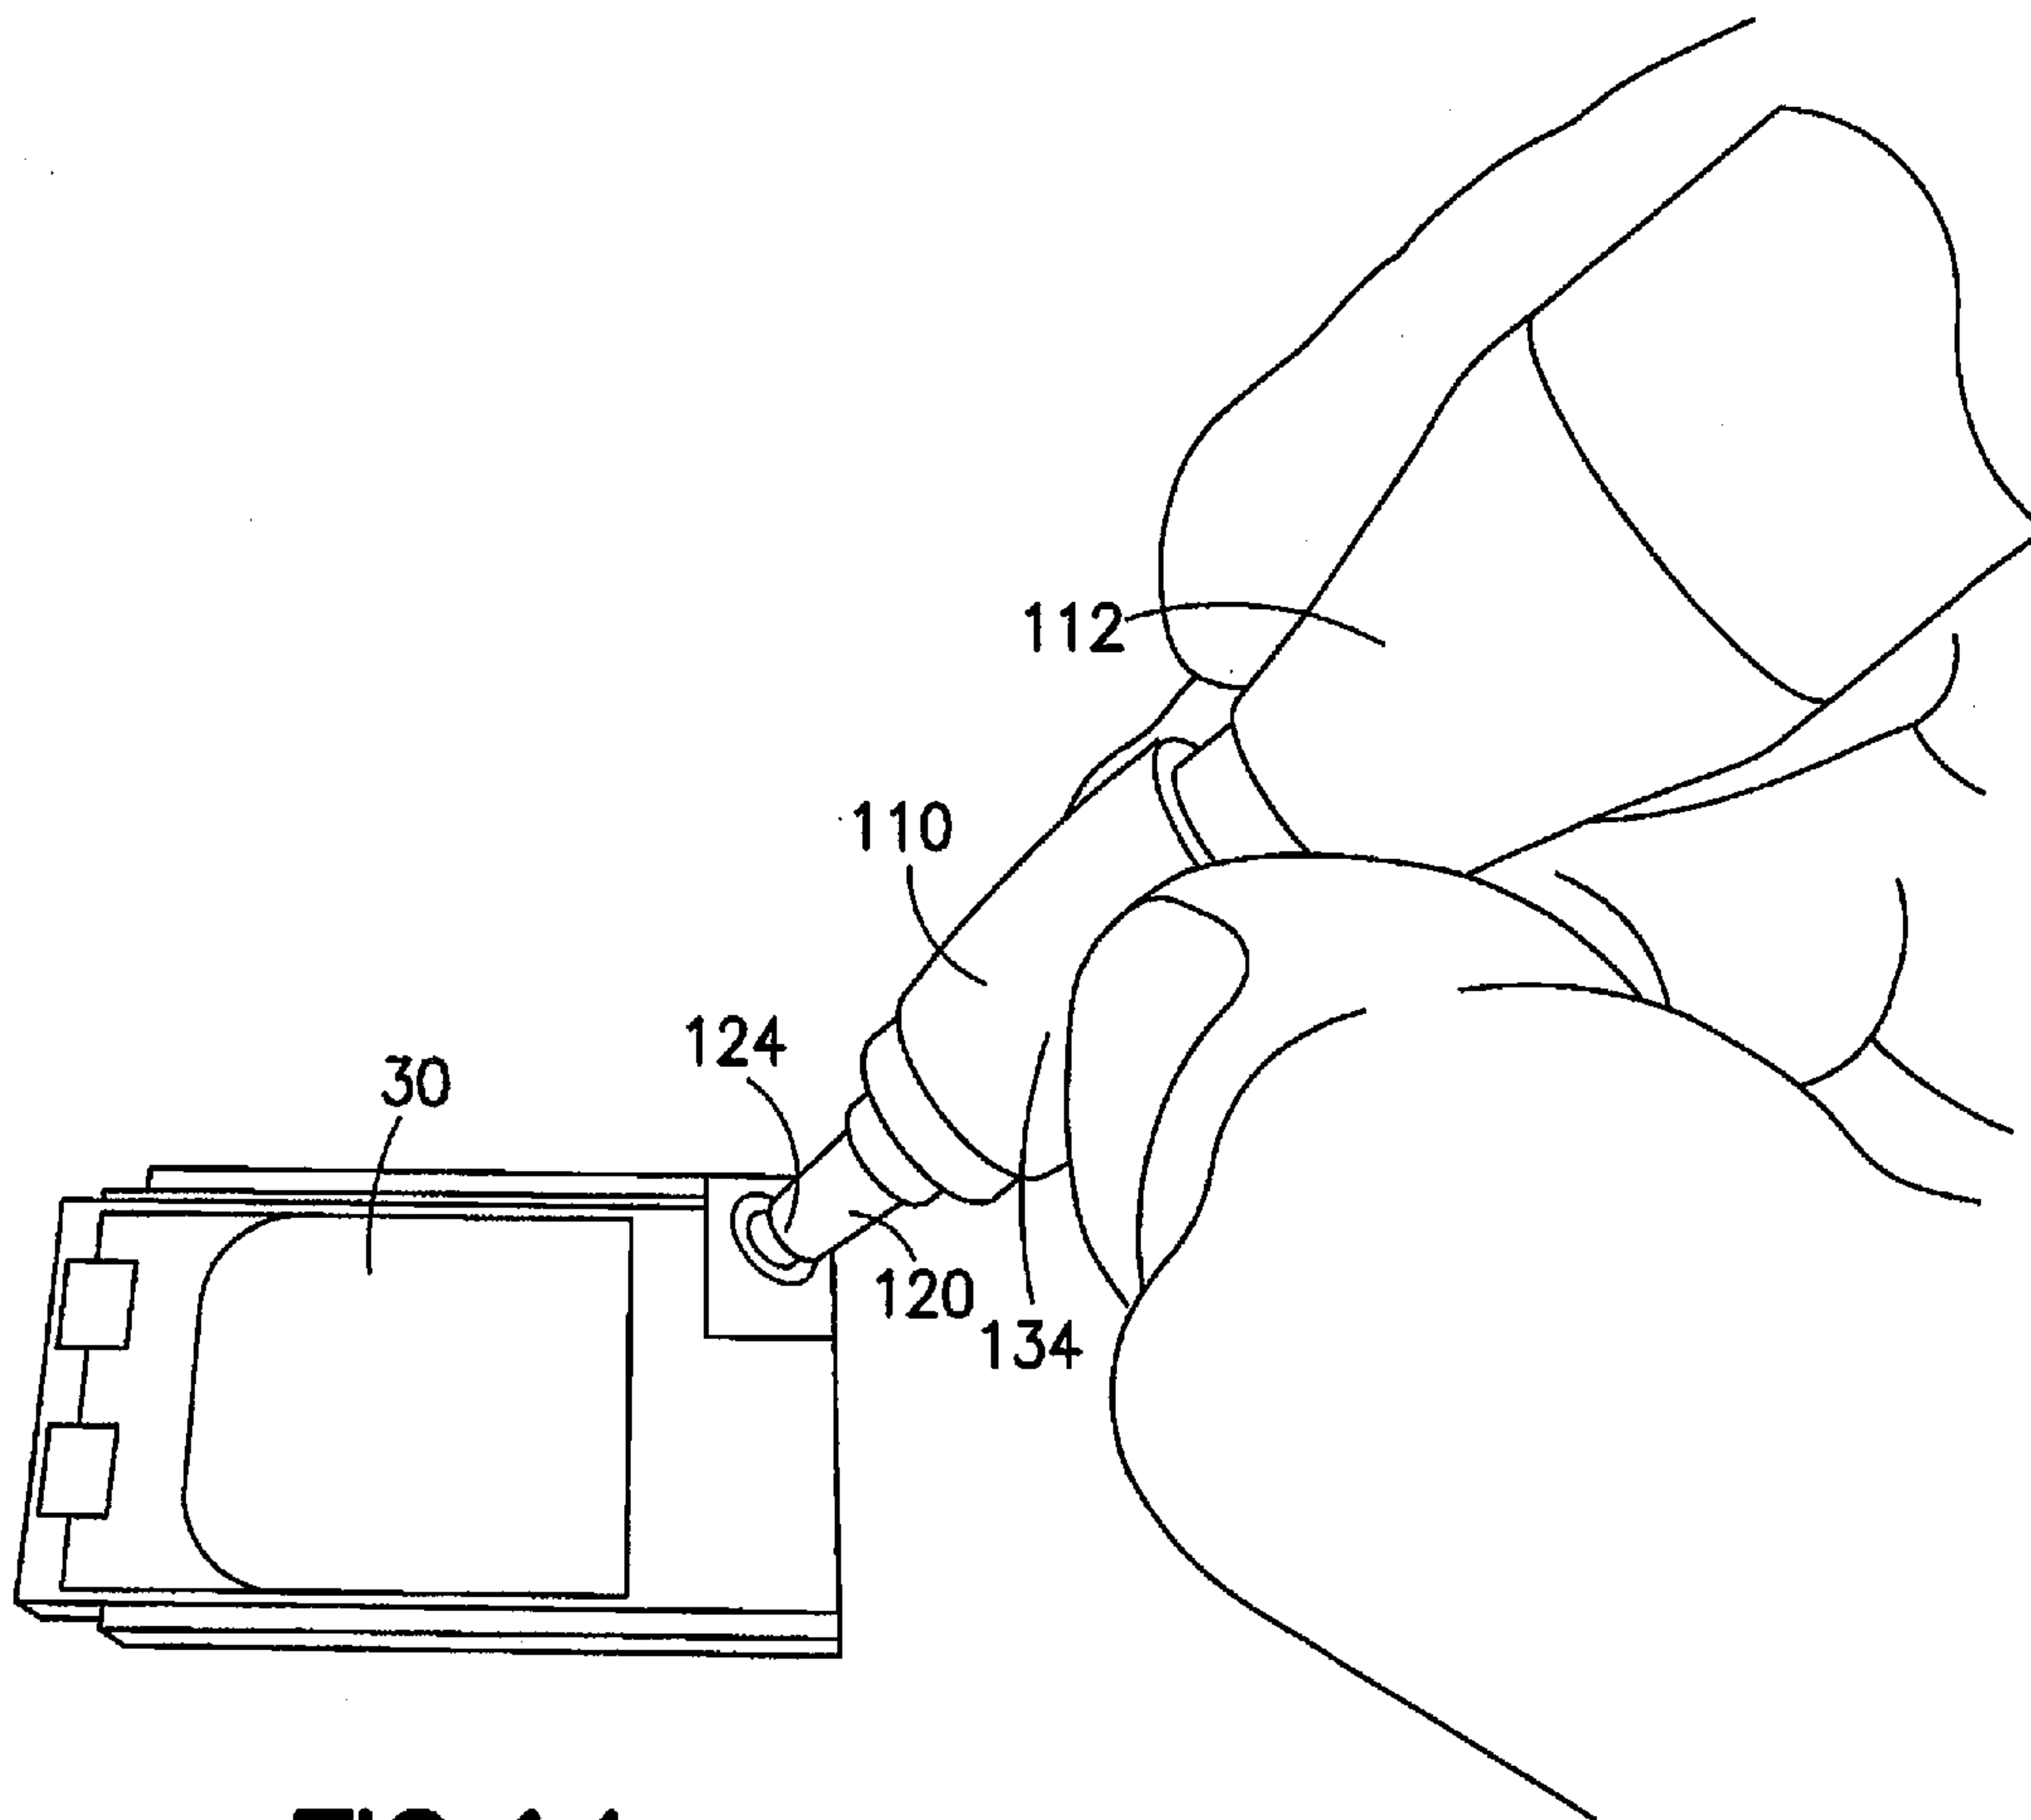


FIG. 14

