

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 October 2010 (07.10.2010)

(10) International Publication Number
WO 2010/111869 A1

(51) International Patent Classification:
C08F 210/02 (2006.01) *C08F 110/02* (2006.01)
C08F 10/02 (2006.01)

(74) Agent: LIU, SHEN & ASSOCIATES; A0601, Huibin Building, No.8 Beichen Dong Street, Chaoyang District, Beijing 100101 (CN).

(21) International Application Number:
PCT/CN2009/075646

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
16 December 2009 (16.12.2009)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/165,065 31 March 2009 (31.03.2009) US

(71) Applicant (for all designated States except US): DOW GLOBAL TECHNOLOGIES INC. [US/US]; 2040 Dow Center, Midland, Michigan 48674 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): YUN, Xiaobing [CN/CN]; No.8 Nanxiange Street, Xuanwu District, Beijing 100053 (CN). WASTIANI, Risdianti [ID/ID]; Petrum Bukit Indah, Block B-6, No.17, Ciputat 15416 (ID). GOH, Hwee Lun [MY/SG]; 150 Prince Charles Crescent, #08-01 Tanglin View, Tower C, 159012 Singapore (SG). WU, Chang [CN/CN]; Room 14C, No.5, Lane 688, Yan An Road (West), Shanghai 200050 (CN). DEMIRORS, Mehmet [NL/US]; 2319 Bending Spring Drive, Pearland, Texas 77584 (US).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: FILM MADE FROM HETEROGENEOUS ETHYLENE/ALPHA-OLEFIN INTERPOLYMER

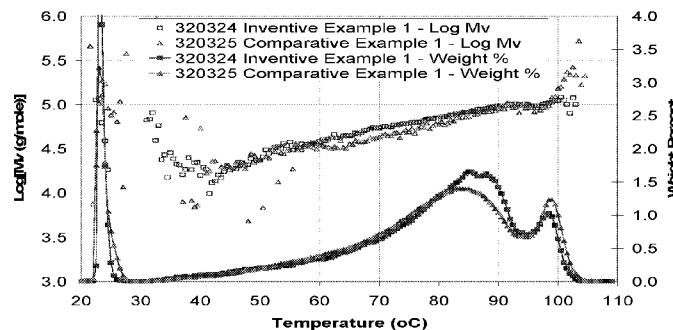


Figure 1: Short Chain Branching Distribution and log Mv data from ATREF For Inventive Resin 1 and Comparative Example 1.

(57) Abstract: A multilayer film is disclosed, comprising at least two layers, wherein a first layer comprises a first interpolymer of ethylene and at least one alpha-olefin, characterized wherein the first interpolymer has a density of less than 0.925 g/cm³, and an average M_v and a valley temperature between the interpolymer and high crystalline fraction, T_{hc}, such that the average M_v for a fraction above T_{hc} from ATREF divided by average M_v of the whole polymer from ATREF (M_{hc}/M_{hp}) is less than about 1.95 and wherein the first interpolymer has a CDBI of less than 60%, and wherein at least one other second layer comprises a second interpolymer of ethylene and at least one alpha-olefin, wherein the second interpolymer has a density from 0.925 to 0.965 g/cm³. The interpolymer of ethylene and at least one alpha-olefin can also be characterized as having a high density (HD) fraction and an overall density such that % HD fraction < 0.0168x₂ - 29.636x + 13036 where x is the density in grams/cubic centimeter. Fabricated articles such as stand up pouches comprising the novel multilayer films are also disclosed.

WO 2010/111869 A1

FILM MADE FROM HETEROGENEOUS ETHYLENE/ALPHA-OLEFIN INTERPOLYMER

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority from United States Serial Number 61/165,065 filed March 31, 2009.

5 BACKGROUND OF THE INVENTION

Films with high clarity, high stiffness and high dart impact are highly demanded in packaging industry. Clarity delivers aesthetics properties, high stiffness and high dart afford down-gauge properties.

10 Ethylene alpha-olefin copolymer resins or film structures comprised these resins that can make films with improved aesthetics (optical) and abuse resistance (dart) properties create value to end-users. Heterogeneous ethylene alpha-olefin copolymers have both high crystalline (thick crystals) and copolymer (thin crystals) fractions.

15 Optical properties of a film can be defined in terms of surface gloss, haze and clarity. Haze can depend on internal haze (bulk scattering) and external haze (surface scattering). Both external haze and internal haze can be a function of the high crystalline fraction content and high crystalline fraction molecular weight of the resin used to make the film. High crystalline fraction can be made of thick crystals that scatter light and hence an increase in the high crystalline fraction content increases the 20 haze of the film and hurts its optical properties. Decreasing the molecular weight of the high crystalline fraction can increase the thickness of the crystals in the high crystalline fraction. The thicker the high crystalline fraction crystals, the worse are the film optics. Hence a reduced content and increased molecular weight of the high crystalline fraction would be desirable for improved optics, although too high of a 25 molecular weight can cause melt fracture problems due to high melt elasticity. Also, increasing the molecular weight of the high crystalline fraction, for improved optics, could hurt dart properties of the film. Higher molecular weight of the copolymer fraction is desirable for higher film dart. For a particular resin melt index (MI or I_2), increasing the molecular weight of the high crystalline fraction for improved optics,

has to be balanced by lowering the molecular weight of copolymer fraction so that the MI be kept constant. This decrease in copolymer molecular weight will hurt the dart properties. Therefore an optimum high crystalline fraction molecular weight is desirable for balanced dart and optical properties. Thick crystals from the high 5 crystalline fraction provide strength to the film improving its tear properties. Decreasing the high crystalline fraction content for improving optics could therefore hurt film tear. In order to achieve a balance of tear and optical properties an optimum content of high crystalline fraction is desirable.

10 Surface haze of the film can depend on the molecular weight distribution of the ethylene alpha-olefin copolymer. Very broad molecular weight distribution usually increases melt elasticity of the resin leading to surface melt fracture while very narrow molecular weight distribution can cause processing issues at the die causing surface melt fracture. Since presence of surface melt fracture hurts film 15 optical properties, an optimum molecular weight distribution is also required for improved optical properties.

20 Dart properties of films can depend on the molecular weight distribution and on the copolymer fraction content. The narrower the molecular weight distribution and more the copolymer fraction content, the higher is the film dart. Too narrow of molecular weight distribution could hurt optical properties and processability (film fabrication) and hence an optimum molecular weight distribution is required for a balance of processability, dart and optical properties. Also, increase in copolymer 25 fraction content could be achieved at a cost of reduction in high crystalline fraction content and this could hurt film tear. Therefore in order to achieve a good balance of processability, dart, tear and optical properties, a particular combination of molecular weight distribution and high crystalline and copolymer fraction content is required.

30 Stiffness of films depends on resin density. The higher the resin density, the more the crystalline fraction, and the higher the film stiffness accordingly. However, as discussed previously, high crystalline fraction will hurt film optical properties and dart impact, so, film stiffness and film optical/dart impact are mutually exclusive properties.

The present invention is a multilayer film made from a particular resin family with this particular combination of molecular weight distribution and high crystalline and copolymer fraction content and molecular weight. For an equivalent density and melt index, this combination of resin characteristics produces a film with improved 5 optics, stiffness, dart, tear and processability.

BRIEF SUMMARY OF THE INVENTION

In one embodiment, a multilayer film is claimed comprising at least two layers, wherein a first layer comprises a first interpolymer of ethylene and at least one alpha-olefin, characterized wherein the first interpolymer has a density of less than 0.925 g/cm³, and an average M_v and a valley temperature between the interpolymer and high crystalline fraction, T_{hc}, such that the average M_v for a fraction above T_{hc} from 10 ATREF divided by average M_v of the whole polymer from ATREF (M_{hc}/M_{hp}) is less than about 1.95, preferably less than 1.7, and wherein the first interpolymer has a CDBI of less than 60%, and wherein at least one other second layer comprises a 15 second interpolymer of ethylene and, optionally at least one alpha-olefin, wherein the second interpolymer has a density from 0.925 to 0.965 g/cm³, preferably wherein said first interpolymer is heterogeneously branched, also preferably wherein said first interpolymer has a CDBI of less than 55%.

20 In another embodiment, the invention is a film comprising at least one layer comprising a first interpolymer of ethylene and at least one alpha-olefin, characterized wherein the first interpolymer has a density of less than 0.925 g/cm³ and is characterized as having a high density (HD) fraction and an overall density such that % HD fraction < 0.0168x² - 29.636x + 13036 where x is the overall density in 25 grams/cubic centimeter, and at least one other layer comprising a second interpolymer of ethylene and, optionally at least one alpha-olefin, wherein the second interpolymer has a density from 0.925 to 0.965 g/cm³.

30 In either embodiment, the film can be a skin A/core/skin B layer, preferably wherein skin A and skin B comprise the same ethylene interpolymers, more preferably when skin A and skin B each comprise the first interpolymer described in the above two embodiments.

Also in either embodiment, the 120 micron film can have haze of < 16% measured according to ASTM D1003, especially in combination with a Dart B measured using ASTM D1709 of at least 250 grams, and a 2 percent secant modulus 5 $((MD+CD)/2)$ measured in accordance with ASTM D882 of at least 240 MPa, and ultimate tensile strength measured in accordance with ASTM D882 at least 45 MPa at both MD, CD direction.

10 The film of either embodiment can further comprise at least one other natural or synthetic polymer, preferably wherein the synthetic polymer is low density polyethylene.

15 Preferably, the first interpolymer comprises a melt index from about 0.1 to about 10 g/10 min. and/or comprises an overall density less than about 0.922 g/cm³.

Also preferably, the first interpolymer comprises long chain branches less than 1 per 1000 C atoms and/or a molecular weight distribution, M_w/M_n , of less than about 5.

20 A fabricated article, such as a stand up pouch, comprising the film described above is also within the embodiments of the invention.

Preferably, the second interpolymer comprises a melt index from about 0.1 to about 10 g/10 min. and/or comprises an overall density > 0.925 g/cm³.

25 Also preferably, the second interpolymer comprises heterogenous LLDPE or HDPE resins which has high MW in high crystalline fraction.

Also preferably, the second interpolymer has long chain branches less than 1 per 1000 C atoms and/or a molecular weight distribution, M_w/M_n , of less than about 5.

30 A fabricated article, such as a stand up pouch, comprising the film described above is also within the embodiments of the invention.

The film embodiments described above wherein the first interpolymer has been at least partially cross-linked to at least 5%, by weight, gel are also within the purview of the invention.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 plots Short Chain Branching Distribution and log M_v data from ATREF for Inventive Resin Example 1 and Comparative Resin Example 1.

DETAILED DESCRIPTION OF THE INVENTION

10 Balance of stiffness, processability, dart, tensile and optical properties was achieved by using a resin with a unique combination of molecular weight distribution and high crystalline and copolymer fraction content. Resin characteristics and film property details are listed in Table 1, Figure 1, Table 2 and Table 3. High density fraction content was significantly dropped and that of the copolymer fraction was
15 increased. Ratio of viscosity average molecular weight of the high crystalline fraction to that of the whole polymer was lowered, indicating lower molecular weight of the high crystalline fraction. Ratio of viscosity average molecular weight of the copolymer fraction to that of the whole polymer was increased indicating higher molecular weight of the copolymer fraction. These differences in the resin
20 characteristics were achieved by reducing the reactor temperature to from about 160°C to about 180°C, especially 175°C and reducing the Al/Ti molar ratio from about 1:1 to about 5:1, especially 1:1 to about 2.5:1.

25 Film made from the inventive resin, having unique combination of molecular characteristics, had significantly improved dart and optics without any sacrifice in MD Tear and processability.

This resin can be used for applications where improvement in optical and dart properties are required without sacrificing film tear properties and processability during film fabrication.

30 Low reactor temperature is useful for narrowing the molecular weight distribution. Reactor temperature of 175°C yielded a product with narrow molecular weight distribution without significantly reducing the production output (lb/hr).

Significant further reduction in temperature could further narrow the molecular weight distribution but significantly lower the output and also make the product hurt the processability (film fabrication) of the resin.

5 Low Al/Ti ratio is useful for narrowing the molecular weight distribution and also for reducing the high crystalline fraction and increasing the copolymer fraction. For a HEC-3 catalyst with 3.0 Ti/Mg ratio, an Al/Ti ratio of 1.5:1 yielded a product with narrow molecular weight distribution, less high crystalline fraction and more copolymer fraction without significantly affecting reactor stability.

Preferably the reactor temperature is from about 160°C to about 180°C.

10 Preferably the ratio of aluminum to metal atom, preferably Al/Ti, is from about 1:1 to about 5:1.

The melt index of the disclosed ethylenic polymer can be from about 0.01 to about 1000 g/ 10 minutes, as measured by ASTM 1238-04 (2.16 kg and 190 °C).

Ethylene-based Polymers

15 Suitable ethylene-based polymers can be prepared with Ziegler-Natta catalysts. Examples of linear ethylene-based polymers include high density polyethylene (HDPE) and linear low density polyethylene (LLDPE). Suitable polyolefins include, but are not limited to, ethylene/diene interpolymers, ethylene/α-olefin interpolymers, ethylene homopolymers, and blends thereof.

20 Suitable heterogeneous linear ethylene-based interpolymers for the second interpolymer include linear low density polyethylene (LLDPE). For example, some interpolymers produced using a Ziegler-Natta catalyst have a density of about 0.925 to about 0.94 g/cm³ and have a melt index (I₂) from about 0.01 to about 1,000 g/10 minutes, as measured by ASTM 1238-04 (2.16 kg and 190 °C). Preferably, the melt index (I₂) can be from about 0.1 to about 50 g/ 10 minutes and density above 25 0.925g/cm³. Heterogeneous linear ethylene-based polymers may have a molecular weight distributions, M_w/M_n, from about 3.5 to about 5.

The linear ethylene-based polymer may comprise units derived from one or more α -olefin copolymers as long as there is at least 50 mole percent polymerized ethylene monomer in the polymer.

High density polyethylene (HDPE) are also suitable for the second 5 interpolymer and may have a density in the range of about 0.94 to about 0.97 g/cm³. HDPE is typically a homopolymer of ethylene or an interpolymer of ethylene and low levels of one or more α -olefin copolymers. HDPE contains relatively few branch 10 chains relative to the various copolymers of ethylene and one or more α -olefin copolymers. HDPE can be comprised of less than 5 mole % of the units derived from one or more α -olefin comonomers

Linear ethylene-based polymers such as linear low density polyethylene and ultra low density polyethylene (ULDPE) are characterized by an absence of long chain branching, in contrast to conventional low crystallinity, highly branched ethylene-based polymers such as LDPE. Heterogeneous linear ethylene-based 15 polymers such as LLDPE can be prepared via solution, slurry, or gas phase polymerization of ethylene and one or more α -olefin comonomers in the presence of a Ziegler-Natta catalyst, by processes such as are disclosed in U.S. Patent No. 4,076,698 (Anderson, et al.). Relevant discussions of both of these classes of materials, and their methods of preparation are found in U.S. Patent No. 4,950,541 20 (Tabor, et al.). Other patents and publications to make LLDPE include WO 2008/0287634, US 4198315, US 5487938, EP 0891381, and US 5977251.

An α -olefin comonomer may have, for example, from 3 to 20 carbon atoms. Preferably, the α -olefin comonomer may have 3 to 8 carbon atoms. Exemplary α -olefin comonomers include, but are not limited to, propylene, 1-butene, 3-methyl-1-butene, 1-pentene, 3-methyl-1-pentene, 4-methyl-1-pentene, 1-hexene, 1-heptene, 4,4-dimethyl-1-pentene, 3-ethyl-1-pentene, 1-octene, 1-nonene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 1-eicosene. Commercial examples of linear ethylene-based polymers that are interpolymers include ATTANETM Ultra Low Density Linear Polyethylene Copolymer, DOWLEXTM Polyethylene Resins, and 30 FLEXOMERTM Very Low Density Polyethylene, all available from The Dow Chemical Company.

In a further aspect, when used in reference to an ethylene homopolymer (that is, a high density ethylene homopolymer not containing any comonomer and thus no short chain branches), the terms "homogeneous ethylene polymer" or "homogeneous linear ethylene polymer" may be used to describe such a polymer.

5 The ethylene-based polymers described herein suitable for the first interpolymer are relatively inhomogeneous (or heterogeneous) ethylene polymers that possess short chain branches and that are characterized by a relatively low composition distribution breadth index (CDBI). That is, the ethylene polymer has a CDBI less than or equal to about 60 percent, preferably less than or equal to about 55
10 percent, more preferably less than or equal to about 50 percent, but usually include a measurable high density (crystalline) polymer fraction.

15 The CDBI is defined as the weight percent of the polymer molecules having a co-monomer content within 50 percent of the median total molar co-monomer content and represents a comparison of the co-monomer distribution in the polymer to the co-monomer distribution expected for a Bernoullian distribution. The CDBI of polyolefins can be conveniently calculated from data obtained from techniques known in the art, such as, for example, temperature rising elution fractionation ("TREF") as described, for example, by Wild, et al., *Journal of Polymer Science, Poly. Phys. Ed.*, Vol. 20, 441 (1982); L. D. Cady, "The Role of Comonomer Type and Distribution in
20 LLDPE Product Performance," *SPE Regional Technical Conference*, Quaker Square Hilton, Akron, OH, 107-119 (Oct. 1-2, 1985); or in U.S. Pat. Nos. 4,798,081 (Hazlitt, et al.) and U.S. Patent No. 5,008,204 (Stehling). However, the TREF technique does not include purge quantities in CDBI calculations. More preferably, the co-monomer distribution of the polymer is determined using ^{13}C NMR analysis in accordance with
25 techniques described, for example, in U.S. Patent No. 5,292,845 (Kawasaki, et al.) and by J. C. Randall in *Rev. Macromol. Chem. Phys.*, C29, 201-317.

30 The presence of long chain branching can be determined in ethylene homopolymers by using ^{13}C nuclear magnetic resonance (NMR) spectroscopy and is quantified using the method described by Randall (*Rev. Macromol. Chem. Phys.*, C29, V. 2&3, 285-297). There are other known techniques useful for determining the presence of long chain branches in ethylene polymers, including ethylene/1-octene interpolymers. Two such exemplary methods are gel permeation chromatography

coupled with a low angle laser light scattering detector (GPC-LALLS) and gel permeation chromatography coupled with a differential viscometer detector (GPC-DV). The use of these techniques for long chain branch detection and the underlying theories have been well documented in the literature. See, for example, Zimm, G. H. and Stockmayer, W. H., *J. Chem. Phys.*, 17, 1301 (1949), and Rudin, A., *Modern Methods of Polymer Characterization*, John Wiley & Sons, New York (1991) 103-112.

The terms "heterogeneous" and "heterogeneously branched" mean that the ethylene polymer can be characterized as a mixture of interpolymer molecules having various ethylene to comonomer molar ratios. Heterogeneously branched linear ethylene polymers are available from The Dow Chemical Company as DOWLEX™ linear low density polyethylene and as ATTANET™ ultra-low density polyethylene resins. Heterogeneously branched linear ethylene polymers can be prepared via the solution, slurry or gas phase polymerization of ethylene and one or more optional α -olefin comonomers in the presence of a Ziegler Natta catalyst, by processes such as are disclosed in U.S. Pat. No. 4,076,698 (Anderson, et al.). Heterogeneously branched ethylene polymers are typically characterized as having molecular weight distributions, M_w/M_n , from about 3 to about 5 and, as such, are distinct from substantially linear ethylene polymers and homogeneously branched linear ethylene polymers in regards to both compositional short chain branching distribution and molecular weight distribution.

Highly Long Chain Branched Ethylene-based Polymers

Highly long chain branched ethylene-based polymers, such as low density polyethylene (LDPE), which can be blended with the novel heterogeneous ethylene polymers herein, can be made using a high-pressure process using free-radical chemistry to polymerize ethylene monomer. Typical LDPE polymer density is from about 0.91 to about 0.94 g/cm³. The low density polyethylene may have a melt index (I_2) from about 0.01 to about 150 g/10 minutes. Highly long chain branched ethylene-based polymers such as LDPE may also be referred to as "high pressure ethylene polymers", meaning that the polymer is partly or entirely homopolymerized or

copolymerized in autoclave or tubular reactors at pressures above 13,000 psig with the use of free-radical initiators, such as peroxides (see, for example, U.S. Patent No. 4,599,392 (McKinney, et al.)). The process creates a polymer with significant branches, including long chain branches.

5 Highly long chain branched ethylene-based polymers are typically homopolymers of ethylene; however, the polymer may comprise units derived from one or more α -olefin copolymers as long as there is at least 50 mole percent polymerized ethylene monomer in the polymer.

10 Comonomers that may be used in forming highly branched ethylene-based polymer include, but are not limited to, α -olefin comonomers, typically having no more than 20 carbon atoms. For example, the α -olefin comonomers, for example, may have 3 to 10 carbon atoms; or in the alternative, the α -olefin comonomers, for example, may have 3 to 8 carbon atoms. Exemplary α -olefin comonomers include, but are not limited to, propylene, 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 15 1-nonene, 1-decene, and 4-methyl-1-pentene. In the alternative, exemplary comonomers include, but are not limited to α , β -unsaturated C₃-C₈-carboxylic acids, in particular maleic acid, fumaric acid, itaconic acid, acrylic acid, methacrylic acid and crotonic acid derivates of the α , β -unsaturated C₃-C₈-carboxylic acids, for example unsaturated C₃-C₁₅-carboxylic acid esters, in particular ester of C₁-C₆-20 alkanols, or anhydrides, in particular methyl methacrylate, ethyl methacrylate, n-butyl methacrylate, ter-butyl methacrylate, methyl acrylate, ethyl acrylate n-butyl acrylate, 2-ethylhexyl acrylate, tert-butyl acrylate, methacrylic anhydride, maleic anhydride, and itaconic anhydride. In another alternative, the exemplary comonomers include, but are not limited to, vinyl carboxylates, for example vinyl acetate. In another 25 alternative, exemplary comonomers include, but are not limited to, n-butyl acrylate, acrylic acid and methacrylic acid.

Process

For producing the first ethylene-based interpolymer used in the invention, a solution-phase polymerization process may be used. Typically such a process occurs 30 in a well-stirred reactor such as a loop reactor or a sphere reactor at temperature from about 150 to about 300 °C, preferably from about 160 to about 180 °C, and at

pressures from about 30 to about 1000 psi, preferably from about 30 to about 750 psi. The residence time in such a process is from about 2 to about 20 minutes, preferably from about 10 to about 20 minutes. Ethylene, solvent, catalyst, and optionally one or more comonomers are fed continuously to the reactor. Exemplary catalysts in these 5 embodiments include, but are not limited to, Ziegler-Natta catalysts. Exemplary solvents include, but are not limited to, isoparaffins. For example, such solvents are commercially available under the name ISOPAR E (ExxonMobil Chemical Co., Houston, Texas). The resultant mixture of ethylene-based polymer and solvent is then removed from the reactor and the polymer is isolated. Solvent is typically recovered 10 via a solvent recovery unit, that is, heat exchangers and vapor liquid separator drum, and is recycled back into the polymerization system.

For producing the highly long chain branched ethylene-based polymer, a high pressure, free-radical initiated polymerization process is typically used. Two different high pressure free-radical initiated polymerization process types are known. In the 15 first type, an agitated autoclave vessel having one or more reaction zones is used. The autoclave reactor normally has several injection points for initiator or monomer feeds, or both. In the second type, a jacketed tube is used as a reactor, which has one or more reaction zones. Suitable, but not limiting, reactor lengths may be from about 100 to about 3000 meters, preferably from about 1000 to about 2000 meters. The 20 beginning of a reaction zone for either type of reactor is defined by the side injection of either initiator of the reaction, ethylene, telomer, comonomer(s) as well as any combination thereof. A high pressure process can be carried out in autoclave or tubular reactors or in a combination of autoclave and tubular reactors, each comprising one or more reaction zones.

25 Suitable catalysts for use in embodiment processes include any compound or combination of compounds that is adapted for preparing polymers of the desired composition or type, either the ethylene-based polymers or the highly long chain branched ethylene-based polymers. Heterogeneous catalysts may be employed. In some embodiment processes, heterogeneous catalysts, including the well known 30 Ziegler-Natta compositions, especially Group 4 metal halides supported on Group 2 metal halides or mixed halides and alkoxides and the well known chromium or vanadium based catalysts, may be used. In some embodiment processes, the catalysts

for use may be homogeneous catalysts comprising a relatively pure organometallic compound or metal complex, especially compounds or complexes based on metals selected from Groups 3-10 or the Lanthanide series. If more than one catalyst is used in a system, it is preferred that any catalyst employed not significantly detrimentally affect the performance of another catalyst under the conditions of polymerization. Desirably, no catalyst is reduced in activity by greater than 25 percent, more preferably greater than 10 percent under the conditions of the polymerization.

In embodiment processes employing a complex metal catalyst, such a catalyst may be activated to form an active catalyst composition by combination with a cocatalyst, preferably a cation forming cocatalyst, a strong Lewis acid, or a combination thereof. Suitable cocatalysts for use include polymeric or oligomeric aluminoxanes, especially methyl aluminoxane, as well as inert, compatible, noncoordinating, ion forming compounds. So-called modified methyl aluminoxane (MMAO) or triethyl aluminum (TEA) is also suitable for use as a cocatalyst. One technique for preparing such modified aluminoxane is disclosed in U.S. Patent No. 5,041,584 (Crapo, et al.). Aluminoxanes can also be made as disclosed in U.S. Patent Nos. 5,542,199 (Lai, et al.); 4,544,762 (Kaminsky, et al.); 5,015,749 (Schmidt, et al.); and 5,041,585 (Deavenport, et al.).

In some embodiment processes, processing aids, such as plasticizers, can also be included in the embodiment ethylenic polymer product. These aids include, but are not limited to, the phthalates, such as dioctyl phthalate and diisobutyl phthalate, natural oils such as lanolin, and paraffin, naphthenic and aromatic oils obtained from petroleum refining, and liquid resins from rosin or petroleum feedstocks. Exemplary classes of oils useful as processing aids include white mineral oil such as KAYDOL oil (Chemtura Corp.; Middlebury, Conn.) and SHELLFLEX 371 naphthenic oil (Shell Lubricants; Houston, Tex.). Another suitable oil is TUFFLO oil (Lyondell Lubricants; Houston, Tex.).

In some embodiment processes, embodiment ethylenic polymers are treated with one or more stabilizers, for example, antioxidants, such as IRGANOX 1010 and IRGAFOS 168 (Ciba Specialty Chemicals; Glattbrugg, Switzerland). In general, polymers are treated with one or more stabilizers before an extrusion or other melt processes. In other embodiment processes, other polymeric additives include, but are

not limited to, ultraviolet light absorbers, antistatic agents, pigments, dyes, nucleating agents, fillers, slip agents, fire retardants, plasticizers, processing aids, lubricants, stabilizers, smoke inhibitors, viscosity control agents and anti-blocking agents. The embodiment ethylenic polymer composition may, for example, comprise less than 10 5 percent by the combined weight of one or more additives, based on the weight of the embodiment ethylenic polymer.

The embodiment ethylenic polymer may further be compounded. In some embodiment ethylenic polymer compositions, one or more antioxidants may further be compounded into the polymer and the compounded polymer pelletized. The 10 compounded ethylenic polymer may contain any amount of one or more antioxidants. For example, the compounded ethylenic polymer may comprise from about 200 to about 600 parts of one or more phenolic antioxidants per one million parts of the polymer. In addition, the compounded ethylenic polymer may comprise from about 15 800 to about 1200 parts of a phosphite-based antioxidant per one million parts of polymer. The compounded disclosed ethylenic polymer may further comprise from about 300 to about 1250 parts of calcium stearate per one million parts of polymer.

Cross-linking Agents

Some suitable cross-linking agents have been disclosed in Zweifel Hans et al., “Plastics Additives Handbook,” Hanser Gardner Publications, Cincinnati, Ohio, 5th 20 edition, Chapter 14, pages 725-812 (2001); Encyclopedia of Chemical Technology, Vol. 17, 2nd edition, Interscience Publishers (1968); and Daniel Seern, “Organic Peroxides,” Vol. 1, Wiley-Interscience, (1970), all of which are incorporated herein by reference.

Non-limiting examples of suitable cross-linking agents include peroxides, 25 phenols, azides, aldehyde-amine reaction products, substituted ureas, substituted guanidines; substituted xanthates; substituted dithiocarbamates; sulfur-containing compounds, such as thiazoles, sulfenamides, thiuramidisulfides, paraquinonedioxime, dibenzoparaquinonedioxime, sulfur; imidazoles; silanes and combinations thereof.

Non-limiting examples of suitable organic peroxide cross-linking agents 30 include alkyl peroxides, aryl peroxides, peroxyesters, peroxycarbonates, diacylperoxides, peroxyketals, cyclic peroxides and combinations thereof. In some

embodiments, the organic peroxide is dicumyl peroxide, t-butylisopropylidene peroxybenzene, 1,1-di-t-butyl peroxy-3,3,5-trimethylcyclohexane, 2,5-dimethyl-2,5-di(t-butyl peroxy) hexane, t-butyl-cumyl peroxide, di-t-butyl peroxide, 2,5-dimethyl-2,5-di-(t-butyl peroxy) hexyne or a combination thereof. In one embodiment, the 5 organic peroxide is dicumyl peroxide. Additional teachings regarding organic peroxide cross-linking agents are disclosed in C. P. Park, "Polyolefin Foam", Chapter 9 of *Handbook of Polymer Foams and Technology*, edited by D. Klempner and K. C. Frisch, Hanser Publishers, pp. 198-204, Munich (1991), which is incorporated herein by reference.

10 Non-limiting examples of suitable azide cross-linking agents include azidoformates, such as tetramethylenebis(azidoformate); aromatic polyazides, such as 4,4'-diphenylmethane diazide; and sulfonazides, such as p,p'-oxybis(benzene sulfonyl azide). The disclosure of azide cross-linking agents can be found in U.S. Patent Nos. 3,284,421 and 3,297,674, both of which are incorporated herein by reference.

15 The poly(sulfonyl azide) is any compound having at least two sulfonyl azide groups (*i.e.*, -SO₂N₃) that are reactive towards the ethylene/α-olefin interpolymer disclosed herein. In some embodiments, the poly(sulfonyl azide)s have a structure of X-R-X wherein each X is -SO₂N₃ and R represents an unsubstituted or inertly substituted hydrocarbyl, hydrocarbyl ether or silicon-containing group. In some 20 embodiments, the R group has sufficient carbon, oxygen or silicon, preferably carbon, atoms to separate the sulfonyl azide groups sufficiently to permit a facile reaction between the ethylene/α-olefin interpolymer and the sulfonyl azide groups. In other embodiments, the R group has at least 1, at least 2, or at least 3 carbon, oxygen or silicon, preferably carbon, atoms between the sulfonyl azide groups. The term 25 "inertly substituted" refers to substitution with atoms or groups which do not undesirably interfere with the desired reaction(s) or desired properties of the resulting cross-linked polymers. Such groups include fluorine, aliphatic or aromatic ethers, siloxanes and the like. Non-limiting examples of suitable structures of R include aryl, alkyl, alkaryl, arylalkyl, silanyl, heterocyclyl, and other inert groups. In some 30 embodiments, the R group includes at least one aryl group between the sulfonyl groups. In other embodiments, the R group includes at least two aryl groups (such as when R is 4,4' diphenylether or 4,4'-biphenyl). When R is one aryl group, it is

preferred that the group have more than one ring, as in the case of naphthylene bis(sulfonyl azides). In some embodiments, the poly(sulfonyl)azides include 1,5-pentane bis(sulfonylazide), 1,8-octane bis(sulfonyl azide), 1,10-decane bis(sulfonyl azide), 1,10-octadecane bis(sulfonyl azide), 1-octyl-2,4,6-benzene tris(sulfonyl azide), 5 4,4'-diphenyl ether bis(sulfonyl azide), 1,6-bis(4'-sulfonazidophenyl)hexane, 2,7-naphthalene bis(sulfonyl azide), and mixed sulfonyl azides of chlorinated aliphatic hydrocarbons containing an average of from 1 to 8 chlorine atoms and from about 2 to 10 5 sulfonyl azide groups per molecule, and combinations thereof. In other embodiments, the poly(sulfonyl azide)s include oxy-bis(4-sulfonylazidobenzene), 2,7-naphthalene bis(sulfonyl azido), 4,4'-bis(sulfonyl azido)biphenyl, 4,4'-diphenyl ether bis(sulfonyl azide) and bis(4-sulfonyl azidophenyl)methane, and combinations thereof.

Non-limiting examples of suitable aldehyde-amine reaction products include formaldehyde-ammonia, formaldehyde-ethylchloride-ammonia, acetaldehyde-ammonia, formaldehyde-aniline, butyraldehyde-aniline, heptaldehyde-aniline, and 15 combinations thereof.

Non-limiting examples of suitable substituted ureas include trimethylthiourea, diethylthiourea, dibutylthiourea, tripentylthiourea, 1,3-bis(2-benzothiazolylmercaptomethyl)urea, N,N-diphenylthiourea, and combinations thereof.

Non-limiting examples of suitable substituted guanidines include 20 diphenylguanidine, di-o-tolylguanidine, diphenylguanidine phthalate, the di-o-tolylguanidine salt of dicatechol borate, and combinations thereof.

Non-limiting examples of suitable substituted xanthates include zinc ethylxanthate, sodium isopropylxanthate, butylxanthic disulfide, potassium isopropylxanthate, zinc butylxanthate, and combinations thereof.

25 Non-limiting examples of suitable dithiocarbamates include copper dimethyl-, zinc dimethyl-, tellurium diethyl-, cadmium dicyclohexyl-, lead dimethyl-, lead dimethyl-, selenium dibutyl-, zinc pentamethylene-, zinc didecyl-, zinc isopropyloctyl-dithiocarbamate, and combinations thereof.

Non-limiting examples of suitable thiazoles include 2-mercaptopbenzothiazole, zinc mercaptothiazolyl mercaptide, 2-benzothiazolyl-N,N-diethylthiocarbamyl sulfide, 2,2'-dithiobis(benzothiazole), and combinations thereof.

5 Non-limiting examples of suitable imidazoles include 2-mercaptoimidazoline 2-mercapto-4,4,6-trimethylidihydropyrimidine, and combinations thereof.

Non-limiting examples of suitable sulfenamides include N-t-butyl-2-benzothiazole-, N-cyclohexylbenzothiazole-, N,N-diisopropylbenzothiazole-, N-(2,6-dimethylmorpholino)-2-benzothiazole-, N,N-diethylbenzothiazole-sulfenamide, and combinations thereof.

10 Non-limiting examples of suitable thiuramidisulfides include N,N'-diethyl-, tetrabutyl-, N,N'-diisopropylidioctyl-, tetramethyl-, N,N'-dicyclohexyl-, N,N'-tetralaurylthiuramidisulfide, and combinations thereof.

In some embodiments, the cross-linking agents are silanes. Any silane that can effectively graft to and/or cross-link the ethylene/α-olefin interpolymer or the 15 polymer blend disclosed herein can be used. Non-limiting examples of suitable silane cross-linking agents include unsaturated silanes that comprise an ethylenically unsaturated hydrocarbyl group, such as a vinyl, allyl, isopropenyl, butenyl, cyclohexenyl or gamma-(meth)acryloxy allyl group, and a hydrolyzable group such as a hydrocarbyloxy, hydrocarbonyloxy, and hydrocarbylamino group. Non-limiting 20 examples of suitable hydrolyzable groups include methoxy, ethoxy, formyloxy, acetoxy, propionyloxy, alkyl and arylamino groups. In other embodiments, the silanes are the unsaturated alkoxy silanes which can be grafted onto the interpolymer. Some of these silanes and their preparation methods are more fully described in U.S. 25 Pat. No. 5,266,627, which is incorporated herein by reference. In further embodiments, the silane cross-linking agents are vinyltrimethoxysilane, vinyltriethoxysilane, vinyltris(2-methoxyethoxy)silane, vinyltriacetoxyxilane, vinylmethyldimethoxysilane, 3-methacryloyloxypropyltrimethoxysilane, and combinations thereof.

The amount of the silane cross-linking agent can vary widely, depending upon 30 the nature of the ethylene/α-olefin interpolymer or the polymer blend, the silane employed, the processing conditions, the amount of grafting initiator, the ultimate

application, and other factors. When vinyltrimethoxysilane (VTMOS) is used, the amount of VTMOS is generally at least about 0.1 weight percent, at least about 0.5 weight percent, or at least about 1 weight percent, based on the combined weight of the silane cross-linking agent and the interpolymer or the polymer blend.

5 **Uses**

The embodiment ethylenic polymer may be employed in a variety of conventional thermoplastic fabrication processes to produce useful articles, including objects comprising at least one film layer, such as a monolayer film, or at least one layer in a multilayer film prepared by cast, blown, calendered, or extrusion coating processes; molded articles, such as blow molded, injection molded, or rotomolded articles; extrusions; fibers; and woven or non-woven fabrics. Thermoplastic compositions comprising the embodiment ethylenic polymer include blends with other natural or synthetic materials, polymers, additives, reinforcing agents, ignition resistant additives, antioxidants, stabilizers, colorants, extenders, crosslinkers, blowing agents, and plasticizers.

The embodiment ethylenic polymer may be used in producing fibers for other applications. Fibers that may be prepared from the embodiment ethylenic polymer or blends thereof include staple fibers, tow, multicomponent, sheath/core, twisted, and monofilament. Suitable fiber forming processes include spunbonded and melt blown techniques, as disclosed in U.S. Patent Nos. 4,340,563 (Appel, et al.), 4,663,220 (Wisneski, et al.), 4,668,566 (Nohr, et al.), and 4,322,027 (Reba), gel spun fibers as disclosed in U.S. Patent No. 4,413,110 (Kavesh, et al.), woven and nonwoven fabrics, as disclosed in U.S. Patent No. 3,485,706 (May), or structures made from such fibers, including blends with other fibers, such as polyester, nylon or cotton, thermoformed articles, extruded shapes, including profile extrusions and co-extrusions, calendered articles, and drawn, twisted, or crimped yarns or fibers.

The embodiment ethylenic polymer may be used in a variety of films, including but not limited to clarity shrink films, collation shrink films, cast stretch films, silage films, stretch hooder films, sealants, stand up pouch films, liner films, and diaper backsheets.

The embodiment ethylenic polymer is also useful in other direct end-use applications. The embodiment ethylenic polymer is useful for wire and cable coating operations, in sheet extrusion for vacuum forming operations, and forming molded articles, including the use of injection molding, blow molding process, or rotomolding processes. Compositions comprising the embodiment ethylenic polymer can also be formed into fabricated articles using conventional polyolefin processing techniques.

Other suitable applications for the embodiment ethylenic polymer include films and fibers; soft touch goods, such as tooth brush handles and appliance handles; gaskets and profiles; adhesives (including hot melt adhesives and pressure sensitive adhesives); footwear (including shoe soles and shoe liners); auto interior parts and profiles; foam goods (both open and closed cell); impact modifiers for other thermoplastic polymers such as high density polyethylene, isotactic polypropylene, or other olefin polymers; coated fabrics; hoses; tubing; weather stripping; cap liners; flooring; and viscosity index modifiers, also known as pour point modifiers, for lubricants.

Further treatment of the embodiment ethylenic polymer may be performed to apply the embodiment ethylenic polymer for other end uses. For example, dispersions (both aqueous and non-aqueous) can also be formed using the present polymers or formulations comprising the same. Frothed foams comprising the embodiment ethylenic polymer can also be formed, as disclosed in PCT Publication No. 2005/021622 (Strandburg, et al.). The embodiment ethylenic polymer may also be crosslinked by any known means, such as the use of peroxide, electron beam, silane, azide, or other cross-linking technique. The embodiment ethylenic polymer can also be chemically modified, such as by grafting (for example by use of maleic anhydride (MAH), silanes, or other grafting agent), halogenation, amination, sulfonation, or other chemical modification.

Additives and adjuvants may be added to the embodiment film structure. Suitable additives include fillers, such as organic or inorganic particles, including clays, talc, titanium dioxide, zeolites, powdered metals, organic or inorganic fibers, including carbon fibers, silicon nitride fibers, steel wire or mesh, and nylon or polyester cording, nano-sized particles, clays, and so forth; tackifiers, oil extenders, including paraffinic or napthelenic oils; and other natural and synthetic polymers,

including other polymers that are or can be made according to the embodiment methods.

Blends and mixtures of the embodiment ethylenic polymer with other polyolefins may be performed. Suitable polymers for blending with the embodiment ethylenic polymer include thermoplastic and non-thermoplastic polymers including natural and synthetic polymers. Exemplary polymers for blending include polypropylene, (both impact modifying polypropylene, isotactic polypropylene, atactic polypropylene, and random ethylene/propylene copolymers), various types of polyethylene, including high pressure, free-radical LDPE, Ziegler-Natta LLDPE, 5 metallocene PE, including multiple reactor PE (“in reactor” blends of Ziegler-Natta PE and metallocene PE, such as products disclosed in U.S. Patent Nos. 6,545,088 (Kolthammer, et al.); 6,538,070 (Cardwell, et al.); 6,566,446 (Parikh, et al.); 10 5,844,045 (Kolthammer, et al.); 5,869,575 (Kolthammer, et al.); and 6,448,341 (Kolthammer, et al.)), ethylene-vinyl acetate (EVA), ethylene/vinyl alcohol 15 copolymers, polystyrene, impact modified polystyrene, ABS, styrene/butadiene block copolymers and hydrogenated derivatives thereof (SBS and SEBS), and thermoplastic polyurethanes. Homogeneous polymers such as olefin plastomers and elastomers, ethylene and propylene-based copolymers (for example, polymers available under the trade designation VERSIFY™ Plastomers & Elastomers (The Dow Chemical 20 Company) and VISTAMAXX™ (ExxonMobil Chemical Co.)) can also be useful as components in blends comprising the embodiment ethylenic polymer.

Blends and mixtures of the embodiment ethylenic polymer may include thermoplastic polyolefin blends (TPO), thermoplastic elastomer blends (TPE), thermoplastic vulcanizates (TPV) and styrenic polymer blends. TPE and TPV blends 25 may be prepared by combining embodiment ethylenic polymers, including functionalized or unsaturated derivatives thereof, with an optional rubber, including conventional block copolymers, especially an SBS block copolymer, and optionally a crosslinking or vulcanizing agent. TPO blends are generally prepared by blending the embodiment polymers with a polyolefin, and optionally a crosslinking or vulcanizing 30 agent. The foregoing blends may be used in forming a molded object, and optionally crosslinking the resulting molded article. A similar procedure using different

components has been previously disclosed in U.S. Patent No. 6,797,779 (Ajbani, et al.).

Definitions

5 The term “composition,” as used, includes a mixture of materials which comprise the composition, as well as reaction products and decomposition products formed from the materials of the composition.

10 The terms “blend” or “polymer blend,” as used, mean an intimate physical mixture (that is, without reaction) of two or more polymers. A blend may or may not be miscible (not phase separated at molecular level). A blend may or may not be phase separated. A blend may or may not contain one or more domain configurations, as determined from transmission electron spectroscopy, light scattering, x-ray scattering, and other methods known in the art. The blend may be effected by physically mixing the two or more polymers on the macro level (for example, melt blending resins or compounding) or the micro level (for example, simultaneous 15 forming within the same reactor).

The term “linear” refers to polymers where the polymer backbone of the polymer lacks measurable or demonstrable long chain branches, for example, the polymer is substituted with an average of less than 0.01 long branch per 1000 carbons.

20 The term “polymer” refers to a polymeric compound prepared by polymerizing monomers, whether of the same or a different type. The generic term polymer thus embraces the term “homopolymer,” usually employed to refer to polymers prepared from only one type of monomer, and the term “interpolymer” as defined. The terms “ethylene/α-olefin polymer” is indicative of interpolymers as described.

25 The term “interpolymer” refers to polymers prepared by the polymerization of at least two different types of monomers. The generic term interpolymer includes copolymers, usually employed to refer to polymers prepared from two different monomers, and polymers prepared from more than two different types of monomers.

The term “ethylene-based polymer” refers to a polymer that contains more than 50 mole percent polymerized ethylene monomer (based on the total amount of polymerizable monomers) and, optionally, may contain at least one comonomer.

5 The term “ethylene/α-olefin interpolymer” refers to an interpolymer that contains more than 50 mole percent polymerized ethylene monomer (based on the total amount of polymerizable monomers) and at least one α-olefin.

The term “ethylenic polymer” refers to a polymer resulting from the bonding of an ethylene-based polymer and at least one highly long chain branched ethylene-based polymer.

10

TEST METHODS

Density

15 Density (g/cm³) is measured according to ASTM-D 792-03, Method B, in isopropanol. Specimens are measured within 1 hour of molding after conditioning in the isopropanol bath at 23 ° C for 8 min to achieve thermal equilibrium prior to measurement. The specimens are compression molded according to ASTM D-4703-00 Annex A with a 5 min initial heating period at about 190 ° C and a 15 ° C/min cooling rate per Procedure C. The specimen is cooled to 45 ° C in the press with 20 continued cooling until “cool to the touch.”

Melt Index

190 °C/2.16 kg, and is reported in grams eluted per 10 minutes. I₁₀ is measured in accordance with ASTM D 1238, Condition 190 °C/10 kg, and is reported in grams 25 eluted per 10 minutes.

DSC Crystallinity

Differential Scanning Calorimetry (DSC) can be used to measure the melting and crystallization behavior of a polymer over a wide range of temperature. For example, the TA Instruments Q1000 DSC, equipped with an RCS (refrigerated cooling system) and an autosampler is used to perform this analysis. During testing, a 5 nitrogen purge gas flow of 50 ml/min is used. Each sample is melt pressed into a thin film at about 175 °C; the melted sample is then air-cooled to room temperature (~25 °C). A 3-10 mg, 6 mm diameter specimen is extracted from the cooled polymer, weighed, placed in a light aluminum pan (ca 50 mg), and crimped shut. Analysis is then performed to determine its thermal properties.

10 The thermal behavior of the sample is determined by ramping the sample temperature up and down to create a heat flow versus temperature profile. First, the sample is rapidly heated to 180 °C and held isothermal for 3 minutes in order to remove its thermal history. Next, the sample is cooled to -40 °C at a 10 °C/minute cooling rate and held isothermal at -40 °C for 3 minutes. The sample is then heated to 15 150 °C (this is the “second heat” ramp) at a 10 °C/minute heating rate. The cooling and second heating curves are recorded. The cool curve is analyzed by setting baseline endpoints from the beginning of crystallization to -20 °C. The heat curve is analyzed by setting baseline endpoints from -20 °C to the end of melt. The values determined are peak melting temperature (T_m), peak crystallization temperature (T_c), 20 heat of fusion (H_f) (in Joules per gram), and the calculated % crystallinity for polyethylene samples using:

$$\% \text{ Crystallinity} = ((H_f)/(292 \text{ J/g})) \times 100.$$

25 The heat of fusion (H_f) and the peak melting temperature are reported from the second heat curve. Peak crystallization temperature is determined from the cooling curve.

Gel Permeation Chromatography (GPC)

The GPC system consists of a Waters (Milford, MA) 150C high temperature chromatograph (other suitable high temperatures GPC instruments include Polymer Laboratories (Shropshire, UK) Model 210 and Model 220) equipped with an on-board 30 differential refractometer (RI). Additional detectors can include an IR4 infra-red detector from Polymer ChAR (Valencia, Spain), Precision Detectors (Amherst, MA)

2-angle laser light scattering detector Model 2040, and a Viscotek (Houston, TX) 150R 4-capillary solution viscometer. A GPC with the last two independent detectors and at least one of the first detectors is sometimes referred to as “3D-GPC”, while the term “GPC” alone generally refers to conventional GPC. Depending on the sample, 5 either the 15-degree angle or the 90-degree angle of the light scattering detector is used for calculation purposes. Data collection is performed using Viscotek TriSEC software, Version 3, and a 4-channel Viscotek Data Manager DM400. The system is also equipped with an on-line solvent degassing device from Polymer Laboratories (Shropshire, UK). Suitable high temperature GPC columns can be used such as four 10 30 cm long Shodex HT803 13 micron columns or four 30 cm Polymer Labs columns of 20-micron mixed-pore-size packing (MixA LS, Polymer Labs). The sample carousel compartment is operated at 140 °C and the column compartment is operated at 150 °C. The samples are prepared at a concentration of 0.1 grams of polymer in 50 milliliters of solvent. The chromatographic solvent and the sample preparation 15 solvent contain 200 ppm of butylated hydroxytoluene (BHT). Both solvents are sparged with nitrogen. The polyethylene samples are gently stirred at 160 °C for four hours. The injection volume is 200 microliters. The flow rate through the GPC is set at 1 ml/minute.

The GPC column set is calibrated before running the Examples by running 20 twenty-one narrow molecular weight distribution polystyrene standards. The molecular weight (MW) of the standards ranges from 580 to 8,400,000 grams per mole, and the standards are contained in 6 “cocktail” mixtures. Each standard mixture has at least a decade of separation between individual molecular weights. The standard mixtures are purchased from Polymer Laboratories (Shropshire, UK). The 25 polystyrene standards are prepared at 0.025 g in 50 mL of solvent for molecular weights equal to or greater than 1,000,000 grams per mole and 0.05 g in 50 ml of solvent for molecular weights less than 1,000,000 grams per mole. The polystyrene standards were dissolved at 80 °C with gentle agitation for 30 minutes. The narrow standards mixtures are run first and in order of decreasing highest molecular weight 30 component to minimize degradation. The polystyrene standard peak molecular weights are converted to polyethylene M_w using the Mark-Houwink K and a (sometimes referred to as α) values mentioned later for polystyrene and polyethylene. See the Examples section for a demonstration of this procedure.

With 3D-GPC absolute weight average molecular weight ("M_{w, Abs}") and intrinsic viscosity are also obtained independently from suitable narrow polyethylene standards using the same conditions mentioned previously. These narrow linear polyethylene standards may be obtained from Polymer Laboratories (Shropshire, UK; 5 Part No.'s PL2650-0101 and PL2650-0102).

The systematic approach for the determination of multi-detector offsets is performed in a manner consistent with that published by Balke, Mourey, et al. (Mourey and Balke, *Chromatography Polym.*, Chapter 12, (1992)) (Balke, Thitiratsakul, Lew, Cheung, Mourey, *Chromatography Polym.*, Chapter 13, (1992)), 10 optimizing triple detector log (M_w and intrinsic viscosity) results from Dow 1683 broad polystyrene (American Polymer Standards Corp.; Mentor, OH) or its equivalent to the narrow standard column calibration results from the narrow polystyrene standards calibration curve. The molecular weight data, accounting for detector volume off-set determination, are obtained in a manner consistent with that published 15 by Zimm (Zimm, B.H., *J. Chem. Phys.*, 16, 1099 (1948)) and Kratochvil (Kratochvil, P., *Classical Light Scattering from Polymer Solutions*, Elsevier, Oxford, NY (1987)). The overall injected concentration used in the determination of the molecular weight is obtained from the mass detector area and the mass detector constant derived from a 20 suitable linear polyethylene homopolymer, or one of the polyethylene standards. The calculated molecular weights are obtained using a light scattering constant derived from one or more of the polyethylene standards mentioned and a refractive index concentration coefficient, dn/dc, of 0.104. Generally, the mass detector response and the light scattering constant should be determined from a linear standard with a molecular weight in excess of about 50,000 daltons. The viscometer calibration can 25 be accomplished using the methods described by the manufacturer or alternatively by using the published values of suitable linear standards such as Standard Reference Materials (SRM) 1475a, 1482a, 1483, or 1484a. The chromatographic concentrations are assumed low enough to eliminate addressing 2nd viral coefficient effects (concentration effects on molecular weight).

30 Analytical Temperature Rising Elution Fractionation (ATREF):

High Density Fraction (percent) is measured via analytical temperature rising elution fractionation analysis (ATREF). ATREF analysis is conducted according to

the method described in U.S. Patent No. 4,798,081 and Wilde, L.; Ryle, T.R.; Knobeloch, D.C.; Peat, I.R.; Determination of Branching Distributions in Polyethylene and Ethylene Copolymers, Journal of Polymer Science, 20, 441-455 (1982). The composition to be analyzed is dissolved in trichlorobenzene and allowed 5 to crystallize in a column containing an inert support (stainless steel shot) by slowly reducing the temperature to 20 °C at a cooling rate of 0.1 °C/min. The column is equipped with an infrared detector. An ATREF chromatogram curve is then generated by eluting the crystallized polymer sample from the column by slowly increasing the temperature of the eluting solvent (trichlorobenzene) from 20 to 120 °C 10 at a rate of 1.5 °C/min. Viscosity average molecular weight (M_v) of the eluting polymer is measured and reported. An ATREF plot has the short chain branching distribution (SCBD) plot and a molecular weight plot. The SCBD plot has 3 peaks, one for the high crystalline fraction (typically above 90°C), one for copolymer fraction (typically in between 30-90°C) and one for purge fraction (typically below 15 30°C). The curve also has a valley in between the copolymer and the high crystalline fraction. Thc is the lowest temperature in this valley. % High density (HD) fraction is the area under the curve above Thc. M_v is the viscosity average molecular weight from ATREF. M_{hc} is the average M_v for fraction above Thc. M_c is the average M_v of copolymer between 60-90°C. M_p is the average M_v of whole polymer.

20 **Fast Temperature Rising Elution Fractionation (F-TREF)**

The fast-TREF can be performed with a Crystex instrument by Polymer ChAR (Valencia, Spain) in orthodichlorobenzene (ODCB) with IR-4 infrared detector in compositional mode (Polymer ChAR, Spain) and light scattering (LS) detector (Precision Detector Inc., Amherst, MA).

25 When testing F-TREF, 120 mg of the sample is added into a Crystex reactor vessel with 40 ml of ODCB held at 160 °C for 60 minutes with mechanical stirring to achieve sample dissolution. The sample is loaded onto TREF column. The sample solution is then cooled down in two stages: (1) from 160 °C to 100 °C at 40 °C/minute, and (2) the polymer crystallization process started from 100 °C to 30 °C at 0.4 30 °C/minute. Next, the sample solution is held isothermally at 30 °C for 30 minutes. The temperature-rising elution process starts from 30 °C to 160 °C at 1.5 °C /minute with flow rate of 0.6 ml/minute. The sample loading volume is 0.8 ml. Sample

molecular weight (M_w) is calculated as the ratio of the 15° or 90° LS signal over the signal from measuring sensor of IR-4 detector. The LS-MW calibration constant is obtained by using polyethylene national bureau of standards SRM 1484a. The elution temperature is reported as the actual oven temperature. The tubing delay volume

5 between the TREF and detector is accounted for in the reported TREF elution temperature.

Preparative Temperature Rising Elution Fractionation (P-TREF)

10 The temperature rising elution fractionation method (TREF) can be used to preparatively fractionate the polymers (P-TREF) and is derived from Wilde, L.; Ryle, T.R.; Knobeloch, D.C.; Peat, I.R.; "Determination of Branching Distributions in Polyethylene and Ethylene Copolymers", *J. Polym. Sci.*, 20, 441-455 (1982), including column dimensions, solvent, flow and temperature program. An infrared (IR) absorbance detector is used to monitor the elution of the polymer from the

15 column. Separate temperature programmed liquid baths – one for column loading and one for column elution – are also used.

20 Samples are prepared by dissolution in trichlorobenzene (TCB) containing approximately 0.5% 2,6-di-tert-butyl-4-methylphenol at 160 °C with a magnetic stir bar providing agitation. Sample load is approximately 150 mg per column. After loading at 125 °C, the column and sample are cooled to 25 °C over approximately 72 hours. The cooled sample and column are then transferred to the second temperature programmable bath and equilibrated at 25 °C with a 4 ml/minute constant flow of TCB. A linear temperature program is initiated to raise the temperature

25 approximately 0.33 °C/minute, achieving a maximum temperature of 102 °C in approximately 4 hours.

Fractions are collected manually by placing a collection bottle at the outlet of the IR detector. Based upon earlier ATREF analysis, the first fraction is collected from 56 to 60 °C. Subsequent small fractions, called subfractions, are collected every

4 °C up to 92 °C, and then every 2 °C up to 102 °C. Subfractions are referred to by the midpoint elution temperature at which the subfraction is collected.

5 Subfractions are often aggregated into larger fractions by ranges of midpoint temperature to perform testing. Fractions may be further combined into larger fractions for testing purposes.

A weight-average elution temperature is determined for each Fraction based upon the average of the elution temperature range for each subfraction and the weight of the subfraction versus the total weight of the sample. Weight average temperature is defined as:

$$10 \quad T_w = \frac{\sum_f T(f) * A(f)}{\sum_f A(f)},$$

where $T(f)$ is the mid-point temperature of a narrow slice or segment and $A(f)$ is the area of the segment, proportional to the amount of polymer, in the segment.

15 Data are stored digitally and processed using an EXCEL (Microsoft Corp.; Redmond, WA) spreadsheet. The TREF plot, peak maximum temperatures, fraction weight percentages, and fraction weight average temperatures were calculated with the spreadsheet program.

Haze is determined according to ASTM-D 1003.

Gloss 45° is determined according to ASTM-2457.

Elmendorf Tear Resistance is measured according to ASTM-D 1922.

20 Modulus and tensile tests are measured according to ASTM D 882.

Dart Impact Strength is measured according to ASTM-D 1709-04, Method B.

C13 NMR Comonomer Content

It is well known to use NMR spectroscopic methods for determining polymer composition. ASTM D 5017-96, J. C. Randall et al., in "NMR and Macromolecules" 25 ACS Symposium series 247, J. C. Randall, Ed., Am. Chem. Soc., Washington, D.C.,

1984, Ch. 9, and J. C. Randall in "Polymer Sequence Determination", Academic Press, New York (1977) provide general methods of polymer analysis by NMR spectroscopy.

Gel Content Measurement

When the ethylene interpolymer, either alone or contained in a composition is at least partially crosslinked, the degree of crosslinking may be measured by dissolving the composition in a solvent for specified duration, and calculating the percent gel or unextractable component. The percent gel normally increases with increasing crosslinking levels. For cured articles according to the invention, the percent gel content is desirably in the range from at least about 5 to 100 percent as measured according to ASTM D-2765.

EXAMPLES

Preparation of Ethylene-Based Polymers

Multi-Constituent Catalyst

An exemplary multi-constituent catalyst system includes a Ziegler-Natta catalyst composition including a magnesium and titanium containing procatalyst and a cocatalyst. The procatalyst is a titanium supported $MgCl_2$ Ziegler Natta catalyst characterized by a Mg:Ti molar ratio of 40:1.0. The cocatalyst is a triethylaluminum. The procatalyst may have a Ti:Mg ratio between 1.0:40 to 5.0:40, preferably 3.0:40. The procatalyst and the cocatalyst components can be contacted either before entering the reactor or in the reactor. The procatalyst may, for example, be any other titanium based Ziegler Natta catalyst. The Al:Ti molar ratio of cocatalyst component to procatalyst component can be from about 1:1 to about 5:1.

General Description of the Multi-Constituent Catalyst System

The multi-constituent catalyst system, as used herein, refers to a Ziegler-Natta catalyst composition including a magnesium and titanium containing procatalyst and a cocatalyst. The procatalyst may, for example, comprise the reaction product of magnesium dichloride, an alkylaluminum dihalide, and a titanium alkoxide.

The olefin polymerization procatalyst precursors comprise the product which results from combining:

(A) a magnesium halide prepared by contacting:

5 (1) at least one hydrocarbon soluble magnesium component represented by the general formula $R''R'Mg.xAlR'3$ wherein each R'' and R' are alkyl groups

(2) at least one non-metallic or metallic halide source under conditions such that the reaction temperature does not exceed about 60° C, preferably does not exceed about 40° C, and most preferably does not exceed about 35° C;

(B) at least one transition metal compound represented by the formula

10 $Tm(OR)y Xy-x$ wherein Tm is a metal of Groups IVB, VB, VIB, VIIB or VIII of the Periodic Table; R is a hydrocarbyl group having from 1 to about 20, preferably from 1 to about 10 carbon atoms.

(C) an additional halide source if an insufficient quantity of component (A-2) is present to provide the desired excess X:Mg ratio;

15

Particularly suitable transition metal compounds include, for example, titanium tetrachloride, titanium trichloride, vanadium tetrachloride, zirconium tetrachloride, tetra(isopropoxy)-titanium, tetrabutoxytitanium, diethoxytitanium dibromide, dibutoxytitanium dichloride, tetraphenoxytitanium, tri-isopropoxy vanadium oxide, zirconium tetra-n-propoxide, mixtures thereof and the like.

20 Other suitable titanium compounds which can be employed as the transition metal component herein include those titanium complexes and/or compounds resulting from reacting:

(A) at least one titanium compound represented by the formula $Ti(OR)x X4-x$ wherein each R is independently a hydrocarbyl group having from 1 to about 20, preferably from about 1 to about 10, most preferably from about 2 to about 4 carbon atoms; X is a halogen and x has a value from zero to 4; with

(B) at least one compound containing at least one aromatic hydroxyl group.

30 The foregoing procatalyst components are combined in proportions sufficient to provide atomic ratios as previously mentioned.

The foregoing pro-catalytic reaction product is preferably prepared in the presence of an inert diluent. The concentrations of catalyst components are preferably such that when the essential components of the catalytic reaction product are combined, the resultant slurry is from about 0.005 to about 1.0 molar (moles/liter) with respect to magnesium. By way of an example of suitable inert organic diluents can be mentioned liquified ethane, propane, isobutane, n-butane, n-hexane, the various isomeric hexanes, isoctane, paraffinic mixtures of alkanes having from 8 to 12 carbon atoms, cyclohexane, methylcyclopentane, dimethylcyclohexane, dodecane, industrial solvents composed of saturated or aromatic hydrocarbons such as kerosene, naphthas, etc., especially when freed of any olefin compounds and other impurities, and especially those having boiling points in the range from about -50 °C to about 200 °C. Mixing of the procatalyst components to provide the desired catalytic reaction product is advantageously prepared under an inert atmosphere such as nitrogen, argon or other inert gas at temperatures in the range from about -100 °C to about 200 °C, preferably from about -20 °C to about 100 °C, provided that the magnesium halide support is prepared such that the reaction temperature does not exceed about 60 °C. In the preparation of the catalytic reaction product, it is not necessary to separate hydrocarbon soluble components from hydrocarbon insoluble components of the reaction product.

The procatalyst composition serves as one component of a Ziegler-Natta catalyst composition, in combination with a cocatalyst. The cocatalyst is preferably employed in a molar ratio based on titanium in the procatalyst of from 1:1 to 100:1, but more preferably in a molar ratio of from 1:1 to 5:1.

Inventive Resin Example 1

Inventive Resin Example 1 is made according to the following procedures: A heterogeneously branched ethylene/α-olefin copolymer is prepared using a multi-constituent catalyst system, as described hereinabove, suitable for (co)polymerizing ethylene and one or more α-olefin comonomers, e.g. 1-octene, in two adiabatic spherical reactors, linked together in series, operating under a solution condition. The ethylene monomer, 1-octene comonomer, and hydrogen were combined with a solvent, e.g. Isopar® E, commercially available from ExxonMobil. The feed streams are purified from polar impurities such as water, carbon monoxide, sulfurous

compounds, and unsaturated compounds such as acetylene and cooled to 13°C before entering the reactor. The majority (85-90%) of the reaction occurs in the first sphere reactor that is 10-foot diameter. The mixing is achieved via circulating the polymer/catalyst/cocatalyst/solvent/ethylene/co-monomer/hydrogen solution with 5 agitator equipped with mixing blades. The feed (ethylene/comonomer/solvent/hydrogen) enters the reactor from the bottom and the catalyst/cocatalyst enters the reactor separately from the feed and also from the bottom. The first reactor temperature is about 175°C, and the reactor pressure is about 500 psi. The temperature of the second reactor, in series with the first, increases to 10 202°C with approximately 10-15% of the remaining reaction occurring and no additional streams added. Catalyst/Co-catalyst Al/Ti molar feed ratio is set at 1.5. The average reactor residence time is about 8 minutes per sphere reactor prior to termination post-reactor by a fluid specially designed for that purpose. After the polymer solution leaves the reactor, the solvent with unconverted ethylene monomer 15 and 1-octene comonomer is removed from the polymer solution via a two stage devolatilizer system, and then recycled. The recycled stream is purified before entering the reactor again. The polymer melt is pumped through a die specially designed for underwater pelletization. The pellets are transferred to classifier screens to remove over and undersize particles. The finished pellets are then transferred to 20 rail cars. The properties of the heterogeneously branched ethylene/α-olefin copolymer are listed in Table 1. Figure 1 is an ATREF of Inventive Resin Example 1.

The co-ex film comprised first ethylene/α-olefin copolymer is further processed via blown film extrusion process on Reifenhauser blown film line with 250mm diameter die. The die has a gap of 2.59 mm. The film is blown with a blow 25 up ratio of about 2.2:1 and a frost-line height of about 30 inches. The layflat width of the film is about 880 mm, while the thickness of the films are listed in Table 3. The 3 layer co-ex resin is melt extruded through an annular circular die. The hot melt emerges from the die thereby forming a tube. The tube is expanded by air, and at the same time, the cooled air chills the web to a solid state. The film tube is then 30 collapsed within a V-shaped frame of rollers and is nipped at the end of the frame to trap the air within the bubble. The nip rolls also draw the film away from the die. The tube is slit and wound as a single-film layer onto a roll. The properties of the comparative films and inventive films are listed in Table 3.

Comparative Resin Example 1

Comparative Resin Example 1, a linear low density polyethylene, is made at 190C reactor temperature and 3.5:1 Al/Ti ratio. All other conditions remain the same as the Inventive Example 1. The properties of Comparative Example 1 are listed in Table 1. Figure 1 is an ATREF of Comparative Example 1. The Comparative Example 1 is processed via blown film extrusion process, as described above. The Comparative Example 1 is melt extruded through an annular circular die. The hot melt emerges from the die thereby forming a tube. The tube is expanded by air, and at the same time, the cooled air chills the web to a solid state. The film tube is then collapsed within a V-shaped frame of rollers and is nipped at the end of the frame to trap the air within the bubble. The nip rolls also draw the film away from the die. The tube is slit and wound as a single-film layer onto a roll. The properties of the comparative film 1 are listed in Table 2.

Table 1: Resin production and characterization data for inventive resin 1 and comparative example 1.

Description	Inventive Example 1	Comparative Example 1
Resin MI (g/10 minutes)	0.80	0.80
Resin density (g/cc)	0.917	0.917
Catalyst	HEC-3	HEC-3
Ti/40Mg	3	3
Al/Ti	1.5	3.5
Rx. Temp (°C)	175	190
M_{hc}	103000	143000
M_c	64234	54815
M_p	76542	71007
M_{hc}/M_p	1.35	2.01
M_c/M_p	0.84	0.77
% HD fraction - ATREF	10.6	15.4

T_{hc} , lowest temperature in the valley between copolymer and high crystalline fraction
 M_v , viscosity average molecular weight from ATREF

M_{hc} , Average M_v for fraction above T_{hc} from ATREF

M_c , Average M_v of copolymer between 60-90°C – ATREF

M_p , Average M_v of whole polymer from ATREF

% HD fraction, area under the curve above T_{hc}

Table 2: Properties of films made from Inventive resin 1 and Comparative example 1.

Description	Units	Inventive Example 1	Comparative Example 1
Target thickness	mil	2	2
Dart A	g	724	533
Gloss 45°	N/A	91	70
Haze	%	5.6	10.6
Normalized MD Tear	g/mil	477	469

Comparative Resin 2: Octene based LLDPE made by Solution process and Z-N catalyst. I₂ (190°C. 2.16KG): 1 g/10min. Density: 0.920 g/cm³;

5 Comparative Resin 3: Octene based LLDPE made by Solution process and Z-N catalyst. I₂ (190°C. 2.16KG): 1 g/10min. Density: 0.935 g/cm³;

10 Inventive Resin 2: Octene based LLDPE made by Solution process and modified Z-N catalyst, as in Inventive Resin 1, I₂ (190°C. 2.16KG): 0.5 g/10min. Density: 0.917 g/cm³;

15 Comparative Resin 4: Octene based LLDPE having overall I₂ (190°C. 2.16KG) of 0.85 g/10min. And overall density of 0.918 g/cm³; 41.4 wt.% of resin 4 has density of 0.898 g/cm³ and MI of 0.27g/10min and 58.6 wt.% of resin 4 has density of 0.929g/cm³ and MI of 9.24g/10min; resin 4 is made in accordance with the teachings of US patent 5,844,045 (Kolthammer, et al.);

20 Comparative Resin 5: Octene based LLDPE made by dual reactor Solution process. I₂ (190°C. 2.16KG): 1.3 g/10min. Density: 0.941 g/cm³ Polymer in 1st reactor is 25.92%, density is 0.924g/cm³ and MI is 0.65g/10min: polymer in 2nd reactor is 74.08%, density is 0.947g/cm³, MI is 5.45g/10min

25 Comparative Resin 6: Octene based LLDPE made by Solution process and Z-N catalyst. I₂ (190°C. 2.16KG): 1 g/10min. Density: 0.925 g/cm³

Fabrication condition:

Comparative example 6: 140 micron film made from 100% Comparative Resin 6

30 Comparative example 2: 45 micron film made from 100% Inventive Resin 1

Comparative example 3: 120 micron film made from Comparative Resin 2/Comparative Resin 5/Comparative Resin 2 (layer ratio:1/3/1)

35 Comparative example 4: 120 micron film made from Comp. Resin 4/Comp. Resin 5/Comp. Resin 4 (layer ratio:1/3/1)

Comparative example 5: 120 micron film made from Comp. Resin 2/Comp. Resin 3/Comp. Resin 2 (layer ratio:1/3/1)

40 Inventive Example 1: 120 micron film made from Inventive Resin 1/Comp. Resin 3/Inventive Resin 1 (layer ratio:1/3/1)

Inventive Example 2: 120 micron film made from Inventive Resin 2/Comp. Resin 3/Inventive Resin 2 (layer ratio:1/3/1)

All the films were made in Reifenhauser blown film line

5
Melt temperature: 220°C
Blow up ratio: 2.2/1
Die gap: 2.59mm

	Density (g/cm3)	Haze, %	2% secant modulus, MPa (MD/CD)	Dart (type B) g	Tensile, MPa (MD/CD)
Comparative example 6 (140 micron)	0.925	39.8	253/303	168	48/43
Comparative example 2 (45 micron)	0.917	13.1	180/214	474	54/57
Comparative example 3 (120 micron)	0.933	28	349/398	139	48/48
Comparative example 4 (120 micron)	0.932	33.8	353/398	230	41/40
Comparative example 5 (120 micron)	0.929	23	293/362	144	47/45
Inventive example 1 (120 micron)	0.928	14	273/320	280	51/48
Inventive example 2 (120 micron)	0.928	14.4	219/269	546	48.4/45.4

Table 3 Properties of inventive and comparative examples

*Note: MD = machine direction; CD = cross direction

1. Comparative example 6 is the incumbent industry Stand up pouch film made with MDPE served as bench mark.
- Comparative example 2 is mono layer film made by 100% first polymer in the inventive structure and served as benchmark.
2. Density of comparable film ,3, 4,5 and inventive film 1, 2 is calculated based composition density and % in film.

The results in table 3 show that:

1. Inventive film 1 has higher density (higher crystalline fraction) and comparable stiffness (modulus) as comparable film 1, but it has 300% lower haze and 70% improvement in dart impact.
2. Inventive film 2 has slightly lower density and 10% lower stiffness than comparable film 1, but it has 300% lower haze and 3.3 times higher dart impact.
3. Comparable film 2 is produced by purely first interpolymer as claimed, although it has lower overall density and lower modulus, but with 45 micron film, which is only 27% thickness of inventive film 1 &2, but its haze is close to 120 micron inventive film.
4. All comparable film 3, 4, 5 have significant lower haze than comparable film 1 even with improved stiffness and overall film density. This proves that co-extrusion of MDPE and LLDPE can reduce film haze and increase film clarity accordingly.
5. All comparable film 3, 4, 5 has significant higher haze than inventive film, although their stiffness and density is only slightly higher. This proves that the selection of resin in core and skin layer is also critical to produce high clarity high stiffness film. Applying first interpolymers LLDPE in the skin layer, which has lower percentage of high MW high density fraction affords the best clarity stiff film with improved dart impact.
6. For comparable film 3, 4, 5 which have comparable stiffness and density, 5 has lowest haze followed by 3, 4 has the highest haze. Co-ex films made of LLDPE and MDPE with high MW HDF have better clarity over the ones made of LLDPE and MDPE with low MW HDF. With same resin in skin layer, haze of example 3 is higher than example 5.

CLAIMS

1. A multilayer film comprising at least two layers, wherein a first layer comprises a first interpolymer of ethylene and at least one alpha-olefin, characterized wherein the first interpolymer has a density of less than 0.925 g/cm³, and an average M_v and a valley temperature between the interpolymer and high crystalline fraction, T_{hc}, such that the average M_v for a fraction above T_{hc} from ATREF divided by average M_v of the whole polymer from ATREF (M_{hc}/M_{hp}) is less than about 1.95 and wherein the first interpolymer has a CDBI of less than 60%, and wherein at least one other second layer comprises a second interpolymer of ethylene and, optionally at least one alpha-olefin, wherein the second interpolymer has a density from 0.925 to 0.965 g/cm³.
5
2. The film of claim 1 wherein said first interpolymer is heterogeneously branched.
3. The film of claim 1 wherein said first interpolymer has a CDBI of less than 55%.
15
4. The film of claim 1 wherein said first interpolymer has a M_{hc}/M_{hp} of less than about 1.7.
5. The film of claim 1 wherein said second interpolymer has density higher than 0.925 g/cc and MI between 0.1 to 10 g/10 minutes.
20
6. The film of claim 1 wherein the second polymer is a heterogeneous polymer selected from LLDPE and HDPE.
7. A film comprising at least one layer comprising a first interpolymer of ethylene and at least one alpha-olefin, characterized wherein the first interpolymer has a density of less than 0.925 g/cm³ and is characterized as having a high density (HD) fraction and an overall density such that % HD fraction < 0.0168x² - 29.636x + 13036 where x is the overall density in grams/cubic centimeter, and at least one other layer comprising a second interpolymer of ethylene and, optionally at least one alpha-olefin, wherein the second interpolymer has a density from 0.925 to 0.965 g/cm³.
25
8. The film of claim 1 further comprising at least one other natural or synthetic polymer.
9. The film of claim 8 where the synthetic polymer is low density polyethylene.
30

10. The film of claim 1 wherein the first interpolymer comprises a melt index from about 0.1 to about 10 g/10 min.
11. The film of claim 1 wherein the first interpolymer comprises an overall density less 5 than about 0.922 g/cm³.
12. The film of claim 1 wherein the first interpolymer comprises long chain branches less than 1 per 1000 C atoms.
- 10 13. The film of claim 1 wherein the first interpolymer comprises a molecular weight distribution, M_w/M_n, of less than about 5.
14. A fabricated article comprising the film of claim 1.
- 15 15. The film of claim 1, wherein the first interpolymer has been at least partially cross-linked to at least 5%, by weight, gel.
16. The film of claim 1, wherein the film has thickness of about 120 microns and a Dart (B) measured using ASTM D1709 of at least 250 grams, a percent haze measured according to ASTM D1003 of less than 16 percent, and a 2 percent secant modulus calculated by (MD+CD)/2 measured in accordance with ASTM D882 of at least 240 20 MPa.

AMENDED CLAIMS
received by the International Bureau on 29 July 2010 (29.07.2010)

1. A multilayer film comprising at least two layers, wherein a first layer comprises a first interpolymer of ethylene and at least one alpha-olefin, characterized wherein the first interpolymer has a density of less than 0.925 g/cm³, and an average M_v and a valley temperature between the interpolymer and high crystalline fraction, T_{hc} , such that the average M_v for a fraction above T_{hc} from ATREF divided by average M_v of the whole polymer from ATREF (M_{hc}/M_{hp}) is less than about 1.95 and wherein the first interpolymer has a CDBI of less than 60%, and wherein at least one other second layer comprises a second interpolymer of ethylene and, optionally at least one alpha-olefin, wherein the second interpolymer has a density from 0.925 to 0.965 g/cm³.
2. The film of claim 1 wherein said first interpolymer is heterogeneously branched.
3. The film of claim 1 wherein said first interpolymer has a CDBI of less than 55%.
4. The film of claim 1 wherein said first interpolymer has a M_{hc}/M_{hp} of less than about 1.7.
5. The film of claim 1 wherein said second interpolymer has density higher than 0.925 g/cc and MI between 0.1 to 10 g/10 minutes.
6. The film of claim 1 wherein the second polymer is a heterogeneous polymer selected from LLDPE and HDPE.
7. (cancel)

8. The film of claim 1 further comprising at least one other natural or synthetic polymer.
9. The film of claim 8 where the synthetic polymer is low density polyethylene.
10. The film of claim 1 wherein the first interpolymer comprises a melt index from about 0.1 to about 10 g/10 min.
11. The film of claim 1 wherein the first interpolymer comprises an overall density less than about 0.922 g/cm³.
12. The film of claim 1 wherein the first interpolymer comprises long chain branches less than 1 per 1000 C atoms.
13. The film of claim 1 wherein the first interpolymer comprises a molecular weight distribution, M_w/M_n, of less than about 5.
14. A fabricated article comprising the film of claim 1.
15. The film of claim 1, wherein the first interpolymer has been at least partially cross-linked to at least 5%, by weight, gel.
16. The film of claim 1, wherein the film has thickness of about 120 microns and a Dart (B) measured using ASTM D1709 of at least 250 grams, a percent haze measured according to ASTM D1003 of less than 16 percent, and a 2 percent secant modulus calculated by (MD+CD)/2 measured in accordance with ASTM D882 of at least 240 MPa.

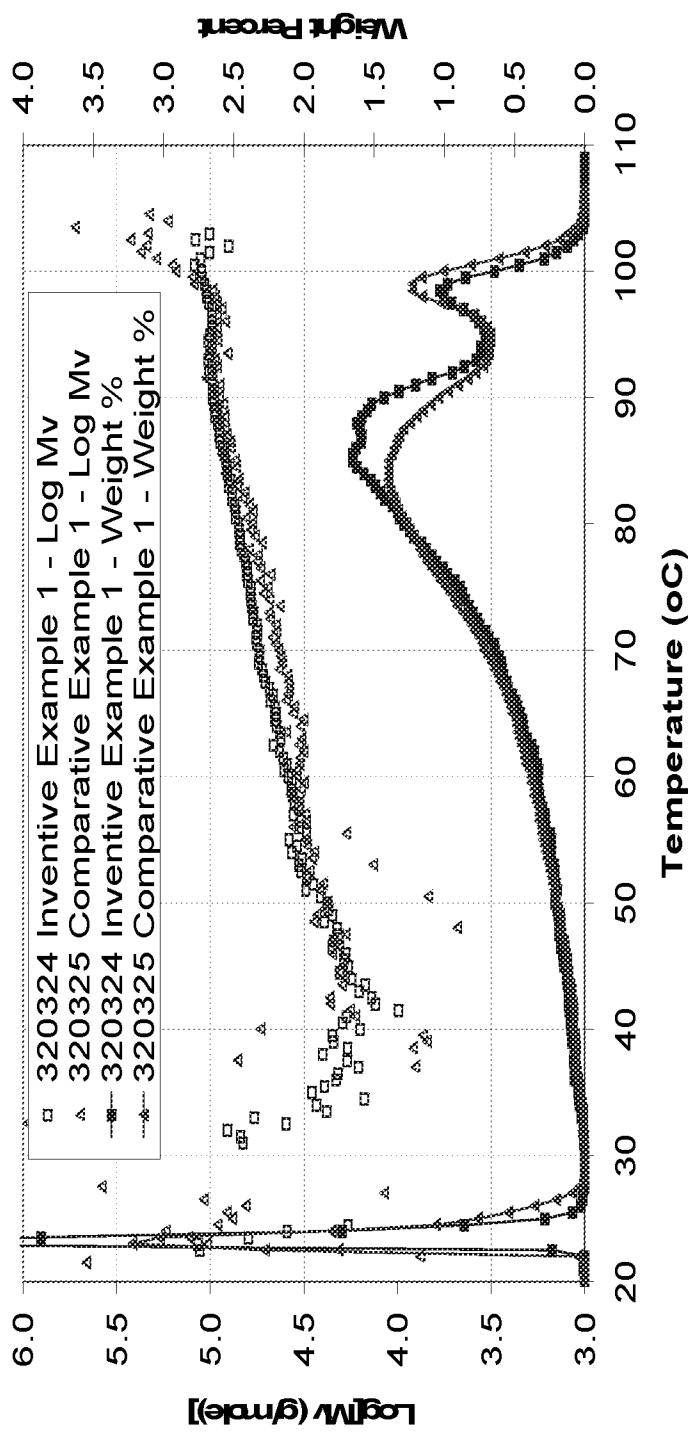


Figure 1: Short Chain Branching Distribution and log M_v data from ATREF
For Inventive Resin 1 and Comparative Example 1.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2009/075646

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC C08F10/-,C08F110/-,C08F210/-,C08L23/-,B32B27/-,B29C55/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNKI,CPRS,WPI,EPODOC, high density fraction,multilayer?,layer?,film,density,ATREF,CDBI, LLDPE ,molecular weight, ethylene,pe,polyethylene,olefin,polyolefin,high crystalline,heterogeneous,HDPE,

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN1270611 A (DOW CHEM CO) 18 Oct.2000 (18.10.2000)	7
A	Example 14,description pages 3-27	1-6,8-16
A	WO2006/086133 A1 (EQUISTAR CHEM LP) 17Aug.2006 (17.08.2006) Example 1	1-16
A	US6172173 B1 (DOW CHEM CO) 09 Jan.2001 (09.01.2001) Column 6,lines 20-33,column 31,lines 30-45, example 16,table XIB	1-16

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- “A” document defining the general state of the art which is not considered to be of particular relevance
- “E” earlier application or patent but published on or after the international filing date
- “L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)
- “O” document referring to an oral disclosure, use, exhibition or other means
- “P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search
10 Feb.2010 (10.02.2010)

Date of mailing of the international search report
25 Mar. 2010 (25.03.2010)

Name and mailing address of the ISA/CN
The State Intellectual Property Office, the P.R.China
6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China
100088
Facsimile No. 86-10-62019451

Authorized officer
Shou,jianhong
Telephone No. (86-10)62084481

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
 PCT/CN2009/075646

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN1270611 A	18.10.2000	WO9914271A1	25.03.1999
		AU9571098A	05.04.1999
		ZA9808572A	31.05.2000
		NO20001408A	15.05.2000
		EP1023390A1	02.08.2000
		BR9812478A	26.09.2000
		CZ20000980A3	17.01.2001
		HU0004649A2	28.04.2001
		MXPA00002739A	01.10.2000
		KR20010024063A	26.03.2001
		TW461906A	01.11.2001
		US6469103B1	22.10.2002
		JP2003517487T	27.05.2003
		US2003139546A1	24.07.2003
		US6683149B2	27.01.2004
		EP1023390B1	04.02.2004
		DE69821511E	11.03.2004
		ES2212348T3	16.07.2004
		US2004158011A1	12.08.2004
		US6908968B2	21.06.2005
		CA2304220C	17.06.2008
WO2006/086133 A1	17.08.2006	US2006177681A1	10.08.2006
		EP1851052A1	07.11.2007
		CN101111374A	23.01.2008
US6172173 B1	09.01.2001	None	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2009/075646

continuation of second sheet

A. CLASSIFICATION OF SUBJECT MATTER

According to International Patent Classification (IPC)

C08F210/02 (2006.01)i

C08F10/02 (2006.01)i

C08F110/02 (2006.01)i