




(86) Date de dépôt PCT/PCT Filing Date: 2016/09/06  
(87) Date publication PCT/PCT Publication Date: 2017/03/09  
(45) Date de délivrance/Issue Date: 2022/02/22  
(85) Entrée phase nationale/National Entry: 2018/02/26  
(86) N° demande PCT/PCT Application No.: US 2016/050412  
(87) N° publication PCT/PCT Publication No.: 2017/041099  
(30) Priorité/Priority: 2015/09/03 (US62/213,739)

(51) Cl.Int./Int.Cl. *F04D 29/00* (2006.01),  
*F04D 29/40* (2006.01), *F04D 29/42* (2006.01),  
*F04D 29/44* (2006.01)  
(72) Inventeur/Inventor:  
RUZICA, PAUL J., US  
(73) Propriétaire/Owner:  
FLUID HANDLING LLC, US  
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : CONCEPTION DE VOLUTE POUR COUT DE FABRICATION PLUS BAS ET REDUCTION DE LA CHARGE RADIALE

(54) Title: VOLUTE DESIGN FOR LOWER MANUFACTURING COST AND RADIAL LOAD REDUCTION

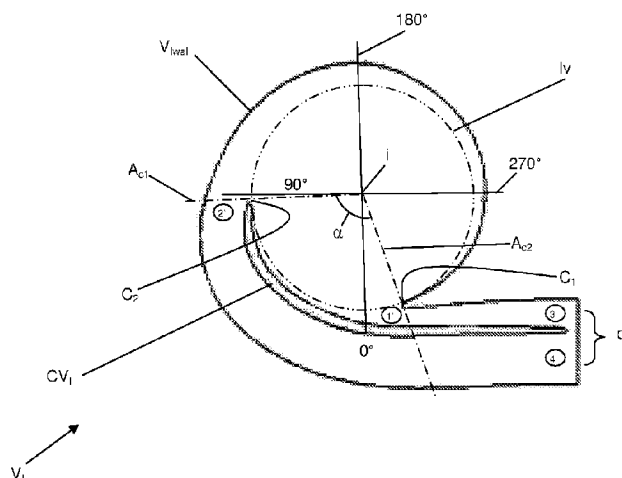

Dual Volute According to the Present Invention

(57) **Abrégé/Abstract:**

A volute for a pump featuring a volute or casing having a pump inlet for receiving a fluid being pumped, a pump discharge for providing the fluid, and a volute or casing vane forming double volutes therein. The volute has an upper cutwater and also has a lower cutwater. The upper cutwater having a throat area dimensioned to be greater than and not equal to a lower cutwater throat area so the upper cutwater throat area and the lower cutwater throat area provide substantially equal flow velocity at both the upper cutwater and the lower cutwater in response to an angular sweep of the fluid being pumped. The end of passage for the upper cutwater is dimensioned with an upper cutwater passage area that is greater than and not equal to a corresponding lower cutwater passage area of the corresponding end of passage for the lower cutwater.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(10) International Publication Number  
**WO 2017/041099 A1**

(43) International Publication Date  
9 March 2017 (09.03.2017)

## (51) International Patent Classification:

*F04D 29/00* (2006.01) *F04D 29/42* (2006.01)  
*F04D 29/40* (2006.01) *F04D 29/44* (2006.01)

## (21) International Application Number:

PCT/US2016/050412

## (22) International Filing Date:

6 September 2016 (06.09.2016)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

62/213,739 3 September 2015 (03.09.2015) US

(71) Applicant: **FLUID HANDLING LLC** [US/US]; 8200 N. Austin Avenue, Morton Grove, Illinois 60053 (US).

(72) Inventor: **RUZICA, Paul J.**; 5868 Bluefield Road, Auburn, New York 13021 (US).

(74) Agent: **BARBER, William, J.**; Ware, Fressola, Maguire & Barber LLP, 755 Main Street, P.O. Box 224, Monroe, Connecticut 06468 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report (Art. 21(3))

(54) Title: VOLUTE DESIGN FOR LOWER MANUFACTURING COST AND RADIAL LOAD REDUCTION

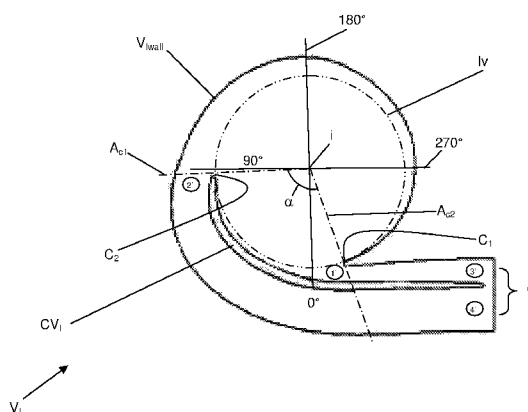


Figure 2: Dual Volute According to the Present Invention

(57) Abstract: A volute for a pump featuring a volute or casing having a pump inlet for receiving a fluid being pumped, a pump discharge for providing the fluid, and a volute or casing vane forming double volutes therein. The volute has an upper cutwater and also has a lower cutwater. The upper cutwater having a throat area dimensioned to be greater than and not equal to a lower cutwater throat area so the upper cutwater throat area and the lower cutwater throat area provide substantially equal flow velocity at both the upper cutwater and the lower cutwater in response to an angular sweep of the fluid being pumped. The end of passage for the upper cutwater is dimensioned with an upper cutwater passage area that is greater than and not equal to a corresponding lower cutwater passage area of the corresponding end of passage for the lower cutwater.

WO 2017/041099 A1

# **VOLUTE DESIGN FOR LOWER MANUFACTURING COST AND RADIAL LOAD REDUCTION**

5

## **BACKGROUND OF THE INVENTION**

### **1. Field of the Invention**

The present invention relates to a volute for a pump; and more particularly  
10 relates to a pump having an improved volute design.

### **2. Brief Description of Related Art**

Figure 1 shows a normal or conventional dual volute  $V_{pa}$  having a volute wall  $V_{wall}$  with a pump inlet represented by the label  $i$  and a pump outlet or discharge  
15 represented by the label  $o$ . The conventional dual volute  $V_{pa}$  includes a casing vane  $CV_{pa}$  formed therein, which has a lower cutwater  $c1$  and an upper cutwater  $c2$  that are arranged on an axis  $A_{c1, c2}$  on opposite sides of the volute wall  $V_{wall}$  and about  $180^\circ$  apart in a radial separation, e.g., consistent with that shown in Figure 1. In Figure 1, the radial degrees of  $0^\circ$ ,  $90^\circ$ ,  $180^\circ$ ,  $270^\circ$  are indicated to provide the reader  
20 with an angular radial frame of reference. Figure 1 also includes a circular dashed line  $lv$  that represents the impeller's outer peripheral vane surface. Figure 1 also shows the circled reference label 1 as a lower cutwater throat area, the circled reference label 2 as an upper cutwater throat area, the circled reference label 3 as an end of passage for lower cutwater  $C1$ , and the circled reference label 4 as an end  
25 of passage for upper cutwater  $c2$ . In Figure 1, for the conventional double volute  $V_{pa}$

the areas labeled 1 and 2 are equal, and these lower and upper cutwaters c1 and c2 are effectively arranged diametrically opposed.

In the prior art, and consistent with that shown in Figure 1, the normal double volute  $V_{pa}$  utilizes a typical 180 degree opposed casing cutwaters c1 and c2 of equal section area labeled 1 and 2 respectively. In other words, Figure 1 shows that for the conventional double volute V the sectional areas labeled 1 and 2 formed between the cutwaters c1 and c2 of the casing vane  $CV_{pa}$  and the volute wall  $V_{wall}$  are substantially equal, and the associated cutwaters c1 and c2 are substantially diametrically opposed. These substantially equal sectional areas labeled 1 and 2 respectively are understood to be the minimum area as measured from the furthest radial edge of the cutwaters C1 and c2 to the next portion of the vertical wall  $V_{wall}$  of the volute  $V_{pa}$ . This sectional area is known as the casing throat area.

One disadvantage of the known volute design  $V_{pa}$ , e.g., like that shown in Figure 1, is that the development of the opposed casing tongues results in a long passage length for cutwater farthest away from the pump discharge o, otherwise know as the upper cutwater C2. This long length adds complexity to the casing and increases the difficulty to properly clean the casting. This results in additional costs, and if not properly cast and cleaned will result in loss of pump performance.

In view of this, there is a need for a better double volute design.

20

## SUMMARY OF THE INVENTION

The present invention provides a new volute design that reduces the radial load on the impeller by establishing an improved pressure balance through the operating flow range of a rotodynamic pump.

By way of example, and according to some embodiment, the present invention may be characterized by the total throat section area required by the volute not being distributed equally as in the conventional known double volute (see Fig. 1). The velocities being controlled by these equal sectional areas are also equal as half  
5 the pump flow passes through each passage. The area of the throat section of the upper cutwater is increased as a function of the angular sweep as measured along the volute centerline from the cutwater closest to the discharge. As a result of the angular sweep, the rate of flow in this passage is greater than that of a conventional volute (e.g., see Figure 1). Conversely, the throat area of the cutwater closest to the  
10 pump discharge, i.e., the lower cutwater, is reduced as a function of the angular sweep from the upper to the lower cutwater, the rate flow in this passage is reduced. In the present invention, these unequal sectional areas continue to provide roughly equal velocities at both upper and lower cutwaters.

The area of the two passages at the pump discharge is also balanced as a  
15 function of the differing rates of flow within these two passages.

It is also established so that the velocity at the end of these two passages, e.g., where they meet in the pump discharge, is substantially equal. In effect, the solution according to the present invention reduces the length of the passage of the upper cutwater furthest away from the pump discharge and increases the size of its  
20 associated passage.

Both these features improve the casting quality, reducing the potential of foundry defects while still providing a pressure balance and reducing the resultant radial load over the operating range of the pump.

Additionally, losses through the casing are reduced as a result of the  
25 reduction of fluid friction from the shorter passage and the ability to better match

velocities of the two passages at the pump discharge. In effect, the present invention reduces the cost and improves the quality of the cast volute.

Moreover, in the case of a split case pump, where the volute is formed in two halves, the upper half is greatly simplified as it has no cutwater and the portion of the passage contained in it, thus reducing the cost of the core, simplifying the cleaning and the tooling required to manufacture the casing half, and reducing the cost to produce the casting.

### Specific Embodiments

10 According to some embodiment of the present invention may include, or take the form of, a volute for a pump, e.g., such as a double volute pump, having the following features:

- a volute wall;
- a pump inlet for receiving a fluid being pumped;
- 15 a pump discharge for providing the fluid being pumped; and
- a casing vane configured on the volute wall.

The casing vane may be configured to form double volutes in the volute, configured with an upper cutwater farthest from the pump discharge defining an upper cutwater throat area and an end of passage for the upper cutwater, and also  
20 configured with a lower cutwater closest to the pump discharge defining a lower cutwater throat and a corresponding end of passage for the lower cutwater.

The upper cutwater throat area may be dimensioned to be greater than and not equal to the lower cutwater throat area so that the upper cutwater throat area and the lower cutwater throat area provide substantially equal flow velocity at both

the upper cutwater and the lower cutwater in response to an angular sweep of the fluid being pumped.

The end of passage for the upper cutwater may be dimensioned with an upper cutwater passage area that is greater than and not equal to a corresponding lower cutwater passage area of the corresponding end of passage for the lower cutwater so that upper and lower cutwater passage areas at the pump discharge are balanced as a function of differing rates of flow of the fluid being pumped therein and so that the fluid being pumped from associated ends of the upper and lower cutwater passage areas meets at the pump discharge with a substantially equal velocity.

According to some embodiments, the upper cutwater and the lower cutwater may be radially displaced at an angle  $\alpha$  that is in a range of between about 108° and about 110°.

Embodiments are also envisioned in which the upper cutwater and the lower cutwater may be radially displaced at an angle  $\alpha$  that is substantially less than 180°, e.g., consistent with that set forth herein.

Embodiments are also envisioned in which the upper cutwater and the lower cutwater may be radially displaced at an angle  $\alpha$  that is in a range of between 90° and 120°, e.g., also consistent with that set forth herein.

The volute may be configured as part of a double volute pump, e.g., that may include an impeller having impeller vanes and being arranged in one of the double volutes in the casing.

In effect, for the present invention, the total sum of both the upper and lower casing throats are similar to that of the conventional double volute in Figure 1, but are distributed as the included angle of the radial sweep.

Similar velocities are maintained at the throat section but are not necessarily equal. The net radial loads acting on the impeller are reduced by the maintenance of the velocities and the pressure balance with in the volute. The exit areas are also distributed in the fraction of the flow rate and are controlled to provide an equal

5 velocity at the end of the passages in the pump discharge.

### BRIEF DESCRIPTION OF THE DRAWING

The drawing, which is not necessarily drawn to scale, includes the following Figures:

10 Figure 1 shows a volute for a pump that is known in the art.

Figure 2 shows a new and improved volute for a pump, according to some embodiments of the present invention.

### DETAILED DESCRIPTION OF THE INVENTION

15 Figure 2: The Basic Invention

Figure 2 shows the present invention, e.g. in the form of a volute  $V_1$  for configuring in relation to a pump (not shown), such as a double volute pump. The volute  $V_1$  may include one or more of the following features:

- a volute wall  $V_{wall}$ ;
- 20 a pump inlet  $i$  (in) for receiving a fluid being pumped;
- a pump discharge  $o$  (out) for providing the fluid being pumped; and
- a casing vane  $CV_1$ .

The casing vane  $CV_1$  may be configured on the volute wall  $V_{wall}$  forming double volutes in the volute  $V_1$  and being configured with an upper cutwater  $C_2$

25 farthest from the pump discharge  $o$  defining an upper cutwater throat area labeled 2'



(in a circle) and an end of passage 4' (in a circle) for the upper cutwater  $C_2$ , and also configured with a lower cutwater  $C_1$  closest to the pump discharge o defining a lower cutwater throat labeled 1' (in a circle) and a corresponding end of passage 3' (in a circle) for the lower cutwater  $C_1$ .

5           The upper cutwater throat area label 2' (in a circle) may be dimensioned to be greater than and not equal to the lower cutwater throat area labeled 1' (in a circle) so that the upper cutwater throat area labeled 2' (in a circle) and the lower cutwater throat area labeled 1' (in a circle) provide substantially equal flow velocity at both the upper cutwater  $C_2$  and the lower cutwater  $C_1$  in response to an angular sweep of the  
10 fluid being pumped.

          The end 4' of passage for the upper cutwater  $C_2$  may be dimensioned with an upper cutwater passage area that is greater than and not equal to a corresponding lower cutwater passage area of the corresponding end of passage labeled 3' (in a circle) for the lower cutwater  $C_1$  so that upper and lower cutwater passage areas at  
15 the pump discharge are balanced as a function of differing rates of flow of the fluid being pumped therein and so that the fluid being pumped from associated ends of the upper and lower cutwater passage areas labeled 3', 4' (in respective circle) meets at the pump discharge o with a substantially equal velocity.

          In Figure 2, the upper cutwater  $C_2$  and the lower cutwater  $C_1$  are shown to be  
20 radially displaced at an angle  $\alpha$  that is in a range of between about  $108^\circ$  and about  $110^\circ$ .

#### The Angle $\alpha$

          Moreover, embodiments are envisioned, and the scope of the invention is  
25 intended to include, using the upper cutwater  $C_2$  and the lower cutwater  $C_1$  radially

displaced at an angle  $\alpha$  that is at least substantially less than  $180^\circ$ , so that the fluid being pumped from associated ends of the upper and lower cutwater passage areas labeled 3', 4' (in respective circle) meets at the pump discharge o with a substantially equal velocity. Moreover, embodiments are envisioned, and the scope of the

5 invention is intended to include, using the upper cutwater  $C_2$  and the lower cutwater  $C_1$  radially displaced at an angle  $\alpha$  that is in a range of between  $100^\circ$  and  $120^\circ$ , so that the fluid being pumped from associated ends of the upper and lower cutwater passage areas labeled 3', 4' (in respective circle) meets at the pump discharge o with a substantially equal velocity. In other words, the scope of the invention is

10 intended to include, embodiments having non-diametrically opposed radially displaced upper cutwater  $C_2$  and the lower cutwater  $C_1$ , for example, that are not radially displaced at any specific angle  $\alpha$  that is in the range of between about  $108^\circ$  and about  $110^\circ$ , but where the fluid being pumped from associated ends of the upper and lower cutwater passage areas labeled 3', 4' (in respective circle) meets at the

15 pump discharge o with a substantially equal velocity.

### Applications

By way of example, possible applications of the present invention may include the following:

20 Pumps,  
Fans,  
Blowers, and  
Compressors.

25

The Scope of the Invention

Further still, the embodiments shown and described in detail herein are provided by way of example only; and the scope of the invention is not intended to be limited to the particular configurations, dimensionalities, and/or design details of these parts or elements included herein. In other words, one skilled in the art would  
5 appreciate that design changes to these embodiments may be made and such that the resulting embodiments would be different than the embodiments disclosed herein, but would still be within the overall spirit of the present invention.

It should be understood that, unless stated otherwise herein, any of the features, characteristics, alternatives or modifications described regarding a  
10 particular embodiment herein may also be applied, used, or incorporated with any other embodiment described herein. Also, the drawings herein are not drawn to scale.

Although the invention has been described and illustrated with respect to exemplary embodiments thereof, the foregoing and various other additions and  
15 omissions may be made therein and thereto without departing from the spirit and scope of the present invention.

**CLAIMS:**

## 1. A volute for a pump comprising:

- a volute wall;

- a pump inlet for receiving a fluid being pumped;

- a pump discharge for providing the fluid being pumped; and

- a casing vane configured on the volute wall forming double volutes

in the volute and being configured with an upper cutwater farthest from the pump discharge defining an upper cutwater throat area and an end of passage for the upper cutwater, and also configured with a lower cutwater closest to the pump discharge defining a lower cutwater throat area and a corresponding end of passage for the lower cutwater, the fluid flowing in the volute in a direction from the upper cutwater to lower cutwater and out the pump discharge, the upper cutwater being configured on an upper cutwater axis with respect to the pump inlet, the lower cutwater being configured on a lower cutwater axis with respect to the pump inlet, the upper cutwater axis and the lower cutwater axis being radially displaced at an angle  $\alpha$  that is substantially less than  $180^\circ$  in radial separation with respect to the pump inlet and in the direction of the fluid flowing in the volute from the upper cutwater to lower cutwater and out the pump discharge;

the upper cutwater throat area being dimensioned to be greater than and not equal to the lower cutwater throat area so that the upper cutwater throat area and the lower cutwater throat area provide substantially equal flow velocity at both the upper cutwater and the lower cutwater in response to an angular sweep of the fluid being pumped; and

the end of passage for the upper cutwater being dimensioned with an upper cutwater passage area that is greater than and not equal to a

corresponding lower cutwater passage area of the corresponding end of passage for the lower cutwater so that upper and lower cutwater passage areas at the pump discharge are balanced as a function of differing rates of flow of the fluid being pumped therein and so that the fluid being pumped from associated ends of the upper and lower cutwater passage areas meets at the pump discharge with a substantially equal velocity.

2. The volute according to claim 1, wherein the angle  $\alpha$  is in a range of between 100° and 120°.

3. A volute for a pump comprising:

- a volute wall;

- a pump inlet for receiving a fluid being pumped;

- a pump discharge for providing the fluid being pumped; and

- a casing vane configured on the volute wall forming double volutes

in the volute and being configured with an upper cutwater farthest from the pump discharge defining an upper cutwater throat area and an end of passage for the upper cutwater, and also configured with a lower cutwater closest to the pump discharge defining a lower cutwater throat and a corresponding end of passage for the lower cutwater;


the upper cutwater throat area being dimensioned to be greater than and not equal to the lower cutwater throat area so that the upper cutwater throat area and the lower cutwater throat area provide substantially equal flow velocity at both the upper cutwater and the lower cutwater in response to an angular sweep of the fluid being pumped; and


the end of passage for the upper cutwater being dimensioned with an upper cutwater passage area that is greater than and not equal to a corresponding lower cutwater passage area of the corresponding end of passage for the lower cutwater so that upper and lower cutwater passage areas at the pump discharge are balanced as a function of differing rates of flow of the fluid being pumped therein and so that the fluid being pumped from associated ends of the upper and lower cutwater passage areas meets at the pump discharge with a substantially equal velocity,

wherein the upper cutwater and the lower cutwater are radially displaced at an angle  $\alpha$  that is in a range of between about 108° and about 110°.

4. The volute according to claim 1, wherein the volute forms part of a double volute pump having an impeller with impeller vanes and being arranged in one of the double volutes in the volute or casing.

5. The volute according to claim 1, wherein the angle  $\alpha$  is in a range of between about 108° and about 110°.

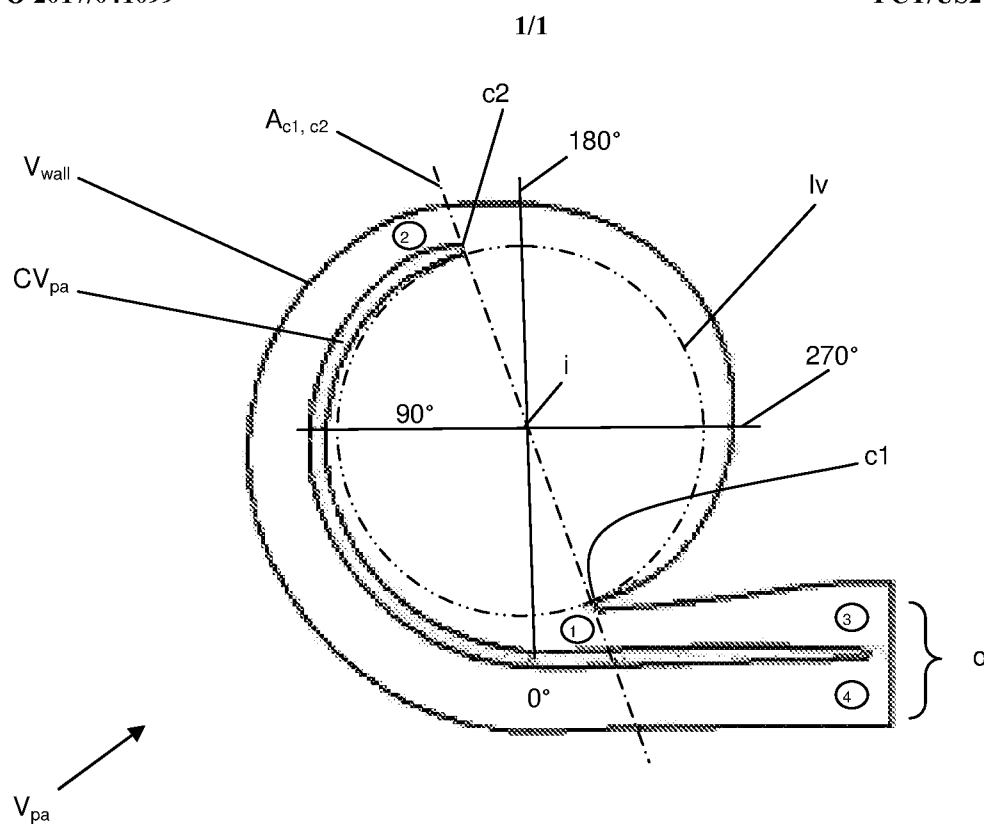

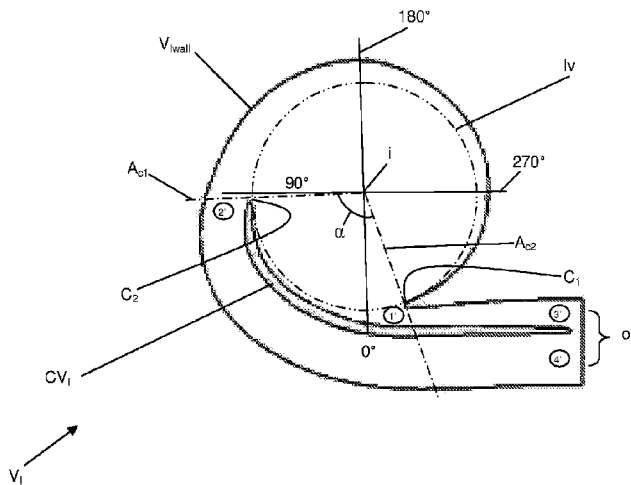

Dual Volute According to the Present Invention